
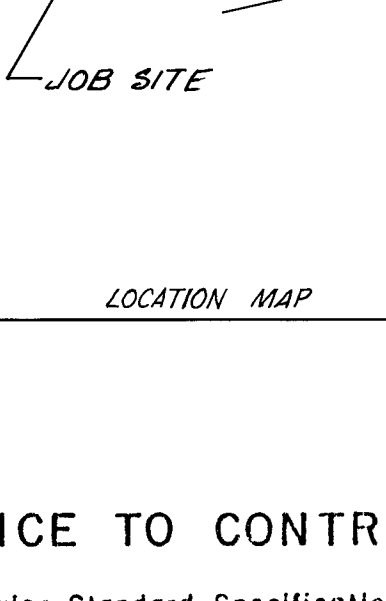
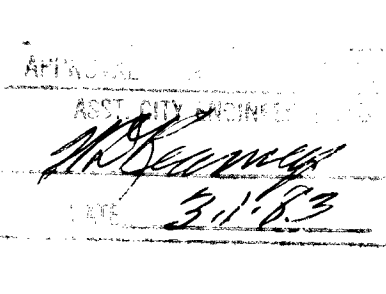








- TRAFFIC HANDLING NOTES

1. CONTRACTOR MUST SUBMIT A CONSTRUCTION SIGNING AND BARRICADING PLAN TO TRAFFIC ENGINEERING DIVISION AND RECEIVE A BARRICADING PERMIT PRIOR TO CONSTRUCTION.
2. ALL CONSTRUCTION SIGNING AND BARRICADING TO COMPLY WITH MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, 1978 EDITION.
3. CONTRACTOR'S OPERATION, BARRICADING AND SIGNING SHALL NOT AFFECT THRU LANES OF MONTGOMERY BETWEEN 7 AM AND 9 AM OR 4 PM AND 6 PM.

		AS BUILT INFORMATION	
LOCATION MAP		CONTRACTOR WORK STATED BY _____ DATE _____ ACCEPTED BY _____ DATE _____ FIELD VERIFICATION BY _____ DATE _____ CORRECTED BY _____ DATE _____ MICRO-FILM INFORMATION RECORDED BY _____ NO. _____	
NOTICE TO CONTRACTORS		BENCH MARKS	
1) New Mexico Standard Specifications for Public Works Construction - 1979 Edition will be referred to hereon as the "Standard Specifications." 2) All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with "Contract Documents for City-Wide Utilities and Cash Paving No. 31 and the Standard Specifications." 3) Two working days prior to any excavation, contractor must contact Line Locating Service, 765-1234, for location of existing utilities. 4) Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or survey so that the conflict can be resolved with minimum of delay.		ACS BM M44 BRASS CAP IN MEDIAN ON MONTGOMERY WEST OF SAN PEDRO ELEV. 5253.305 DATE 7-29-82	
THE FOLLOWING NOTES APPLY WHEN CHECKED :		SURVEY INFORMATION	
☐ All utilities and utility service lines shall be installed prior to paving. ☒ Backfill compaction shall be according to specified street use. (ARTERIAL) ☒ Tack coat requirements shall be determined by the City Engineer. ☐ Sidewalks and wheelchair ramps within the curb returns shall be constructed whenever a new curb return is constructed. ☐ If curb is depressed for a driveway, the driveway shall be constructed prior to acceptance of the curb and gutter. ☐ All storm drain facilities shall be completed prior to final acceptance.		FIELD NOTES NO. PS-23 BY H. MERCER DATE 7-29-82	
ENGINEER'S SEAL		REVISIONS	
		NO. _____ DATE _____ BY _____ REMARKS _____ REVISIONS _____ DESIGN _____ DESIGNED BY _____ DATE _____ DRAWN BY E.D. FEGETTE _____ DATE 6-27-82 CHECKED BY _____ DATE 6-27-82	
CITY OF ALBUQUERQUE MUNICIPAL DEVELOPMENT DEPARTMENT ENGINEERING DIVISION			
TITLE: MEDIAN REVISION ON MONTGOMERY WEST OF SAN PEDRO BLVD. FOR BANK OF ALBUQUERQUE			
APPROVALS City Engineer 		APPROVALS Liquid Waste 	
A.C.E. - Design 		Traffic 	
A.C.E. - Hydrology 		Water 	
DRAWING NO. 1481		MAP NO. G-18	
SHEET 1 OF 1		SHEET 1 OF 1	

愛