

1841

Scale: N 1" = 20'

REPUBLIC SQUARE

GULF SERVICE STATION

BLVD., N.E.

CURVE DATA			
R	Δ	T	L
2'	180°	—	6.28
150'	16° 15' 37"	21.43	42.57

MONTGOMERY

BLVD., N.E.

SAN PEDRO


GOODY'S

## LEGEND

	CONCRETE MEDIAN NOSE, SIDEWALK STANDARD (EXT. JT., BOTH SIDES OF 4" CONCRETE PAVING.)
	NEW ARTERIAL PAVING
	EXISTING CONCRETE MEDIAN CURB
	NEW CONCRETE MEDIAN CURB
	NEW CURB GRADE

## TRAFFIC HANDLING NOTES

- CONTRACTOR MUST SUBMIT A CONSTRUCTION SIGNING AND BARRICADING PLAN TO TRAFFIC ENGINEERING DIVISION AND RECEIVE A BARRICADING PERMIT PRIOR TO CONSTRUCTION.
- ALL CONSTRUCTION SIGNING AND BARRICADING TO COMPLY WITH MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, 1978 EDITION.
- CONTRACTOR'S OPERATION, BARRICADING AND SIGNING SHALL NOT AFFECT THRU LANES OF MONTGOMERY BETWEEN 7 AM AND 9 AM OR 4 PM AND 6 PM.

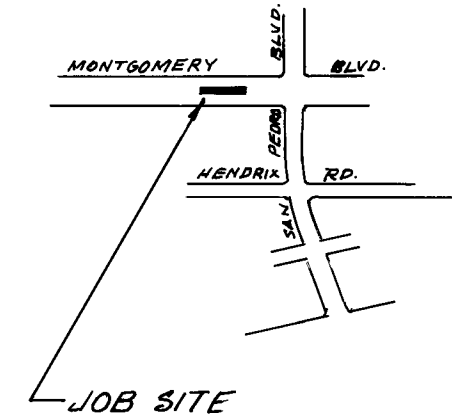

LOCATION MAP

## NOTICE TO CONTRACTORS

- New Mexico Standard Specifications for Public Works Construction - 1979 Edition will be referred to hereon as the "Standard Specifications."
- All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with Contract Documents for City-Wide Utilities and Cash Paving No. 31 and the Standard Specifications.
- Two working days prior to any excavation, contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
- Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or survey so that the conflict can be resolved with minimum of delay.

## THE FOLLOWING NOTES APPLY WHEN CHECKED:

- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☒ Backfill compaction shall be according to specified street use. (ARTERIAL)
- ☒ Tack coat requirements shall be determined by the City Engineer.
- ☐ Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
- ☐ If curb is depressed for a driveway, the driveway shall be constructed prior to acceptance of the curb and gutter.
- ☐ All storm drain facilities shall be completed prior to final acceptance.

APPROVED  
  
 3/1/82

CITY OF ALBUQUERQUE  
 MUNICIPAL DEVELOPMENT DEPARTMENT  
 ENGINEERING DIVISION MR 82-5

TITLE: MEDIAN REVISION ON MONTGOMERY WEST OF  
 SAN PEDRO BLVD. FOR BANK OF ALBUQUERQUE

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer		10/15/82	Liquid Waste	NA	9-27-82
A.C.E.-Design		3/28/82	Traffic		3/8/82
A.C.E.-Hydrology		7-22-82	Water	NA	4-27-82

DRAWING NO.	MAP NO.	SHEET	OF
1481	G-18	1	1

1841