


七七二

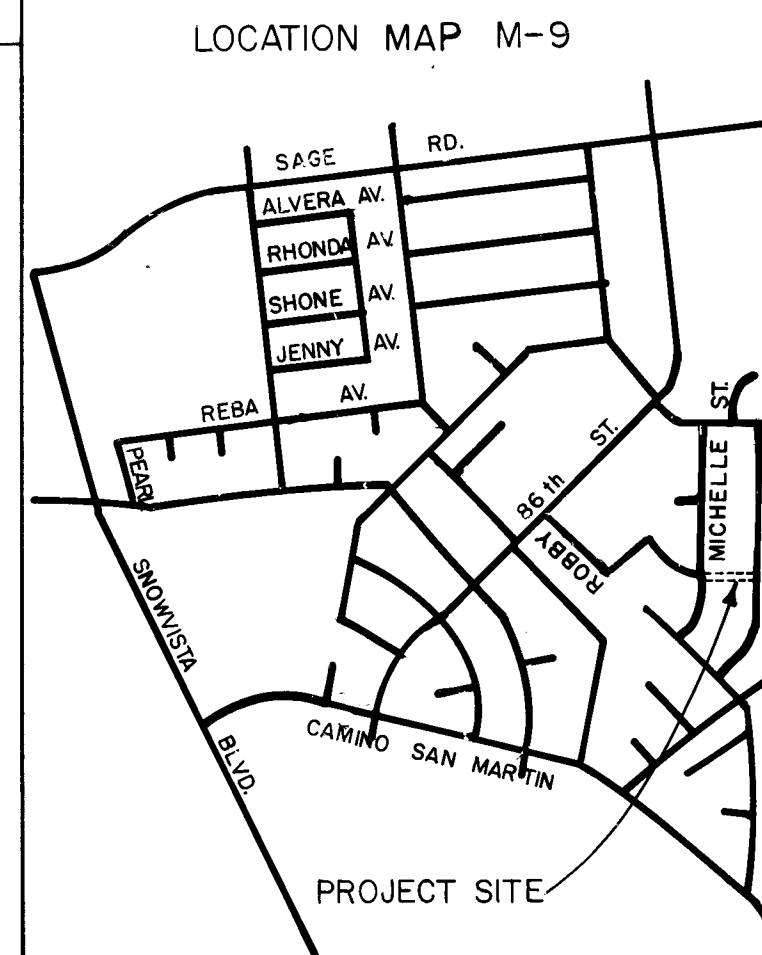

1. All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for herein, be constructed in accordance with the New Mexico Standard Specifications for Public Works Construction-1979 Edition (referred to herein as the Standard Specifications) and the Contract Documents for Public Works Contract 84-1.
2. Two (2) working days prior to any excavation, the contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
3. Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor that the conflict can be resolved with minimum amount of delay.

- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☒ Backfill compaction shall be according to specified street use. RESIDENTIAL
- ☒ Tack coat requirements shall be determined by City Engineer.

- 1) REMOVE AND REPLACE EXISTING PAVING, CURB, GUTTER, SIDEWALK, DRIVEPAD, CONCRETE CHANNEL BOTTOM AND VALLEY GUTTER WITHIN THE CONSTRUCTION LIMITS
- 2) REMOVE CHANNEL WALLS AS REQUIRED TO ACCOMMODATE NEW CONSTRUCTION
- 3) REMOVE CURB RETURNS IF REQUIRED TO MATCH NEW CONSTRUCTION.
- 4) SLOPE TOP OF CURB DOWN TO THE ELEVATION OF THE BOTTOM OF THE CHANNEL AT END OF THE RETURN AS REQUIRED.
- 5) CONSTRUCT CUT-OFF WALL ADJACENT TO PROPERTY LINE AS PER DETAIL
- 6) REMOVE METAL GATES AND RETURN TO STREET MAINTENANCE AT CITY YARDS.

*E. W. Snodgrass* 1/10/34

TITLE: DRAINAGE CHANNEL IMPROVEMENTS IN WESTGATE  
HEIGHTS ADDN. BLOCK 74.

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	<i>[Signature]</i>	11/4/83	Liquid Waste	WA <i>[Signature]</i>	11-25-
A C E - Design	<i>[Signature]</i>	10/20/83	Traffic	<i>[Signature]</i>	11/24/83
A C E -Hydrology	<i>[Signature]</i>	12/29/83	Water	WA <i>[Signature]</i>	11-25-

DRAWING NO.	1744	MAP NO.	M-9	SHEET	1	OF	1
-------------	------	---------	-----	-------	---	----	---

