


• L E G E N D •


MATERIALS

CONCRETE
RIP-RAP



LINES

SUBDIVISION BOUNDARY
PROPERTY LINE (PLAN)
PROPERTY LINE (SECTION)
CENTERLINE
EASEMENT LINE
MATCH LINE
SECTION CUT LINE

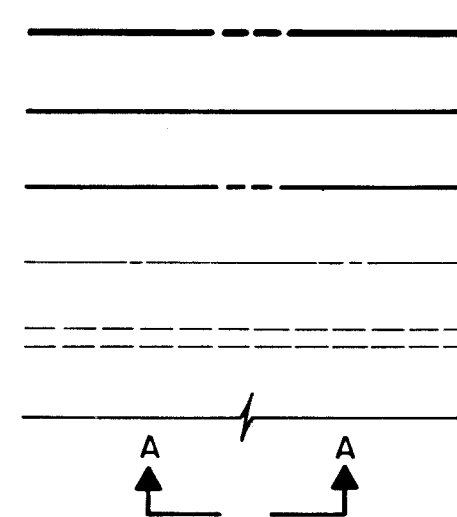


EARTHWORK

CONTOUR LINE
SPOT ELEVATION
PROJECT / PHASE BOUNDARY
SWALE
DIRECTION OF FLOW




MISCELLANEOUS UTILITIES

GAS LINE
UNDERGROUND TELEPHONE
UNDERGROUND ELECTRICAL
STORM DRAIN
STORM DRAIN MANHOLE
STORM DRAIN INLET

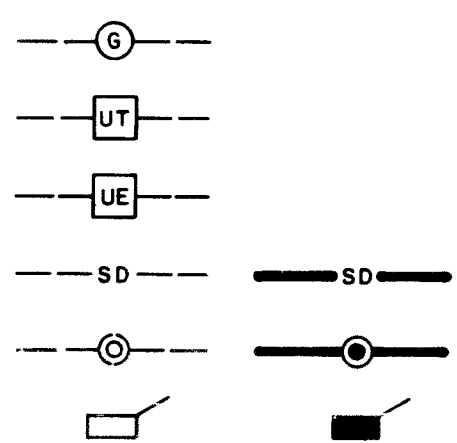


SANITARY SEWER

SANITARY SEWER LINE
SANITARY SEWER MANHOLE
SAS SERVICE CONNECTIONS
SAS CAP OR PLUG
ENCASEMENT

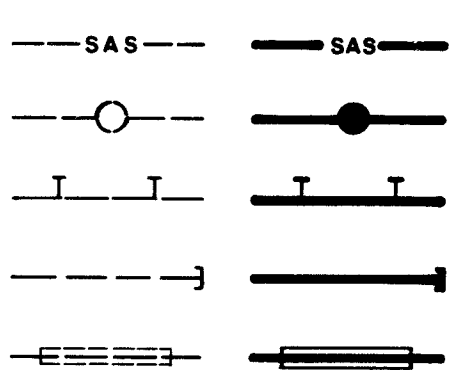


WATER

WATER LINE
WATER SERVICE CONNECTIONS
GATE VALVE
FIRE HYDRANT
BUTTERFLY VALVE
REDUCER
WATER PRESSURE ZONE BOUNDARY

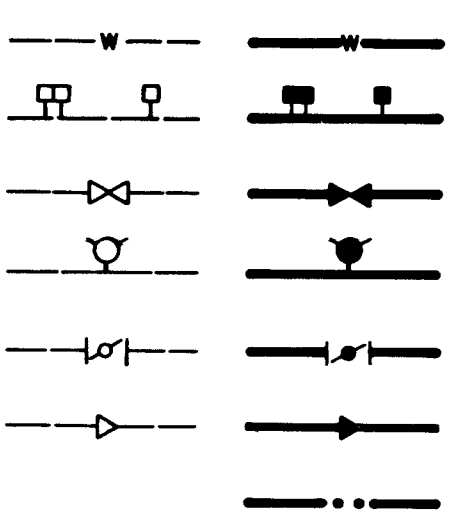



WATER FITTINGS

CAPS AND PLUGS
ELBOW
CROSS
TEE

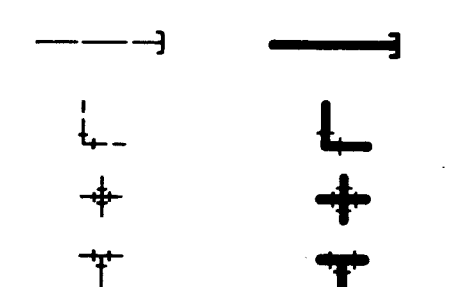

MISCELLANEOUS

CHAINLINK FENCE
FIELD FENCE
COMMON YARD WALL
RETAINING WALL
POWER OR TELEPHONE POLE

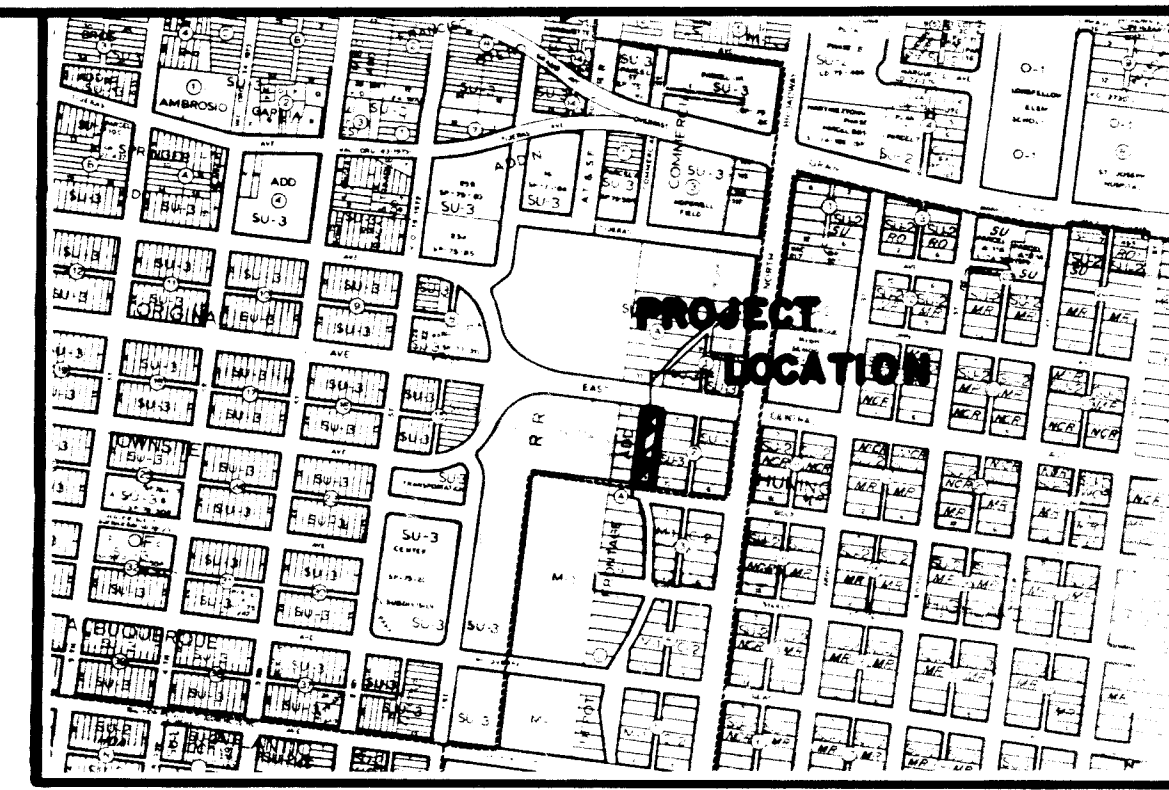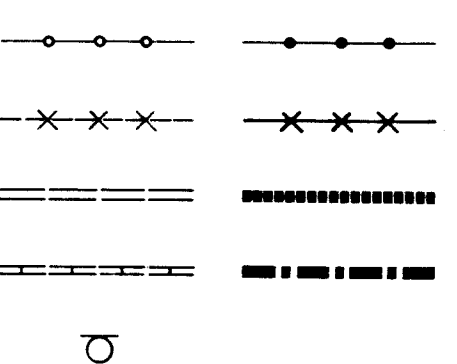

VICINITY MAP
SCALE: 1" = 800'

K-14

GENERAL NOTES

- All work detailed on these plans to be performed under contract shall, except otherwise stated or provided for hereon, be constructed in accordance with the New Mexico Standard Specifications for Public Works Construction - 1979 Edition (referred to herein as the Standard Specifications) and the "Specifications and Contract Documents for Public Works Contract No. 84-3".
- Two working days prior to any excavation, Contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
- Prior to construction, the Contractor shall excavate and verify the horizontal and vertical locations of all existing utilities and potential obstructions. Should a conflict exist, the Contractor shall notify the Engineer so that the conflict can be resolved with a minimum amount of delay.
- All work on this project shall be performed in accordance with applicable Federal, State, and Local laws, rules and regulations concerning construction safety and health.
- The Contractor must submit a construction signing and barricading plan to Traffic Engineering to receive a barricading permit prior to construction. The cost of traffic control shall be considered incidental to the contract.
- All utilities and utility service lines shall be installed prior to paving.
- Backfill compaction shall be according to specified street use.
- Tack coat requirements shall be determined by the City Engineer.
- Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
- If curb is depressed for a driveway, the driveway shall be constructed prior to acceptance of curb and gutter.
- This project shall be coordinated with the Broadway waterline replacement which will include the John St. waterline.
- All brickwork, landscaping, irrigation, & electrical work was excluded from this project on 8/20/84. This work shall be included under separate contract upon completion of this project with an estimate bid date of February 12, 1985.

CONSTRUCTION PLANS

FOR THE

DEVELOPMENT OF

JOHN STREET S.E.

FROM CENTRAL AVE. TO GOLD AVE. S.E.

ALBUQUERQUE, NEW MEXICO

MARCH, 1984



• INDEX OF DRAWINGS •

SHEET NO.	DESCRIPTION
1	TITLE, INDEX, LEGEND & GENERAL NOTES
2	DEMOLITION PLAN
3	PAVING IMPROVEMENTS PLAN & PROFILE
4	SANITARY SEWER PLAN & PROFILE

PROJECT SCOPE REVISION APPROVALS	
City Engineer <i>C. H. Thompson</i>	8/29/84
Water Resources <i>Richard Tena</i>	8/29/84
ACE - Design <i>James L. Grier</i>	8/30/84
ACE - Hydrology <i>Jim Fink</i>	8/29/84
Traffic Engineer <i>David W. Hansen</i>	8/30/84

REV.	4	SHEETS	CITY ENGINEER	DATE	USER DEPARTMENT	DATE	USER DEPARTMENT	DATE
APPROVAL OF REVISIONS								

		APPROVED FOR CONSTRUCTION <i>C. H. Thompson</i> C.E.
1802		SHEET 1 OF 4

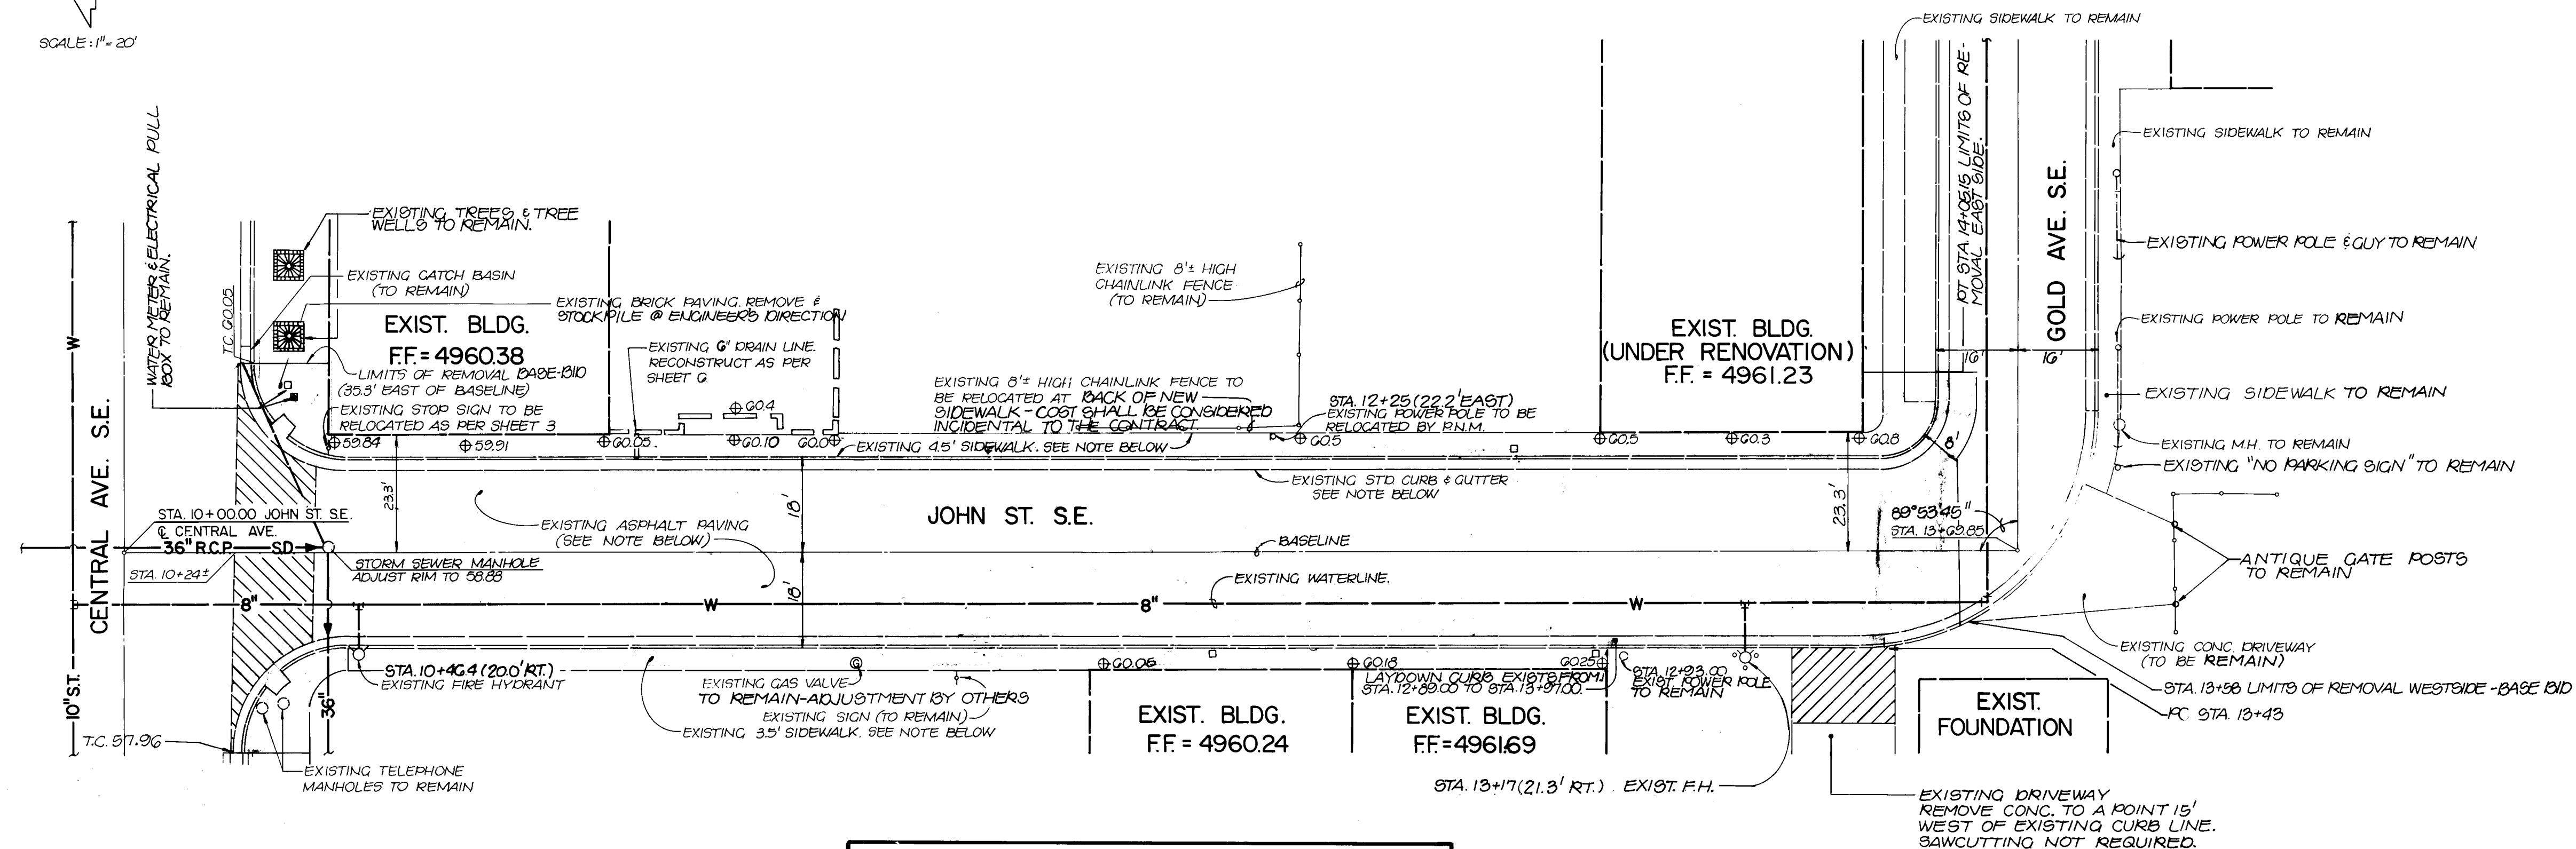

NOTE: CONTRACTOR SHALL REMOVE ALL CURB & GUTTER, SIDEWALK AND PAVING WITHIN THE SHADED AREAS.


NOTES:

1. CONTRACTOR SHALL ADJUST ALL MANHOLES & VALVES EXCEPT AS NOTED "BY OTHERS".
2. NAIL & SHINER WAS SET ON BASELINE @ EACH 50' INTERVAL ON GOLD AVE. TO STA. 16+00.
3. SHADED AREA INDICATES LIMITS OF REMOVAL UNDER BASE BID.

				SURVEY INFORMATION	BENCH MARKS	AS BUILT INFORMATION
				FIELD NOTES		
				NO.	BY DATE	CONTRACTOR
						WORK STAKED BY
						INSPECTOR'S RECLAMANCE BY
						FIELD VERIFICATION BY
						CHECKED BY
						MICRO-FILM INFORMATION
						DATE
						RECORDED BY
						NO

PROFESSIONAL ENGINEER
STATE OF TEXAS
JAMES L. THOMAST.
No. 3790
LAND AND SURVEYING
3/12/84
8/28/84

811 DALLAS N.E. • ALBUQUERQUE • NEW MEXICO • 87110
ENGINEERS
New Mexico Scientific

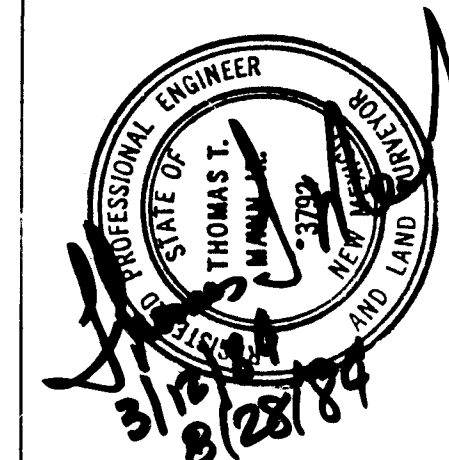

111 DALLAS, N.E. • ALBUQUERQUE • NEW MEXICO • 87110
ENGINEERS




1	2	3	4	5	6	7	8	9	10	11
2	6		1	8	0	2	0	2	8	5

CITY OF ALBUQUERQUE MUNICIPAL DEVELOPMENT DEPARTMENT ENGINEERING DIVISION					
TITLE: JOHN ST. S.E. DEMOLITION PLAN					
APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	<i>C. B. [Signature]</i>	<i>5/14/84</i>	Liquid Waste	<i>R. Peña</i>	<i>6/27/84</i>
A.C.E. - Design	<i>J. L. Peña</i>	<i>7/16/84</i>	Traffic	<i>T. J. [Signature]</i>	<i>6/27/84</i>
A.C.E. - Hydrology	<i>[Signature]</i>	<i>6/27/84</i>	Water	<i>R. Peña</i>	<i>6/27/84</i>
DRAWING NO.	MAP NO.		SHEET OF		
1802	K-14	2	4		

**APPROVED FOR
CONSTRUCTION**


CITY ENGINEER		DATE
---------------	--	------

AF 22400

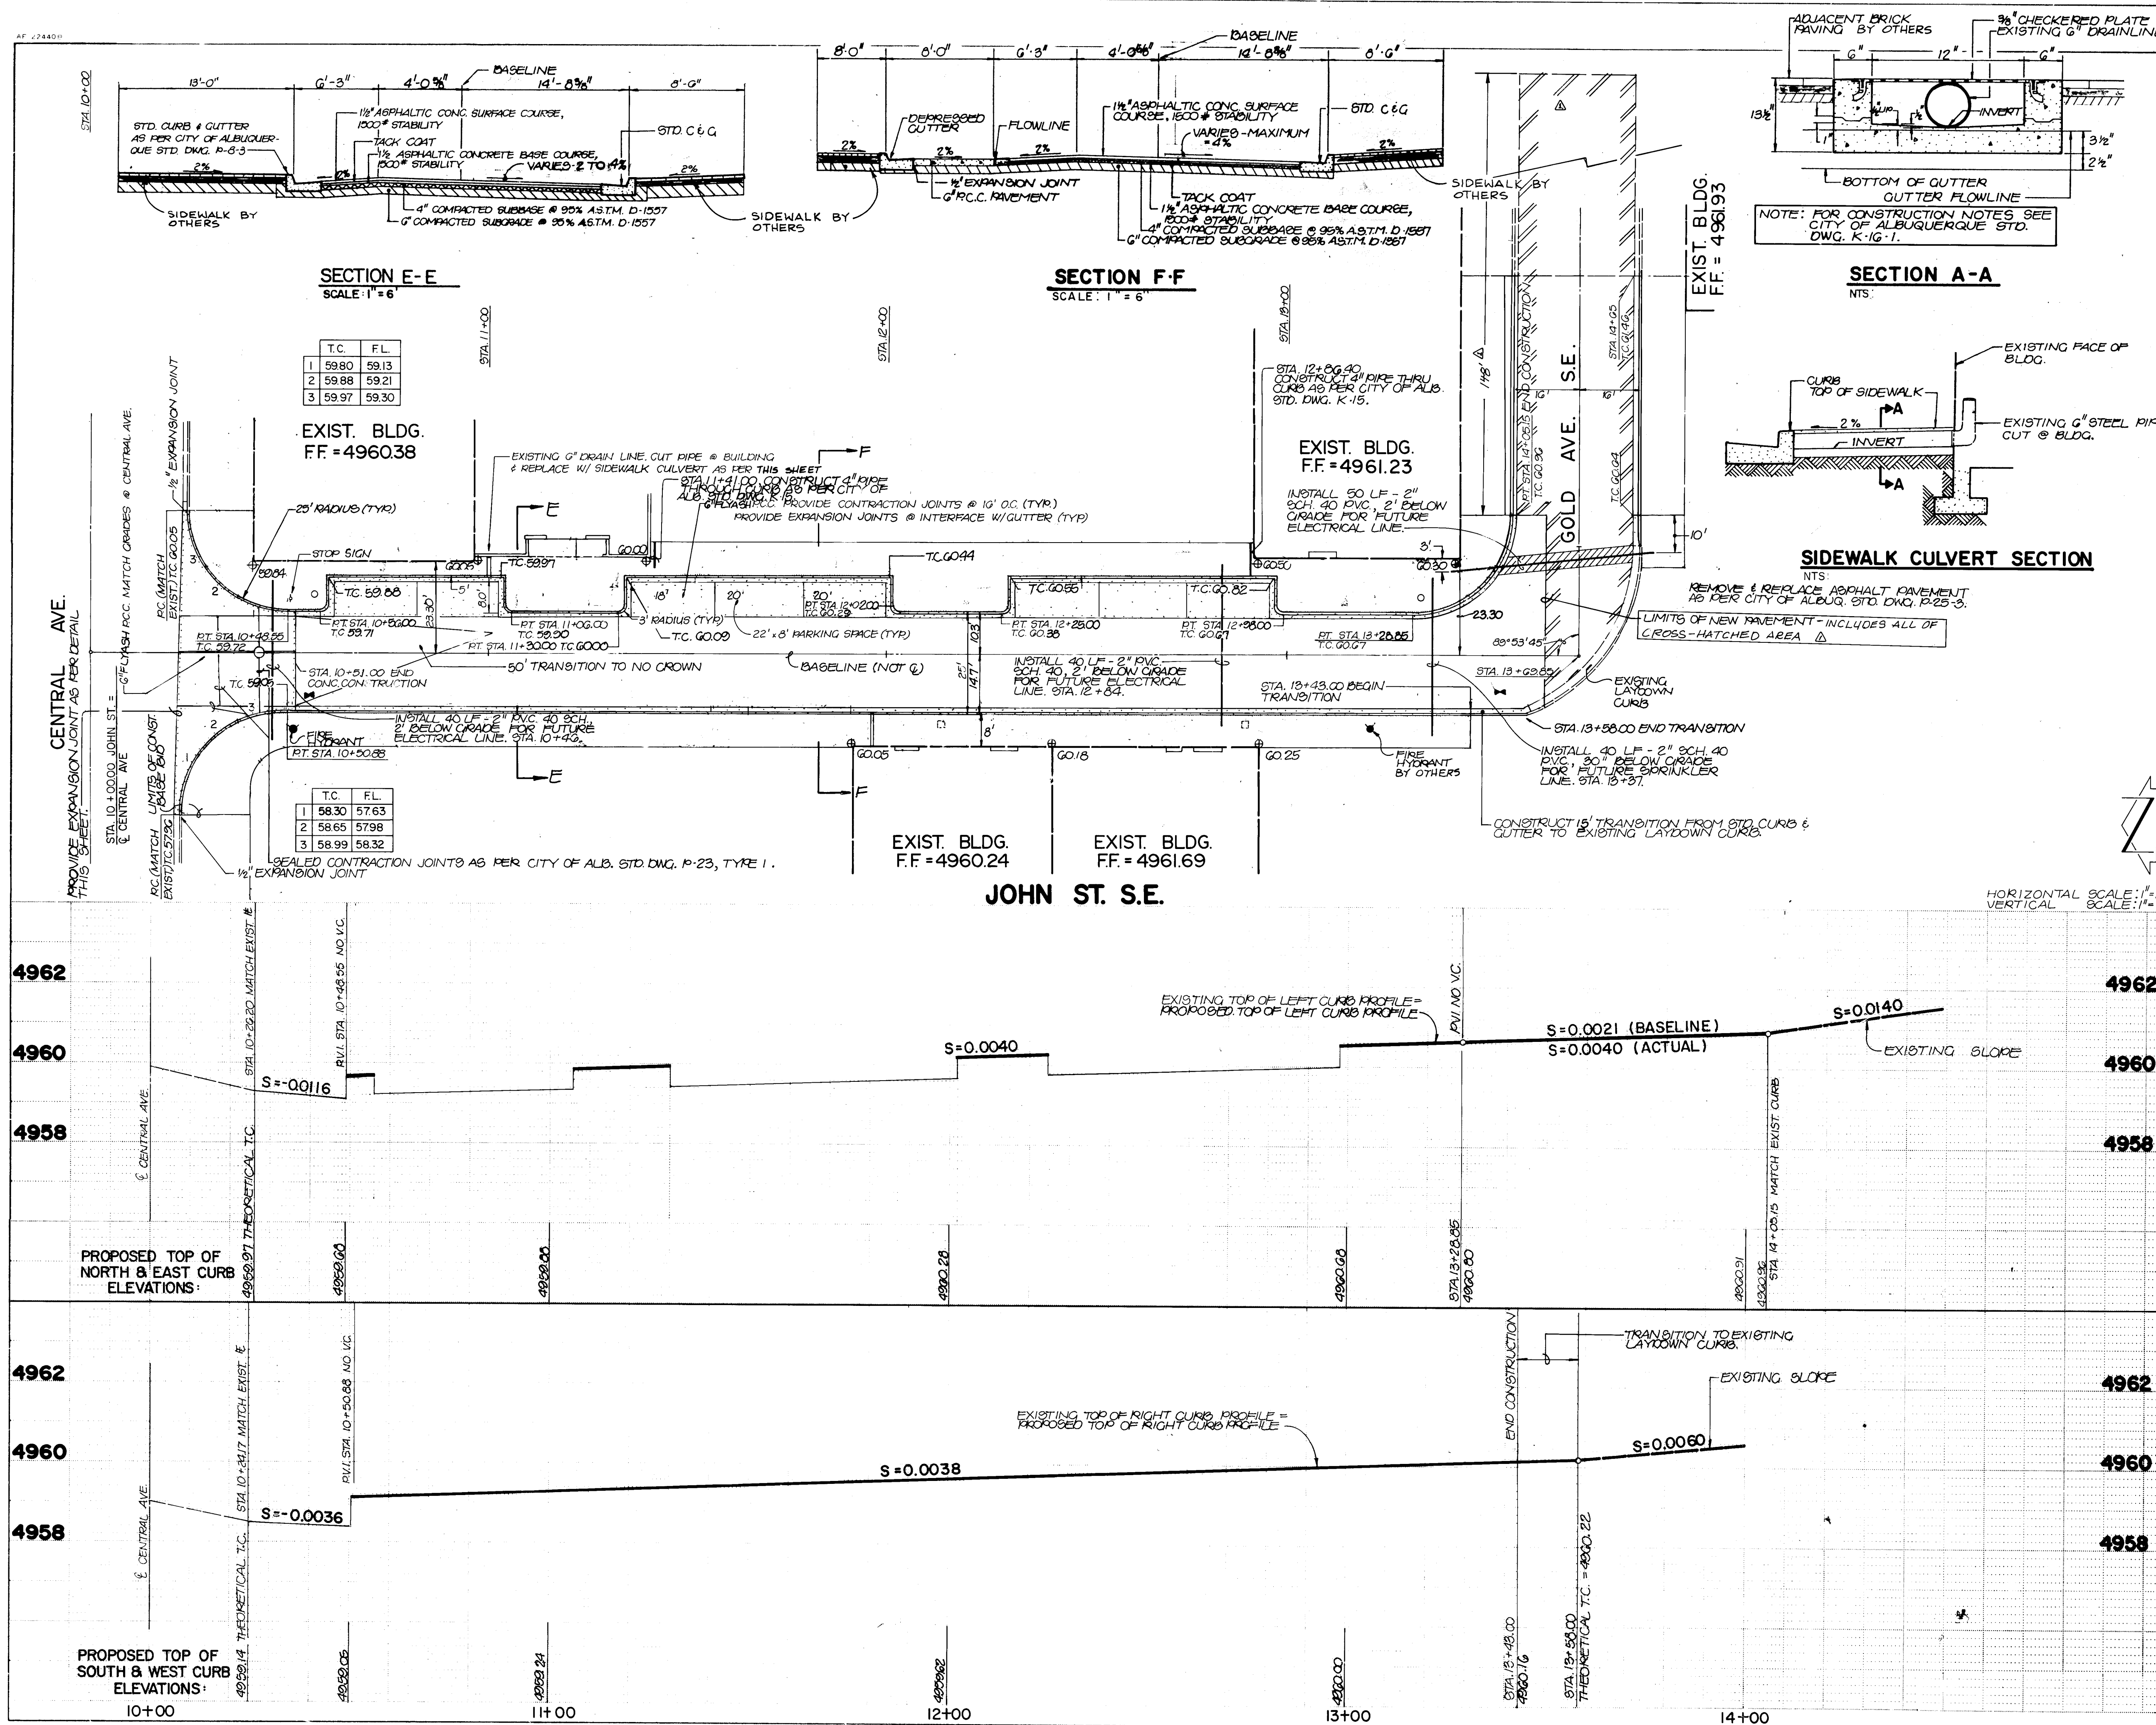

PAVING NOTES

1. All slopes as shown on profiles are based on BASELINE stationing. Baseline is identical on sheet 2 and 3.
2. Where removal of existing curb and gutter, sidewalk or pavement is required, the Contractor shall sawcut and/or remove to the nearest joint. Curb and gutter shown as existing and not to be removed under this contract which is damaged or displaced by the Contractor shall be removed and replaced by the Contractor at the Contractor's expense.
3. All dimensions of curb and curb returns are shown to face of curb.

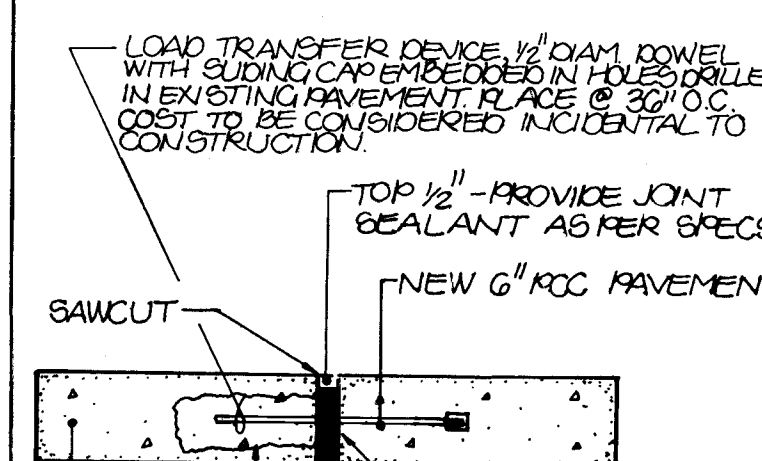

LOAD TRANSFER DEVICE 1/2" DIAM. HOLE WITH 1/2" DIAM. STEEL PLATE IN EXISTING PAVEMENT PLACE @ 30" O.C. COST TO BE CONSIDERED INCIDENTAL TO CONSTRUCTION.

TOP 1/2" - PROVIDE JOINT SEALANT AS PER SPECS

EXISTING CONCRETE NON-SHRINK GROUT

JOINT FILLER - PROVIDE SELF-EXPANDING GROUT AS PER ASTM D-1152 OR EQUAL.

EXPANSION JOINT DETAIL

NO SCALE.

AS BUILT INFORMATION		BENCH MARKS		SURVEY INFORMATION		ENGINEER'S SEAL	
NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE
1	5980	1	5980	1	5980	1	5980
2	5988	2	5988	2	5988	2	5988
3	5997	3	5997	3	5997	3	5997

PROFESSIONAL ENGINEER

STATE OF NEW MEXICO

3/18/2018


NO.	DATE	REMARKS
1	5980	1
2	5988	2
3	5997	3

CITY OF ALBUQUERQUE
MUNICIPAL DEVELOPMENT DEPARTMENT
ENGINEERING DIVISION

TITLE: JOHN ST. S.E.
STREET PAVING IMPROVEMENTS PLAN & PROFILE

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	7/10/2018	7/10/2018	Liquid Waste	7/10/2018	7/10/2018
A.C.E. - Design	7/10/2018	7/10/2018	Traffic	7/10/2018	7/10/2018
A.C.E. - Hydrology	6/27/2018	6/27/2018	Water	6/27/2018	6/27/2018

DRAWING NO. 1802 MAP NO. K-14 SHEET 3 OF 4

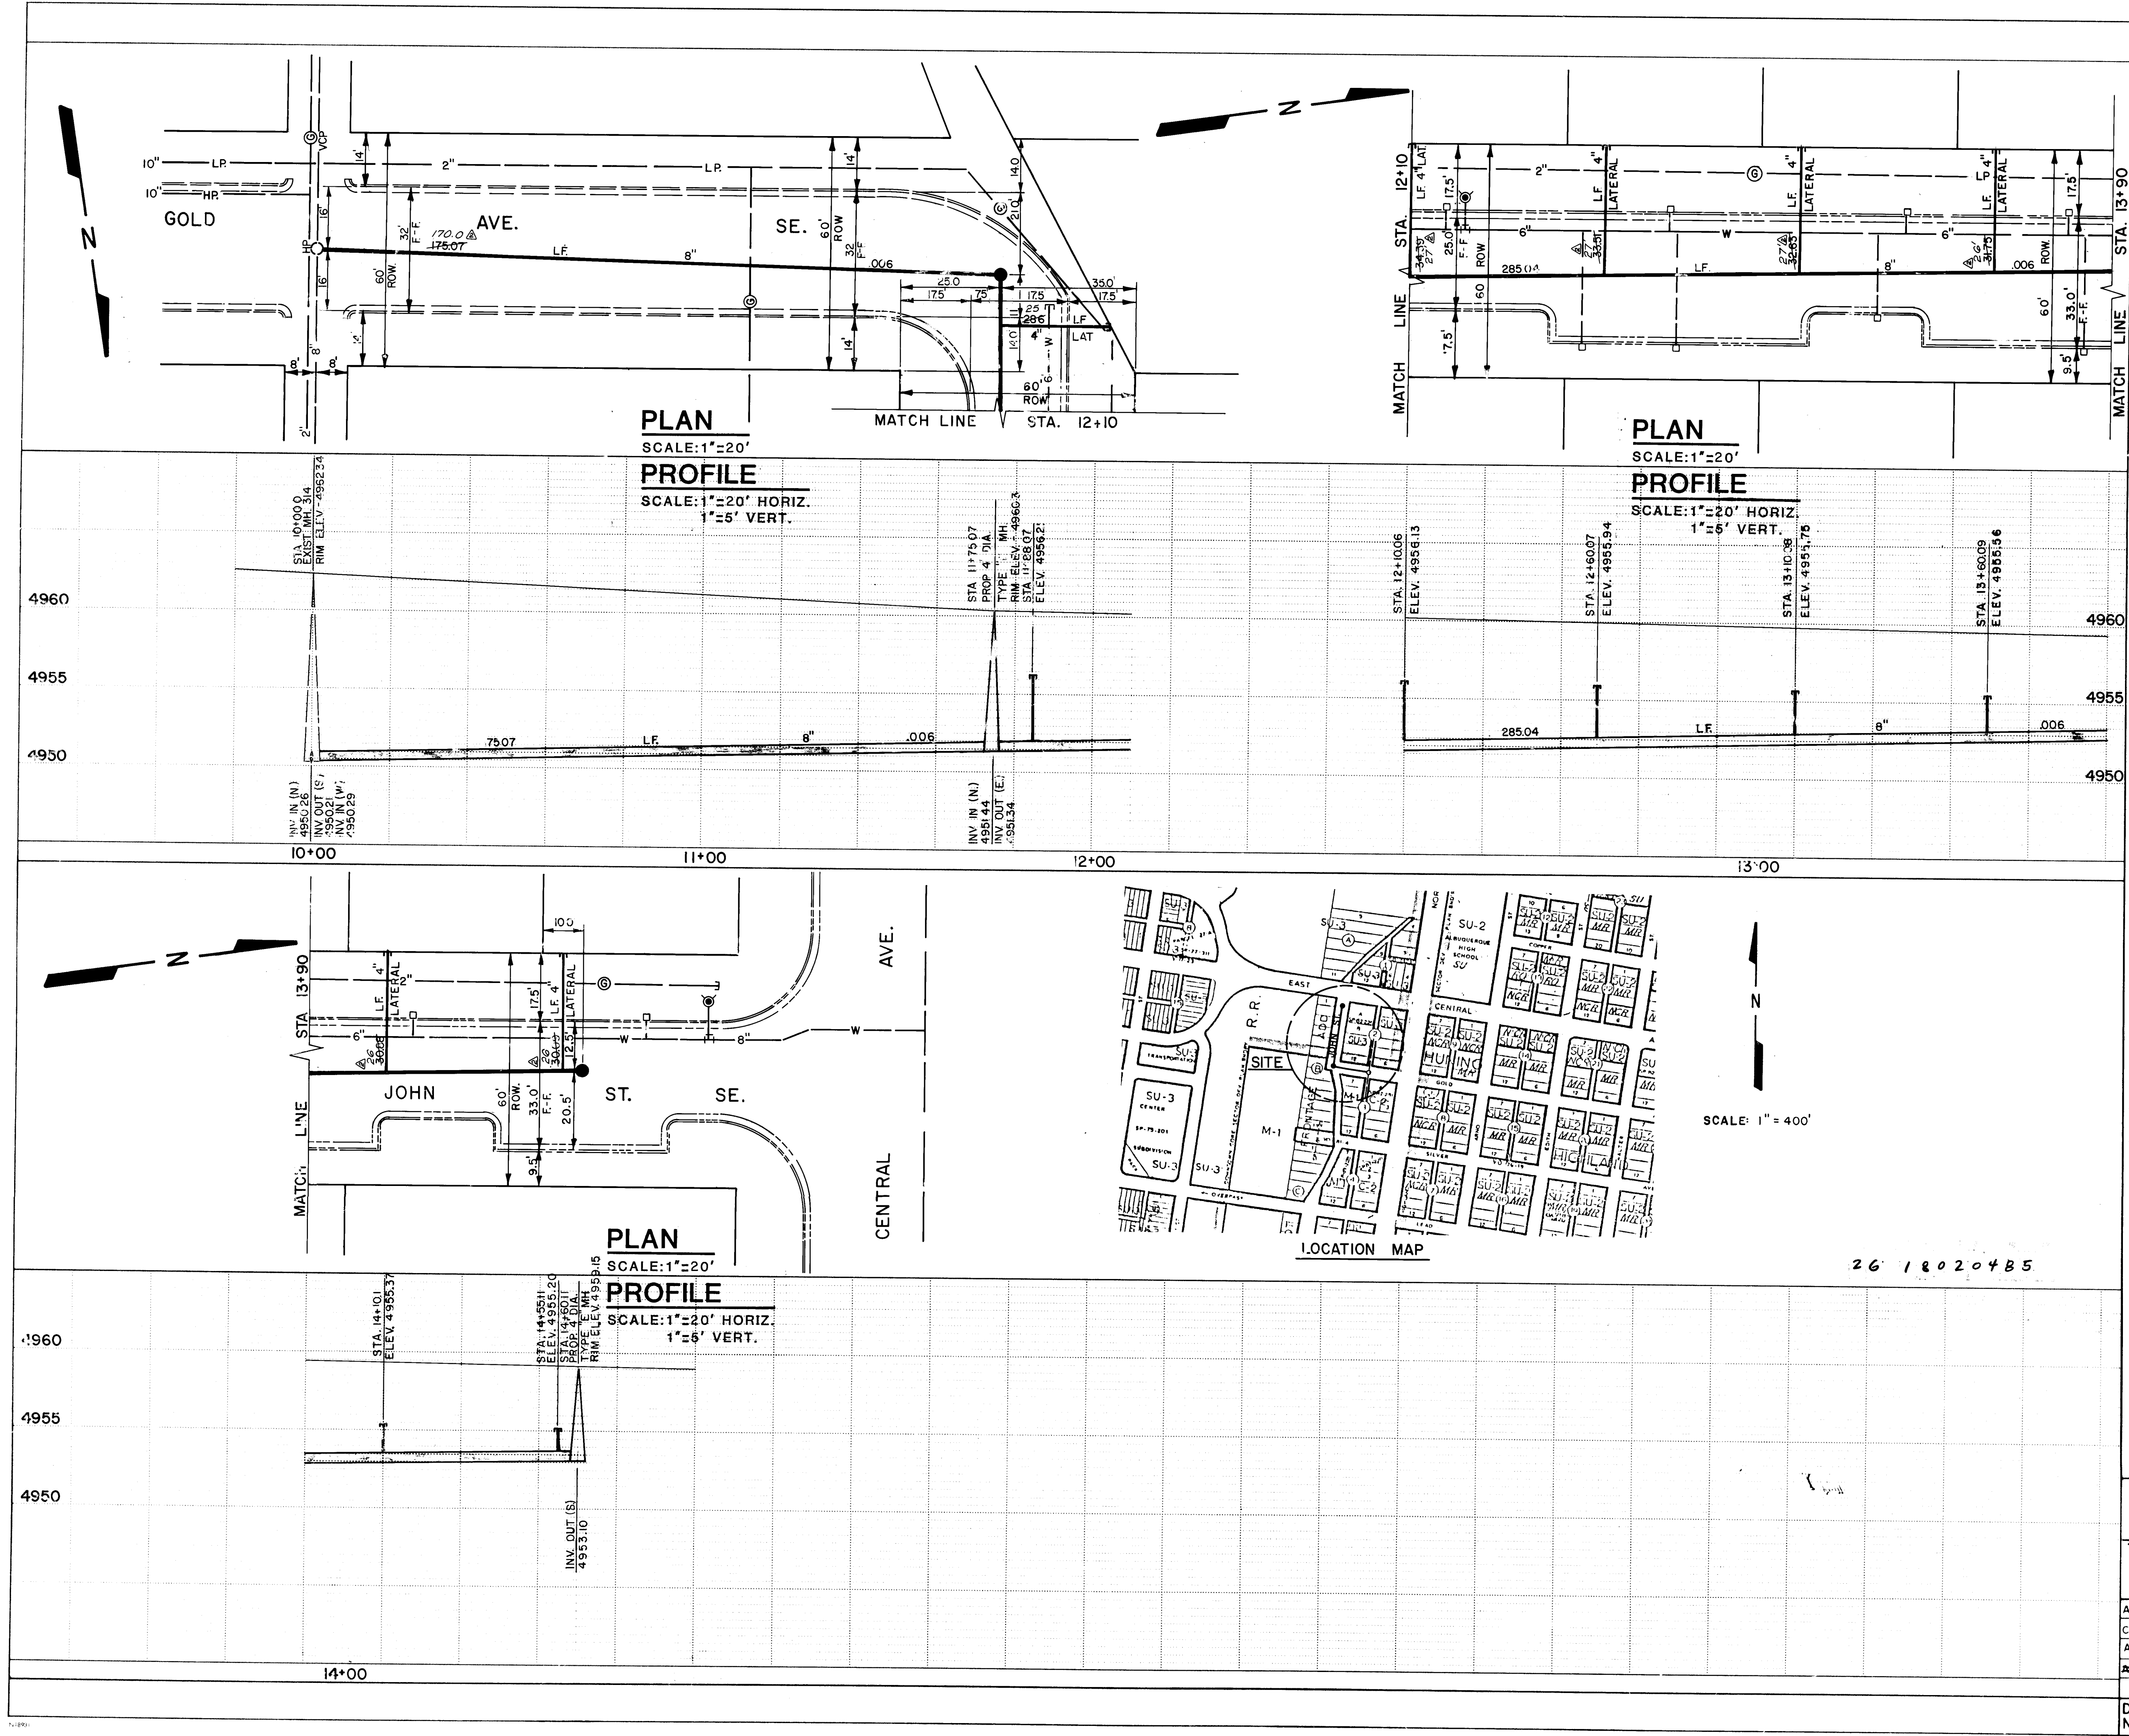

ENGINEER'S SEAL			SURVEY INFORMATION			BENCH MARKS			AS BUILT INFORMATION		
			FIELD NOTES			BM-6 K14 A BR+SSCA LOCATED AT THE NORTHEAST CORNER OF CENTRAL AVE AND BROADWAY BLVD.			CONTRACT INFORMATION		
			NO. 111			DATE			DATE		
DESIGNED BY T.Y. ASPERA			DATE APRIL 1985			DRAWN BY T.Y. ASPERA			DATE APRIL 1985		
CHECKED BY R. FAUGHT			DATE APRIL 1985			REMARKS			DATE		
NO. DATE			NO. DATE			NO. DATE			NO. DATE		
DESIGN			DESIGN			DESIGN			DESIGN		
CITY OF ALBUQUERQUE			CITY OF ALBUQUERQUE			CITY OF ALBUQUERQUE			CITY OF ALBUQUERQUE		
WATER RESOURCES DEPARTMENT			WATER RESOURCES DEPARTMENT			WATER RESOURCES DEPARTMENT			WATER RESOURCES DEPARTMENT		
ENGINEERING DIVISION			ENGINEERING DIVISION			ENGINEERING DIVISION			ENGINEERING DIVISION		
TITLE: JOHN ST. SE SEWER LINE EXTENSION			TITLE: JOHN ST. SE SEWER LINE EXTENSION			TITLE: JOHN ST. SE SEWER LINE EXTENSION			TITLE: JOHN ST. SE SEWER LINE EXTENSION		
APPROVALS			APPROVALS			APPROVALS			APPROVALS		
ENGINEER			ENGINEER			ENGINEER			ENGINEER		
DATE			DATE			DATE			DATE		
City Engineer			City Engineer			City Engineer			City Engineer		
ACE-Design			ACE-Design			ACE-Design			ACE-Design		
Hydrology			Hydrology			Hydrology			Hydrology		
DRAWING NO. 1802			DRAWING NO. 1802			DRAWING NO. 1802			DRAWING NO. 1802		
MAP NO. K-14			MAP NO. K-14			MAP NO. K-14			MAP NO. K-14		
SHEET 4 OF 4			SHEET 4 OF 4			SHEET 4 OF 4			SHEET 4 OF 4		