


HERITAGE HILLS PARK PLAY AREA ADDITION

INDEX

SHEET	DESCRIPTION
1	COVER SHEET
2	CONSTRUCTION PLAN
3	IRRIGATION PLAN
4	PLANTING PLAN
5	SECTION & DETAILS

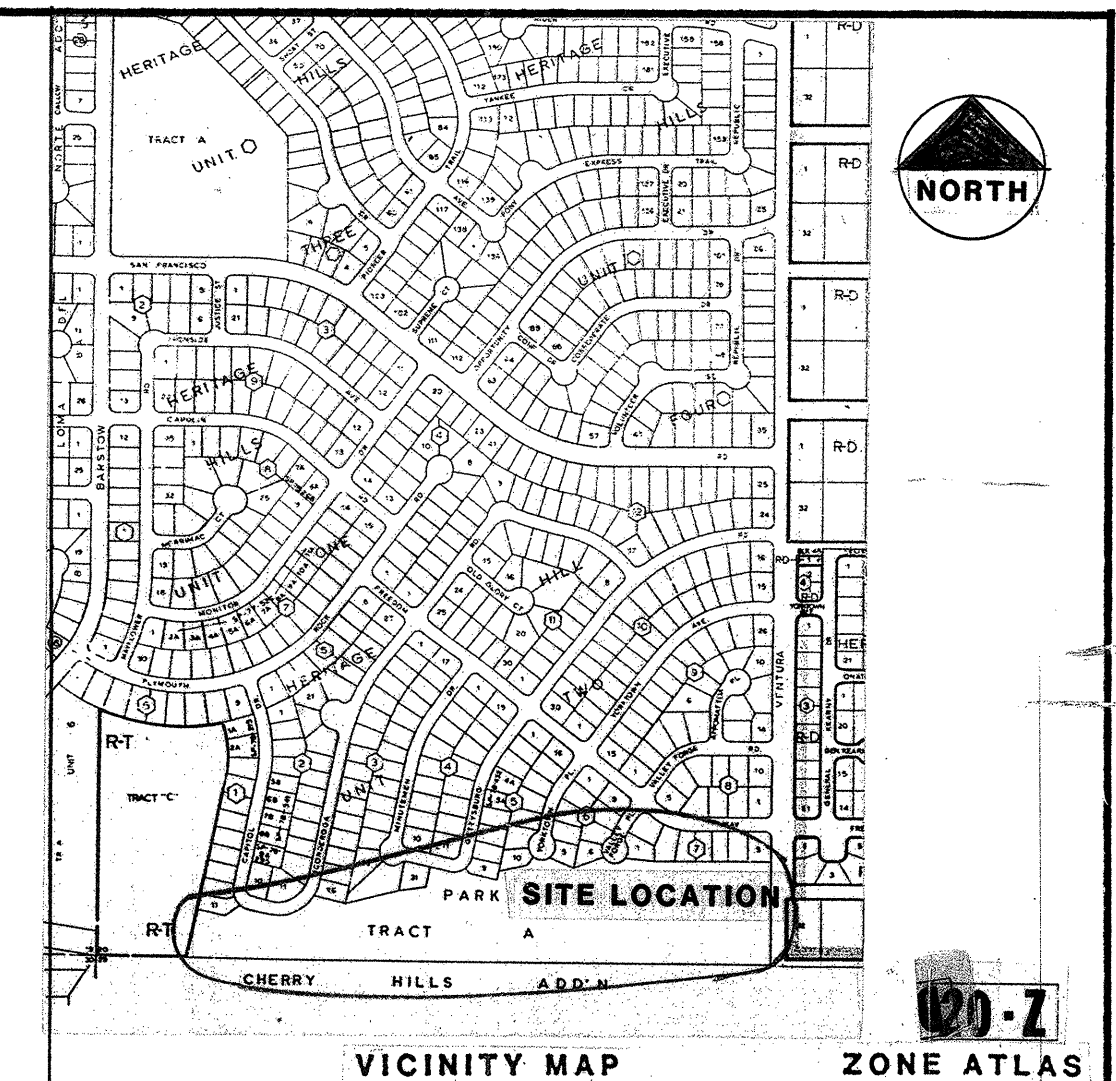

NOTICE TO CONTRACTOR

- All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with City of Albuquerque Standard Specifications, Public Works Construction, 1986.
- Two (2) working days prior to any excavation, contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
- Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with a minimum amount of delay.

THE FOLLOWING NOTES ALSO APPLY WHEN CHECKED

- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☐ Backfill compaction shall be according to specified street use.
- ☐ Tack coat requirements shall be determined by the City Engineer.
- ☐ Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
- ☐ If curb is depressed for a driveway or ramp shall be constructed prior to acceptance of the curb and gutter.
- ☐ All storm drainage facilities shall be completed prior to final acceptance.

SUPERINTENDENT
ASST. SUPERINTENDENT
AREA SUPERVISOR
UTILITY REPAIRMAN

3	REV. IRRIG. PER FLD HTS 4/8/93	PARKS/DESIGN/DEVEL			
REV. SHEETS	DATE	USER DEPT.	DATE	USER DEPT.	DATE
			APPROVED FOR CONSTRUCTION		
			DATE		
PROJECT NUMBER			SHEET OF		

Heritage Hills Park Play Area



CONSTRUCTION LEGEND:

VALVING LEGEND									
VALVE NO.	VALVE SIZE	TOTAL GPM	HEAD TYPE -	ARC	NOZZLE	QUANTITY	PSI	RADIUS	GPM
V-28	RAINBIRD PE-PRS 150-1 1/2"	17.25	RAINBIRD 1401 BUBBLER	-		69	-	BUBBLER	0.25
V-27	EXISTING RAINBIRD PE-PRS 150-1 1/2"	61.20	TORO XP300-07	90°		2	40	38'	1.5
				180°		1	40	38'	3.0
				225°		2	40	38'	3.8

IRRIGATION NOTES:

- 

SCALE: 1/8"=1'-0"


CITY OF ALBUQUERQUE
PARKS & RECREATION
DESIGN & DEVELOPMENT

TITLE: HERITAGE HILLS PARK PLAY AREA ADDITION

IRRIGATION PLAN

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
DRC CHAIRMAN			LIQUID WASTE		
DESIGN			TRAFFIC		
HYDROLOGY			WATER		
PARKS & REC					

DRAWING NO.		MAP NO. D-20-7	SHEET 3 OF 5
-------------	--	-------------------	--------------

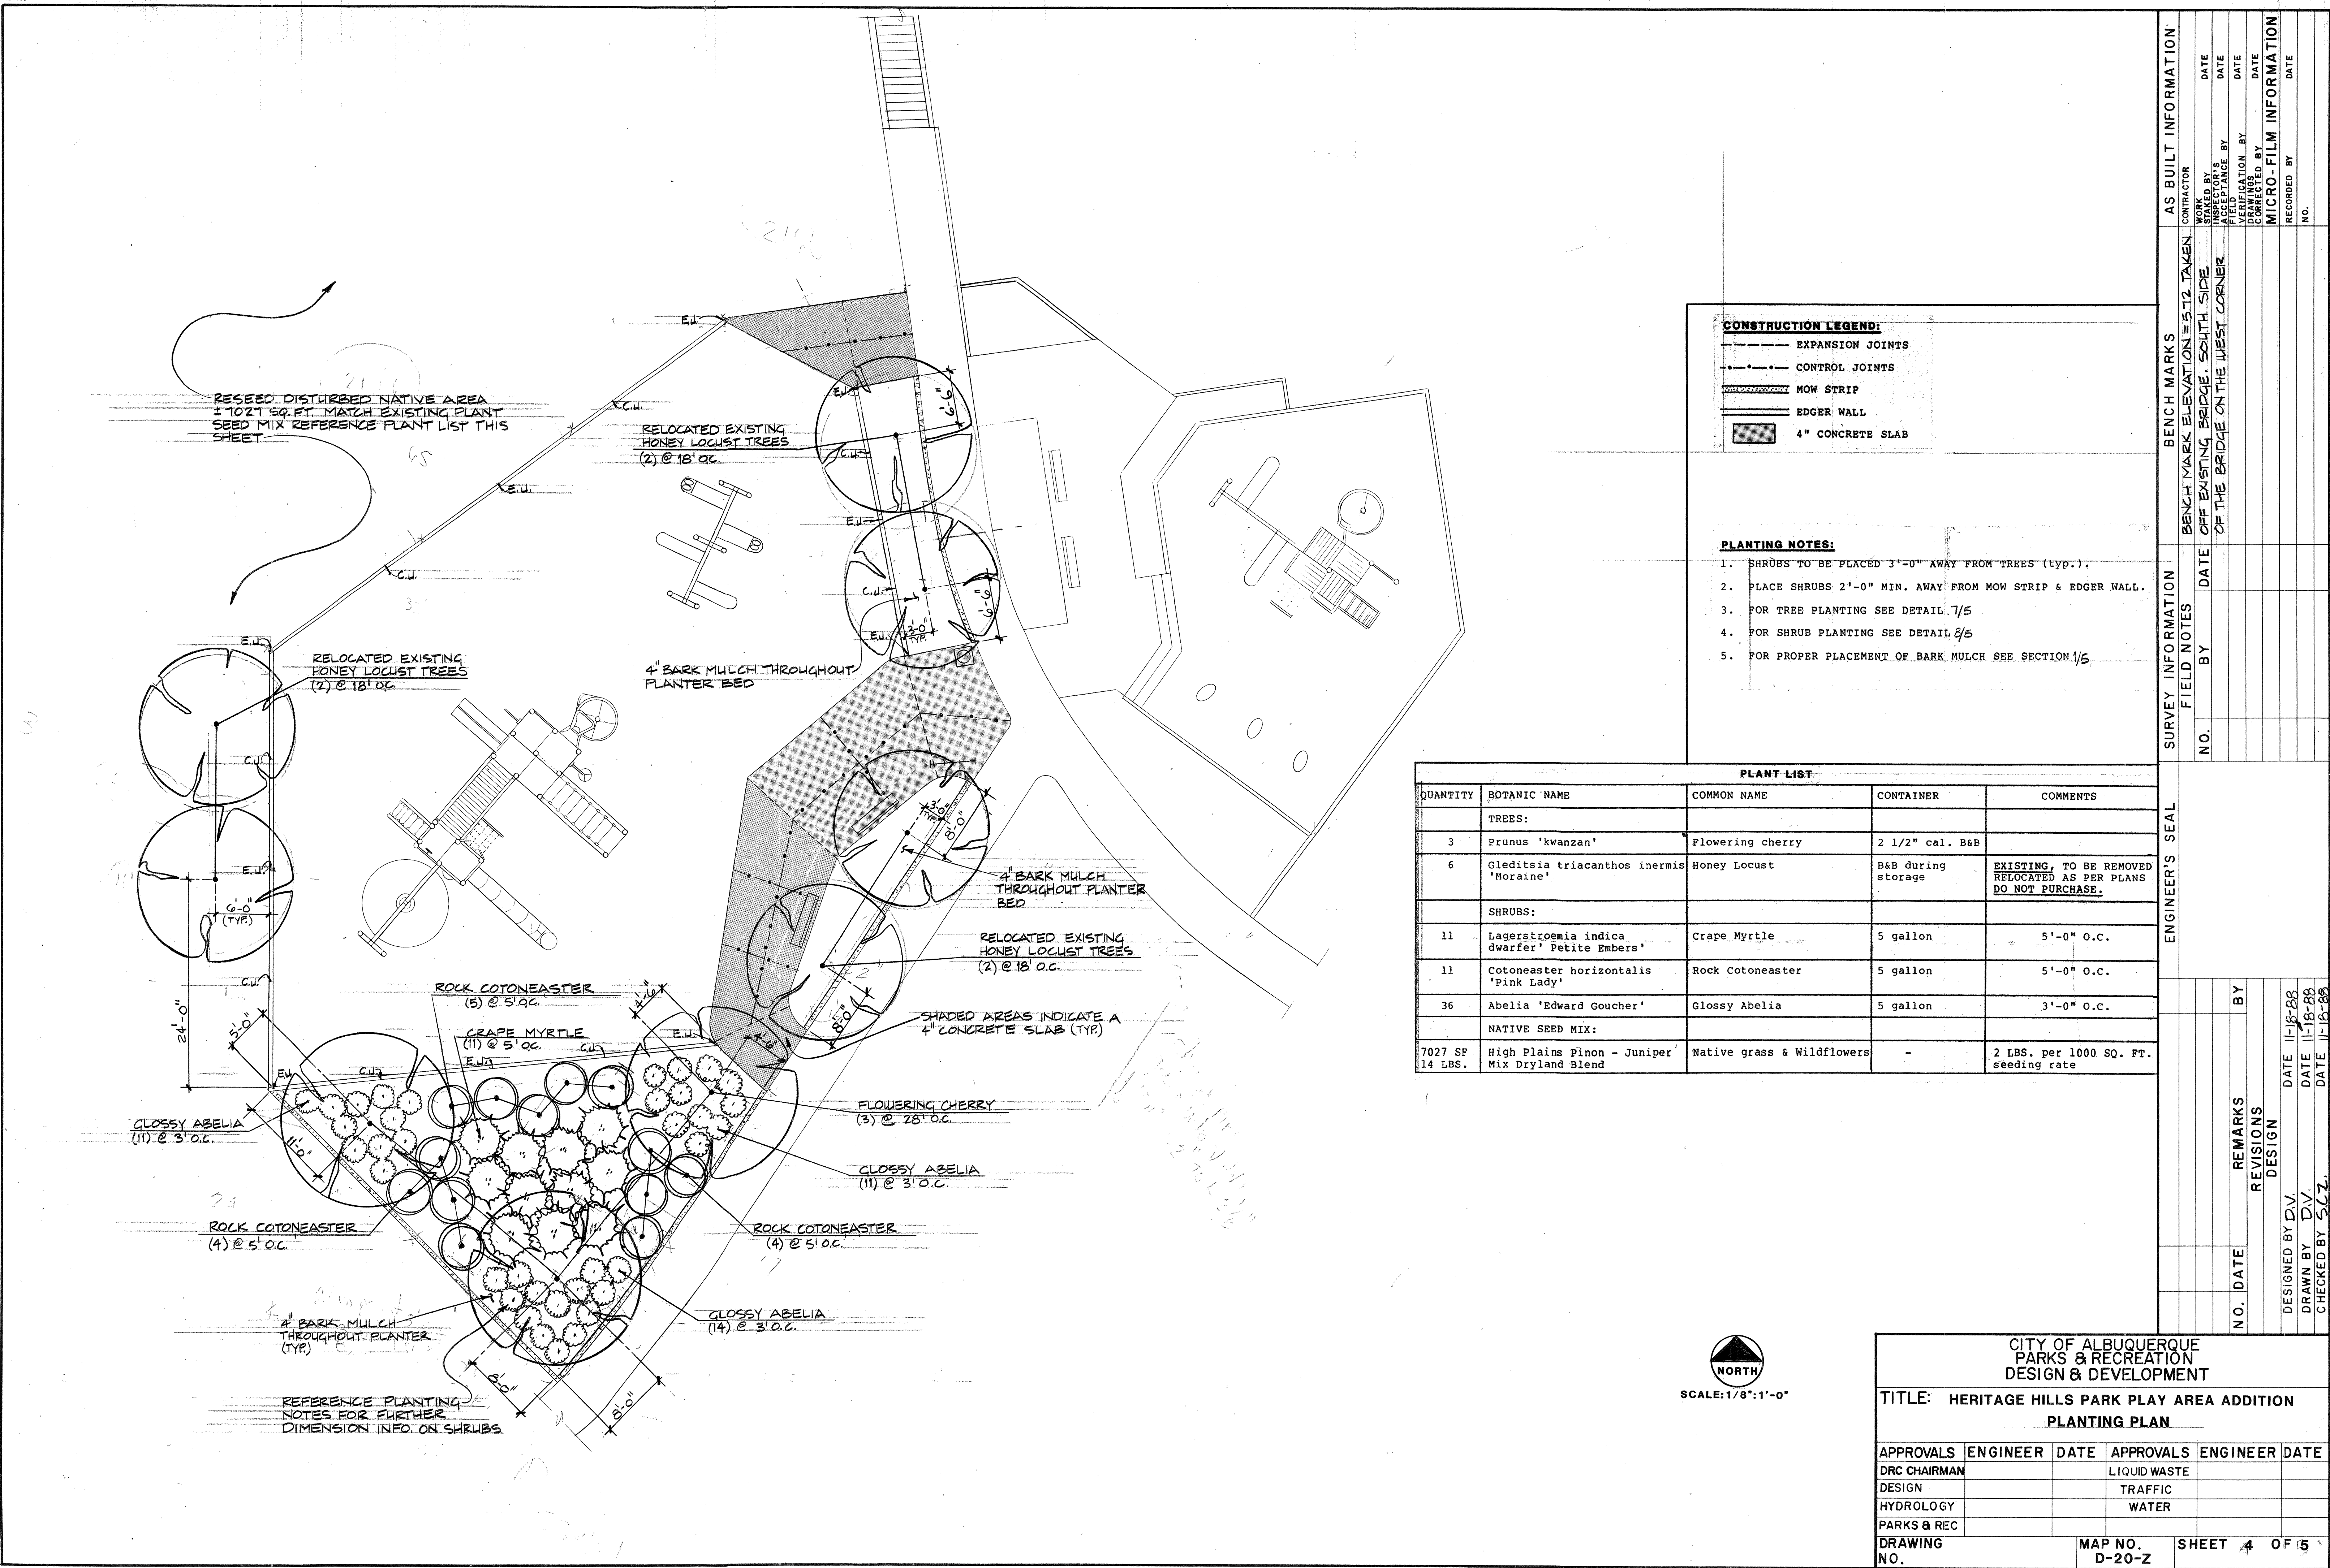


CONSTRUCTION LEGEND:

- EXPANSION JOINTS
- CONTROL JOINTS
- MOW STRIP
- EDGER WALL
- 4" CONCRETE SLAB


- PLANTING NOTES:**
- SHRUBS TO BE PLACED 3'-0" AWAY FROM TREES (typ.).
 - PLACE SHRUBS 2'-0" MIN. AWAY FROM MOW STRIP & EDGER WALL.
 - FOR TREE PLANTING SEE DETAIL 7/5
 - FOR SHRUB PLANTING SEE DETAIL 8/5
 - FOR PROPER PLACEMENT OF BARK MULCH SEE SECTION 1/5

PLANT LIST				
QUANTITY	BOTANIC NAME	COMMON NAME	CONTAINER	COMMENTS
TREES:				
3	Prunus 'kwanzan'	Flowering cherry	2 1/2" cal. B&B	
6	Gleditsia triacanthos inermis 'Moraine'	Honey Locust	B&B during storage	EXISTING, TO BE REMOVED RELOCATED AS PER PLANS DO NOT PURCHASE.
SHRUBS:				
11	Lagerstroemia indica 'dwarfer' Petite Embers'	Crape Myrtle	5 gallon	5'-0" O.C.
11	Cotoneaster horizontalis 'Pink Lady'	Rock Cotoneaster	5 gallon	5'-0" O.C.
36	Abelia 'Edward Goucher'	Glossy Abelia	5 gallon	3'-0" O.C.
NATIVE SEED MIX:				
7027 SF 14 LBS.	High Plains Pinon - Juniper Mix Dryland Blend	Native grass & Wildflowers	-	2 LBS. per 1000 SQ. FT. seeding rate

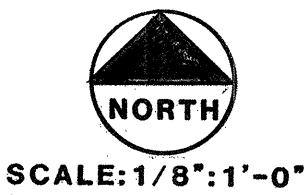


CITY OF ALBUQUERQUE PARKS & RECREATION DESIGN & DEVELOPMENT					
TITLE: HERITAGE HILLS PARK PLAY AREA ADDITION PLANTING PLAN					
APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
DRC CHAIRMAN			LIQUID WASTE		
DESIGN			TRAFFIC		
HYDROLOGY			WATER		
PARKS & REC					
DRAWING NO.	MAP NO. D-20-Z		SHEET 4 OF 5		

SURVEY INFORMATION		BENCH MARKS		AS BUILT INFORMATION	
NO.	BY	DATE	NO.	CONTRACTOR	NO.
				WORKED BY	DATE
				INSPECTOR'S FIELD	DATE
				FIELD BY	DATE
				VERIFICATION BY	DATE
				CORRECTED BY	DATE
				MICRO-FILM INFORMATION	
				RECORDED BY	DATE
				NO.	

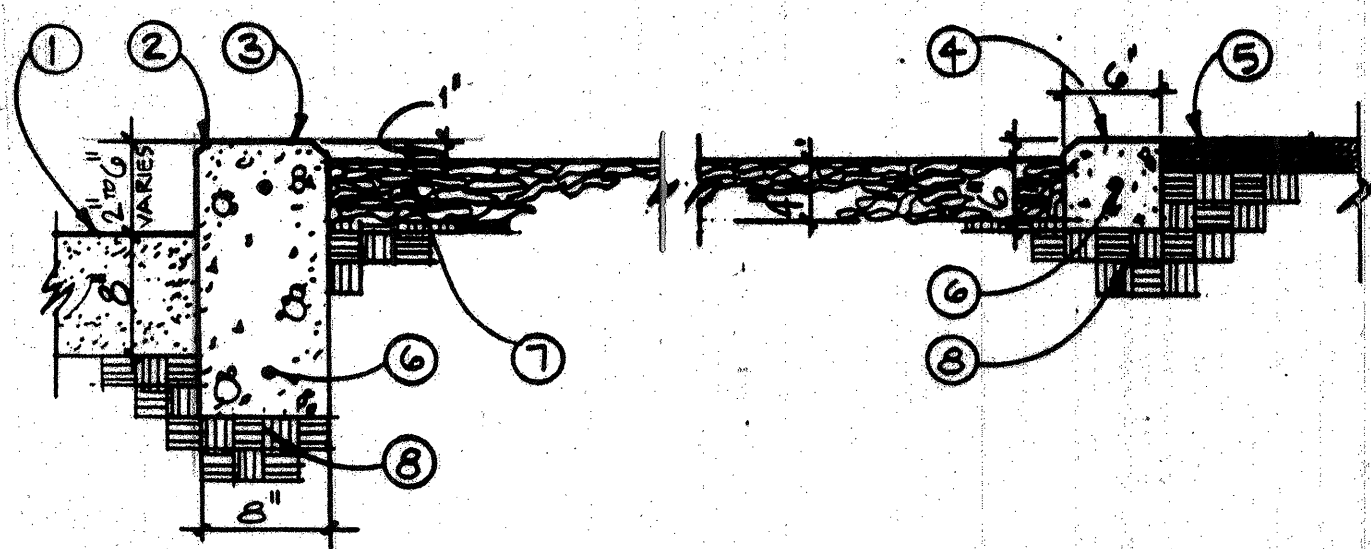**KEYED NOTES:**


- 1 BRICK SAND TRANSITION 6" TO 2" BELOW TOP OF CONCRETE SLAB
- 2 3/4" CHAMFER EDGE
- 3 3000 PSI CONCRETE EDGER WALL
- 4 3000 PSI CONCRETE MOW STRIP
- 5 EXISTING ASPHALT PATH
- 6 # 4 REBAR HORIZONTAL & CONTINUOUS
- 7 4" BARK MULCH IN PLANTER BED
- 8 SUBGRADE COMPACTED TO 95%

1
5 **SECTION THRU PLANTER BED**
SCALE: 1/2"=1'-0"

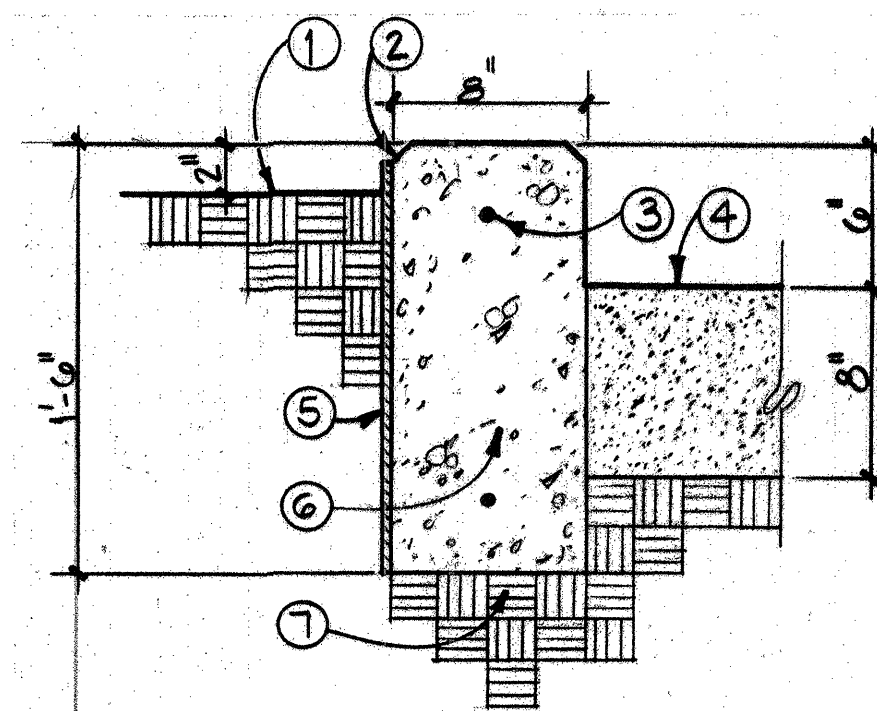**KEYED NOTES:**


- 1 FINISHED GRADE
- 2 3/4" CHAMFER EDGE
- 3 # 4 REBAR HORIZONTAL AND CONTINUOUS
- 4 BRICK SAND
- 5 1/4" MASTIC WATERPROOFING
- 6 3000 PSI CONCRETE
- 7 SUBGRADE COMPACTED TO 95%

2
5 **CONCRETE EDGER WALL DETAIL**
SCALE: 1/2"=1'-0"

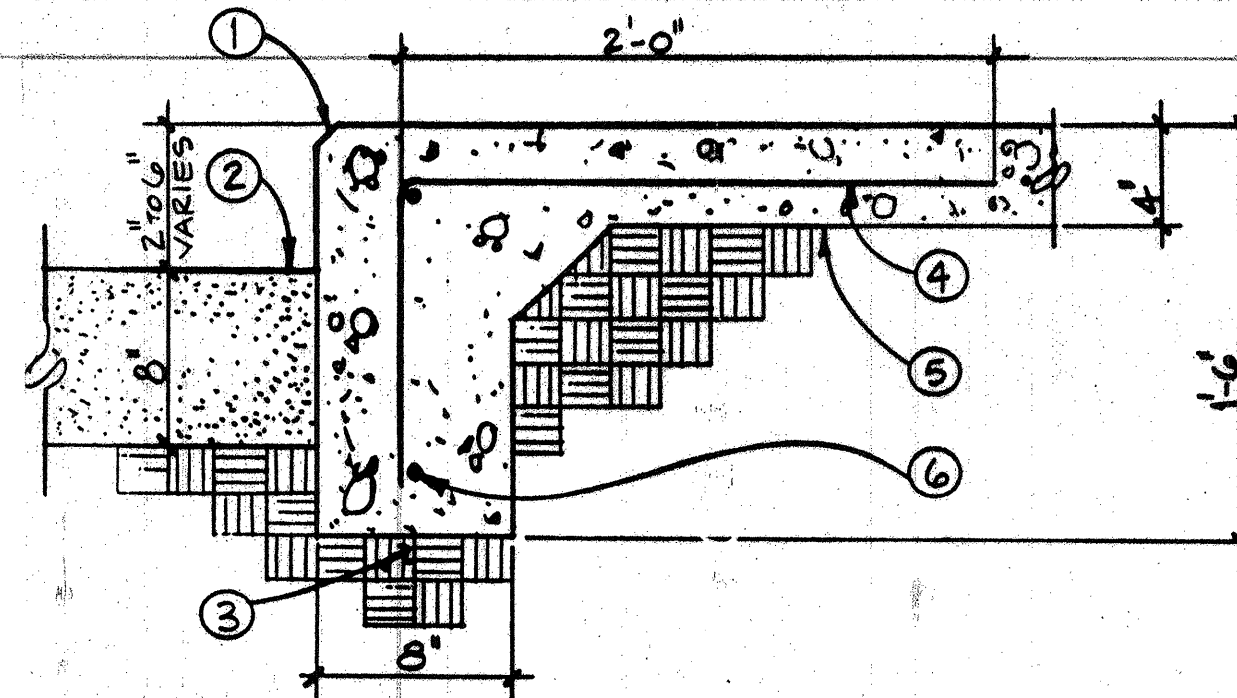**KEYED NOTES:**


- 1 3/4" CHAMFER EDGE
- 2 BRICK SAND 2" TO 6" BELOW TOP OF CONCRETE SLAB REFERENCE SPOT ELEVATIONS ON CONSTRUCTION PLAN FOR CORRECT LOCATION.
- 3 SUBGRADE COMPACTED TO 95%
- 4 # 4 REBAR @ 12" O.C.
- 5 3000 PSI CONCRETE
- 6 # 4 REBAR HORIZONTAL AND CONTINUOUS

3
5 **TURN DOWN SLAB DETAIL**
SCALE: 1/2"=1'-0"

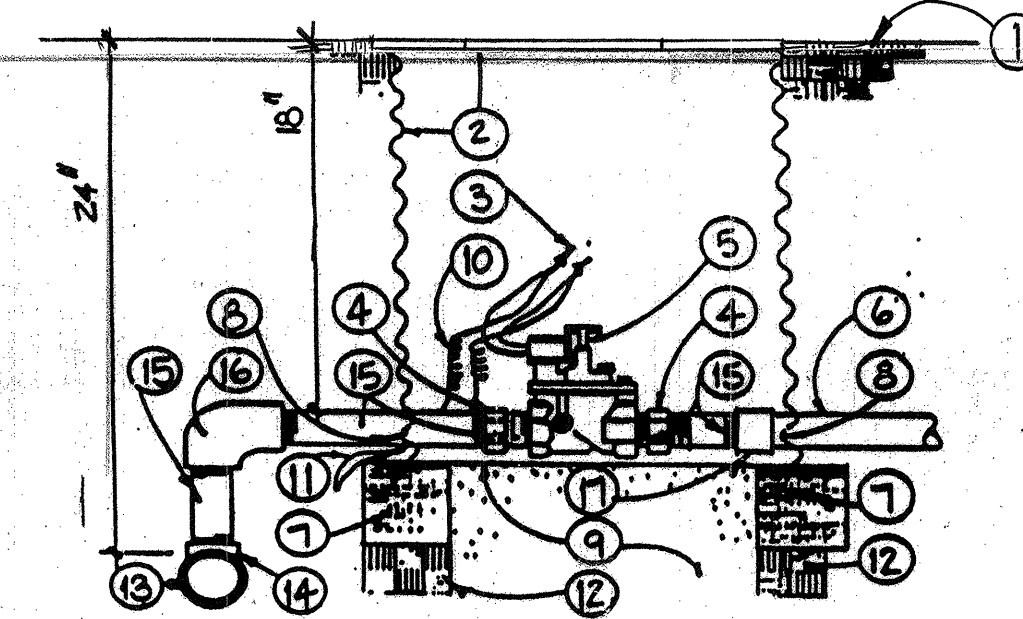**KEYED NOTES:**


- 1 FINISH GRADE
- 2 STEEL VALVE BOX BASS & HAYES 34-D
- 3 SPEARS DRI-SPLICE CONNECTORS
- 4 GALV. UNION
- 5 AUTOMATIC VALVE
- 6 LATERAL PIPE
- 7 8"x8"x16" SOLID CMU
- 8 CUT OUT FOR LATERAL PIPE
- 9 2 CUBIC FEET 1" DIAM. WASHED ROCK
- 10 36" WIRE EXPANSION COIL
- 11 WIRE BUNDLE
- 12 COMPACTED SUBGRADE TO 95%
- 13 MAINLINE
- 14 MAINLINE TEE
- 15 GALV. NIPPLE
- 16 MAINLINE ELL
- 17 SCH. 40 PVC EXT COUPLING

4
5 **CONTROL VALVE**
N.T.S.

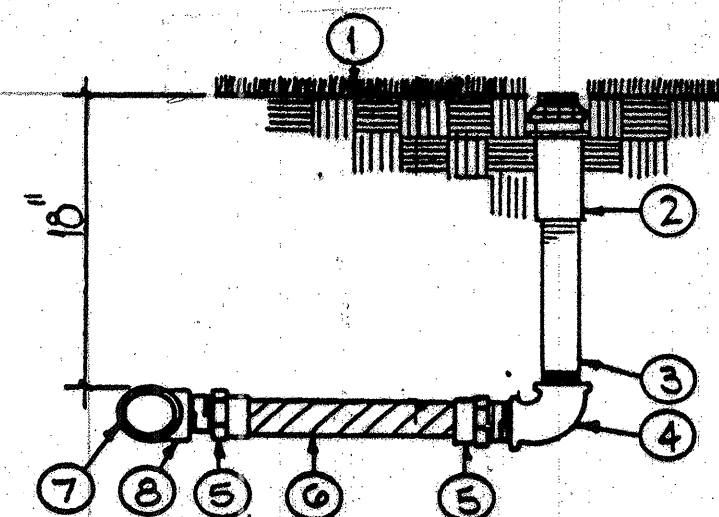**KEYED NOTES:**


- 1 FINISH GRADE
- 2 SPRINKLER HEAD
- 3 SCH. 80 PVC NIPPLE
- 4 GALV. ELL
- 5 SCH. 40 PVC MIP ADAPTER
- 6 PVC FLEX HOSE (12")
- 7 LATERAL PIPE
- 8 SCH. 40 SxSxT TEE

5
5 **SPRINKLER HEAD W/ FLEX HOSE RISER ASSEMBLY**
N.T.S.

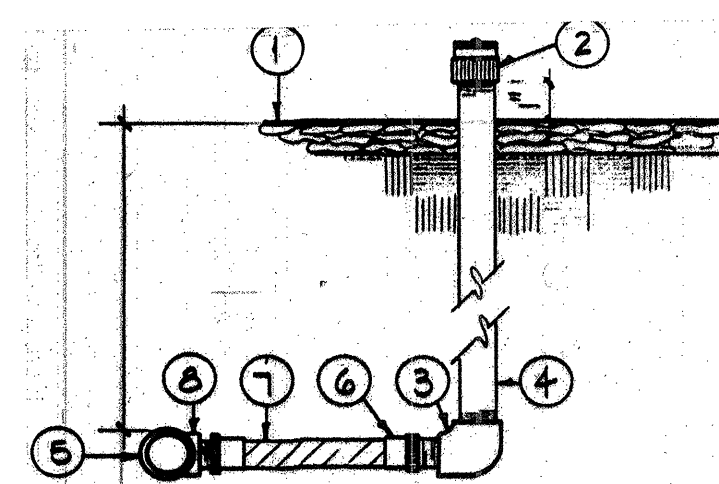**KEYED NOTES:**


- 1 FINISH GRADE
- 2 FLOOD BUBBLER, 1" ABOVE GRADE OR MULCH
- 3 SCH. 40 PVC ELL
- 4 SCH. 80 PVC RISER
- 5 PVC LATERAL PIPING
- 6 PVC MIP ADAPTER
- 7 PVC FLEX HOSE (12")
- 8 PVC SxSxT TEE

6
5 **FLOOD BUBBLER**
N.T.S.

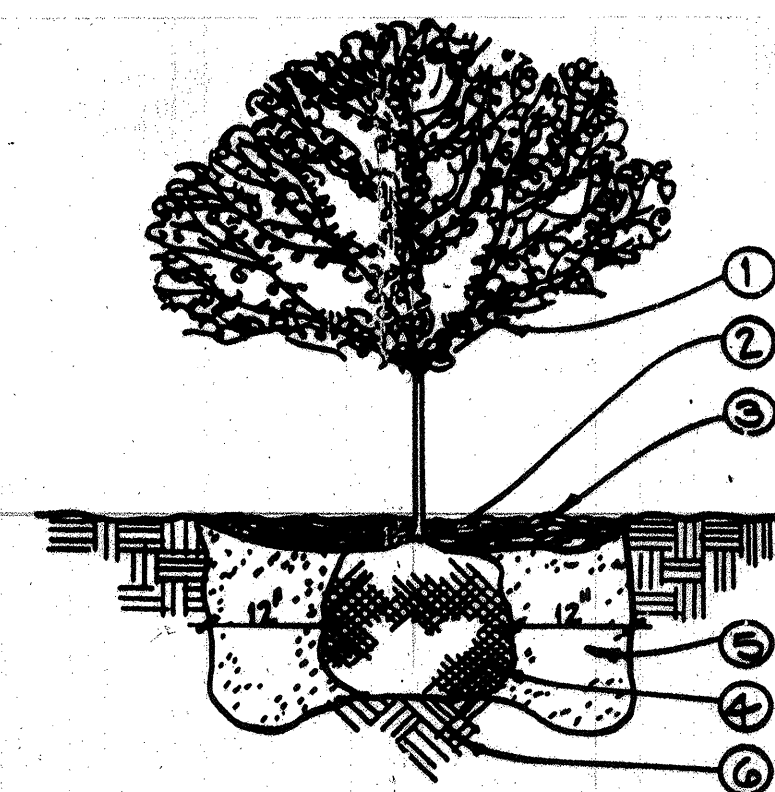**KEYED NOTES:**

- 1 TREE LOCATION & SPECIES AS PER PLAN
- 2 PLANT AT SAME DEPTH MAINTAINED IN NURSERY
- 3 4" DEEP BARK MULCH THROUGHOUT PLANTING BED, 36" DIA. RING OF 4" DEEP BARK MULCH FOR TREES IN NATIVE AREA.
- 4 REMOVE WIRE BASKET FROM ROOTBALL
- 5 BACKFILL W/ EXISTING SOIL & ADD (1) 21 GRAM AGRIFORM FERTILIZER TAB FOR EACH 1/2" OF TREE TRUNK DIAMETER OR FOR EACH 1 FOOT OF HEIGHT
- 6 UNDISTURBED SOIL

7
5 **TREE PLANTING DETAIL**
N.T.S.

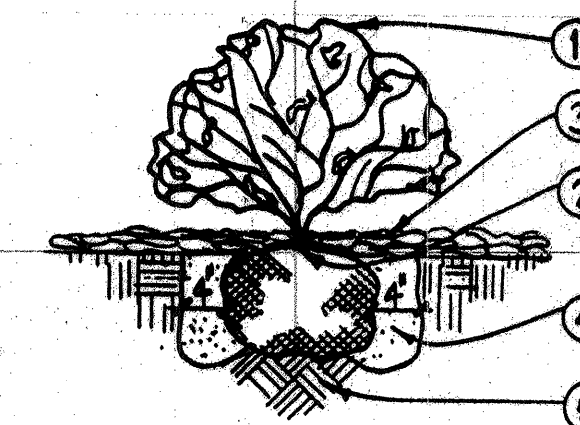**KEYED NOTES:**

- 1 SHRUB LOCATION & SPECIES AS PER PLAN
- 2 PLANT AT SAME DEPTH MAINTAINED IN NURSERY
- 3 4" DEEP BARK MULCH THROUGHOUT
- 4 BACKFILL W/ EXISTING SOIL & (2-3) 21 GRAM AGRIFORM FERTILIZER TABS
- 5 UNDISTURBED SOIL

8
5 **SHRUB PLANTING DETAIL**
N.T.S.


AS BUILT INFORMATION			BENCH MARKS			SURVEY INFORMATION			ENGINEER'S SEAL		
CONTRACTOR	WORK BY	DATE	NO.	BY	DATE	NO.	BY	DATE	NO.	BY	DATE
INSPECTOR'S	ACCEPTANCE BY	DATE									
VERIFICATION BY	DATE										
DRAWINGS	DATE										
CHECKED BY	DATE										
RECORDED BY	DATE										
NO.											

CITY OF ALBUQUERQUE PARKS & RECREATION DESIGN & DEVELOPMENT					
TITLE: HERITAGE HILLS PARK PLAY AREA ADDITION					
SECTION & DETAILS					
APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
DRC CHAIRMAN			LIQUID WASTE		
DESIGN			TRAFFIC		
HYDROLOGY			WATER		
PARKS & REC					
DRAWING NO.	MAP NO. D-20-Z		SHEET 5 OF 5		

DESIGNED BY D.V.
DRAWN BY D.V.
CHECKED BY S.C.L.

DATE 11-18-88
DATE 11-18-88
DATE 11-18-88


NO. DATE REMARKS
REVISIONS
DESIGN

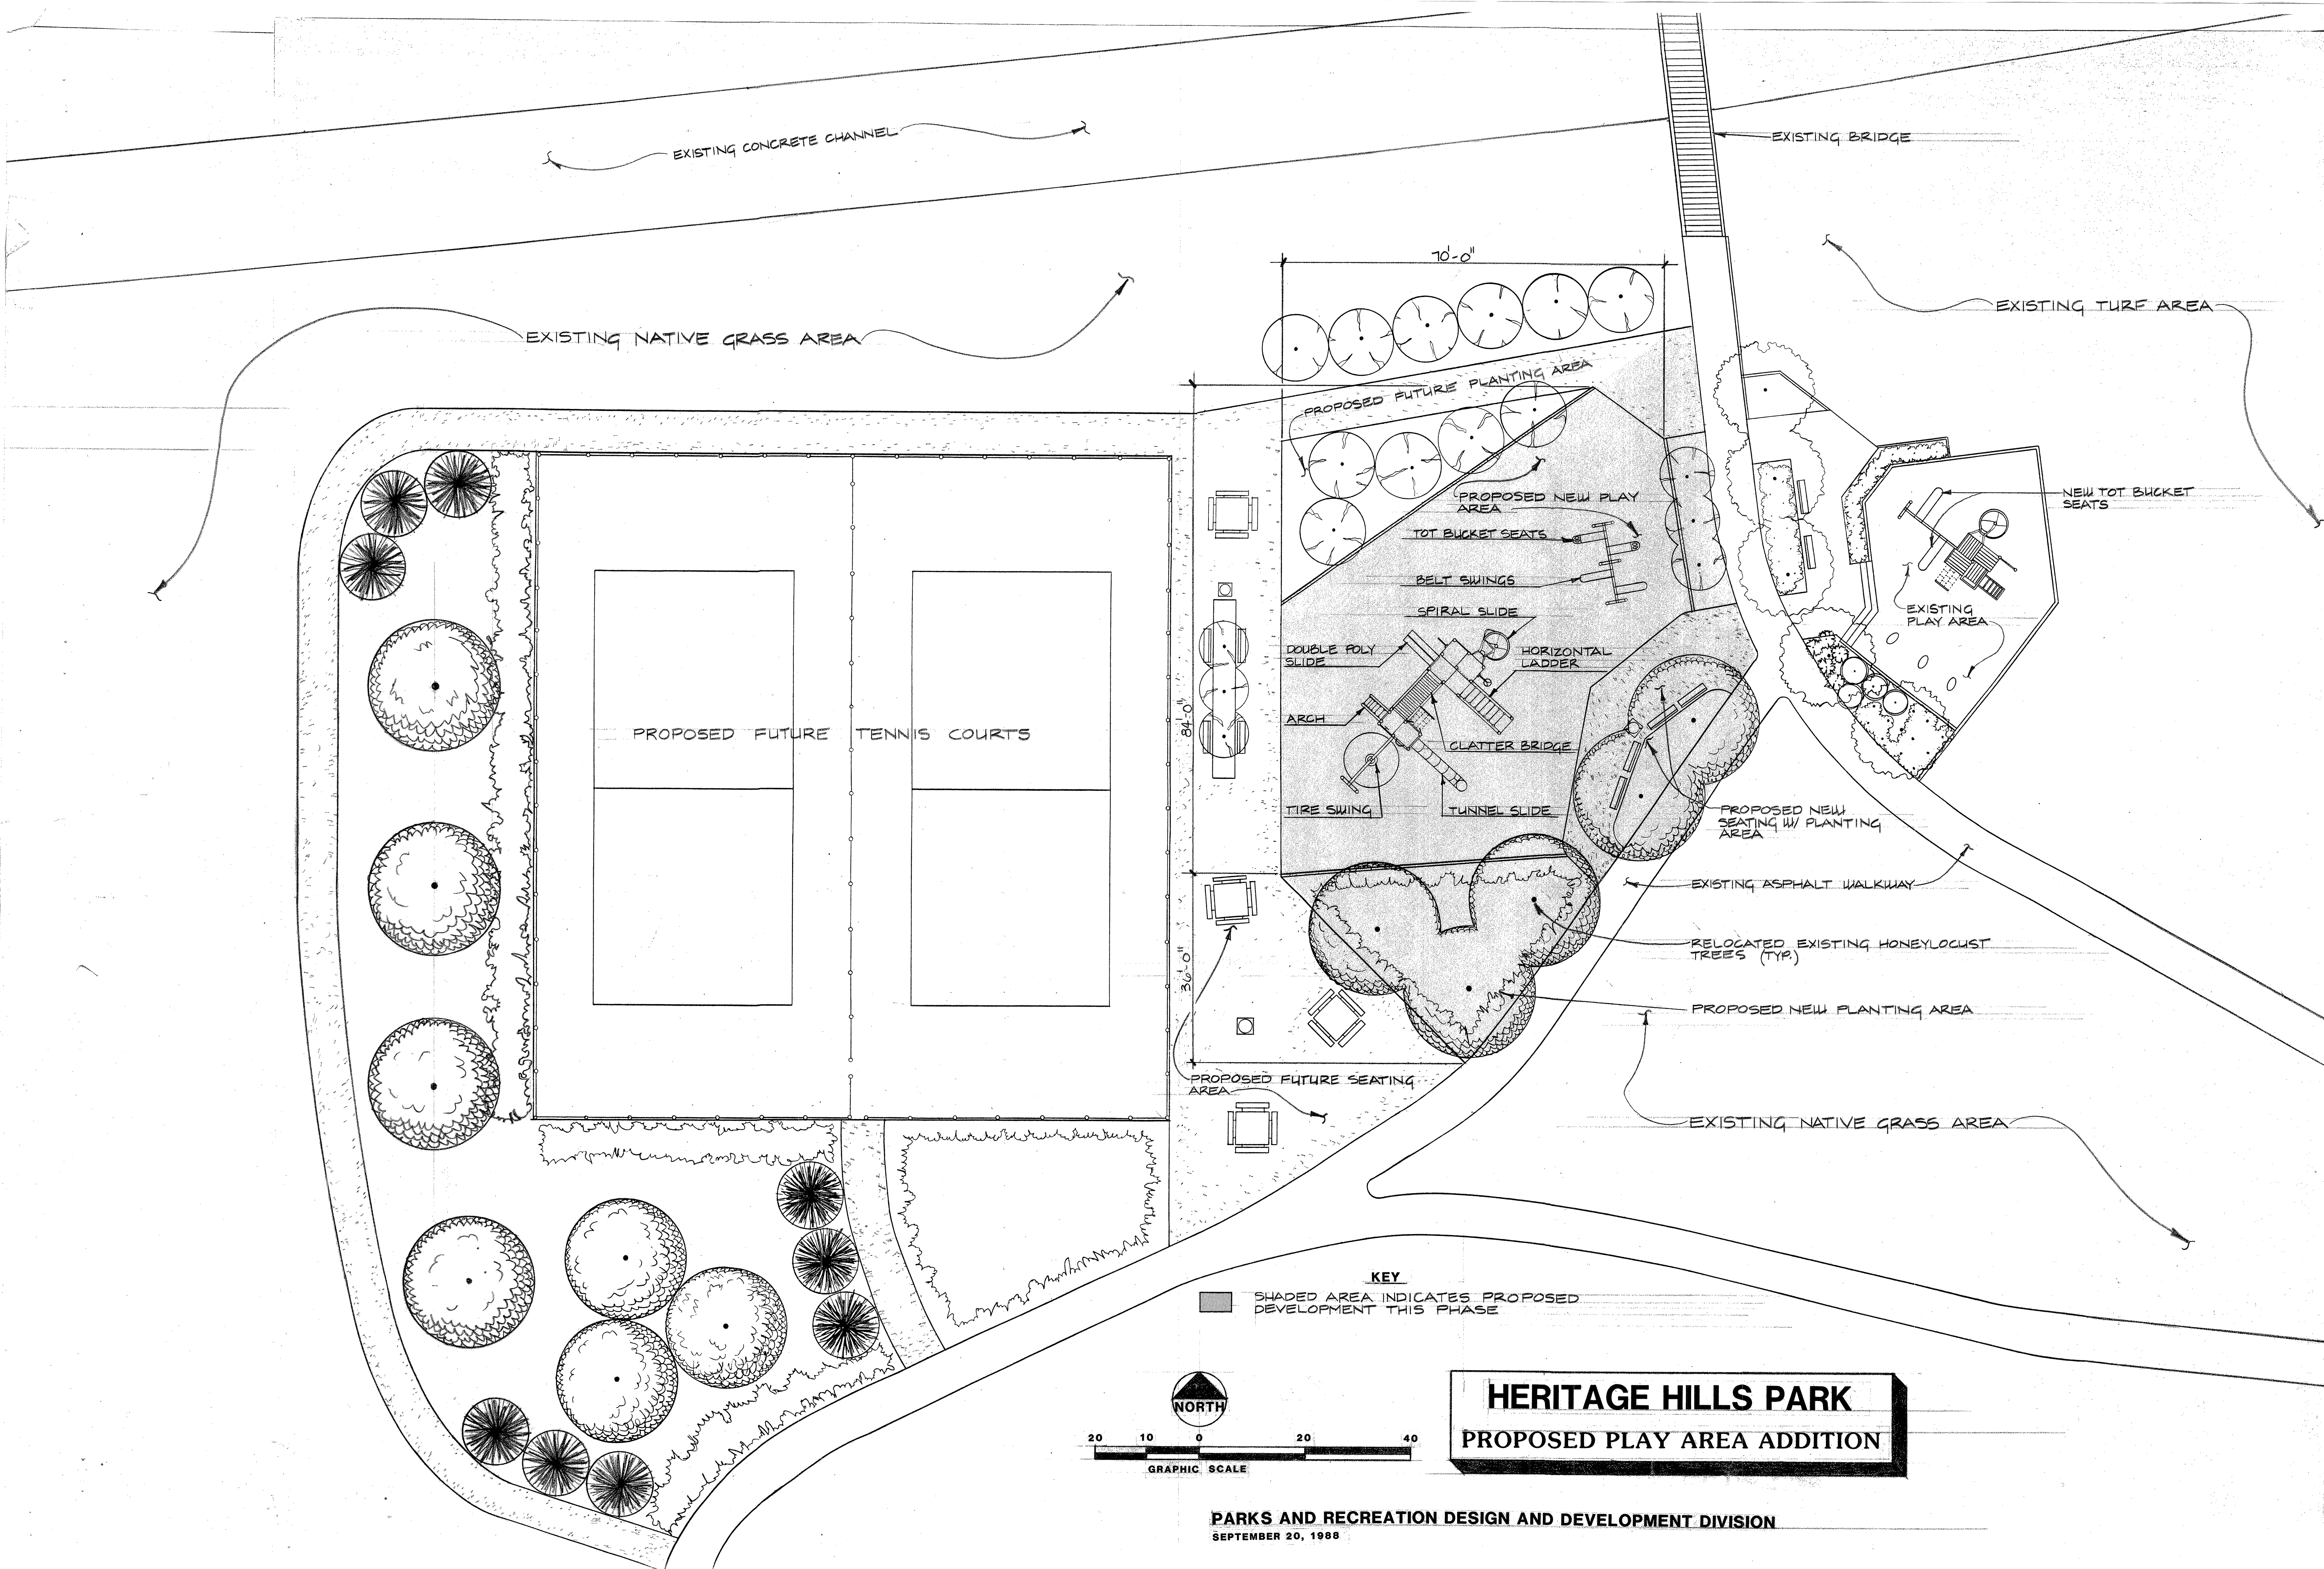

HERITAGE HILLS PARK PLAY AREA ADDITION

INDEX

SHEET	DESCRIPTION
1	COVER SHEET
2	CONSTRUCTION PLAN
3	IRRIGATION PLAN
4	PLANTING PLAN
5	SECTION & DETAILS

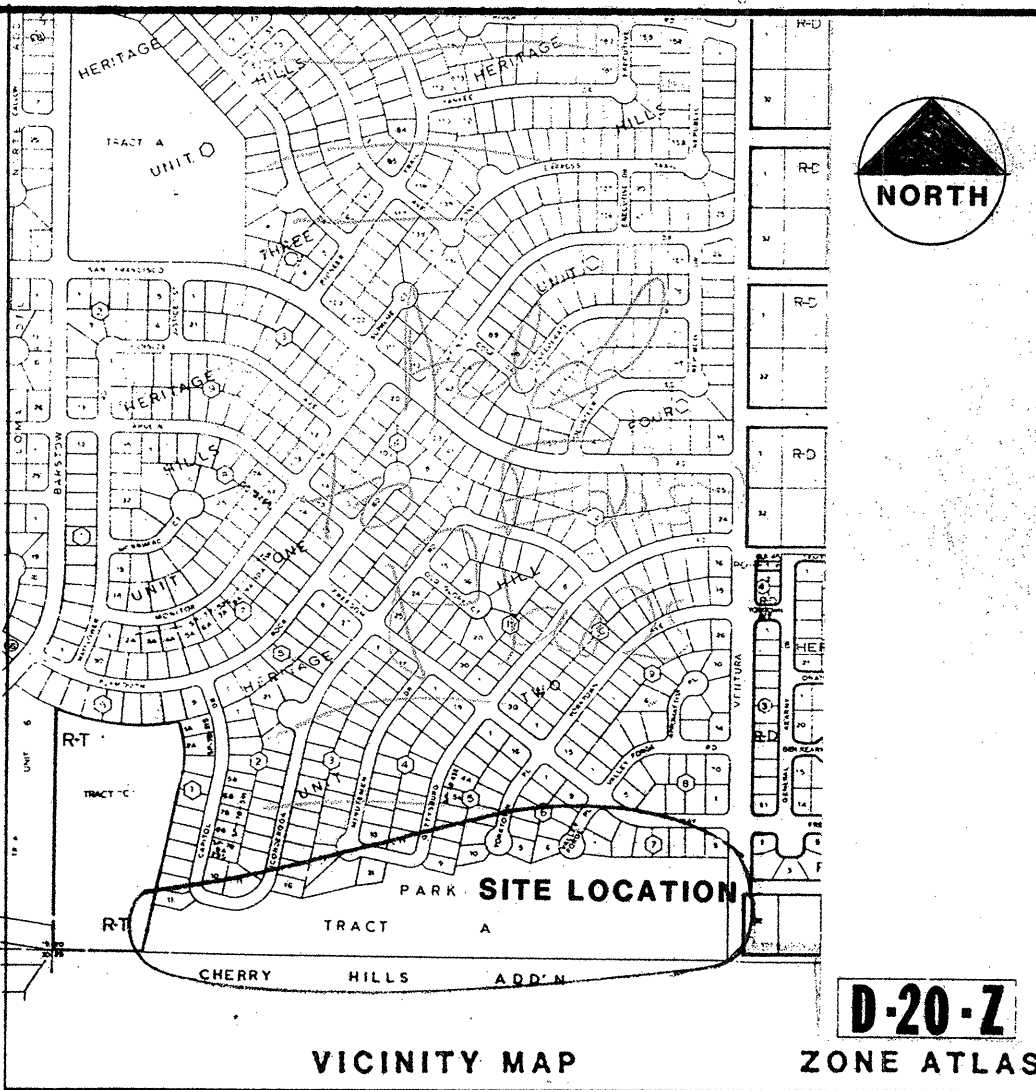

VICINITY MAP ZONE ATLAS

NOTICE TO CONTRACTOR

1. All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with City of Albuquerque Standard Specifications, Public Works Construction, 1986.
2. Two (2) working days prior to any excavation, contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
3. Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with a minimum amount of delay.

THE FOLLOWING NOTES ALSO APPLY WHEN CHECKED

- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☐ Backfill compaction shall be according to specified street use.
- ☐ Tack coat requirements shall be determined by the City Engineer.
- ☐ Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
- ☐ If curb is depressed for a drivepad or ramp shall be constructed prior to acceptance of the curb and gutter.
- ☐ All storm drainage facilities shall be completed prior to final acceptance.


SUPERINTENDENT
ASST. SUPERINTENDENT
AREA SUPERVISOR
UTILITY REPAIRMAN

FINAL FOR CONSTRUCTION

DATE: 11-23-88

REV. SHEETS	CITY ENGR.	DATE	USER DEPT.	DATE	USER DEPT.	DATE
APPROVED FOR CONSTRUCTION DATE						
PROJECT NUMBER				SHEET 1 OF 5		

PAUL DYCAMA SET #7 FINAL FOR CONSTRUCTION

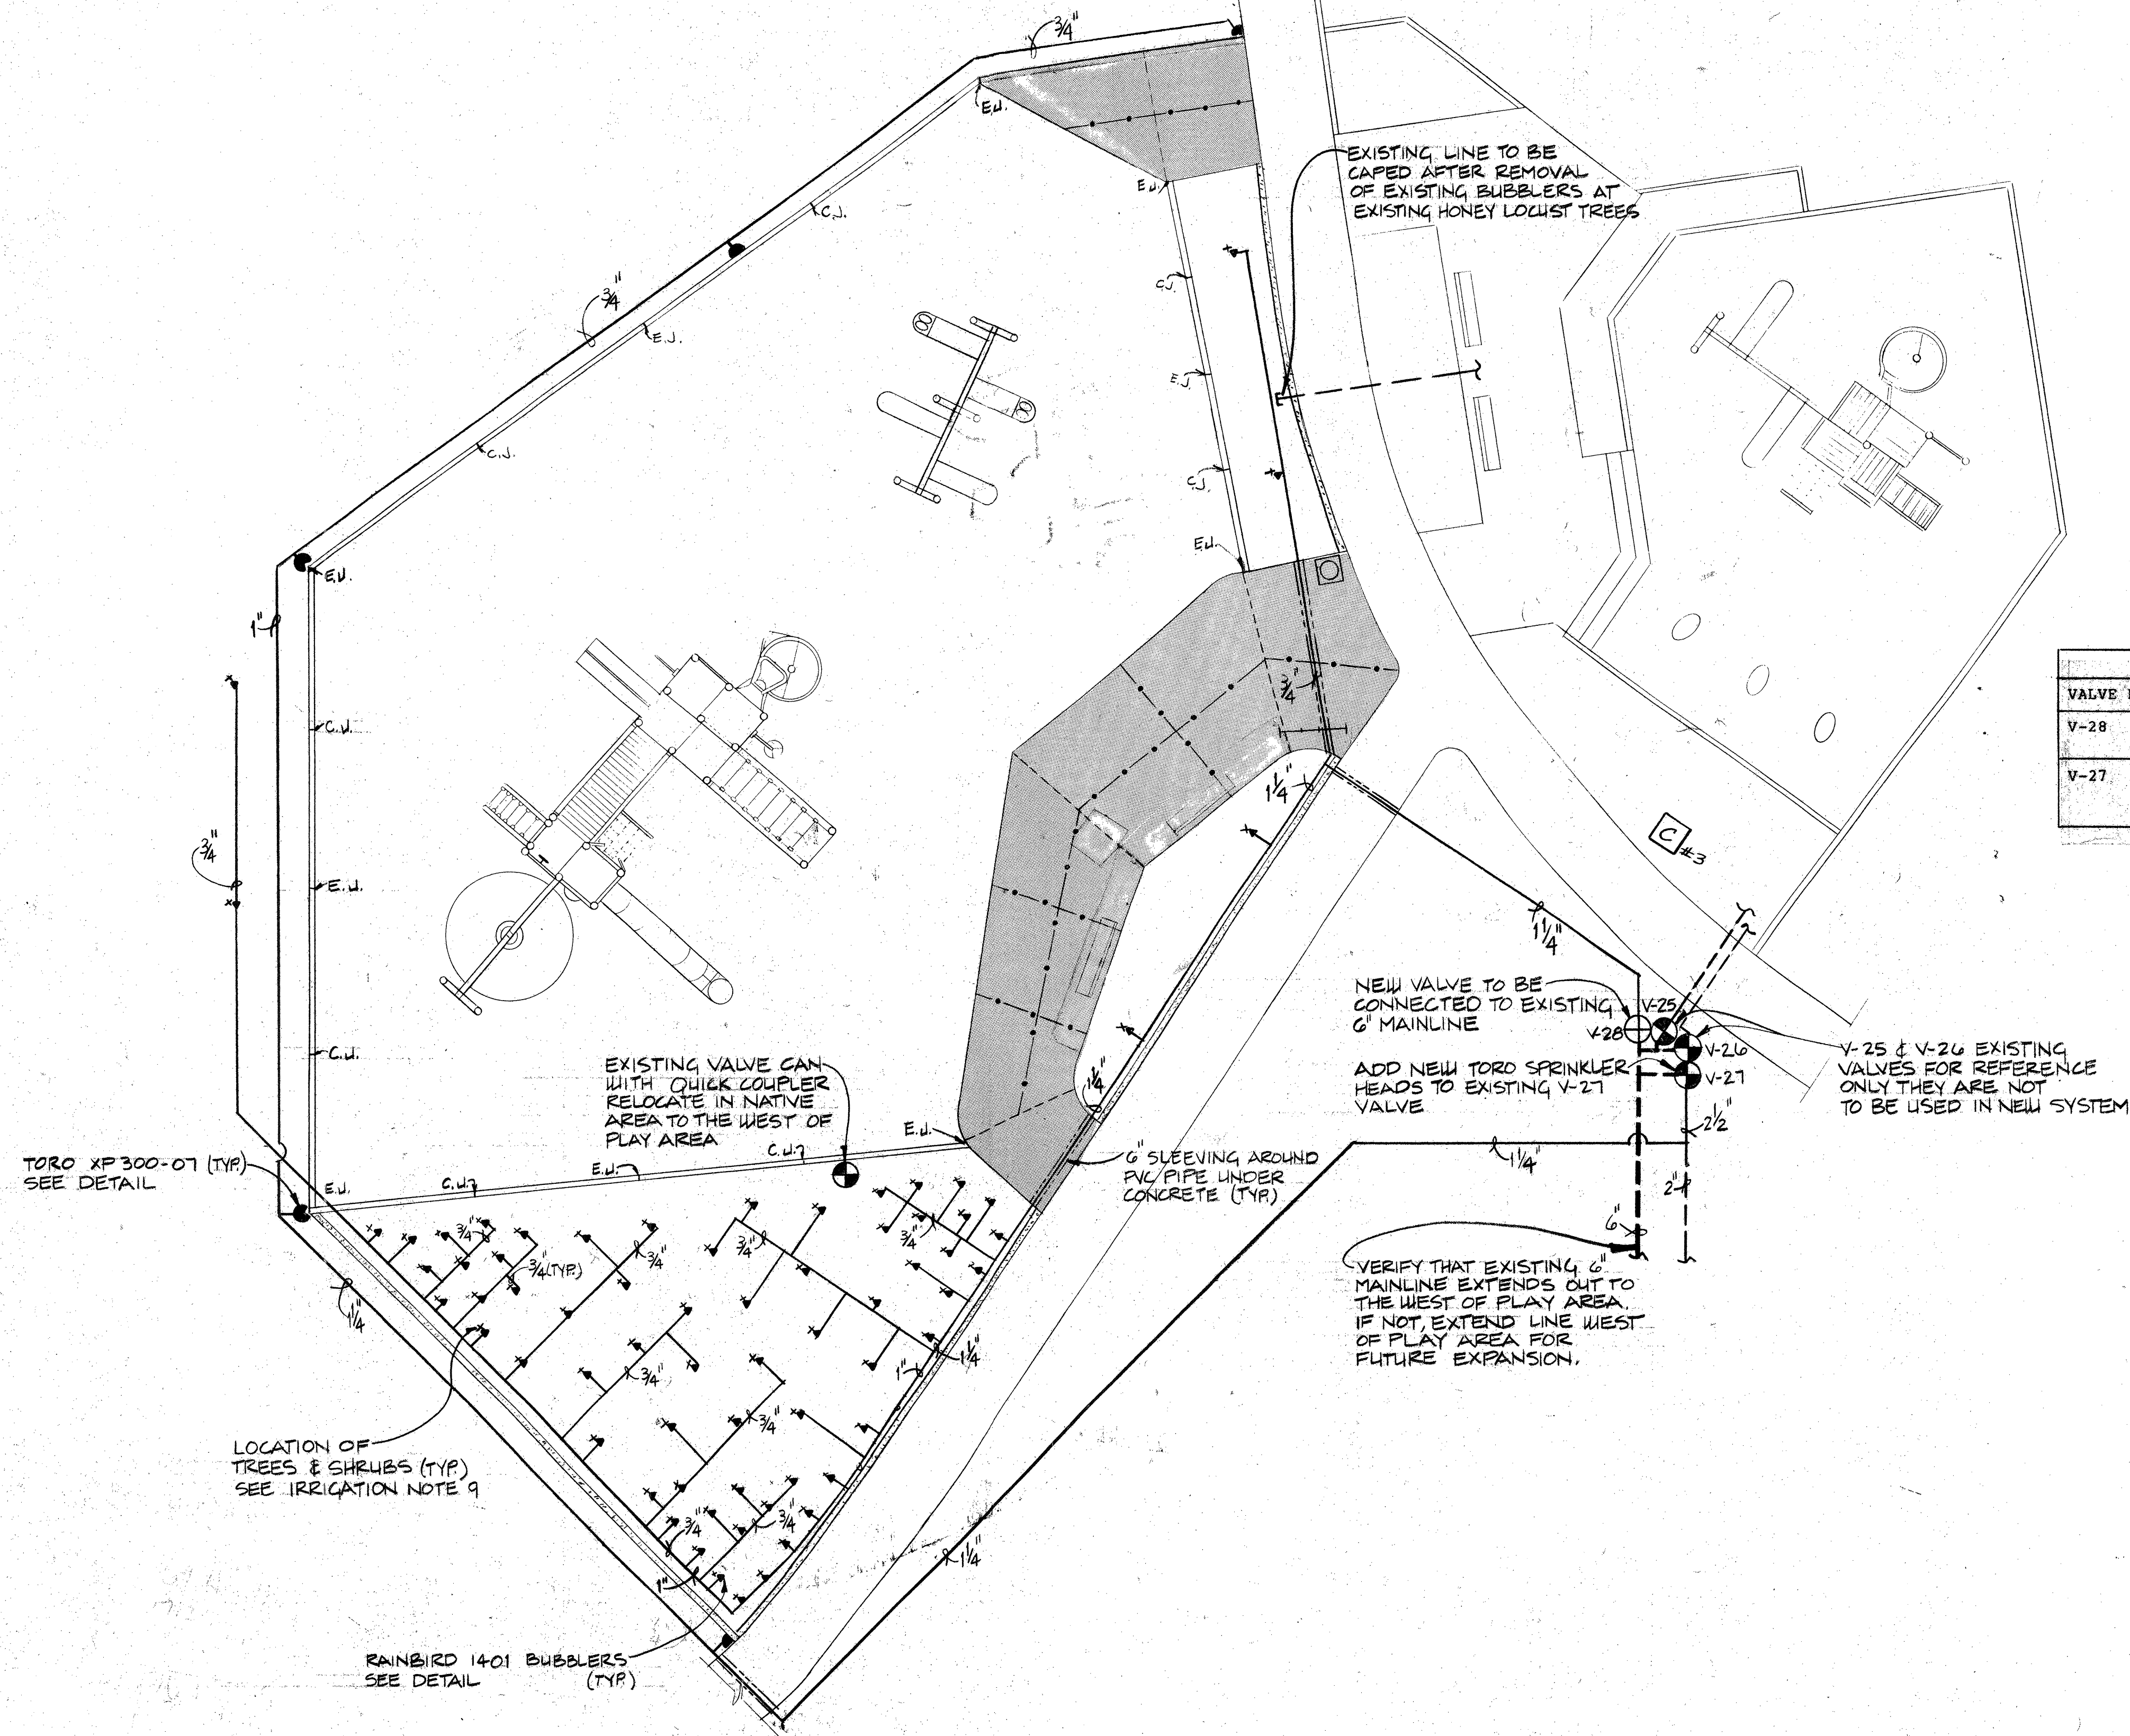**IRRIGATION LEGEND:**

- EXISTING 3" METER located in Ventura Street southeast side of park
- EXISTING RAINBIRD CIC-12 Station Controller
- LATERAL PIPE - Sized as marked. Depth of bury shall be a min. 18" deep. All lateral pipe 2" or smaller to be Sch. 40 PVC. Lateral pipe 2 1/2" and larger shall be class 200 "O" ring pipe w/ gasket fittings.
- EXISTING LATERAL PIPE
- EXISTING 6" IRRIGATION MAINLINE
- SOLVENT WELD CAP
- EXISTING RAINBIRD PE-PRS 150-1 1/2" Electric Control Valve
- NEW RAINBIRD PE-PRS 150-1 1/2" Electric Control Valve See DETAIL 4/5
- TORO XP300-07 Sprinkler Head See DETAIL 5/5
- RAINBIRD 1401 Bubbler See DETAIL 6/5
- 6" SLEEVING

CONSTRUCTION LEGEND:


- EXPANSION JOINTS
- CONTROL JOINTS
- MOW STRIP
- EDGER WALL
- 4" CONCRETE SLAB

VALVING LEGEND:

VALVE NO.	VALVE SIZE	TOTAL GPM	HEAD TYPE	ARC	NOZZLE	QUANTITY	PSI	RADIUS	GPM
V-28	RAINBIRD PE-PRS 150-1 1/2"	17.25	RAINBIRD 1401 BUBBLER	-	▲	69	-	BUBBLER	0.25
V-27	EXISTING RAINBIRD PE-PRS 150-1 1/2"	61.20	TORO XP300-07	90°	●	2	40	38'	1.54
				180°	●	1	40	38'	3.07
				225°	●	2	40	38'	3.87

IRRIGATION NOTES:

- Prior to the start of construction, the locations of all existing utility lines shall be marked. Verify locations with the City of Albuquerque and all public utilities.
- Control wires shall be identified w/ E-Z Coder WDR Series Tape & valve and controller.
- This system is designed for 40.0 psi needed at the head. Pressure at the point of connection is estimated to be 60 PSI. Verify pressure prior to start of construction.
- When locating heads in the field, care shall be taken to space heads as shown on the plan.
- PRS on valves, and nozzles on sprinkler heads shall be adjusted as necessary to achieve proper coverage. Adjustments shall be made to prevent water misting from heads and to prevent water overspray onto play area.
- At the completion of the project, Design & Development shall coordinate the programming of the controller with Park Management.
- All products shall be as specified or approved substitution.
- Change PVC pipe going into existing valve V-27 from a 2" to a 2 1/2" to accommodate the 13.89 G.P.M. added to existing 43.31 G.P.M. system. 61.20 G.P.M. new total for V-27 valve.
- To locate bubblers correctly reference PLANTING PLAN for dimensions of shrubs.
- Extend existing 6" mainline as needed to add new valve to existing irrigation system.
- Connect new valve V-28 to existing controller #3 located in existing play area planter.




SCALE: 1/8"=1'-0"

CITY OF ALBUQUERQUE
PARKS & RECREATION
DESIGN & DEVELOPMENTTITLE: HERITAGE HILLS PARK PLAY AREA ADDITION
IRRIGATION PLAN

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
DRC CHAIRMAN			LIQUID WASTE		
DESIGN			TRAFFIC		
HYDROLOGY			WATER		
PARKS & REC					

DRAWING NO. MAP NO. D-20-Z SHEET 3 OF 5

ENGINEER'S SEAL		SURVEY INFORMATION		BENCH MARKS		AS BUILT INFORMATION	
		FIELD NOTES		BENCH MARK ELEVATION = 5172 TAKEN OFF OF EXISTING BRIDGE, SOUTH SIDE OF THE BRIDGE ON THE WEST CORNER			
		NO.	BY	DATE			
					WORK	DATE	
					INSPECTED BY	DATE	
					ACCEPTANCE BY	DATE	
					VERIFICATION BY	DATE	
					DRAWINGS BY	DATE	
					MICRO-FILM INFORMATION		
					RECORDED BY	DATE	
					NO.		
					</		

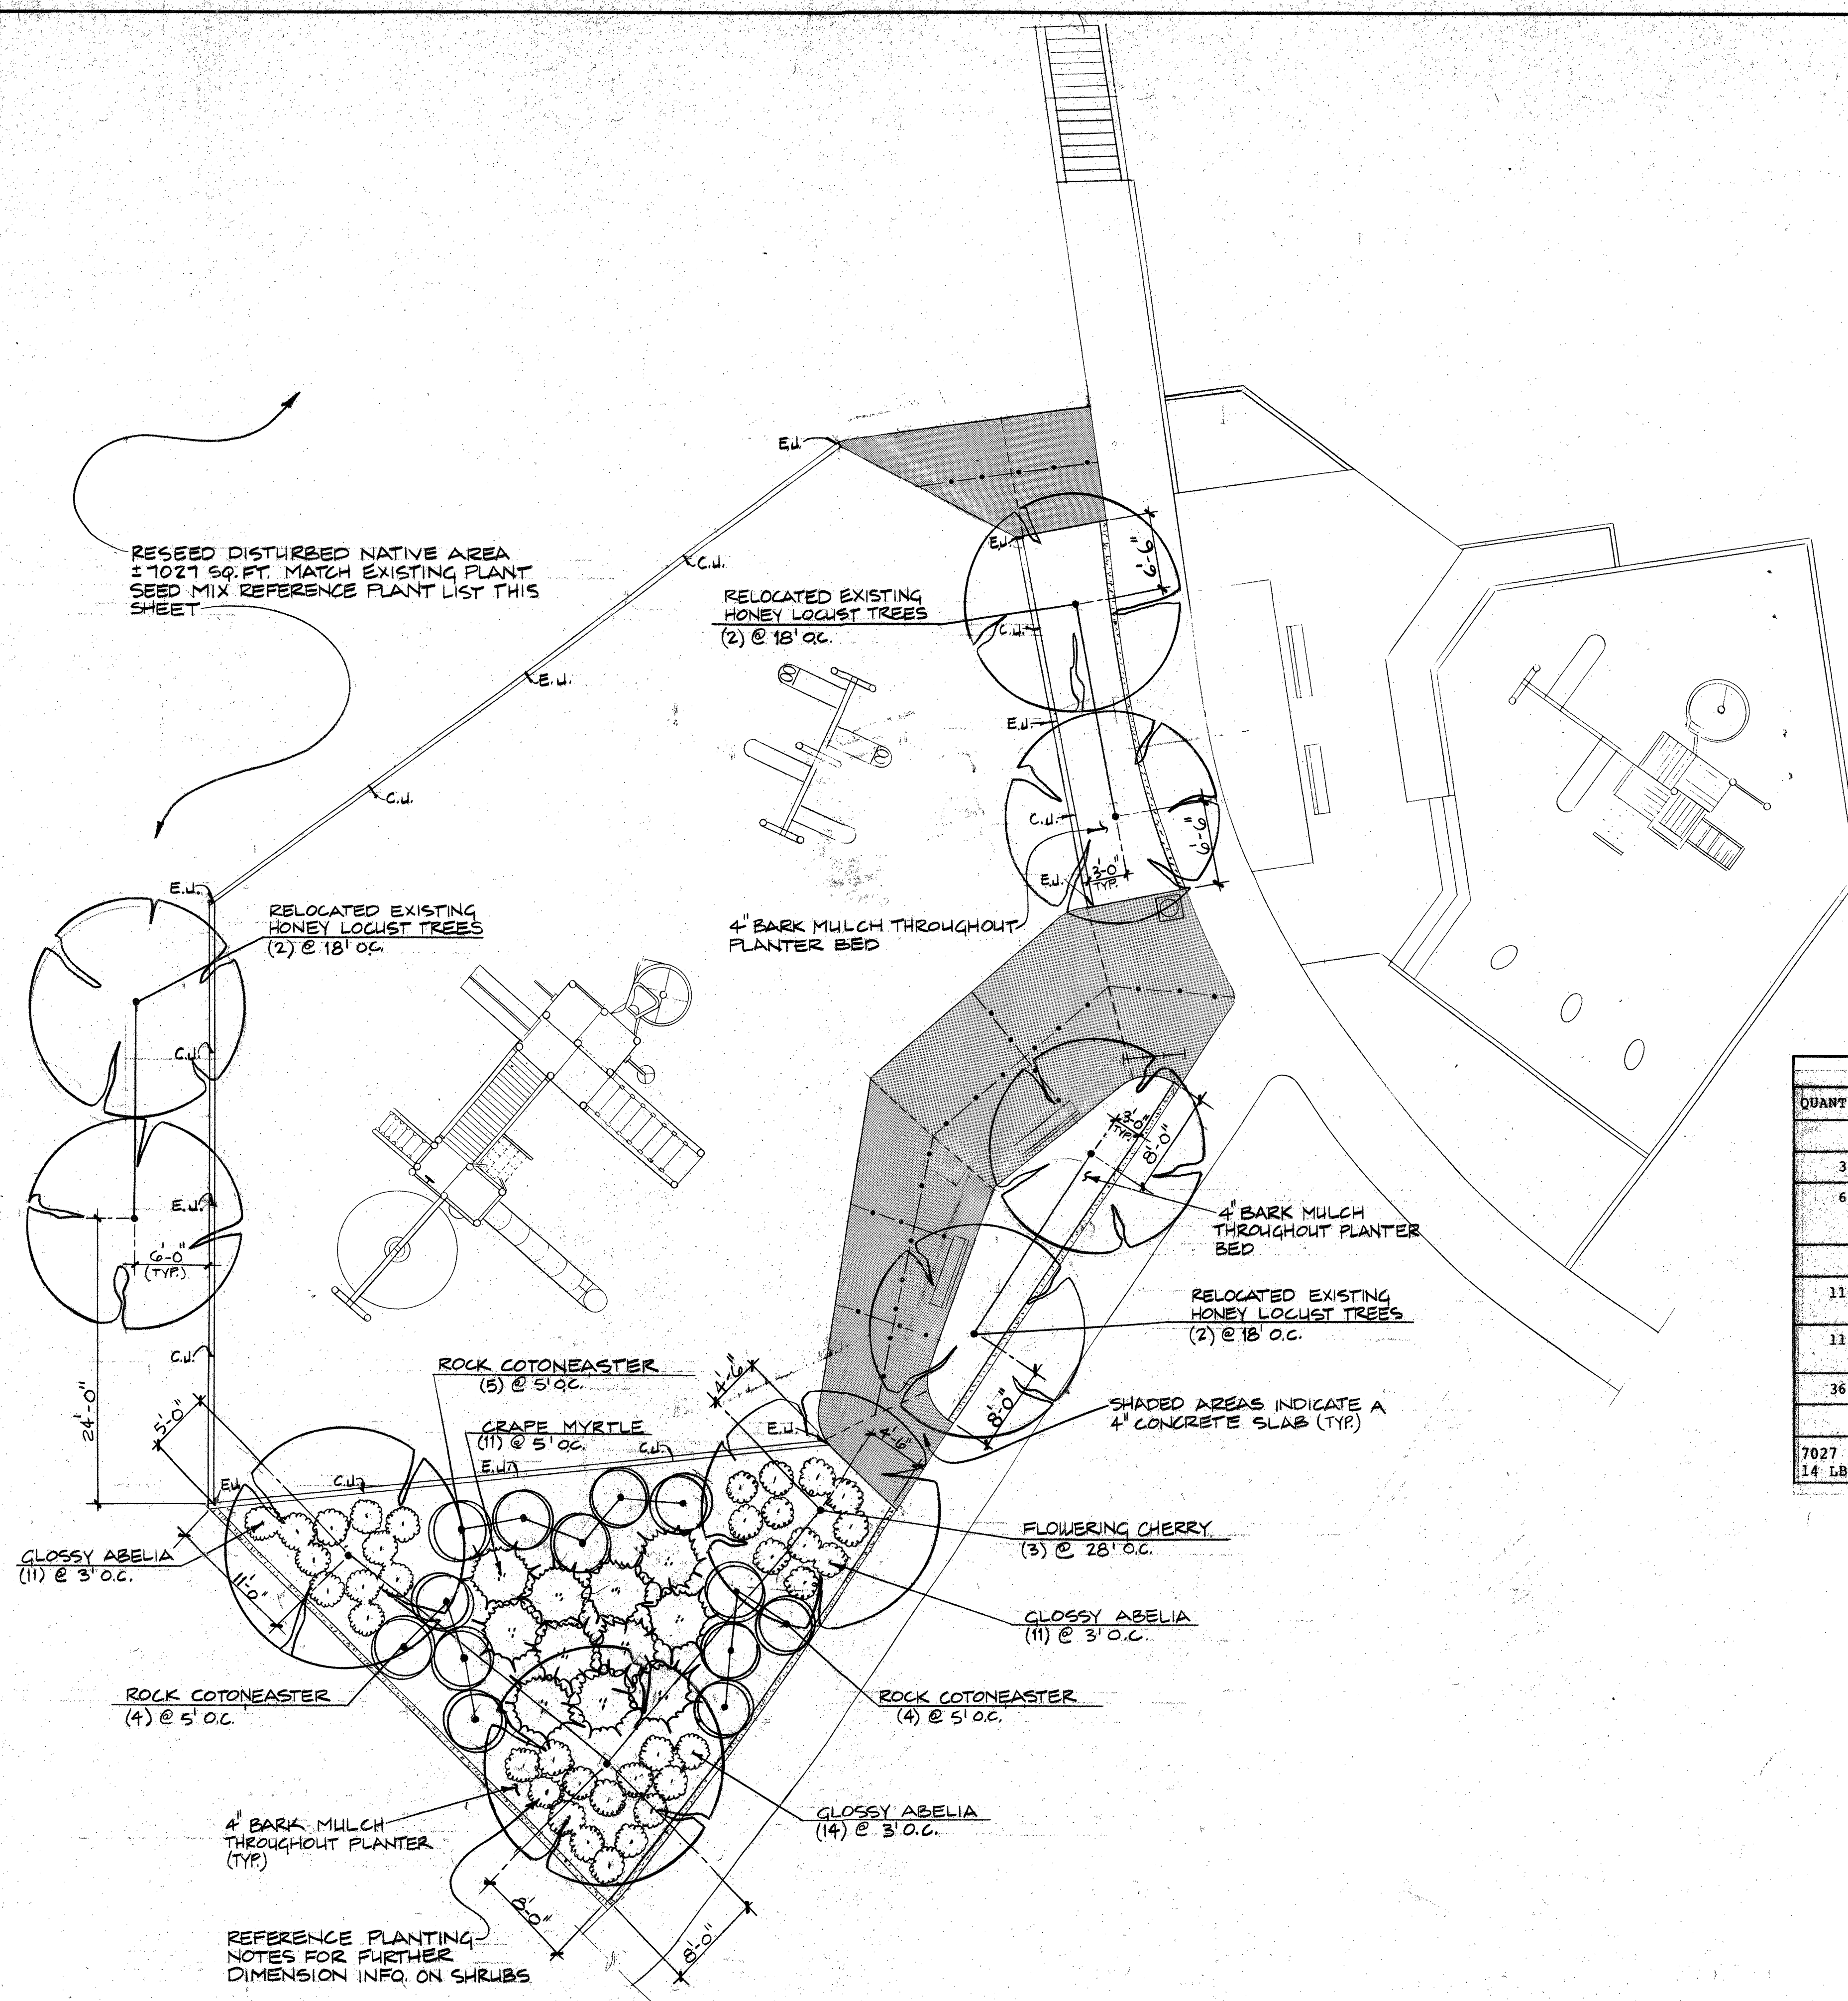

CONSTRUCTION LEGEND:

----- EXPANSION JOINT

..... CONTROL JOINTS


----- MOW STRIP

===== EDGER WALL


 4" CONCRETE SLA

- PLANTING NOTES:**
1. SHRUBS TO BE PLACED 3'-0" AWAY FROM TREES (typ.).
 2. PLACE SHRUBS 2'-0" MIN. AWAY FROM MOW STRIP & EDGER WALL
 3. FOR TREE PLANTING SEE DETAIL 7/5
 4. FOR SHRUB PLANTING SEE DETAIL 8/5
 5. FOR PROPER PLACEMENT OF BARK MULCH SEE SECTION 1/5

PLANT LIST				
QUANTITY	BOTANIC NAME	COMMON NAME	CONTAINER	COMMENTS
	TREES:			
3	Prunus 'kwanzan'	Flowering cherry	2 1/2" cal. B&B	
6	Gleditsia triacanthos inermis 'Morraine'	Honey Locust	B&B during storage	EXISTING, TO BE REMOVED RELOCATED AS PER PLAN DO NOT PURCHASE.
	SHRUBS:			
11	Lagerstroemia indica dwarfier 'Petite Embers'	Crape Myrtle	5 gallon	5'-0" O.C.
11	Cotoneaster horizontalis 'Pink Lady'	Rock Cotoneaster	5 gallon	5'-0" O.C.
36	Abelia 'Edward Goucher'	Glossy Abelia	5 gallon	3'-0" O.C.
	NATIVE SEED MIX:			
7027 SF 14 LBS.	High Plains Pinon - Juniper Mix Dryland Blend	Native grass & Wildflowers	-	2 LBS. per 1000 SQ. F. seeding rate

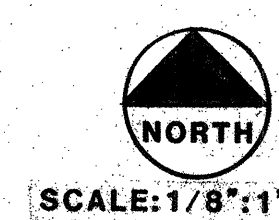[illegible]


CITY OF ALBUQUERQUE PARKS & RECREATION DESIGN & DEVELOPMENT					
TITLE: HERITAGE HILLS PARK PLAY AREA ADDITION PLANTING PLAN					
APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
DRC CHAIRMAN			LIQUID WASTE		
DESIGN			TRAFFIC		
HYDROLOGY			WATER		
PARKS & REC					
DRAWING NO.		MAP NO. D-20-Z		SHEET 4 OF 5	

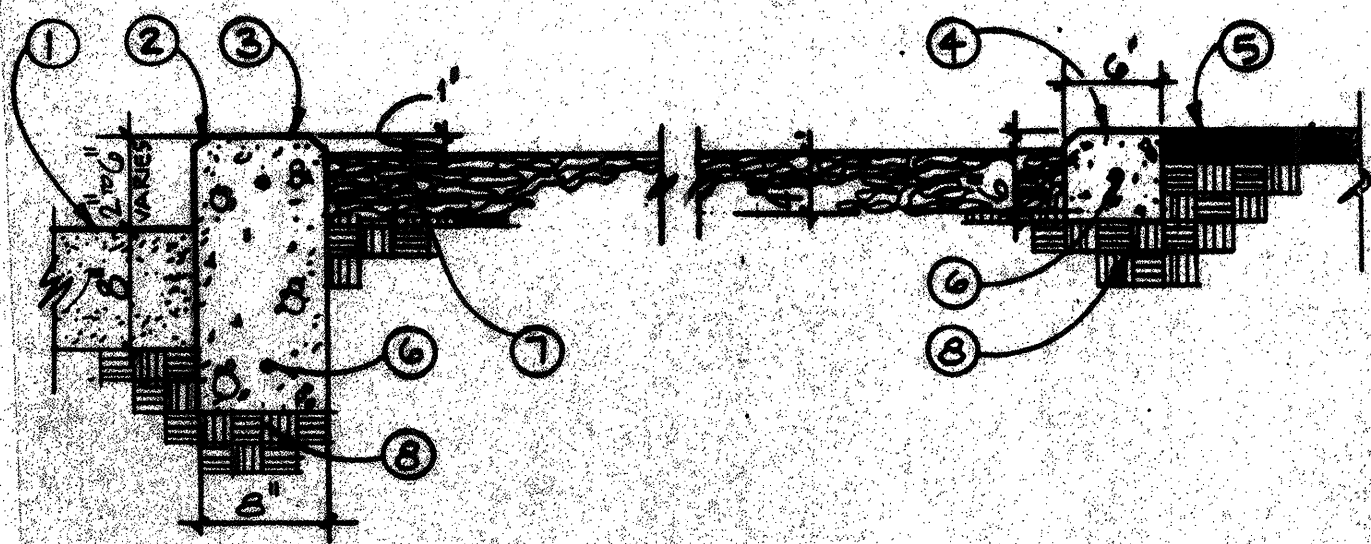

KEYED NOTES:

- 1 BRICK SAND TRANSITION 6" TO 2" BELOW TOP OF CONCRETE SLAB
- 2 3/4" CHAMFER EDGE
- 3 3000 PSI CONCRETE EDGER WALL
- 4 3000 PSI CONCRETE MOW STRIP
- 5 EXISTING ASPHALT PATH
- 6 # 4 REBAR HORIZONTAL & CONTINUOUS
- 7 4" BARK MULCH IN PLANTER BED
- 8 SUBGRADE COMPACTED TO 95%


SECTION THRU PLANTER BED
SCALE: 1 1/2" = 1'-0"

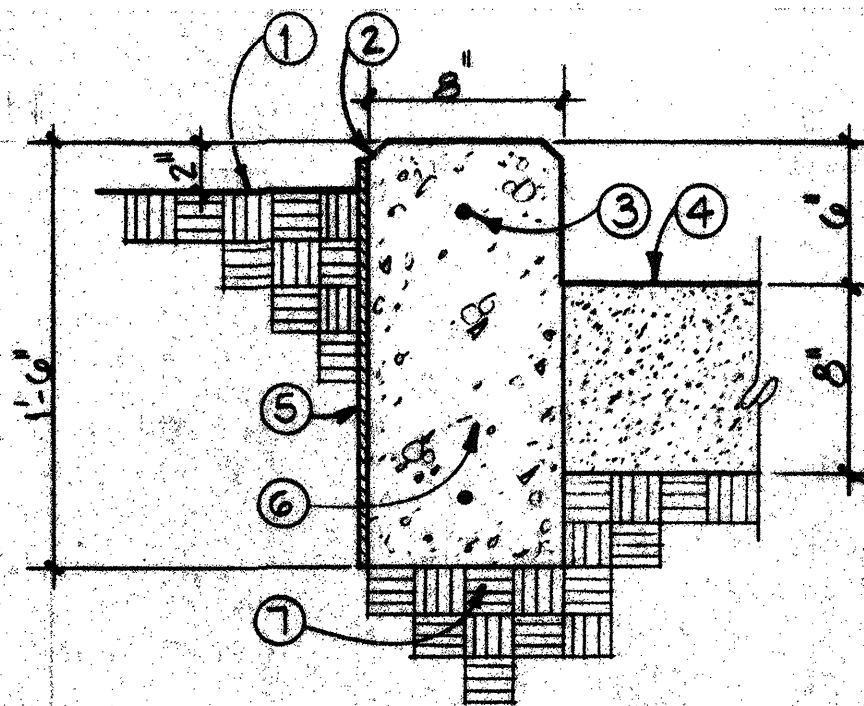

KEYED NOTES:

- 1 FINISHED GRADE
- 2 3/4" CHAMFER EDGE
- 3 # 4 REBAR HORIZONTAL AND CONTINUOUS
- 4 BRICK SAND
- 5 1/4" MASTIC WATERPROOFING
- 6 3000 PSI CONCRETE
- 7 SUBGRADE COMPACTED TO 95%


CONCRETE EDGER WALL DETAIL
SCALE: 1 1/2" = 1'-0"

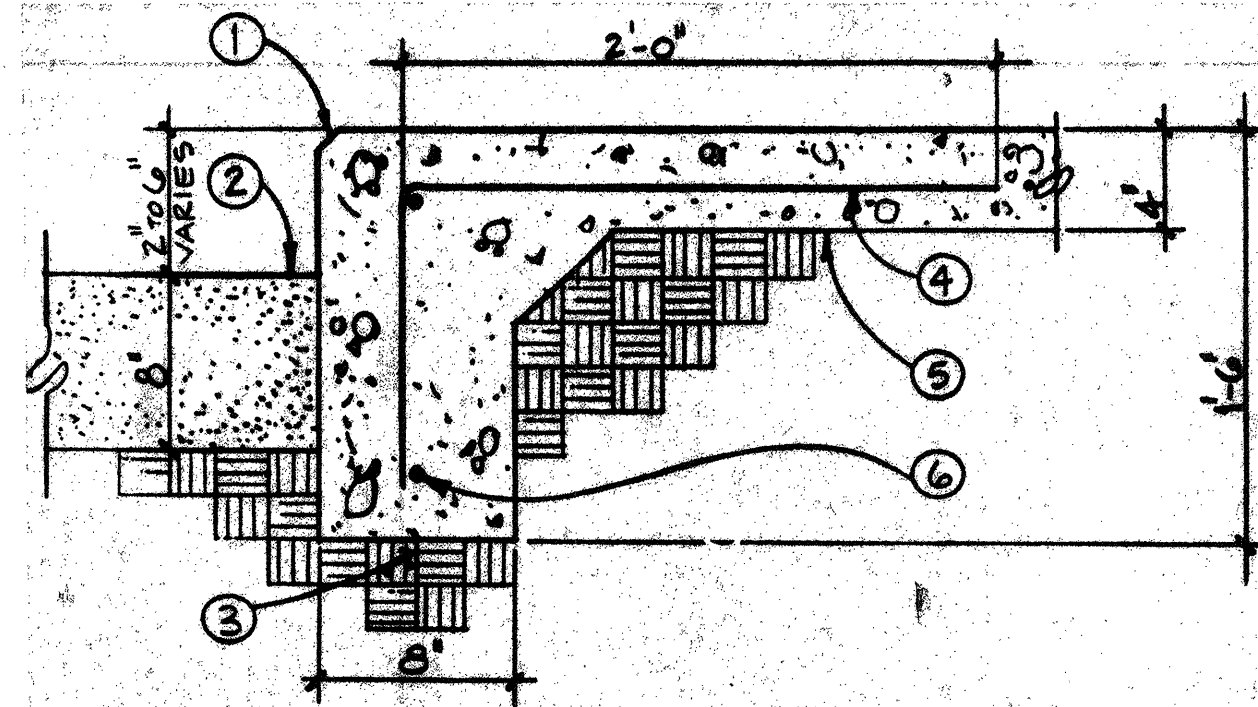

KEYED NOTES:

- 1 3/4" CHAMFER EDGE
- 2 BRICK SAND 2" TO 6" BELOW TOP OF CONCRETE SLAB REFERENCE SPOT ELEVATIONS ON CONSTRUCTION PLAN FOR CORRECT LOCATION.
- 3 SUBGRADE COMPACTED TO 95%
- 4 # 4 REBAR @ 12" O.C.
- 5 3000 PSI CONCRETE
- 6 # 4 REBAR HORIZONTAL AND CONTINUOUS


TURN DOWN SLAB DETAIL
SCALE: 1 1/2" = 1'-0"

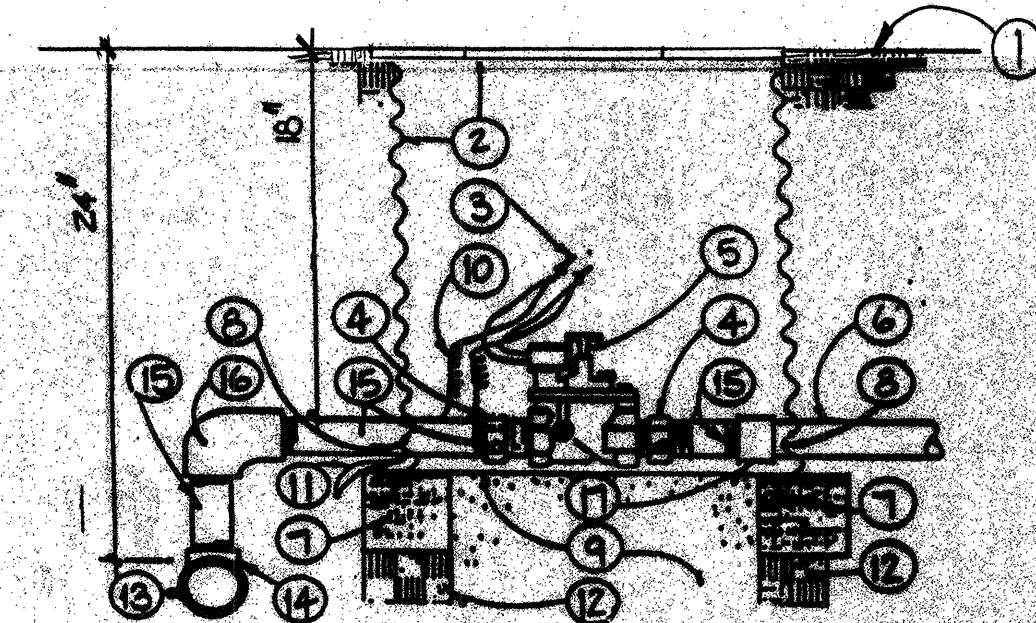

KEYED NOTES:

- 1 FINISH GRADE
- 2 STEEL VALVE BOX BASE & HAYES 34-D SPEARS DRI-SPLICE CONNECTORS
- 3 GALV. UNION
- 4 AUTOMATIC VALVE
- 5 LATERAL PIPE
- 6 8"x8"x16" SOLID CND
- 7 CUT OUT FOR LATERAL PIPE
- 8 2 CUBIC FEET 1" DIAM. WASHED ROCK
- 9 36" WIRE EXPANSION COIL
- 10 WIRE BUNDLE
- 11 COMPACTED SUBGRADE TO 95%
- 12 MAINLINE
- 13 MAINLINE TEE
- 14 GALV. NIPPLE
- 15 MAINLINE ELL
- 16 SCH. 40 PVC 5xT COUPLING


CONTROL VALVE
N.T.S.

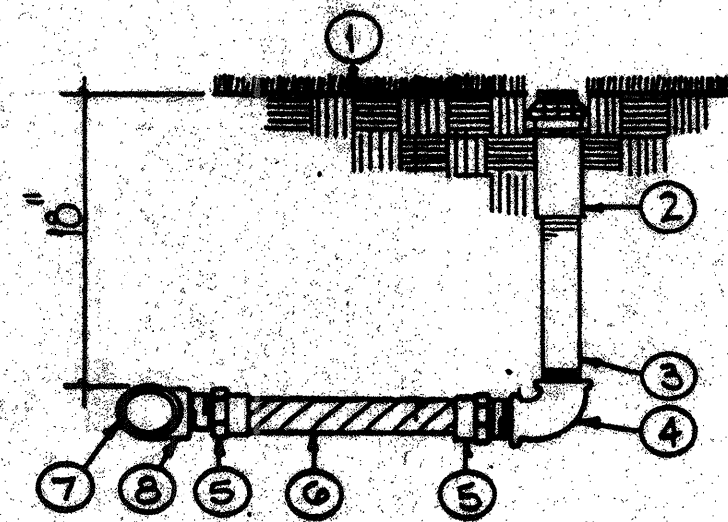

KEYED NOTES:

- 1 FINISH GRADE
- 2 SPRINKLER HEAD
- 3 SCH. 80 PVC NIPPLE
- 4 GALV. ELL
- 5 SCH. 40 PVC NIP ADAPTER
- 6 PVC FLEX HOSE (12")
- 7 LATERAL PIPE
- 8 SCH. 40 5x5T TEE


SPRINKLER HEAD W/ FLEX HOSE RISER ASSEMBLY
N.T.S.

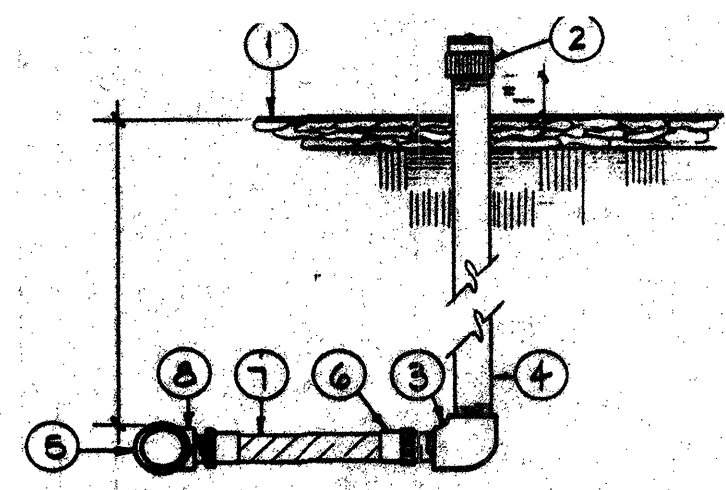

KEYED NOTES:

- 1 FINISH GRADE
- 2 FLOOD BUBBLER, 1" ABOVE GRADE OR MULCH
- 3 SCH. 40 PVC ELL
- 4 SCH. 80 PVC RISER
- 5 PVC LATERAL PIPING
- 6 PVC NIP ADAPTER
- 7 PVC FLEX HOSE (12")
- 8 PVC 5x5T TEE


FLOOD BUBBLER
N.T.S.

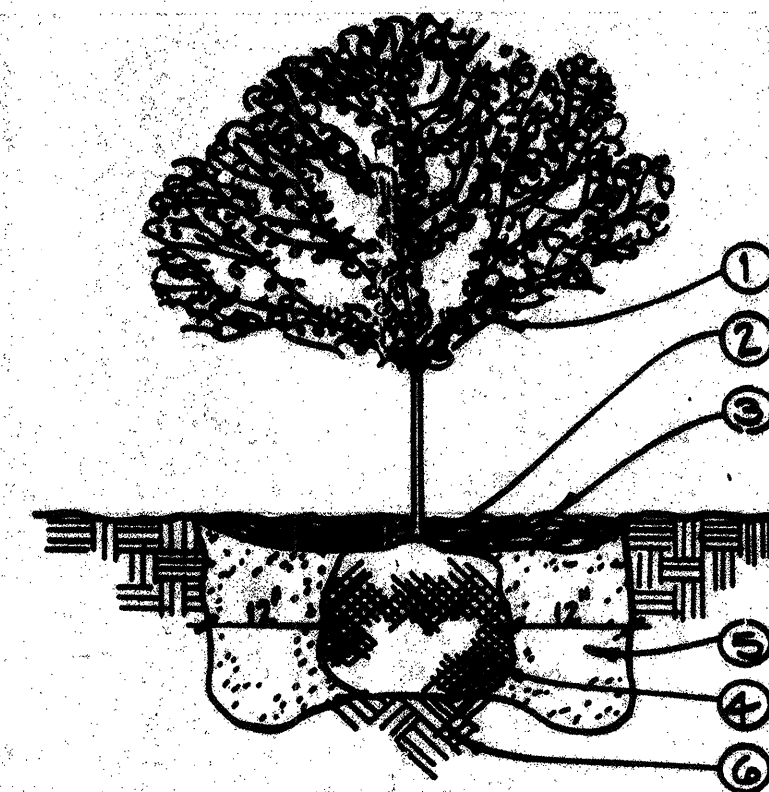

KEYED NOTES:

- 1 TREE LOCATION & SPECIES AS PER PLAN
- 2 PLANT AT SAME DEPTH MAINTAINED IN NURSERY
- 3 4" DEEP BARK MULCH THROUGHOUT PLANTING BED, 36" DIA. RING OF 4" DEEP BARK MULCH FOR TREES IN NATIVE AREA. REMOVE WIRE BASKET FROM ROOTBALL
- 4 BACKFILL W/ EXISTING SOIL & ADD (1) 21 GRAM AGRIFORM FERTILIZER TAB FOR EACH 1/2" OF TREE TRUNK DIAMETER OR FOR EACH 1 FOOT OF HEIGHT
- 5 UNDISTURBED SOIL

TREE PLANTING DETAIL
N.T.S.

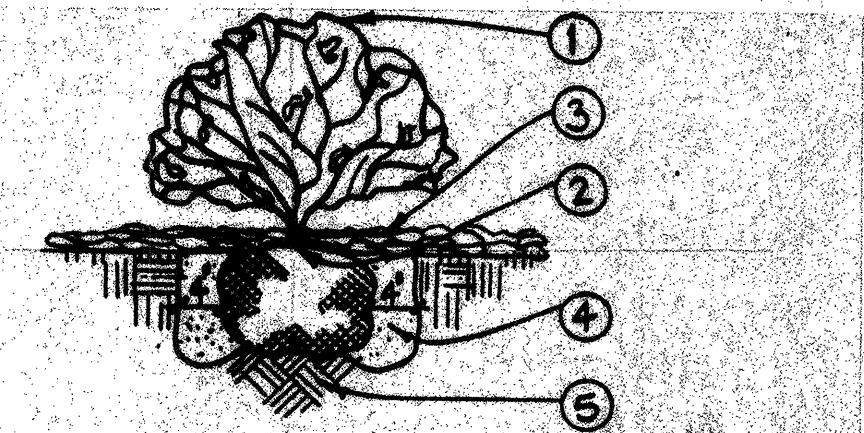

KEYED NOTES:

- 1 SHRUB LOCATION & SPECIES AS PER PLAN
- 2 PLANT AT SAME DEPTH MAINTAINED IN NURSERY
- 3 4" DEEP BARK MULCH THROUGHOUT
- 4 BACKFILL W/ EXISTING SOIL & (2-3) 21 GRAM AGRIFORM FERTILIZER TABS
- 5 UNDISTURBED SOIL

SHRUB PLANTING DETAIL
N.T.S.

AS BUILT INFORMATION		BENCH MARKS		SURVEY INFORMATION		ENGINEER'S SEAL	
CONTRACTOR	WORK BY	DATE	DATE	FIELD NOTES	DATE	NO.	BY
INSPECTOR'S ACCEPTANCE BY	DATE	DATE	DATE				
VERIFICATION BY	DATE	DATE	DATE				
DESIGNED BY	DATE	DATE	DATE				
DRAWN BY	DATE	DATE	DATE				
CHECKED BY	DATE	DATE	DATE				
RECORDED BY	DATE	DATE	DATE				
NO.	DATE	DATE	DATE				

CITY OF ALBUQUERQUE PARKS & RECREATION DESIGN & DEVELOPMENT					
TITLE: HERITAGE HILLS PARK PLAY AREA ADDITION					
SECTION & DETAILS					
APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
DRC CHAIRMAN			LIQUID WASTE		
DESIGN			TRAFFIC		
HYDROLOGY			WATER		
PARKS & REC					
DRAWING NO.			MAP NO. D-20-Z	SHEET 5 OF 5	