


UPTOWN BLVD. N.E.

TURN BAY CONSTRUCTION

FOR

TRANSAMERICA PLAZA

FEBRUARY, 1983

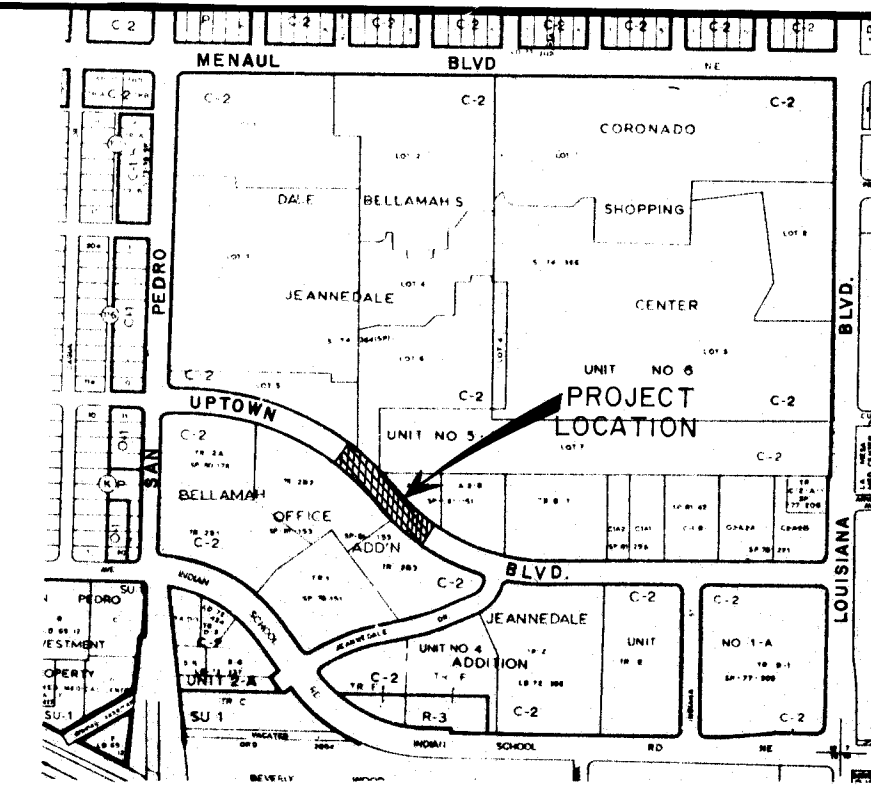

NOTICE TO CONTRACTORS

1. New Mexico Standard Specifications for Public Works Construction-1979 Edition will be referred to hereon as the "Standard Specification".
2. All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided hereon, be constructed in accordance with "Contract Documents for Public Works Contract No. 84-1".
3. Two working days prior to any excavation, contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
4. Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with a minimum amount of delay.
5. Backfill compaction shall be according to specified street use. (Arterial)
6. Tack coat requirements shall be determined by the City Engineer.
7. Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
8. The requestor or developer shall be responsible for repair or replacement of all curb and gutter or sidewalk damaged after approval by the City Engineer of work completed by the Contractor.

GENERAL NOTES

1. All stationing refers to street $\frac{1}{2}$ stationing.

26 20650185

APPROVAL OF ALL SUBMIT DRAWINGS
CITY ENGINEER
W. J. McNamee
10-23-85


REV	SHEETS	CITY ENGR.	DATE	USER DEPT.	DATE	USER DEPT.	DATE



APPROVAL OF REVISIONS

<i>David J. Shoshinski</i> 2/23/84 for MSM/SP Group	MSM MSM/SP Group CONSULTING ENGINEERS • SURVEYORS • PLANNERS 2601 Wyoming Blvd., N.E. Albuquerque, New Mexico 87112 (505) 292-1936	APPROVED FOR CONSTRUCTION <i>C. H. Shoshinski</i> 2/5/84 C.E.
	DRAWING NO. 2065	SHEET 1 OF 2

22

1. All stations and offsets shown are from centerline to face of curb.
2. All construction shall conform to City of Albuquerque Standards, Public Works Contract No. 84-1.
3. Construction of proposed curb & gutter shall be to the nearest joint.
4. Contractor to remove existing sprinklers & irrigation system from proposed turn bay improvements.
5. Tree location to be determined in the field. Tree removal to be coordinated by the contractor prior to median construction.
6. Patterened & red colored concrete paving to be installed shall match patterened & red colored concrete on other portions of Uptown Blvd.

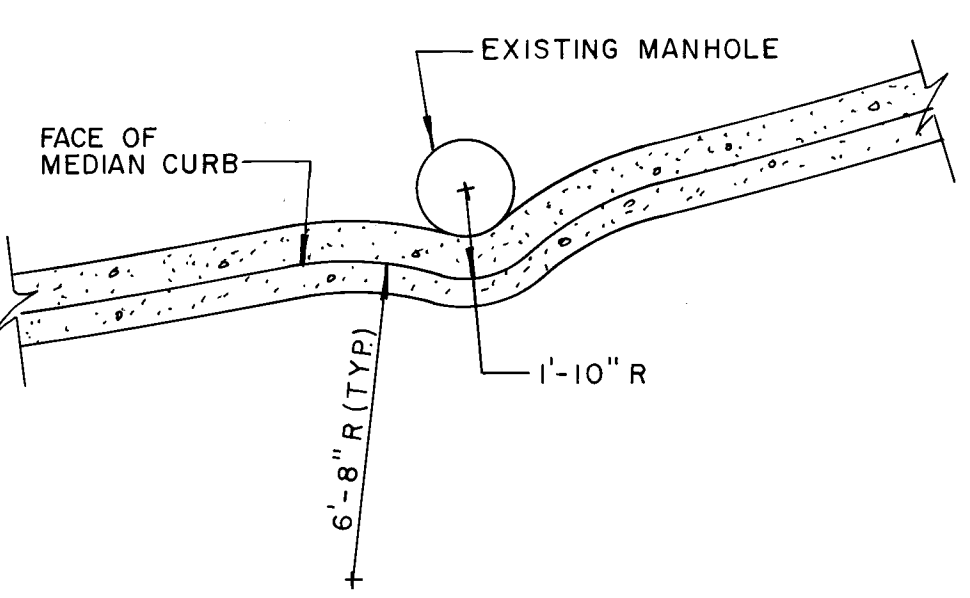

EXISTING	PROPOSED	
		CURB & GUTTER
		PAVING
56.61 55.94	56.52 56.07	CONCRETE PAVING 4" RED COLORED & PATTERNED RUNNING BOND BRICK
		TREES
		WATER METER
		SPRINKLER
		MANHOLE
		SPOT ELEV.

DETAIL A
SCALE: $\frac{1}{4}" = 1'-0"$

[illegible]

CITY OF ALBUQUERQUE
MUNICIPAL DEVELOPMENT DEPARTMENT
ENGINEERING DIVISION

TITLE: UPTOWN BLVD. N.E.
TURN BAY CONSTRUCTION, BETWEEN
SAN PEDRO & JEANNEDALE

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	<i>C.D. Edwards</i>	4/2/84	Liquid Waste	<i>N.A.E. Edsward</i>	3/14/84
A.C.E. Design	<i>Edwards</i>	21 Mar 84	Traffic	<i>David W. Mann</i>	3/14/84
A.C.E. -Hydrology	<i>Edwards</i>	3/21/84	Water	<i>N.A.E. Edsward</i>	3/14/84

DRAWING NO.	2065	MAP NO.	H-18	SHEET	OF	2	2
-------------	------	---------	------	-------	----	---	---