

IMPROVEMENT PLANS

MONTGOMERY BLVD. LEFT TURN BAY


CITY OF ALBUQUERQUE  
NEW MEXICO

INDEX

|                |   |
|----------------|---|
| COVER SHEET    | 1 |
| PLAN & PROFILE | 2 |

26 27140185

W.J. McManis  
8-9-85

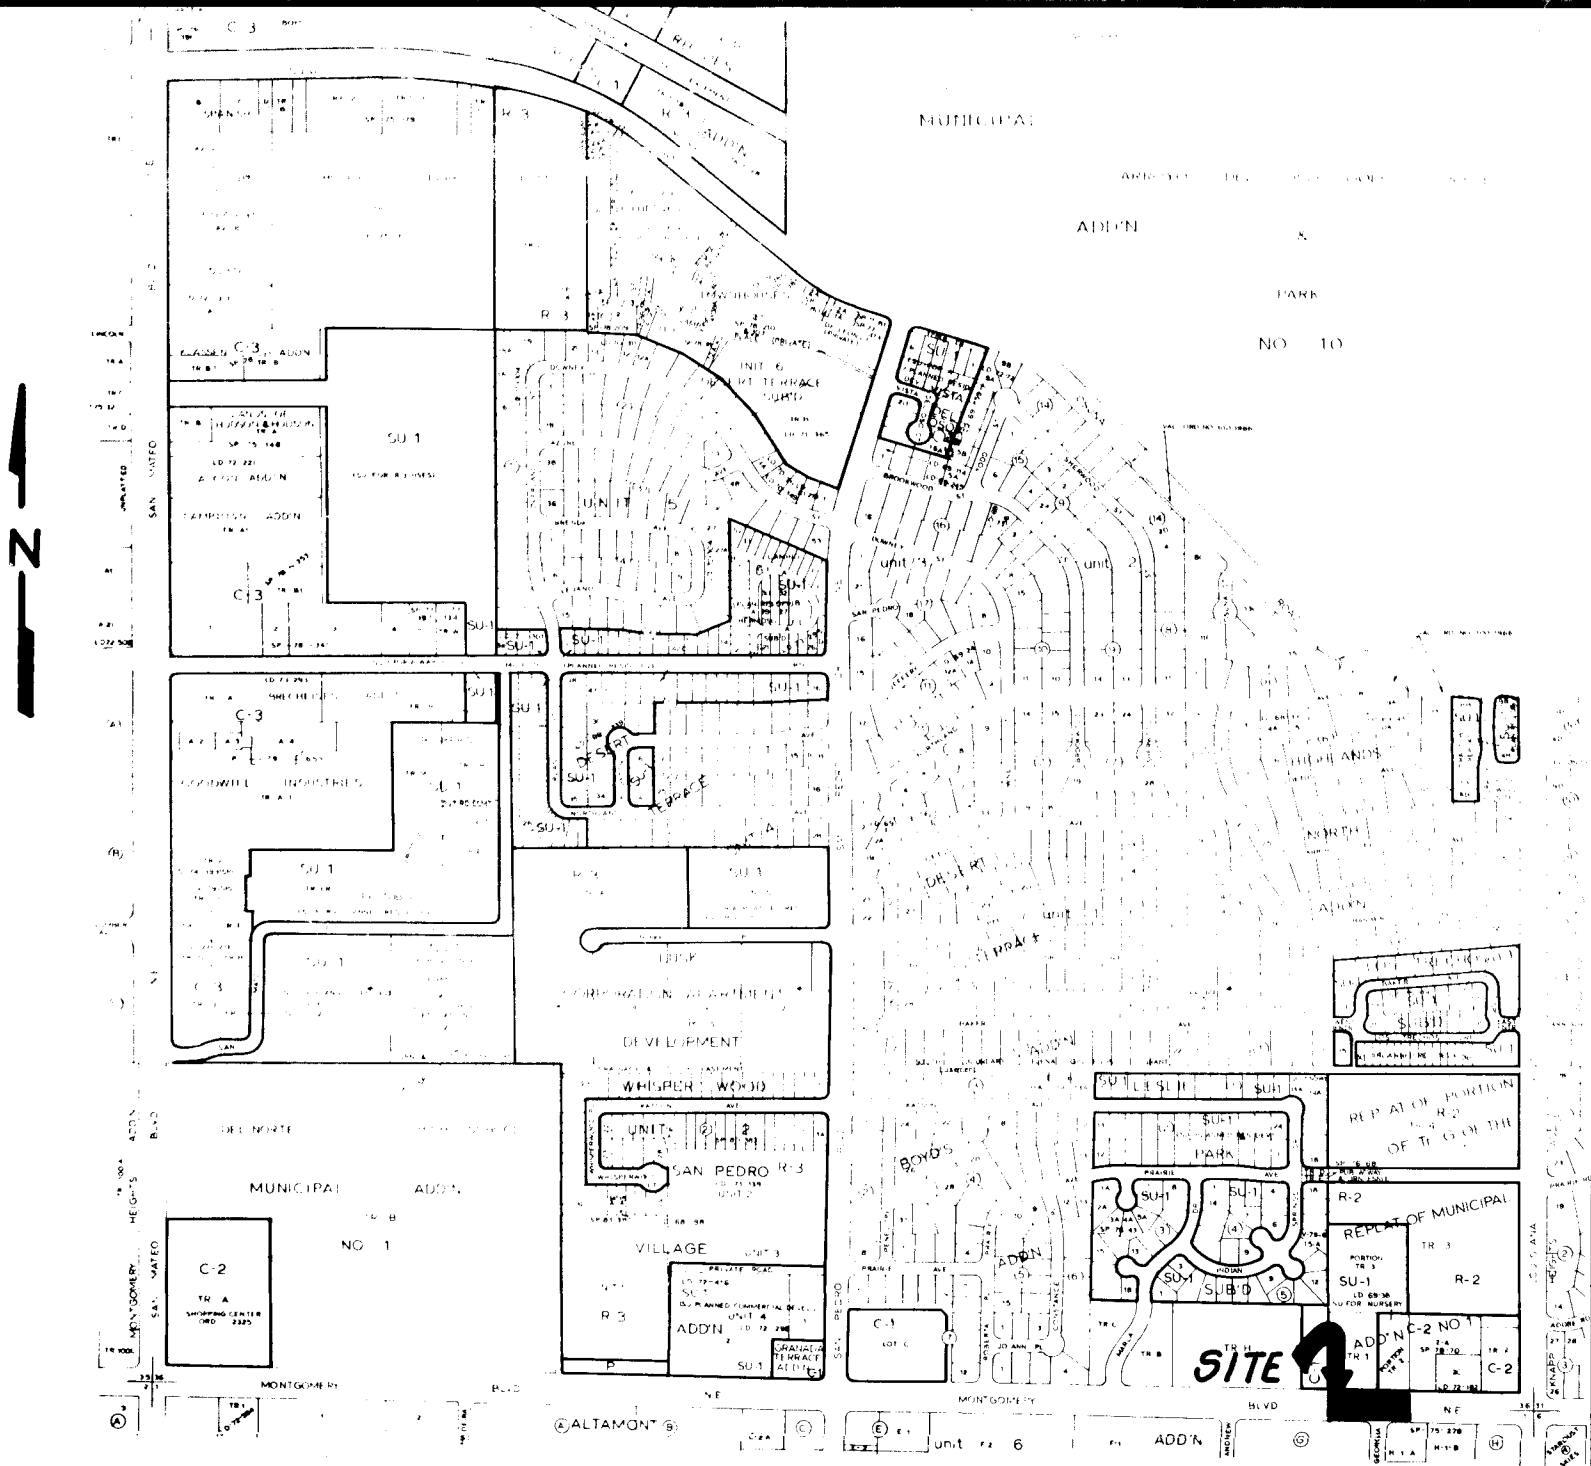




VICINITY MAP F-18

GENERAL NOTES

- New Mexico Standard Specifications for Public Works Construction-1979 Edition, with amendments, referred to hereon as the "Standard Specifications".
- All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with the Standard Specifications for Public Works Contract No. 84-1 and the Standard Specifications.
- All utilities and utility lines shall be installed prior to paving.
- Where a water line passes beneath or less than 18" above an existing sewer line, the sewer line shall be encased in concrete 6" thick for at least 10' on each side of the water line, or the sewer line shall be replaced with ductile iron pipe from manhole to manhole. This shall also apply where a parallel water line is less than 10' horizontally and less than 2' above the sewer.
- Backfill compaction shall be according to specified street use.
- Montgomery Blvd. shall be considered an arterial street.
- Stations shown are centerline stations.
- Two working days prior to any excavation, contractor must contact Line Locating Service 765-1234, for location of existing lines.
- Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with a minimum amount of delay.
- All manholes on this project are 4 ft. in diameter, unless otherwise noted. Invert elevations shown are at edge of manhole. All sewer line stations refer to centerline street stations.
- Sewer pipe lengths are from centerline of manhole to centerline of manhole.
- All waterline stations refer to centerline street stations.
- The existence and location of existing underground facilities shown on these plans were obtained by a search of the available records. To the best of our knowledge, there are no other existing facilities except as shown on these plans. However, the contractor is required to take precautionary measures to protect any existing facilities shown hereon and any other which is not of record or not shown on these plans.
- References made to Standard Drawings refer to City of Albuquerque drawings.
- Standard Drawings used are:

|        |       |        |
|--------|-------|--------|
| K-16-1 | P-3-2 | P-13-3 |
| W-1-3  | P-4   | P-14-1 |
| W-20-1 | P-7-2 | P-16-1 |
| W-21   | P-8-4 | P-17-1 |
| W-22   | P-9-3 | T-2-3  |
- Tack coat requirements shall be determined by the City Engineer.
- All storm drainage facilities shall be completed prior to final acceptance.

|                       |        |               |      |                                                                                                                                      |       |      |                                       |       |      |
|-----------------------|--------|---------------|------|--------------------------------------------------------------------------------------------------------------------------------------|-------|------|---------------------------------------|-------|------|
| REV.                  | SHEETS | CITY ENGINEER | DATE | USER                                                                                                                                 | DEPT. | DATE | USER                                  | DEPT. | DATE |
| APPROVAL OF REVISIONS |        |               |      |                                                                                                                                      |       |      |                                       |       |      |
|                       |        |               |      | DWJM/Adam, Hamlyn, Anderson<br>Suite A<br>4055 Montgomery Boulevard N.E.<br>Albuquerque, New Mexico 87109<br>Telephone: 505/591-1808 |       |      | APPROVED FOR CONSTRUCTION<br><br>C.E. |       |      |
| 2214                  |        |               |      | SHEET 1 OF 2                                                                                                                         |       |      |                                       |       |      |

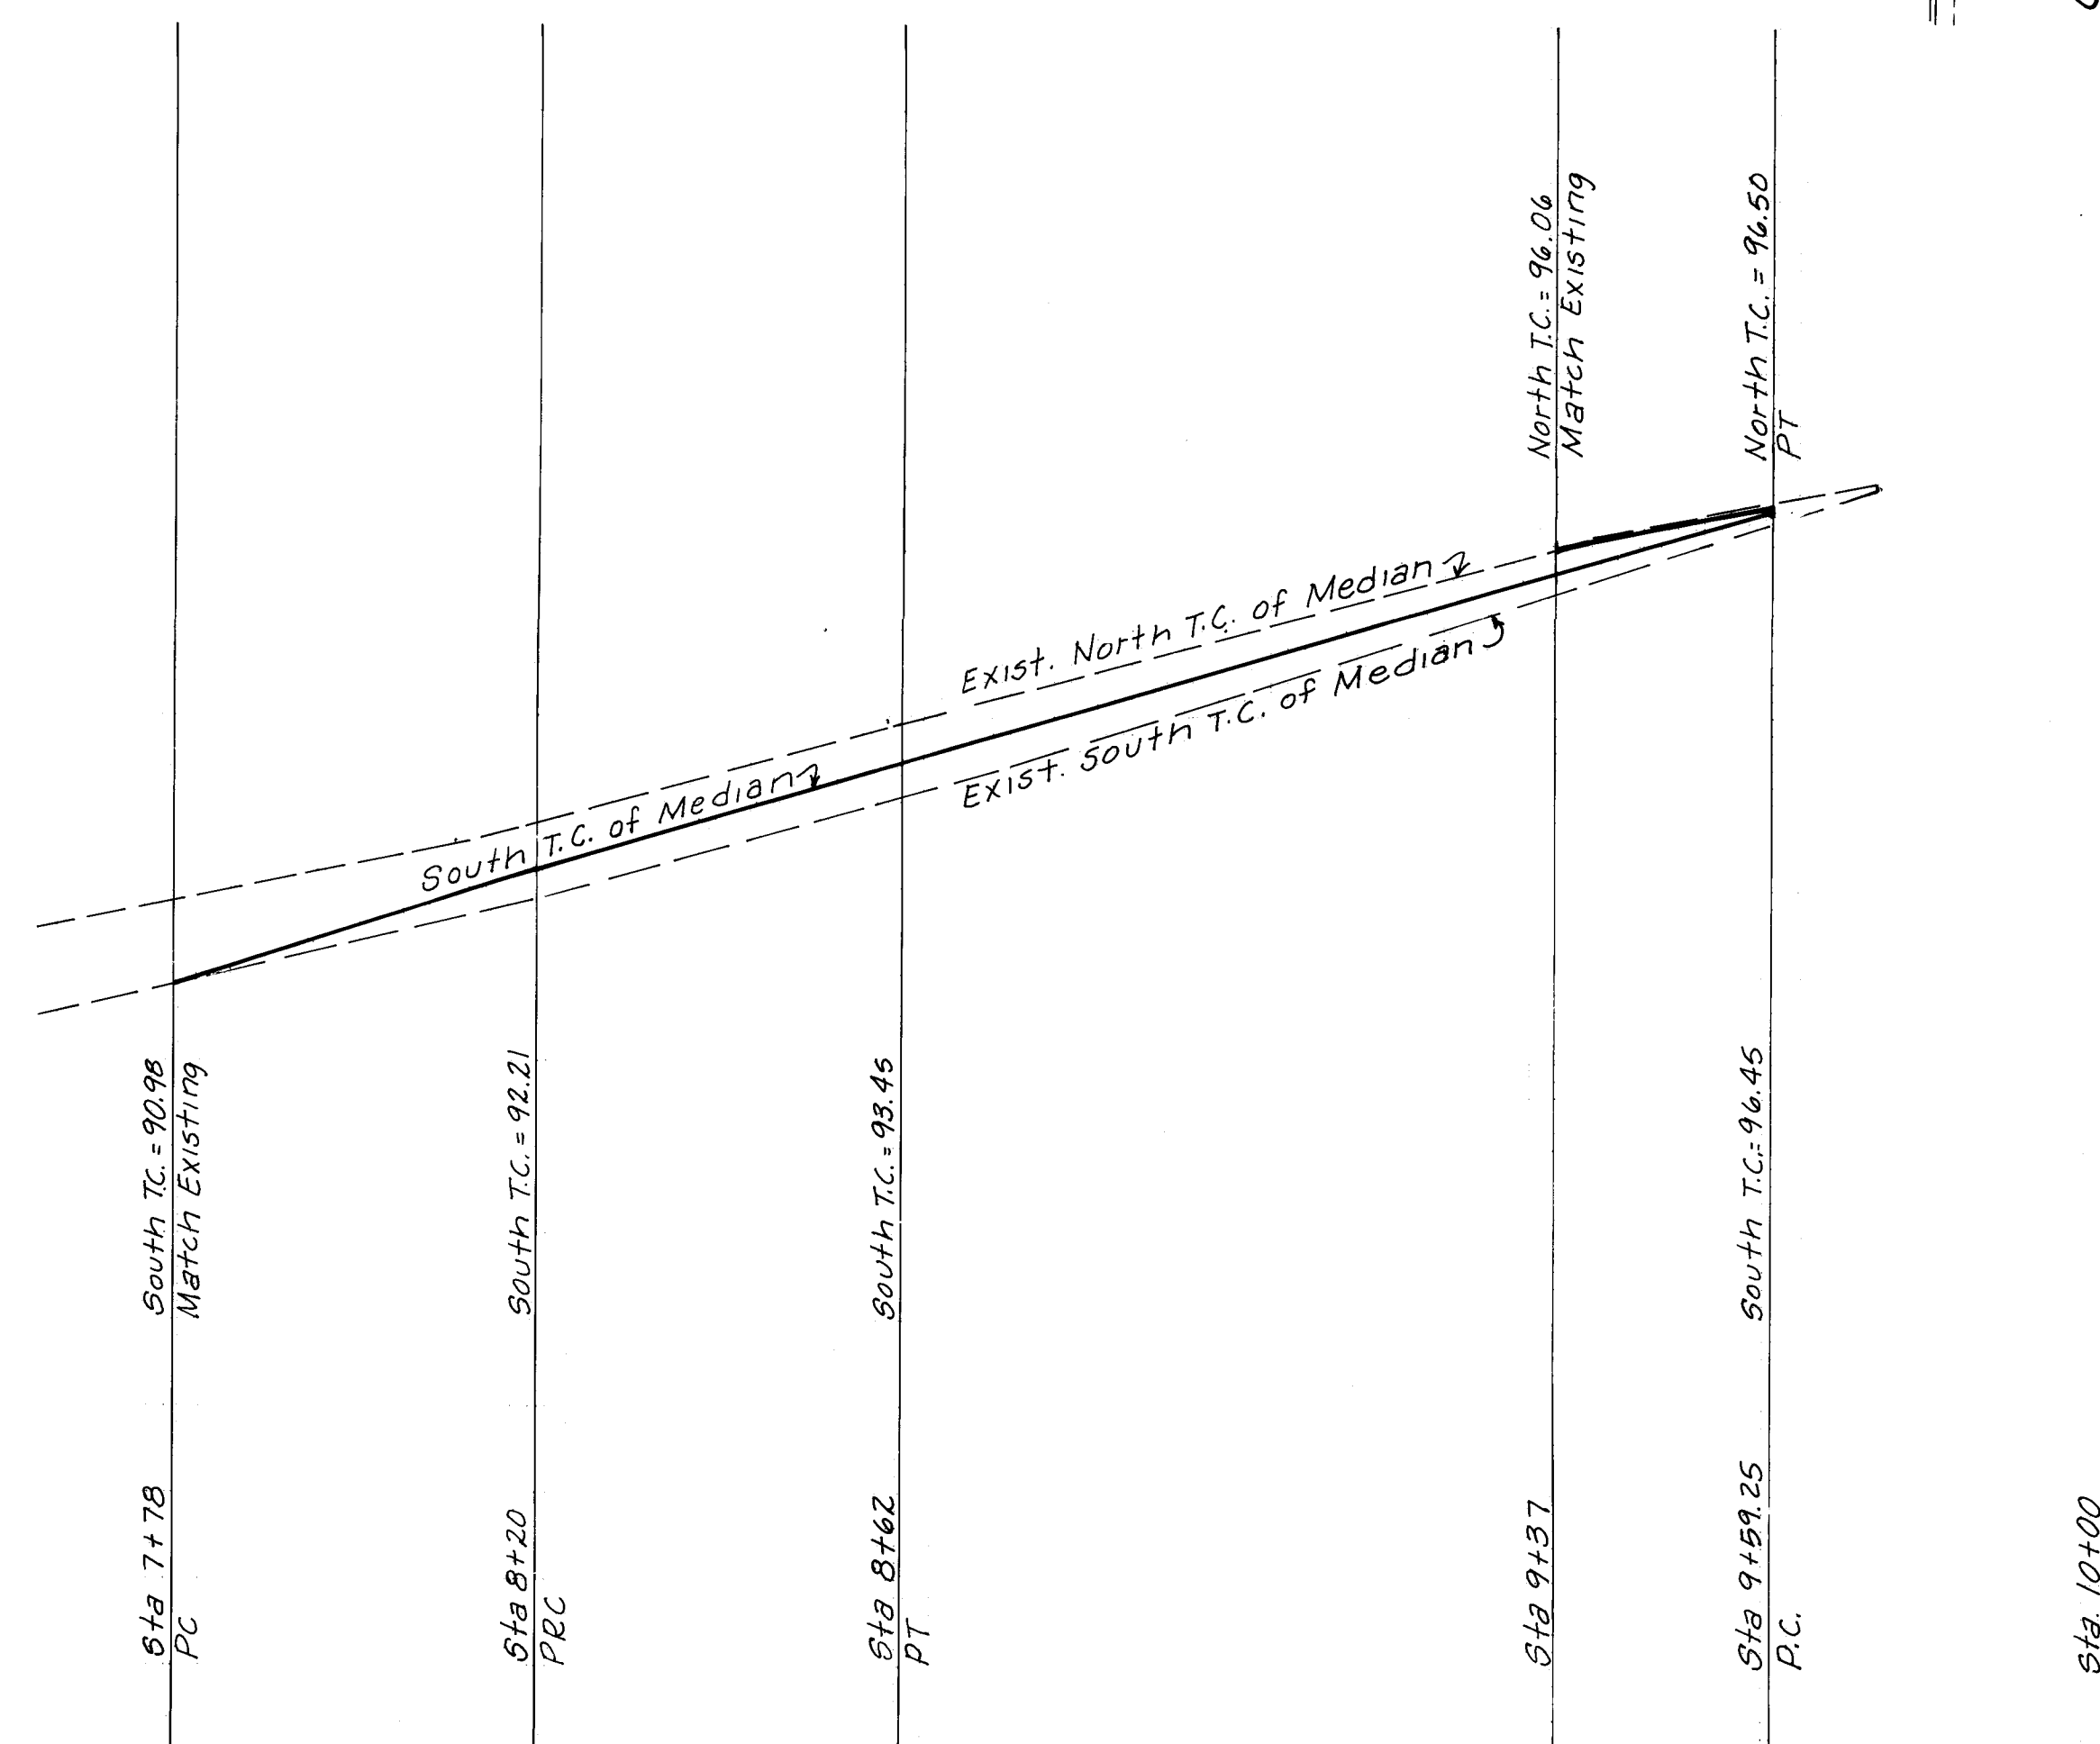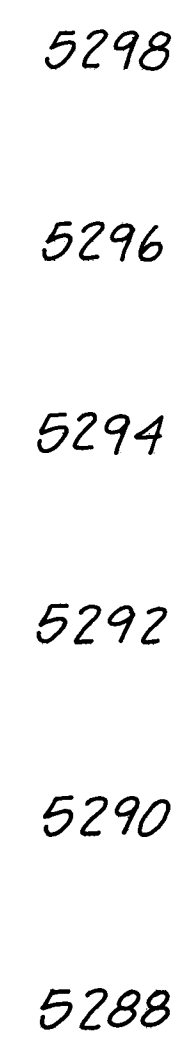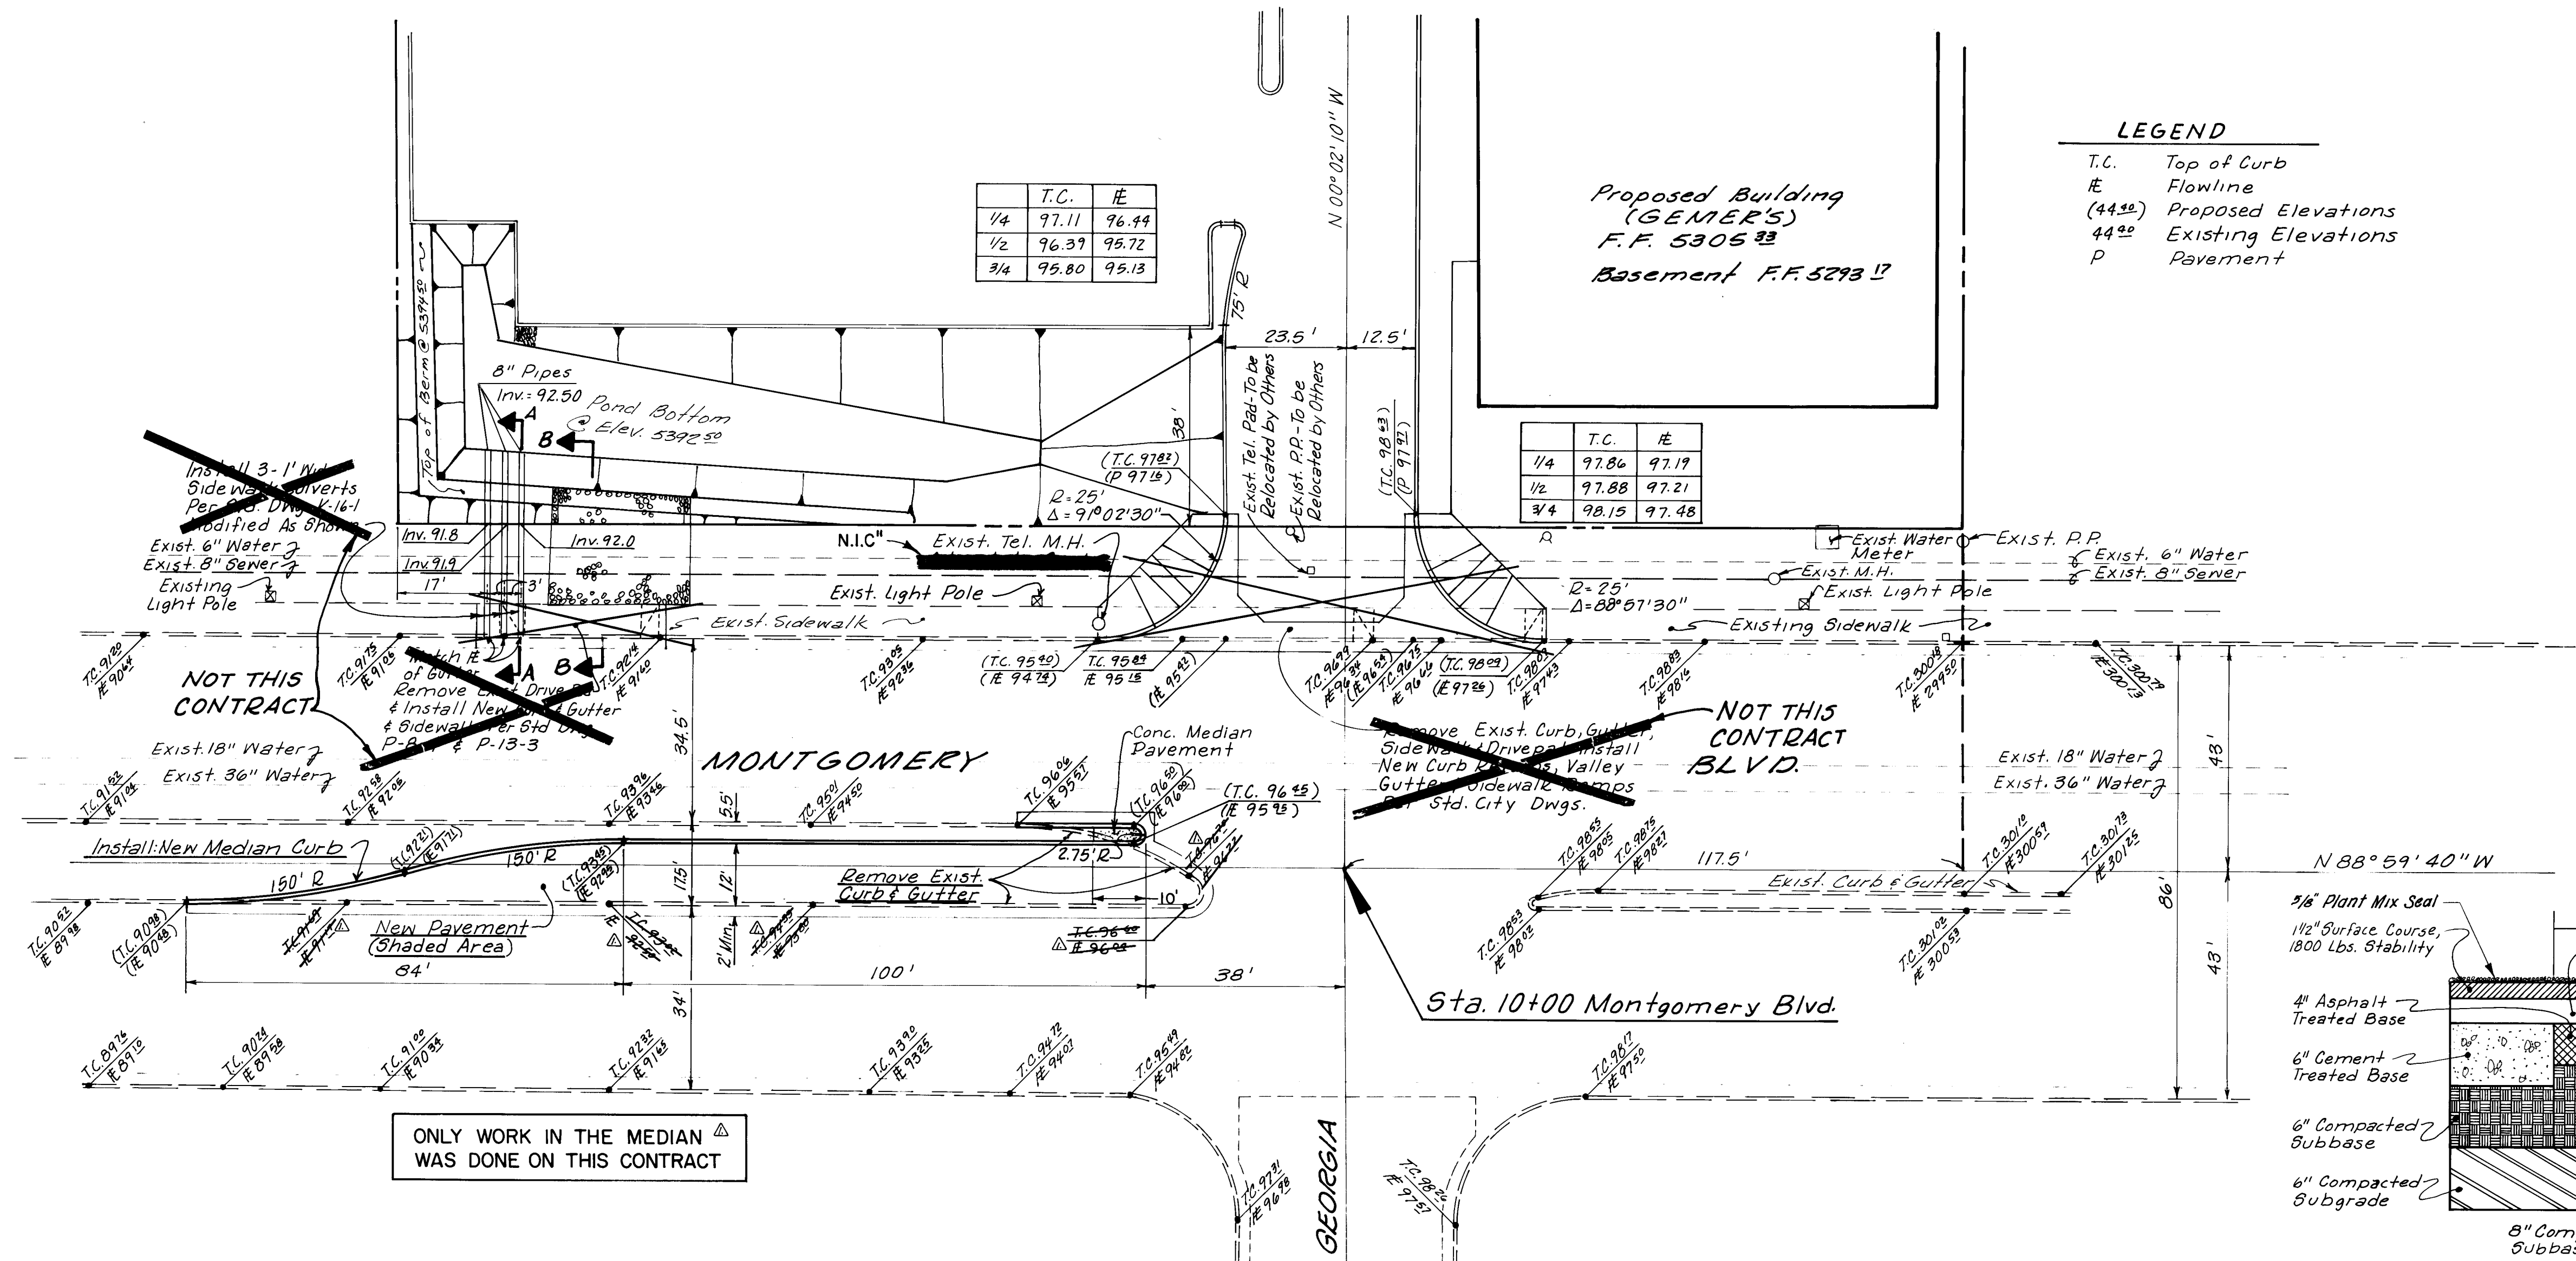

|                                                                                       |  |                                                                                 |                    |                |              |                      |                |
|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------|--------------------|----------------|--------------|----------------------|----------------|
| PLANS PREPARED<br>UNDER THE DIRECTION<br>OF                                           |  | CITY OF ALBUQUERQUE<br>MUNICIPAL DEVELOPMENT DEPARTMENT<br>ENGINEERING DIVISION |                    |                |              |                      |                |
|  |  | TITLE MONTGOMERY BLVD. LEFT TURN BAY<br>PLAN & PROFILE                          |                    |                |              |                      |                |
|                                                                                       |  | APPROVALS                                                                       | ENGINEER           | DATE           | APPROVALS    | ENGINEER             | DATE           |
|                                                                                       |  | City Engineer                                                                   | <i>C. L. Jang</i>  | <i>9/15/84</i> | Liquid Waste | <i>N.R. Jang</i>     | <i>8/15/84</i> |
|                                                                                       |  | A.C.E. Design                                                                   | <i>A.C. Design</i> | <i>9/15/84</i> | Traffic      | <i>David M. Nunn</i> | <i>9/15/84</i> |
|                                                                                       |  | A.C.E. Hydrology                                                                | <i>N.A. SGA</i>    | <i>8/15/84</i> | Water        | <i>N.R. Jang</i>     | <i>8/15/84</i> |
| APPROVED FOR<br>CONSTRUCTION                                                          |  | DRAWING<br>NO.                                                                  |                    |                |              | SHEET 2 OF 2         |                |
| CITY ENGINEER                                                                         |  | DATE                                                                            |                    |                |              |                      |                |