


SYM.	RAD.	Δ	T	L
①	210.74'	29° 48' 42"	56.10'	109.65'
②	238.81	31° 27' 20"	67.25'	131.11'

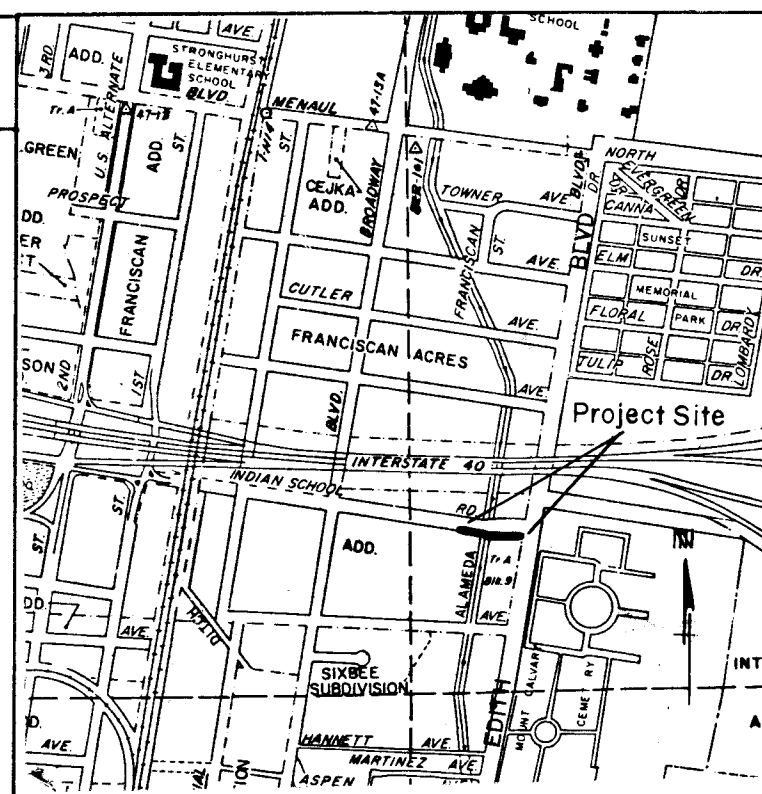

LOCATION MAP H - 15

NOTICE TO CONTRACTORS

1. All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for herein, be constructed in accordance with the New Mexico Standard Specifications for Public Works Construction-1979 Edition (referred to herein as the Standard Specifications) and the Contract Documents for Public Works Contract 85-1
2. Two (2) working days prior to any excavation, the contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
3. Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with minimum amount of delay.

THE FOLLOWING NOTES ALSO APPLY
WHEN CHECKED

- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☒ Backfill compaction shall be according to specified street use. (Collector)
- ☒ Task cost requirements shall be determined by the City Engineer.
- ☐ Sidewalks and wheelchair ramps within the curb return shall be constructed wherever a new curb return is constructed.
- ☒ If curb is depressed for a driveway or a handicap ramp, the driveway or ramp shall be constructed prior to acceptance of the curb and gutter.
- ☐ All storm drainage facilities shall be completed prior to final acceptance.

GENERAL NOTES:

- (A) Driveways wider than 18' (nominal) shall have 1/2" Exp. Jt. at midpoint. Drivepads wider than 36" shall have 1/2" Exp. Jt. 18' max. between Jts. equally spaced. Also space construction joints 6' apart.
- (B) Subgrade under Drivepads shall be compacted to 95 % max. Density to a depth of 6". Per ASTM D - 1557.
- (C) An opening for a temporary entrance to 418 Indian School Rd. (R - C Garage) shall be provided during construction. Contractor to coordinate with property owner to determine location of opening for entrance.
- (D) A min. curing period of 7 days must be allowed after completion of drivepad before being used.
- (E) After completion of new drivepad, opening for temporary entrance to property at 418 Indian School Rd. shall be closed off and new curb & gutter to be constructed as per design.

APPROVED FOR
CONSTRUCTION
C. J. Shipman 2/9/85
CITY ENGINEER DATE

CITY OF ALBUQUERQUE
MUNICIPAL DEVELOPMENT DEPARTMENT
ENGINEERING DIVISION

TITLE:
NEW C & G AND DRIVEPADS, ON INDIAN SCHOOL
ROAD WEST OF EDITH BLVD.

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	<i>C. D. Chapman</i>	<i>1/25/85</i>	Liquid Waste	<i>William Borch</i>	<i>1/29/85</i>
A-C-E-Design	<i>H. K. Olson</i>	<i>1/25/85</i>	Traffic	<i>Dave Johnson</i>	<i>1/4/85</i>
A-C-E-Hydrology	<i>John Zink</i>	<i>1/11/85</i>	Water	<i>William Borch</i>	<i>1/8/85</i>

DRAWING NO.	2262	MAP NO. H-15	SHEET 1	OF 1
----------------	------	-----------------	------------	---------