
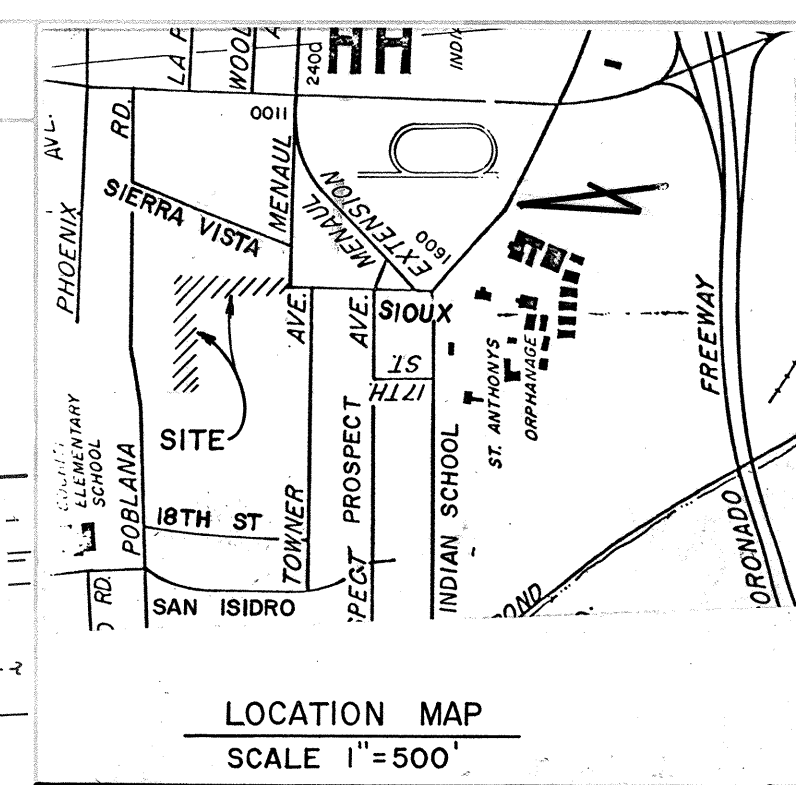


5206

SCANNED BY 3/27/97

SCANNED BY

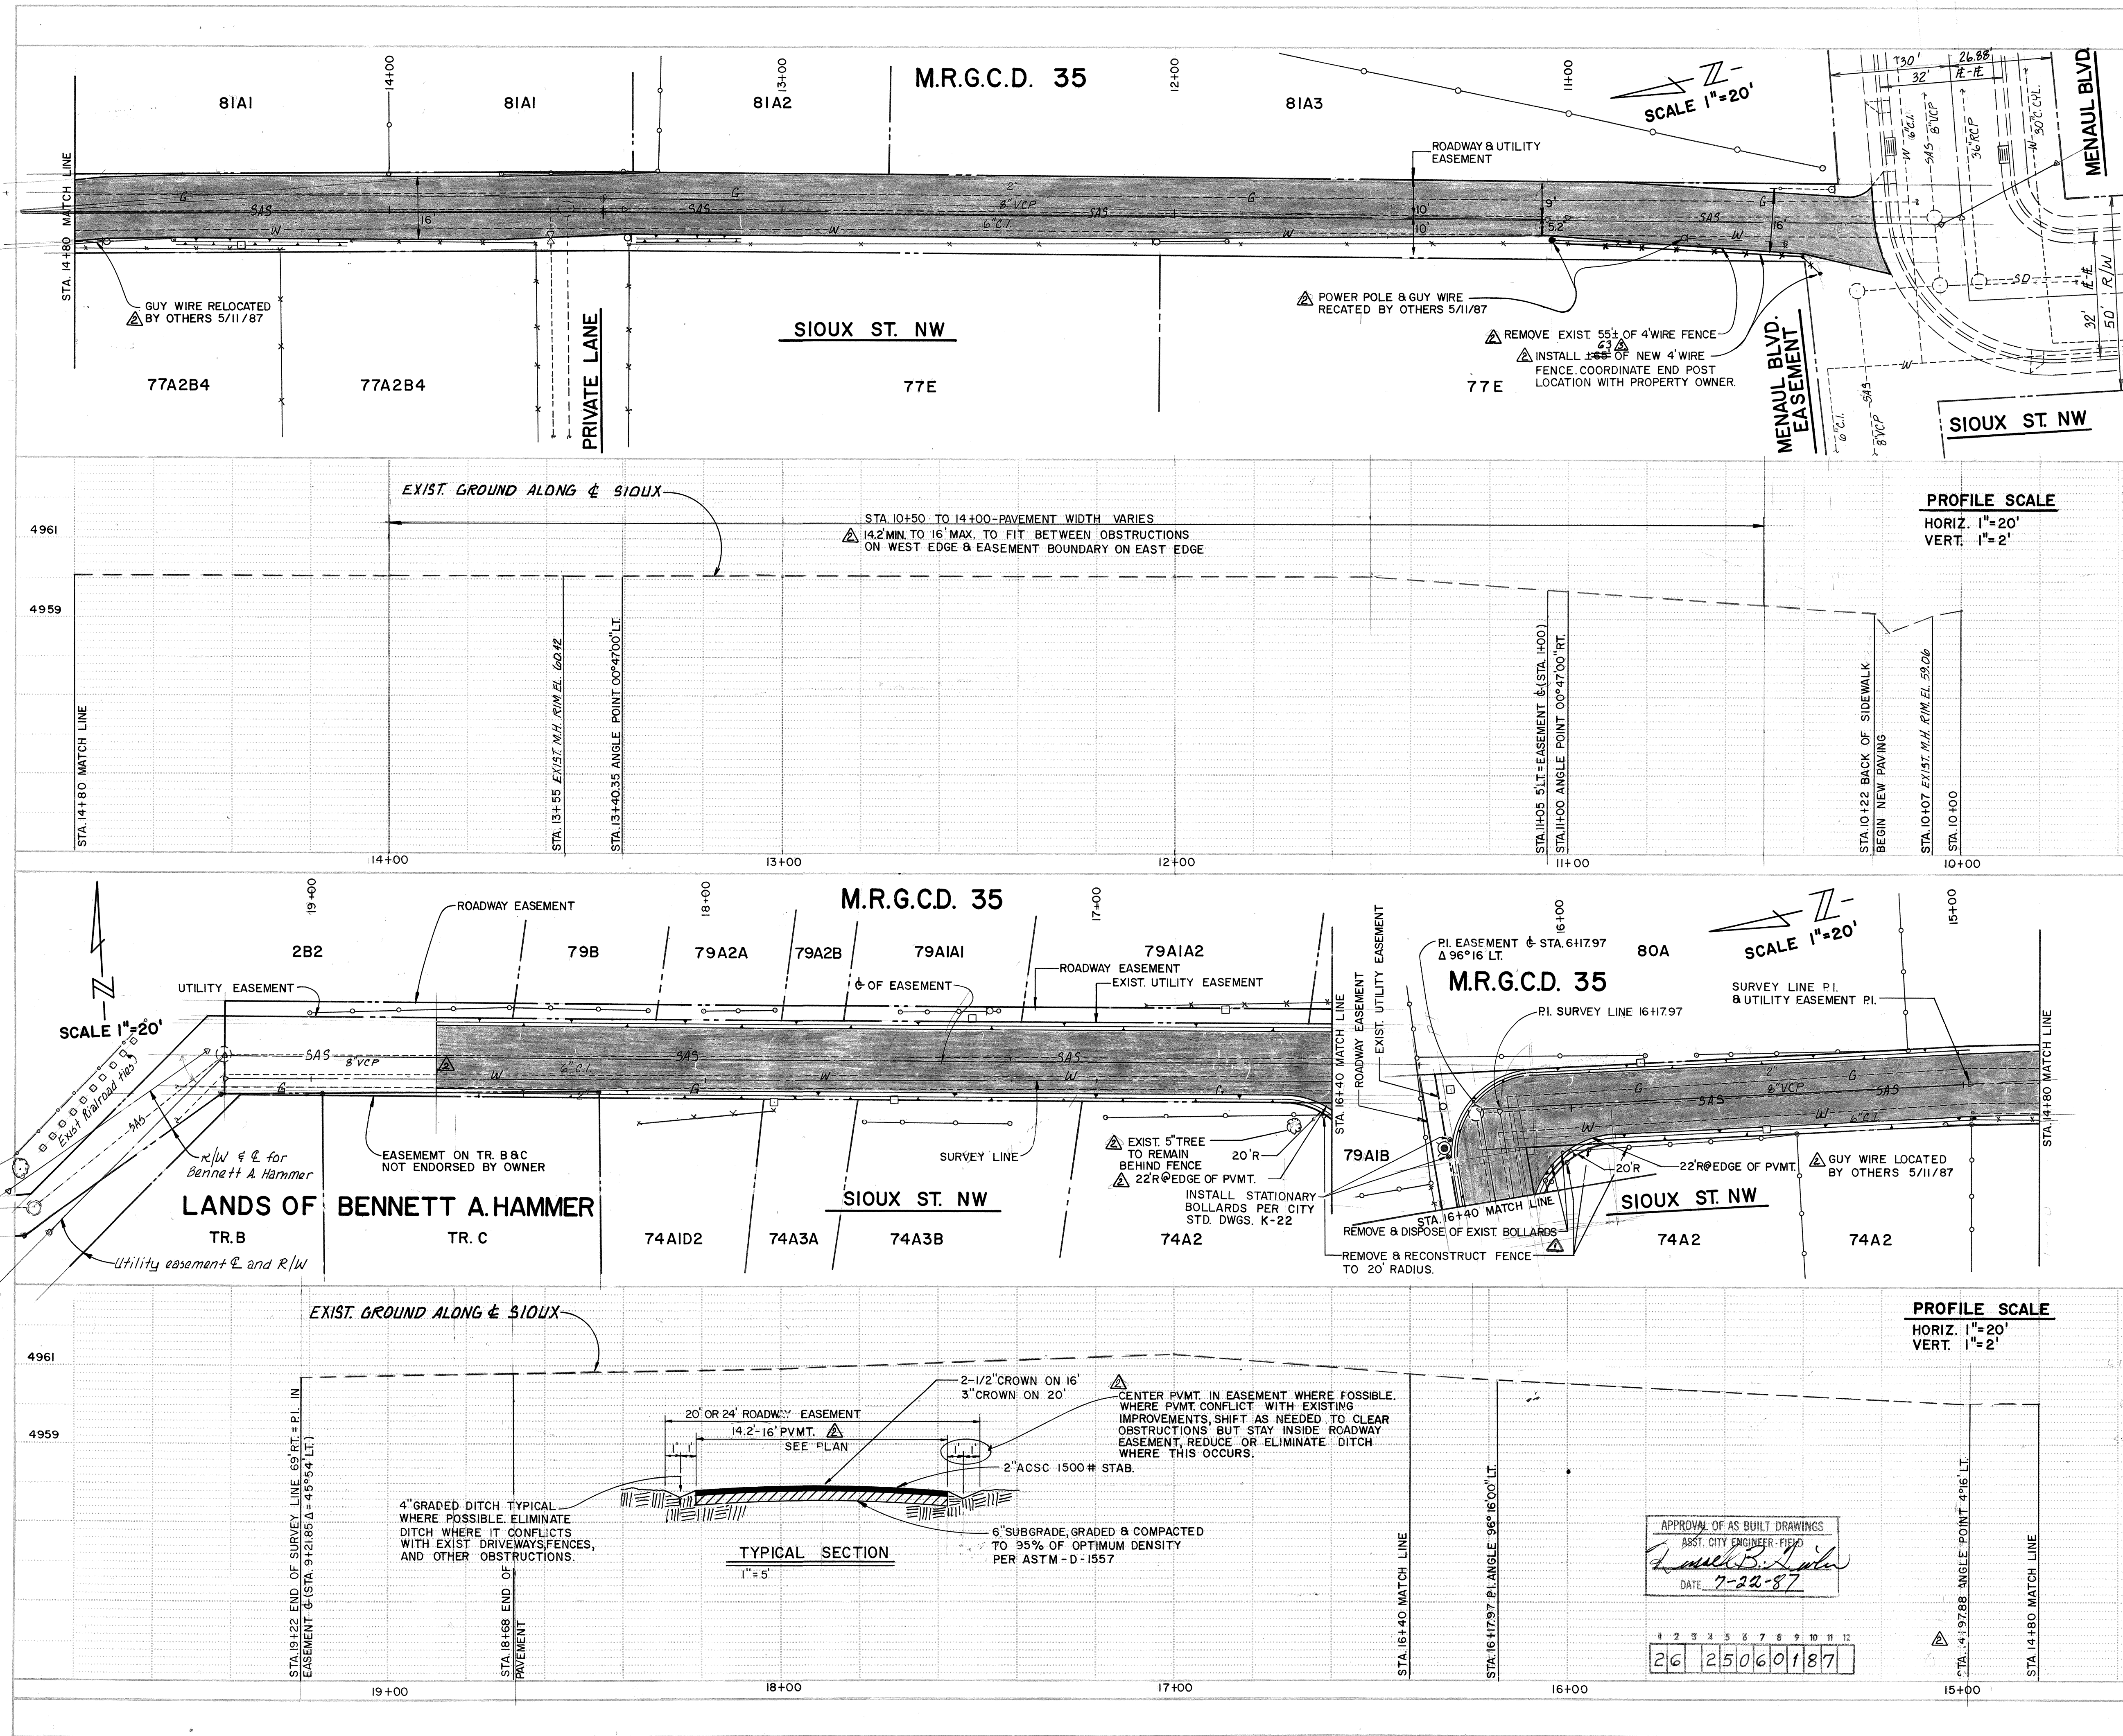

NOTICE TO CONTRACTORS

- All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with the City of Albuquerque Interim Standard Specifications for Construction 1985.
- Two (2) working days prior to any excavation, the contractor must contact Line Locating Service, 765-1234, for location of existing utilities.
- Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with minimum amount of delay.

THE FOLLOWING NOTES ALSO APPLY WHEN CHECKED

- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☐ Backfill compaction shall be according to specified street use.
- ☐ Tack coat requirements shall be determined by the City Engineer.
- ☐ Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
- ☐ If curb is depressed for a driveway or a handicap ramp, the driveway or ramp shall be constructed prior to acceptance of the curb and gutter.
- ☐ All storm drainage facilities shall be completed prior to final acceptance.

- LEGEND
- Exist. Fire Hydrant
 - Exist. Manhole
 - Exist. Water Meter Box
 - Exist. Power Pole
 - Exist. Power Pole & Guide Wire
 - Exist. Chain Link Fence
 - Exist. Wood Fence
 - Exist. Curb & Gutter
 - NEW DITCH 4" INVERT

- NOTES
- CONVERT WATER METER PADS TO HEAVY DUTY COVER PER STD. W-19.
 - ALIGNMENT PER PLAN AND AS DIRECTED BY CITY ENGINEERS REPRESENTATIVES IN FIELD.
 - ADJUST MANHOLES & VALVES TO GRADE PER CITY STD. DETAILS.
 - ALL STATIONING & OFF SETS ARE BASED ON SURVEY LINE.

Handwritten signature and date: *Russell B. Siler 7-22-87*

CITY OF ALBUQUERQUE
MUNICIPAL DEVELOPMENT DEPARTMENT
ENGINEERING DIVISION
TITLE: TEMPORARY PAVING FOR SIOUX ST. FROM MENAUL BLVD. NORTH 900'

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	<i>[Signature]</i>	7/3/86	Liquid Waste	<i>[Signature]</i>	3-7-86
A.C.E. - Design	<i>[Signature]</i>	7/3/86	Traffic	<i>[Signature]</i>	3-19-86
A.C.E. - Hydrology	<i>[Signature]</i>	7/3/86	Water	<i>[Signature]</i>	3-7-86

DRAWING NO. 2506 MAP NO. H-13 SHEET 1 OF 1

AS BUILT INFORMATION		CONTRACTOR		DATE	
2-HIB Located at the intersection of Rio Grande Blvd and Indian School Rd NW in the NE Quadrant of the intersection. A square chiseled on top of concrete curb at the NNE curb return. ELEV. 4961.46		C.B.M. MH Rim @ Menaul & Sierra Vista NW		Book P-5-1 4959.99	
2-HIB Located at the intersection of Rio Grande Blvd and Indian School Rd NW in the NE Quadrant of the intersection. A square chiseled on top of concrete curb at the NNE curb return. ELEV. 4961.46		C.B.M. MH Rim @ Menaul & Sierra Vista NW		Book P-5-1 4959.99	
2-HIB Located at the intersection of Rio Grande Blvd and Indian School Rd NW in the NE Quadrant of the intersection. A square chiseled on top of concrete curb at the NNE curb return. ELEV. 4961.46		C.B.M. MH Rim @ Menaul & Sierra Vista NW		Book P-5-1 4959.99	

5205