
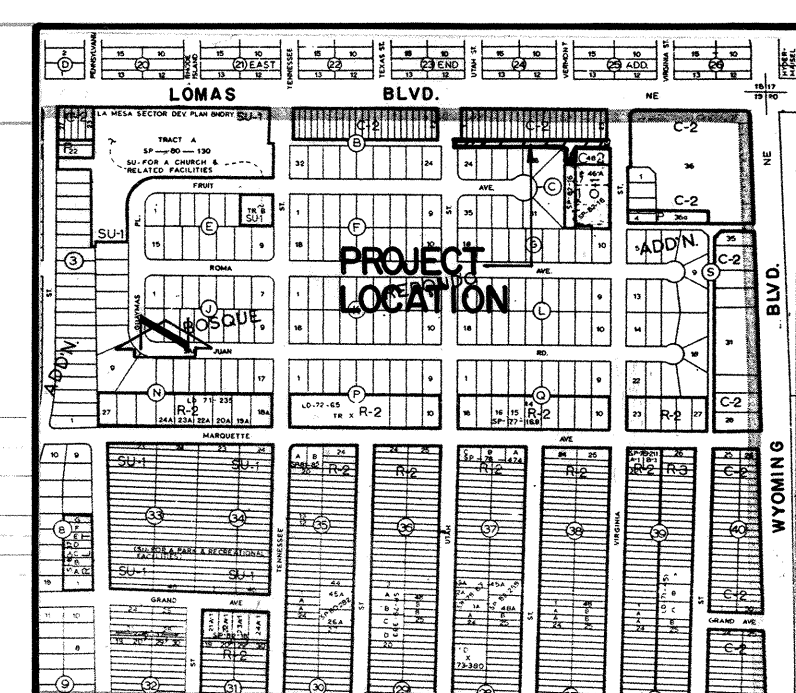


SCANNED BY LASON

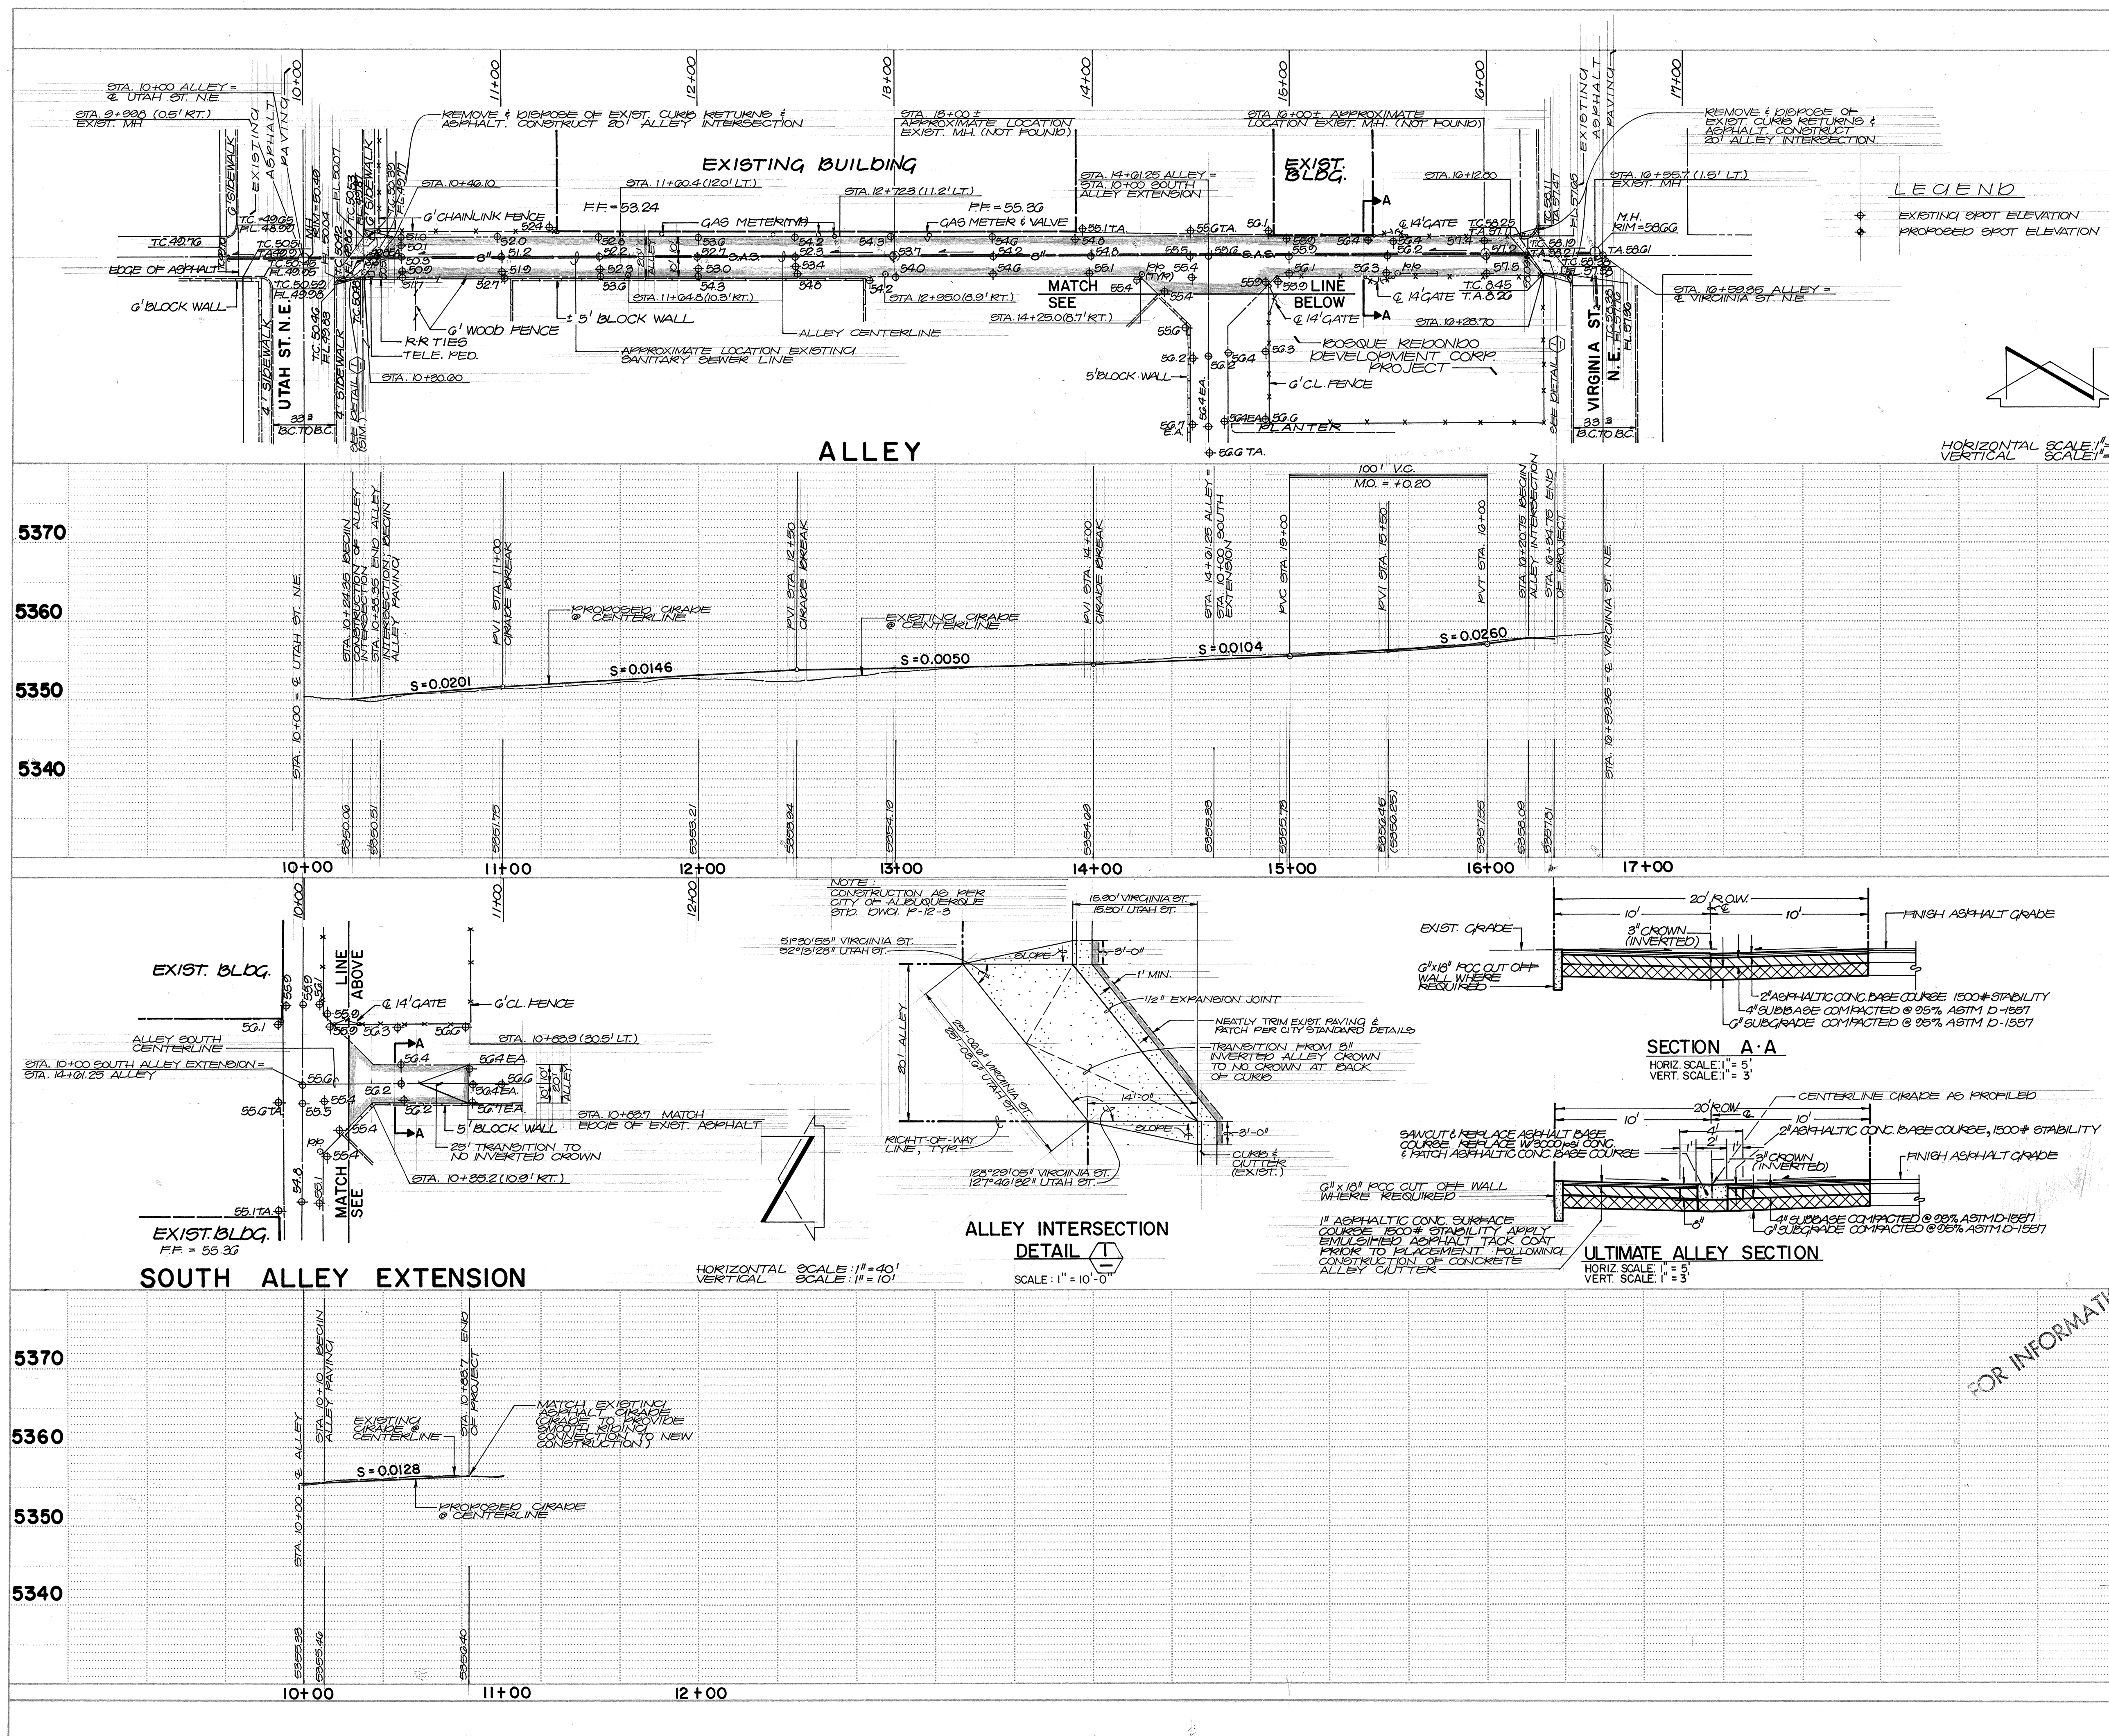


VICINITY MAP
SCALE: 1" = 800'

GENERAL NOTES:

1. ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED UNDER CONTRACT SHALL, EXCEPT OTHERWISE STATED OR PROVIDED FOR HEREON, BE CONSTRUCTED IN ACCORDANCE WITH THE CITY OF ALBUQUERQUE INTERIM STANDARD SPECIFICATIONS - PUBLIC WORKS CONSTRUCTION - 1985.
2. TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE, 765-1234, FOR LOCATION OF EXISTING UTILITIES.
3. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF ALL POTENTIAL OBSTRUCTIONS. SHOULD ANY CONFLICTS EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM AMOUNT OF DELAY.
4. THE CONTRACTOR SHALL MAINTAIN ACCESS TO ADJACENT PROPERTIES DURING CONSTRUCTION.
5. ALL WORK ON THIS PROJECT SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE AND LOCAL LAWS, RULES AND REGULATIONS CONCERNING CONSTRUCTION SAFETY AND HEALTH.
6. THE CONTRACTOR MUST SUBMIT A CONSTRUCTION SIGNING AND BARRICADING PLAN TO TRAFFIC ENGINEERING TO RECEIVE A BARRICADING PERMIT PRIOR TO CONSTRUCTION.
7. ALLEY SHALL BE CONSTRUCTED IN CONJUNCTION WITH BOSQUE REDONDO DEVELOPMENT CORP. BY LICENSE AGREEMENT.
8. CONTRACTOR SHALL ADJUST TO GRADE ALL WATER METERS, VALVE BOXES AND MANHOLES ENCOUNTERED WITHIN THE CONSTRUCTION LIMITS.
9. CONTRACTOR SHALL PAVE AROUND ALL EXISTING TELEPHONE AND POWER POLES. ONE-HALF INCH EXPANSION JOINTS SHALL BE PROVIDED WHERE PAVING IS CONCRETE.
10. WHERE WATER METER BOXES ARE ENCOUNTERED WITHIN THE PROPOSED PAVING, THE METER BOX SHALL BE ADJUSTED TO GRADE AND THE COVER REPLACED WITH THE HEAVYWEIGHT COVER AND LID AS PER STANDARD DRAWING W-19.
11. WHERE ALLEY ABUTS EXISTING WALLS, CURBS AND PAVING, A 6"x18" PCC CUT-OFF WALL WILL NOT BE REQUIRED. A CUT-OFF WALL WILL BE REQUIRED OTHERWISE.

FOR GRADES ONLY

26 25470185

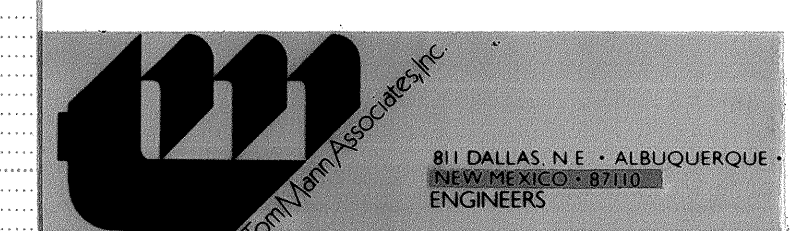

CITY OF ALBUQUERQUE
MUNICIPAL DEVELOPMENT DEPARTMENT
ENGINEERING DIVISION

TITLE
ALLEY BETWEEN LOMAS BLVD. N.E. AND FRUIT AVE. N.E.
FROM UTAH ST. N.E. TO VIRGINIA ST. N.E.

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer			Liquid Waste	R. Pina	7/31/85
A.C.E. Design		11/3/85	Traffic	D. J. Pina	7/31/85
Hydrology		7/3/85	Water	R. Pina	7/3/85

DRAWING NO. 2547 MAP NO. K-19 SHEET 1 OF 1

AS BUILT INFORMATION		BENCH MARKS		CONTRACTOR	
DATE	BY	DATE	BY	DATE	BY
SURVEY INFORMATION		FIELD NOTES		NO.	
DATE	BY	DATE	BY	DATE	BY
ENGINEER'S SEAL		REVISIONS		DESIGN	
		NO.	DATE	REVISIONS	DATE
		1	7/3/85	DESIGN	7/3/85
		DESIGNED BY	J.C.M. & K.S.	DATE	7/3/85
		DRAWN BY	J.M.C. & L.B.D.	DATE	7/3/85
		CHECKED BY	J.C.M.	DATE	7/3/85