


ALLEY GRADES FOR ALLEY BETWEEN CHARLESTON ST. & DALLAS ST. SOUTH OF CENTRAL

INDEX	
SHEET NO.	DESCRIPTION
1 OF 3	TITLE SHEET
2 OF 3	PLAN & PROFILE
3 OF 3	CROSS SECTIONS

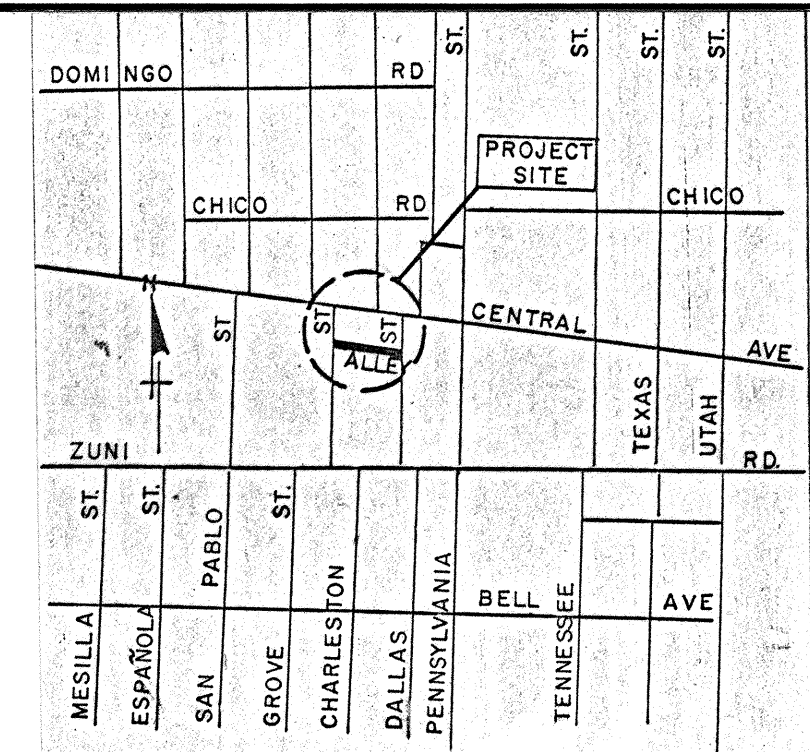

LOCATION MAP K-19

NOTICE TO CONTRACTORS




- All work detailed on these plans to be performed under contract shall, except as otherwise stated or provided for hereon, be constructed in accordance with the City of Albuquerque Interim Standard Specifications for Public Works Construction 1985.
- Two(2) working days prior to any excavation, the contractor must contact Line Locating Service, 765-1234 for location of existing utilities.
- Prior to construction, the contractor shall excavate and verify the horizontal and vertical locations of all obstructions. Should a conflict exist, the contractor shall notify the engineer or surveyor so that the conflict can be resolved with minimum amount of delay.

THE FOLLOWING NOTES ALSO APPLY WHEN CHECKED


- ☐ All utilities and utility service lines shall be installed prior to paving.
- ☒ Backfill compaction shall be according to specified street use.
- ☒ Tack coat requirements shall be determined by the City Engineer.
- ☐ Sidewalks and wheelchair ramps within the curb returns shall be constructed wherever a new curb return is constructed.
- ☒ If curb is depressed for a driveway or a handicap ramp, the driveway or ramp shall be constructed prior to acceptance of the curb and gutter.
- ☐ All storm drainage facilities shall be completed prior to final acceptance.

1 2 3 4 5 6 7 8 9 10 11 12
24 2436 156

	CITY OF ALBUQUERQUE	APPROVED FOR GRADES ONLY <i>M. O. H.</i> 2/25/86 CITY ENGINEER DATE
	DRAWING NO. 2636	SHEET 1 OF 3

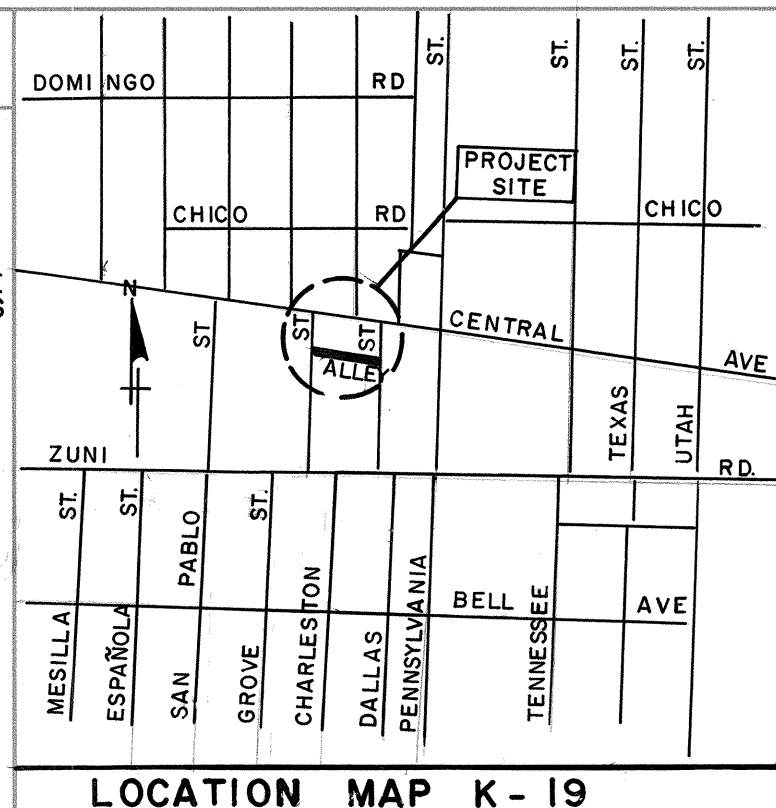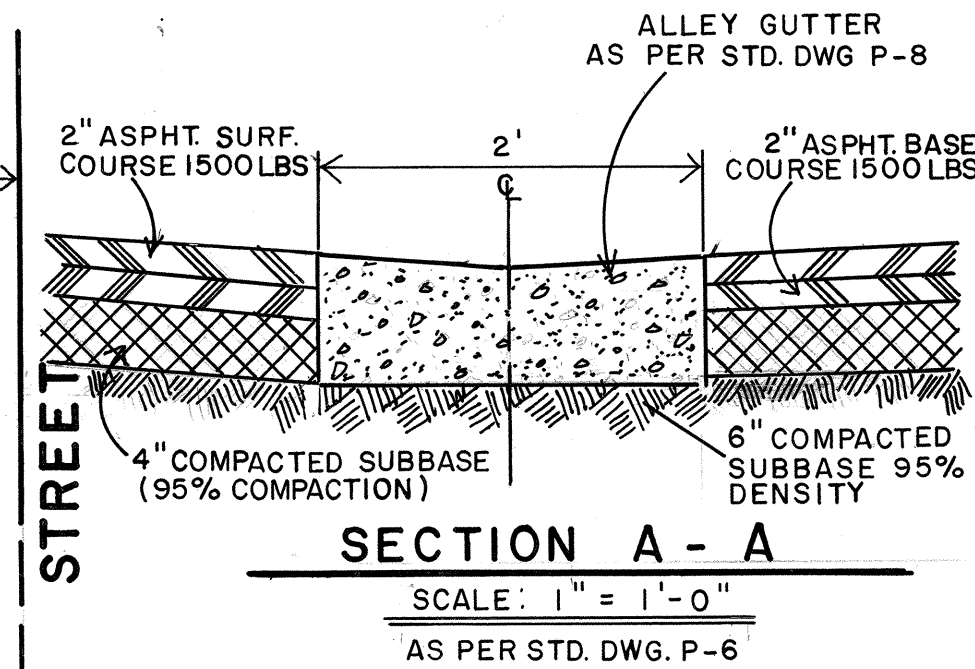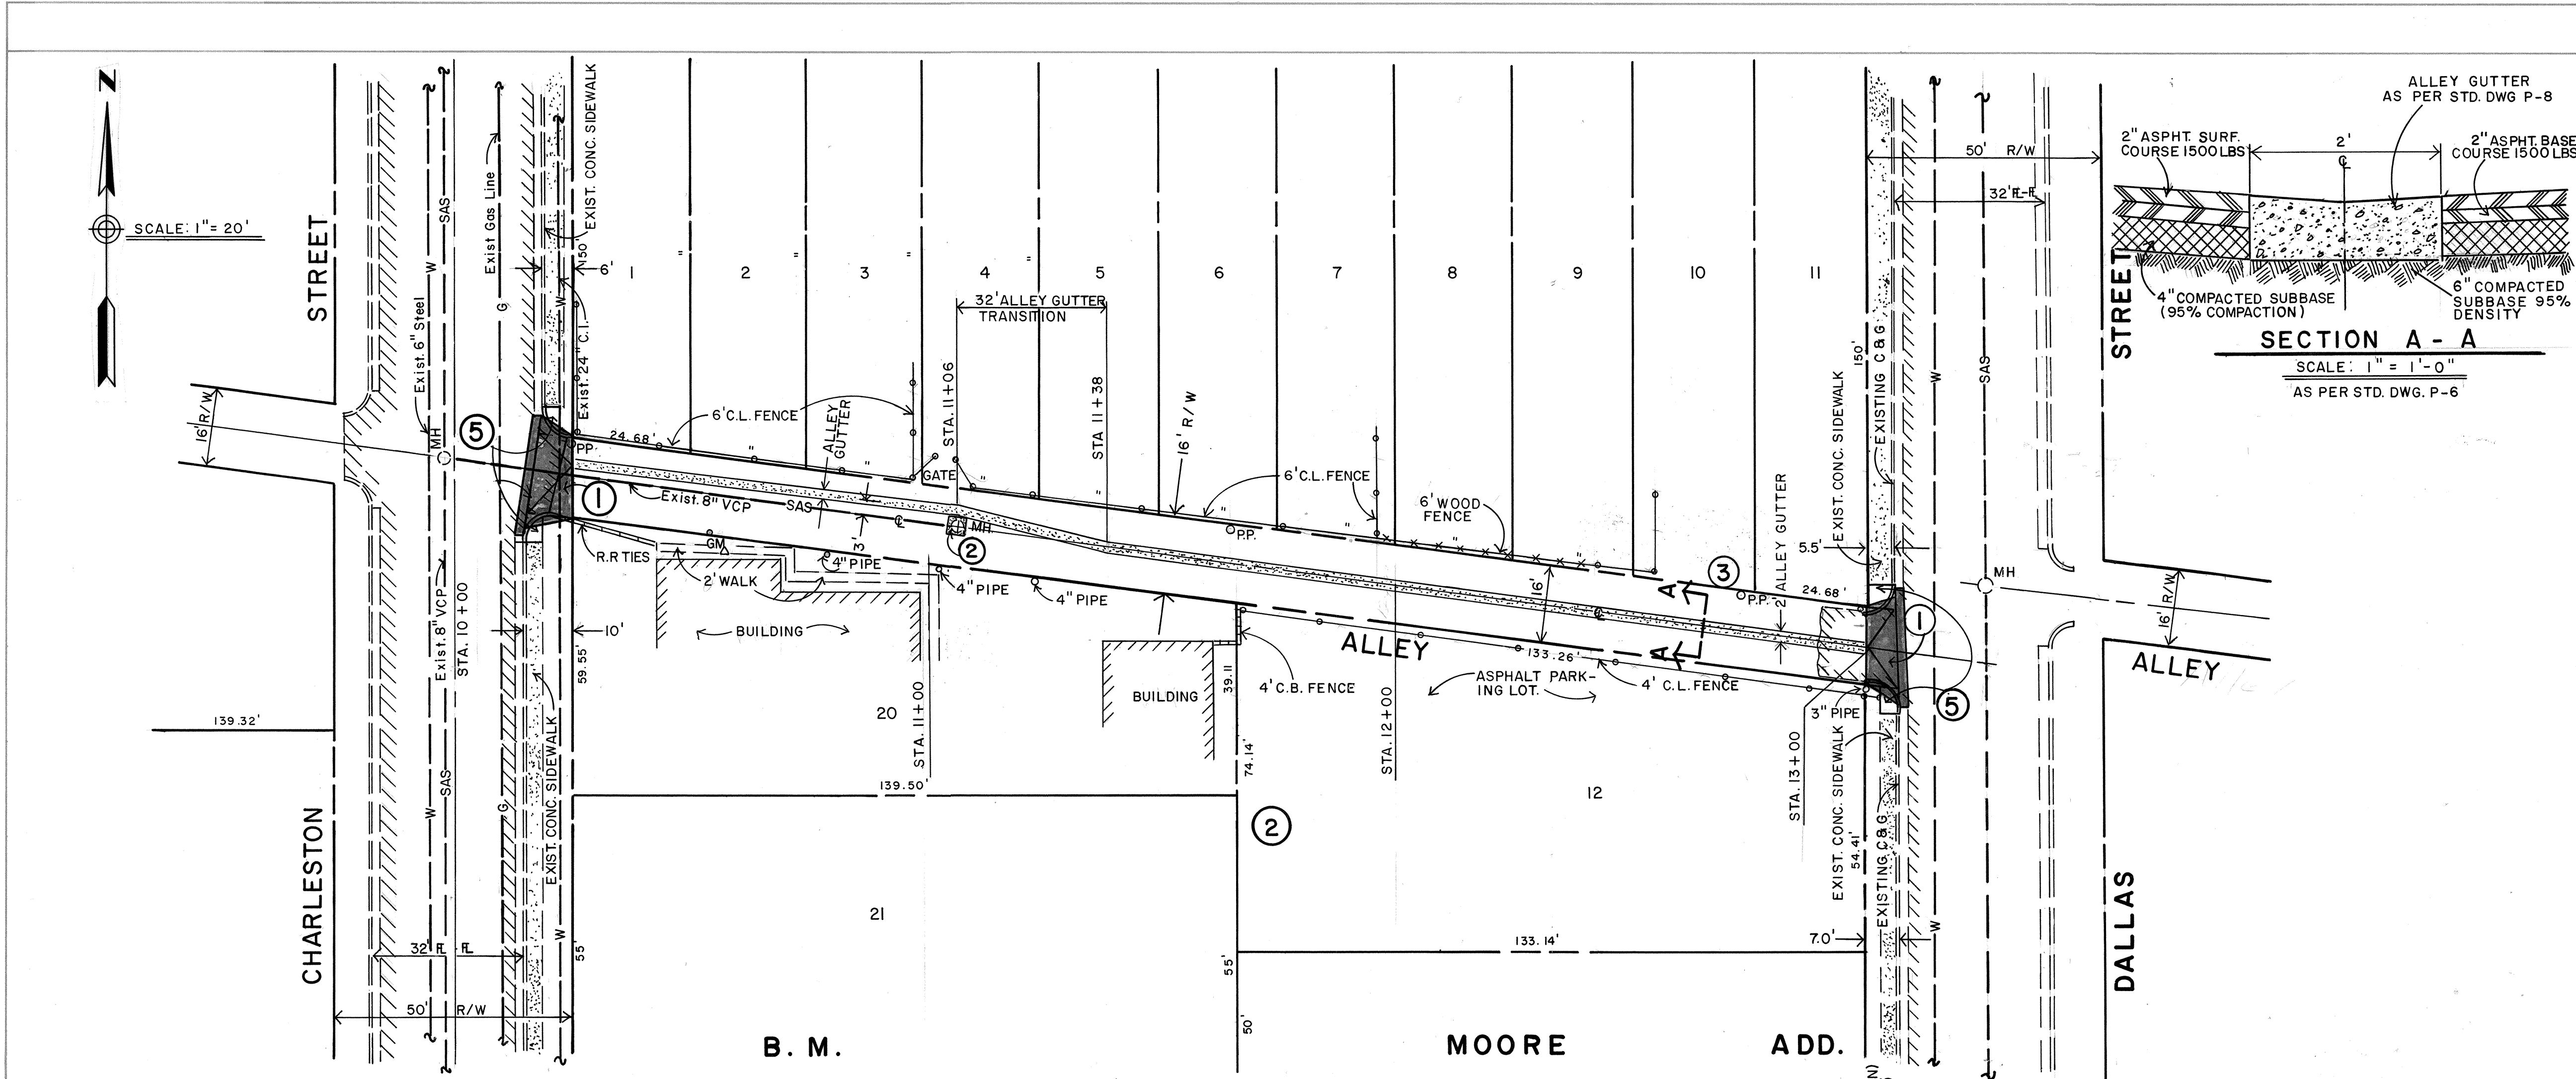

- CONSTRUCTION NOTES:**
1. CONSTRUCT ALLEY DRIVEPADS AS PER STANDARD SPEC. DWG. P-12.
 2. ADJUST EXISTING MAN HOLE TO NEW GRADES, REMOVE & REPLACE CONC. COLLAR AS NECESSARY. M.H. STA. 11+06.
 3. DEVELOPER TO OBTAIN CONSTRUCTION EASEMENTS OR PERMISSION FOR GRADING OUTSIDE OF RIGHT OF WAY, PRIOR TO ALLEY CONSTRUCTION.
 4. USE 1/2" EXPANSION JOINT MATERIAL WHERE PCC PAVEMENT ABUTS WALLS, ALLEY GUTTERS, RIGID PAVEMENT, POLES TRANSFORMERS, ETC..
 5. REMOVE EXISTING SIDEWALK, CURB AND GUTTER TO NEAREST JOINT. REPLACE SIDEWALK, CURB AND GUTTER TO MATCH EXISTING.

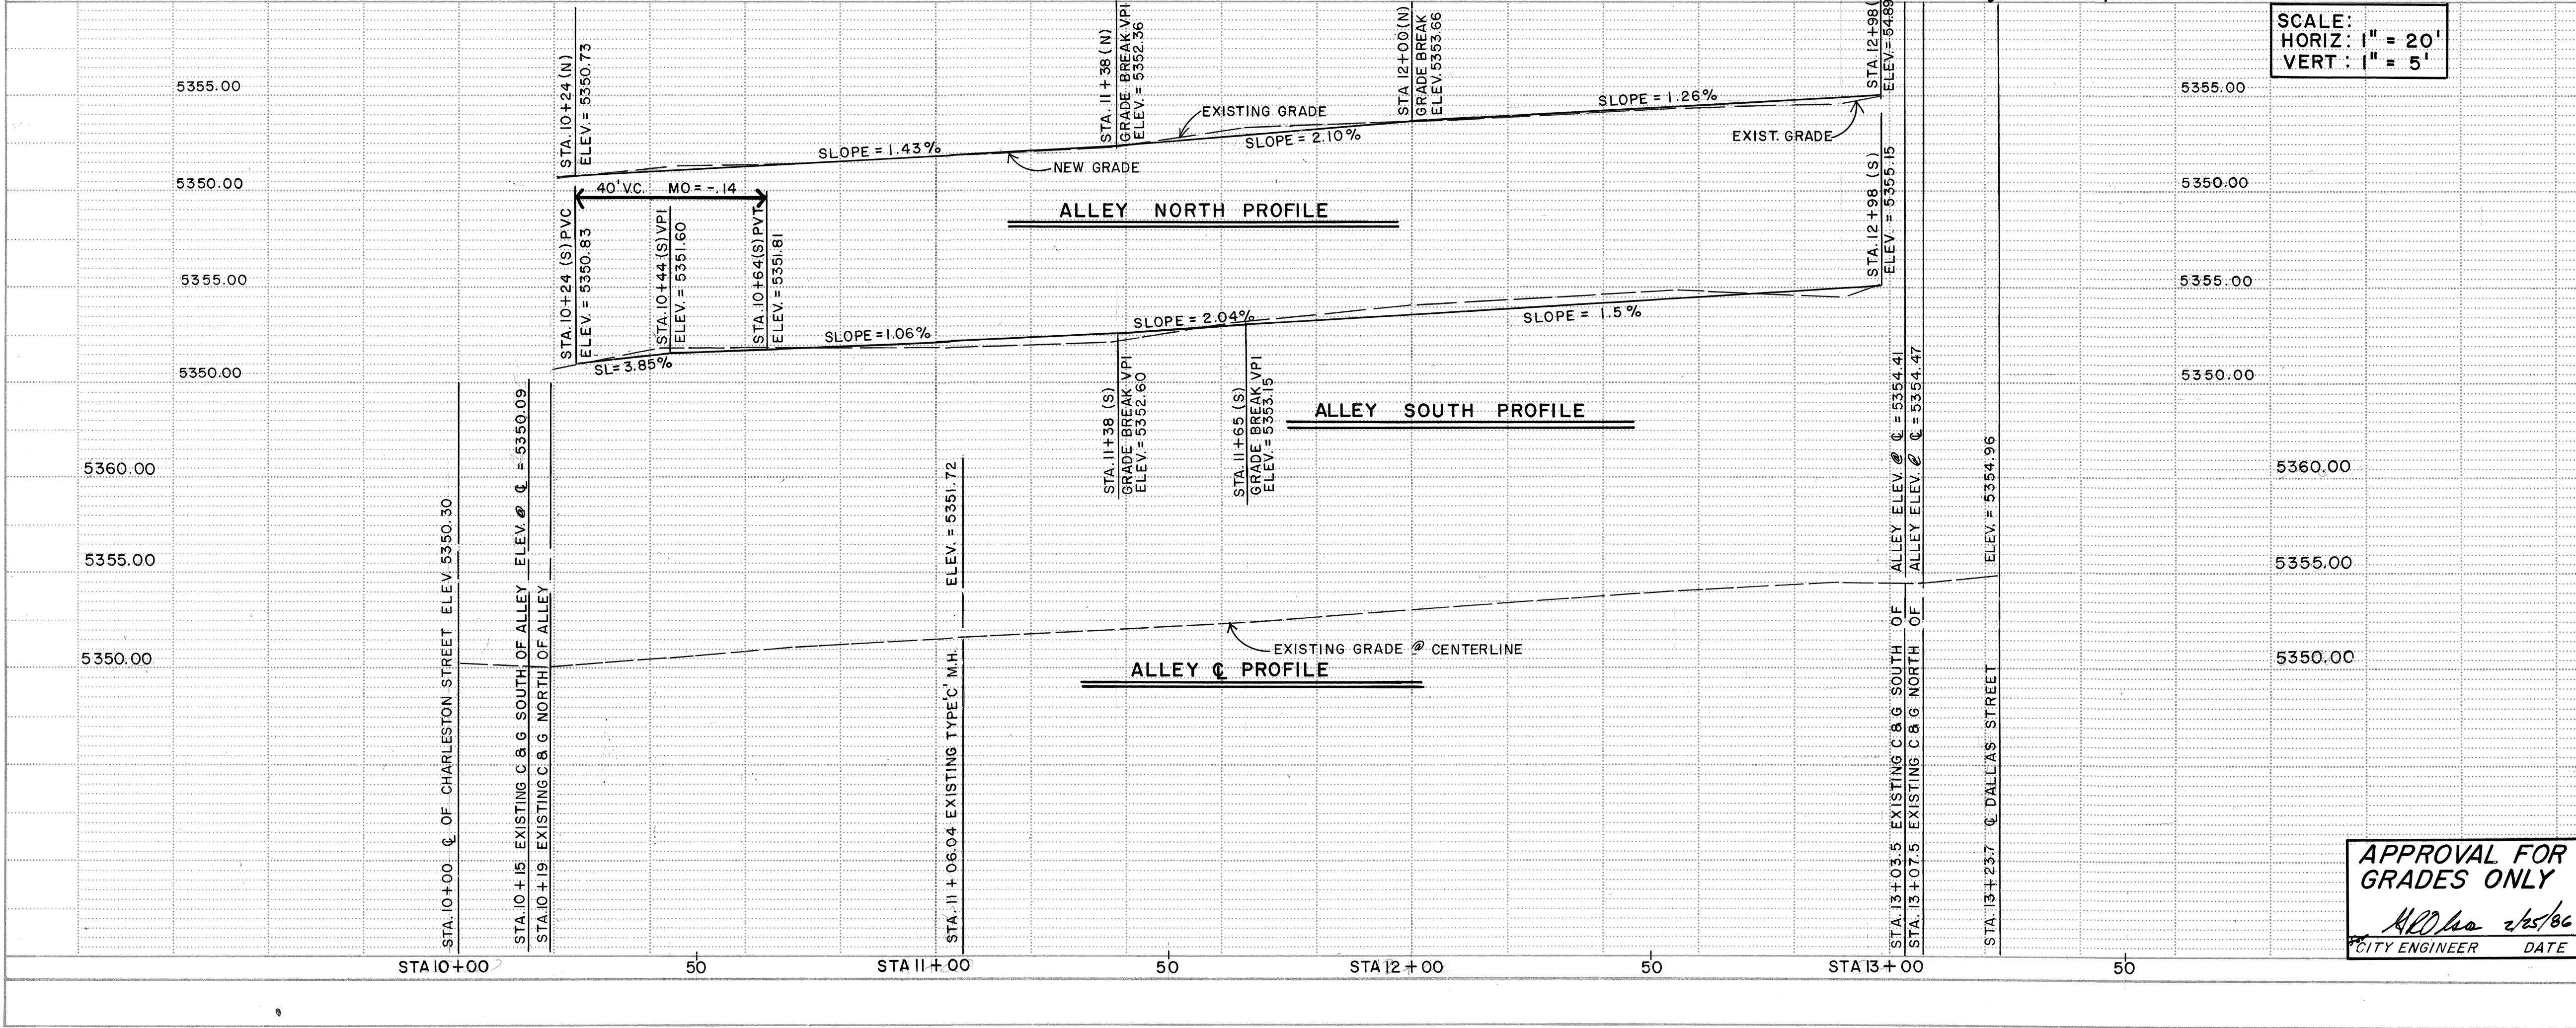

LEGEND

- EXISTING CURB & GUTTER
- EXISTING ASPHALT PAVT.
- SAS EXISTING SANITARY SEWER
- EXISTING MAN HOLE
- EXISTING CONC. SIDEWALK
- NEW ALLEY GUTTER
- NEW DRIVEPAD
- RIGHT OF WAY
- NEW CURB

26 2636 0286

CITY OF ALBUQUERQUE
MUNICIPAL DEVELOPMENT DEPARTMENT
ENGINEERING DIVISION

TITLE: ALLEY GRADES FOR ALLEY SOUTH OF CENTRAL AVE BETWEEN CHARLESTON ST. AND DALLAS ST. SE.

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
City Engineer	Phil Fischer	2/25/86	Liquid Waste	N/A BR	1-31-86
Design	Phil Fischer	1/31/86	Traffic	D.G. Parks	2-7-86
A.C.E. - Hydrology	Phil Fischer	1/31/86	Water	N/A BR	1-31-86

APPROVAL FOR GRADES ONLY
N/A BR 2/25/86
CITY ENGINEER DATE

DRAWING NO. 2636 MAP NO. K-19 SHEET 2 OF 3

