


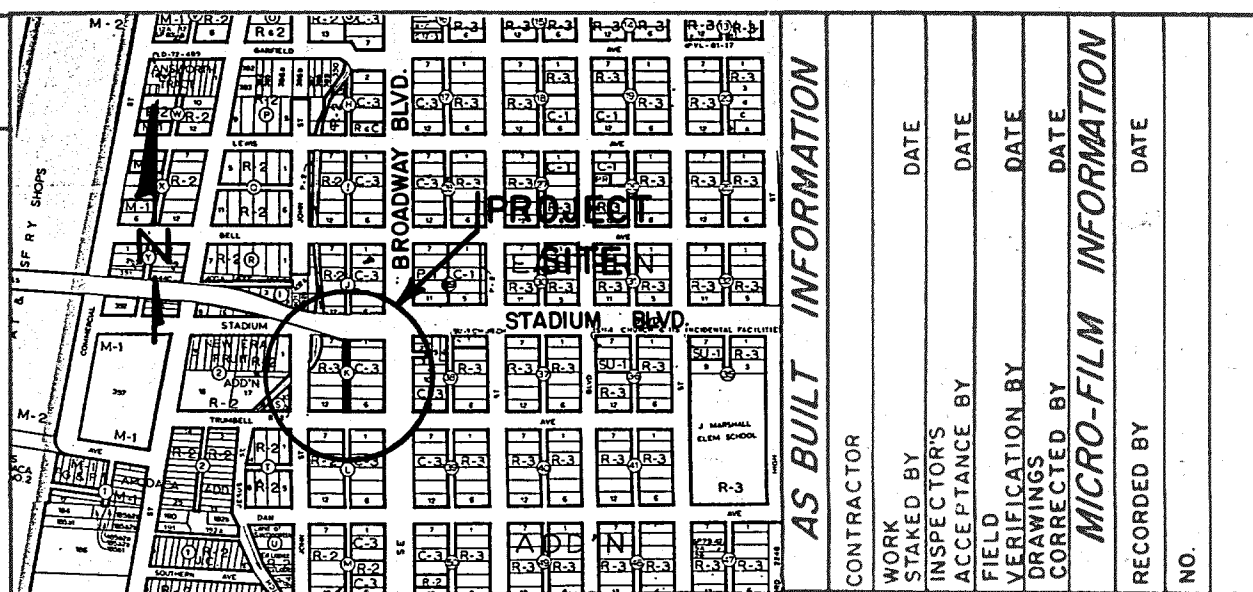

LOCATION MAP N.T.S

NOTICE TO CONTRACTORS


1. ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED UNDER CONTRACT SHALL, EXCEPT AS OTHERWISE STATED OR PROVIDED FOR HEREON, BE CONSTRUCTED IN ACCORDANCE WITH THE CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION 1986.
2. TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, THE CONTRACTOR MUST CONTACT LINE LOCATING SERVICE 765-1234, FOR LOCATION OF EXISTING UTILITIES.
3. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATIONS OF ALL OBSTRUCTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER OR SURVEYOR SO THAT THE CONFLICT CAN BE RESOLVED WITH MINIMUM AMOUNT OF DELAY.

THE FOLLOWING NOTES ALSO APPLY
WHEN CHECKED

- ☒ ALL UTILITIES AND UTILITY SERVICE LINES SHALL BE INSTALLED PRIOR TO PAVING.
- ☒ BACKFILL COMPACTION SHALL BE ACCORDING TO SPECIFIED STREET USE. (ALLEY)
- ☒ TACK COAT REQUIREMENTS SHALL BE DETERMINED BY THE CITY ENGINEER.
- ☐ SIDEWALKS AND WHEELCHAIR RAMPS WITHIN THE CURB RETURNS SHALL BE CONSTRUCTED WHEREVER A NEW CURB RETURN IS CONSTRUCTED.
- ☐ IF CURB IS DERESSED FOR A DRIVEPAD OR A HANDICAP RAMP, THE DRIVEPAD OR RAMP SHALL BE CONSTRUCTED PRIOR TO ACCEPTANCE OF THE CURB AND GUTTER.
- ☒ ALL STORM DRAINAGE FACILITIES SHALL BE COMPLETED PRIOR TO FINAL ACCEPTANCE.

- (1) CONSTRUCTION NOTES:
REMOVE AND REPLACE EXISTING RESIDENTIAL
PAVEMENT PER STANDARD DRAWING 2405 (1
FOOT MINIMUM WIDTH)
- (2) REMOVE AND DISPOSE OF EXISTING CURB AND
GUTTER AND RETURNS AT ALLEY
INTERSECTION AND RECONSTRUCT ALLEY
INTERSECTION AS SHOWN.
- (3) BUILD ALLEY INTERSECTION PER STANDARD
DETAIL DRAWING 2428.
- (4) REMOVE AND REPLACE EXISTING 4" SIDEWALK
TO NEAREST JOINT TO MATCH NEW ALLEY
INTERSECTION.
- (5) BUILD RESIDENTIAL ALLEY PAVING PER
STANDARD DRAWING 2411.
- (6) CONSTRUCT NEW 2' ALLEY GUTTER PER
STANDARD DRAWING 2415.
- (7) ADJUST MANHOLE COVER AND RIM TO ELEV.
57.92.
- (8) ADJUST WATER METER COVER AND PAD TO
MATCH NEW ALLEY PAVING.

DETAIL A
PAVEMENT SECTION

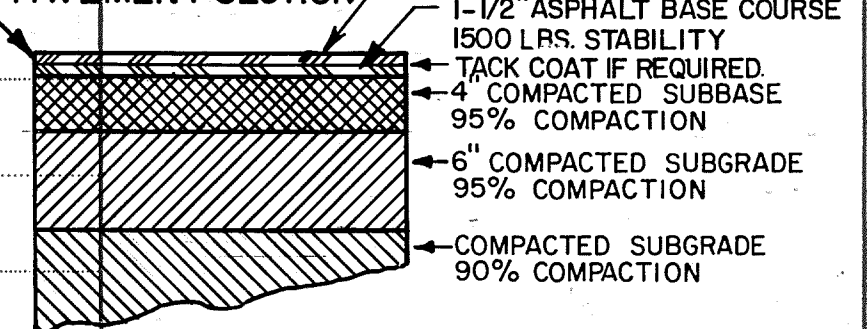

CITY OF ALBUQUERQUE
PUBLIC WORKS DEPARTMENT
ENGINEERING GROUP

TITLE: ALLEY GRADES - STADIUM TO TRUMBULL - WEST OF BROADWAY (EASTERN ADDITION)

APPROVALS	ENGINEER	DATE	APPROVALS	ENGINEER	DATE
D.R.C. Chair.	<i>Ryan Green</i>	10-25-89			
Trans. Dev.	<i>Ryan Green</i>	10-25-89			
Utility Dev.	<i>Ryan Green</i>	10-25-89			

APPROVED

GRADES ONLY

DRAWING
NO.

MAP NO.
L-14

SHEET 1 OF 1