MARK D. MCCLUGGAGE AIA, CCS
1525 E. Douglas Wichita, KS 67211
Tel: (316) 265-9397
Fax: (316) 265-9466
www.glhnv.com

Taco Bell - 12" Channel Letter — V-349

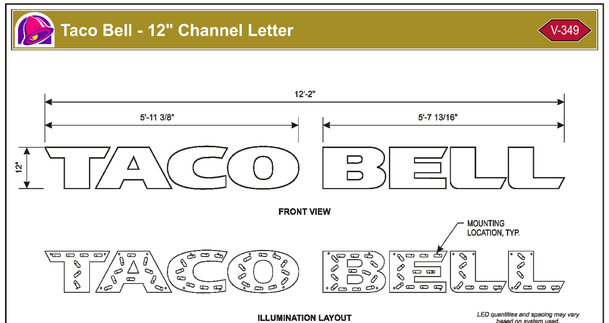



SPECIFICATIONS

DESIGN PARAMETERS
- **Structural adequacy shall be the manufacturer's responsibility using the following criteria:**
- 110 MPH 3 second gust wind speed, Exposure C, Category II. Components & Cladding, Zone 5.
- Attachment may vary based on wall conditions.
- Compliant with national building codes and standards (IBC 2009, AISC 13th Edition, ASCE 7-05, ACI & Aluminum Design Manual).
- Refer to written documentation for material specifications.

Materials
- Cabinet: .040 aluminum returns w/ white finish and .063 aluminum back
- 1" white Jewelite trim
- Faces: .150 SG polycarbonate
- Removable face

Area
- Squared: 12.17 sf
- Actual: 8.18 sf

ELECTRICAL/ PERFORMANCE SPECIFICATIONS
- NEC approval required.
- 12V, Class II UL approved system.
- 50,000 hour system where no greater than 30% lumen depreciation is experienced at 50K hours.
- Thermally managed surface mount devices (SMD).

LED(s): (77) AgiLight LS-CORE-50K-G2 White (5000K) LEDs (29 ft) *or equivalent - pre-approval required*
Power Supply: (1) General LED PS12-60W-100-277V @ 0.8 amps *or equivalent - Remotely Located*
Total Load: 0.8 amps
Circuits(s): (1) 20 amp-120V

GRAPHIC & COLOR SPECIFICATIONS:
- (1) TB Bronze Tiger Drylac 49-66230 C33
- (2) Plum PMS 2685U
- (3) Amber Wave SW-6657 PMS 138U
- (4) PMS 131U
- (5) PMS 139U
- (6) Yellow PMS 108U
- (7) Pantone Process Magenta U
- (8) Pantone Violet U
- (9) Pantone Black
- (10) Benjamin Moore Bavarian Creme White #2146-70
- (11) Violet 3M Vinyl 3630-9126
- (12) White Matte - Cabinet Interior

NOT FOR CONSTRUCTION: DECEMBER 2012

Taco Bell - Swinging Bell - Formed Face — V-322

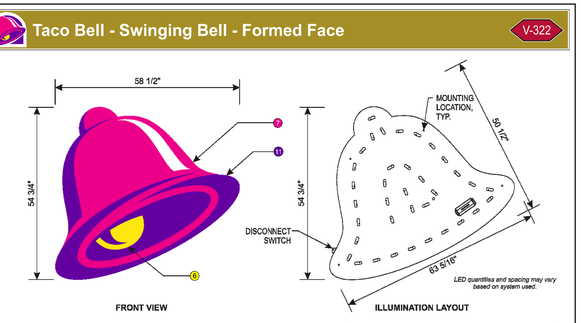



SPECIFICATIONS

DESIGN PARAMETERS
- **Structural adequacy shall be the manufacturer's responsibility using the following criteria:**
- 110 MPH 3 second gust wind speed, Exposure C, Category II. Components & Cladding, Zone 5.
- Attachment may vary based on wall conditions.
- Compliant with national building codes and standards (IBC 2009, AISC 13th Edition, ASCE 7-05, ACI & Aluminum Design Manual).
- Refer to written documentation for material specifications.

Materials
- Cabinet: .050 aluminum returns w/ violet finish and .090 aluminum back
- Face: .150 SG polycarbonate vacuum formed
- Second surface decoration
- Removable face for service

Area
- Squared: 22.24 sf
- Actual: 14.19 sf

Weight (Est.)
- 100 lbs

ELECTRICAL/ PERFORMANCE SPECIFICATIONS
- NEC approval required.
- 12V, Class II UL approved system.
- 50,000 hour system where no greater than 30% lumen depreciation is experienced at 50K hours.
- Thermally managed surface mount devices (SMD).

LED(s): (36) AgiLight LS-APEX-50K-G2 White (5000K) LEDs (18 ft) *or equivalent - pre-approval required*
Power Supply: (1) General LED PS12-60W-100-277V @ 0.8 amps *or equivalent*
Total Load: 0.8 amps
Circuits(s): (1) 20 amp-120V

GRAPHIC & COLOR SPECIFICATIONS:
- (1) TB Bronze Tiger Drylac 49-66230 C33
- (2) Plum PMS 2685U
- (3) Amber Wave SW-6657 PMS 138U
- (4) PMS 131U
- (5) PMS 139U
- (6) Yellow PMS 108U
- (7) Pantone Process Magenta U
- (8) Pantone Violet U
- (9) Pantone Black
- (10) Benjamin Moore Bavarian Creme White #2146-70
- (11) Violet 3M Vinyl 3630-9126
- (12) White Matte - Cabinet Interior

NOT FOR CONSTRUCTION: DECEMBER 2012

12134.230

CONTRACT DATE: --
BUILDING TYPE: EXP. LITE MED40
PLAN VERSION: SEPTEMBER 2015
SITE NUMBER: --
STORE NUMBER: --

TACO BELL

UNSER BLVD NW & McMAHON BLVD. NW
ALBUQUERQUE, NM 87114

EXPLORER LITE
MEDIUM 40

SIGNAGE CUT SHEETS

A4.2