


CONSTRUCTION DOCUMENTS  
CLASS II CONSTRUCTION  
COORS ROAD N.W.  
MEDIAN IMPROVEMENTS

CENTRAL AVENUE TO BLUEWATER ROAD

INDEX OF DRAWINGS

| TITLE                                | SHEET NO. |
|--------------------------------------|-----------|
| COVER SHEET                          | 1 OF 5    |
| EXISTING CONDITIONS AND REMOVAL PLAN | 2 OF 5    |
| IRRIGATION PLAN                      | 3 OF 5    |
| PLANTING PLAN                        | 4 OF 5    |
| DETAILS                              | 5 OF 5    |


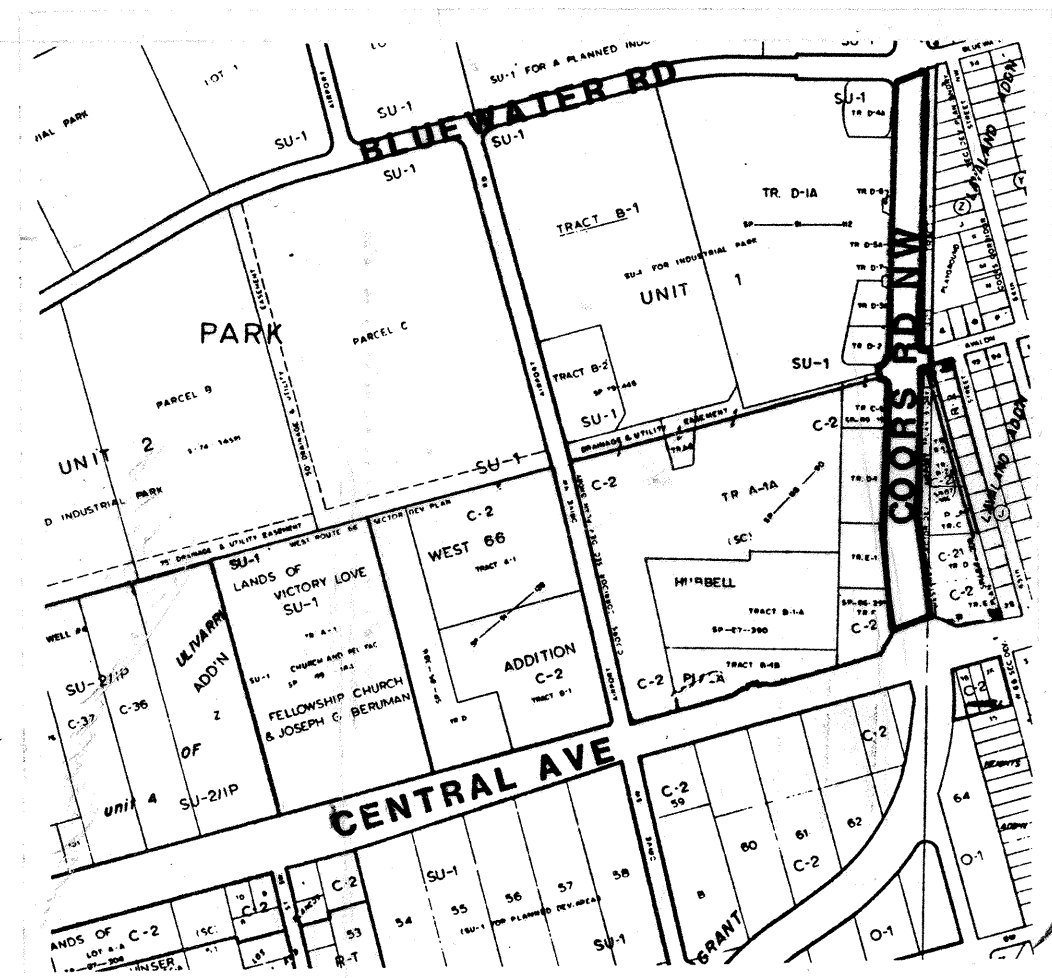


VICINITY MAP MAP NO. K-10-Z

- CLASS II CONSTRUCTION BY PARKS & GENERAL SERVICES DEPARTMENT, DESIGN AND DEVELOPMENT DIVISION.
- ALL WORK TO BE IN ACCORDANCE WITH CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS, 1986, OR PER ATTACHED SPECIFICATIONS.
- THREE WORKING DAYS PRIOR TO BEGINNING CONSTRUCTION CONTRACTOR SHALL SUBMIT TO THE CONSTRUCTION COORDINATION DIVISION A DETAILED CONSTRUCTION SCHEDULE.
- TWO WORKING DAYS PRIOR TO CONSTRUCTION THE CONTRACTOR SHALL OBTAIN A BARRICADING PERMIT FROM THE CONSTRUCTION COORDINATION DIVISION. CONTRACTOR SHALL NOTIFY BARRICADE ENGINEER ( 768-2551 ) PRIOR TO OCCUPYING AN INTERSECTION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING PERMITS FOR TRAFFIC ALTERATIONS DURING CONSTRUCTION. CONTACT CONSTRUCTION COORDINATION AT 768-2551.
- THE CONTRACTOR SHALL CONTACT NEW MEXICO ONE CALL SYSTEM PHONE: 260-1990, TO LOCATE UNDERGROUND UTILITIES 2 WORK DAYS PRIOR TO BEGINNING EXCAVATION.
- THE CONTRACTOR SHALL CONTACT TRAFFIC ENGINEERING OPERATIONS 764-1599 FOR REMOVAL AND REPLACEMENT OF TRAFFIC SIGNS.
- THE CONTRACTOR SHALL RETAIN AND PROTECT ALL EXISTING UTILITIES, UNLESS NOTED OTHERWISE. ANY DAMAGE TO EXISTING UTILITIES SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- ALL EXISTING IMPROVEMENTS ARE TO REMAIN, UNLESS SPECIFICALLY NOTED TO BE REMOVED. CONTRACTOR SHALL REPAIR ANY CONTRACTOR-CAUSED DAMAGE, AS DETERMINED BY THE ENGINEER TO EXISTING IMPROVEMENTS TO THE SATISFACTION OF THE OWNER AT THE CONTRACTOR'S EXPENSE.
- ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED UNDER CONTRACT SHALL, EXCEPT AS OTHERWISE NOTED OR PROVIDED HEREIN, BE CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS "COORS ROAD N.W. MEDIAN IMPROVEMENTS".
- PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL CHECK ALL DIMENSIONS, HORIZONTAL AND VERTICAL, AND SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATIONS OF ALL OBSTRUCTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER PRIOR TO CONSTRUCTION SO THAT CONFLICT CAN BE RESOLVED WITH THE MINIMUM AMOUNT OF DELAY.
- FOR PURPOSES OF THIS PROJECT, THE TERM ENGINEER SHALL REFER TO EITHER THE OWNER'S EMPLOYEE OR THE LANDSCAPE ARCHITECT RESPONSIBLE FOR CONSTRUCTION INSPECTION OF THE PROJECT.
- ALL REFERENCES TO COMPACTED BACKFILL OR COMPACTED SUBGRADE SHALL MEAN SOIL COMPACTED TO 95% OF MAXIMUM DENSITY AS DETERMINED BY ASTM D-1557 UNLESS OTHERWISE NOTED.
- CONTRACTOR SHALL NOTIFY THE ENGINEER NOT LESS THAN SEVEN (7) DAYS PRIOR TO STARTING WORK, IN ORDER THAT THE ENGINEER MAY TAKE NECESSARY MEASURES TO INSURE THE PRESERVATION OF SURVEY MONUMENTS. CONTRACTOR SHALL NOT DISTURB PERMANENT SURVEY MONUMENTS WITHOUT THE CONSENT OF THE ENGINEER AND SHALL NOTIFY THE ENGINEER AND BEAR THE EXPENSE OF REPLACING ANY THAT MAY BE DISTURBED WITHOUT PERMISSION. REPLACEMENT SHALL BE DONE ONLY BY THE ENGINEER. WHEN A CHANGE IS MADE IN THE FINISH ELEVATION OF THE PAVEMENT OF ANY ROADWAY IN WHICH A PERMANENT SURVEY MONUMENT IS LOCATED, CONTRACTOR SHALL, AT HIS OWN EXPENSE, ADJUST THE MONUMENT COVER TO NEW GRADE, UNLESS OTHERWISE SPECIFIED.


|                            |                          |                                                                                                                                                                           |      |                                               |      |                 |      |
|----------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------|------|-----------------|------|
| 3 of 5                     | REVISED PER ASBUILT DWG. | 9-27-95                                                                                                                                                                   |      |                                               |      |                 |      |
| REV.                       | SHEETS                   | CITY ENGINEER                                                                                                                                                             | DATE | USER DEPARTMENT                               | DATE | USER DEPARTMENT | DATE |
| APPROVAL FOR REVISIONS     |                          |                                                                                                                                                                           |      |                                               |      |                 |      |
| LANDSCAPE ARCHITECT'S SEAL |                          | WALTER WEAVER INC.<br>LANDSCAPE ARCHITECTS / ENVIRONMENTAL PLANNERS / GOLF COURSE ARCHITECTS<br>809 COPPER AVE. NE SUITE 100E ALBUQUERQUE, NEW MEXICO 87102 (505)243-3556 |      | APPROVED FOR CONSTRUCTION<br><br>7/23/93 C.E. |      |                 |      |
|                            |                          | PROJECT NO. 4574.90                                                                                                                                                       |      | COVER SHEET<br>1 OF 5                         |      |                 |      |

SET NUMBER: \_\_\_\_\_

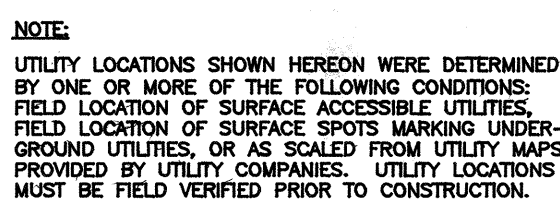

LANDSCAPE ARCHITECTS / ENVIRONMENTAL PLANNERS / GOLF COURSE ARCHITECTS  
809 COPPER AVE NE SUITE 100E ALBUQUERQUE, NEW MEXICO 87102 (505)243-3556

|                            |                     |                     |
|----------------------------|---------------------|---------------------|
| <b>PROJECT NO. 4574.90</b> | <b>MAP NO. K10Z</b> | <b>SHEET 2 OF 5</b> |
|----------------------------|---------------------|---------------------|

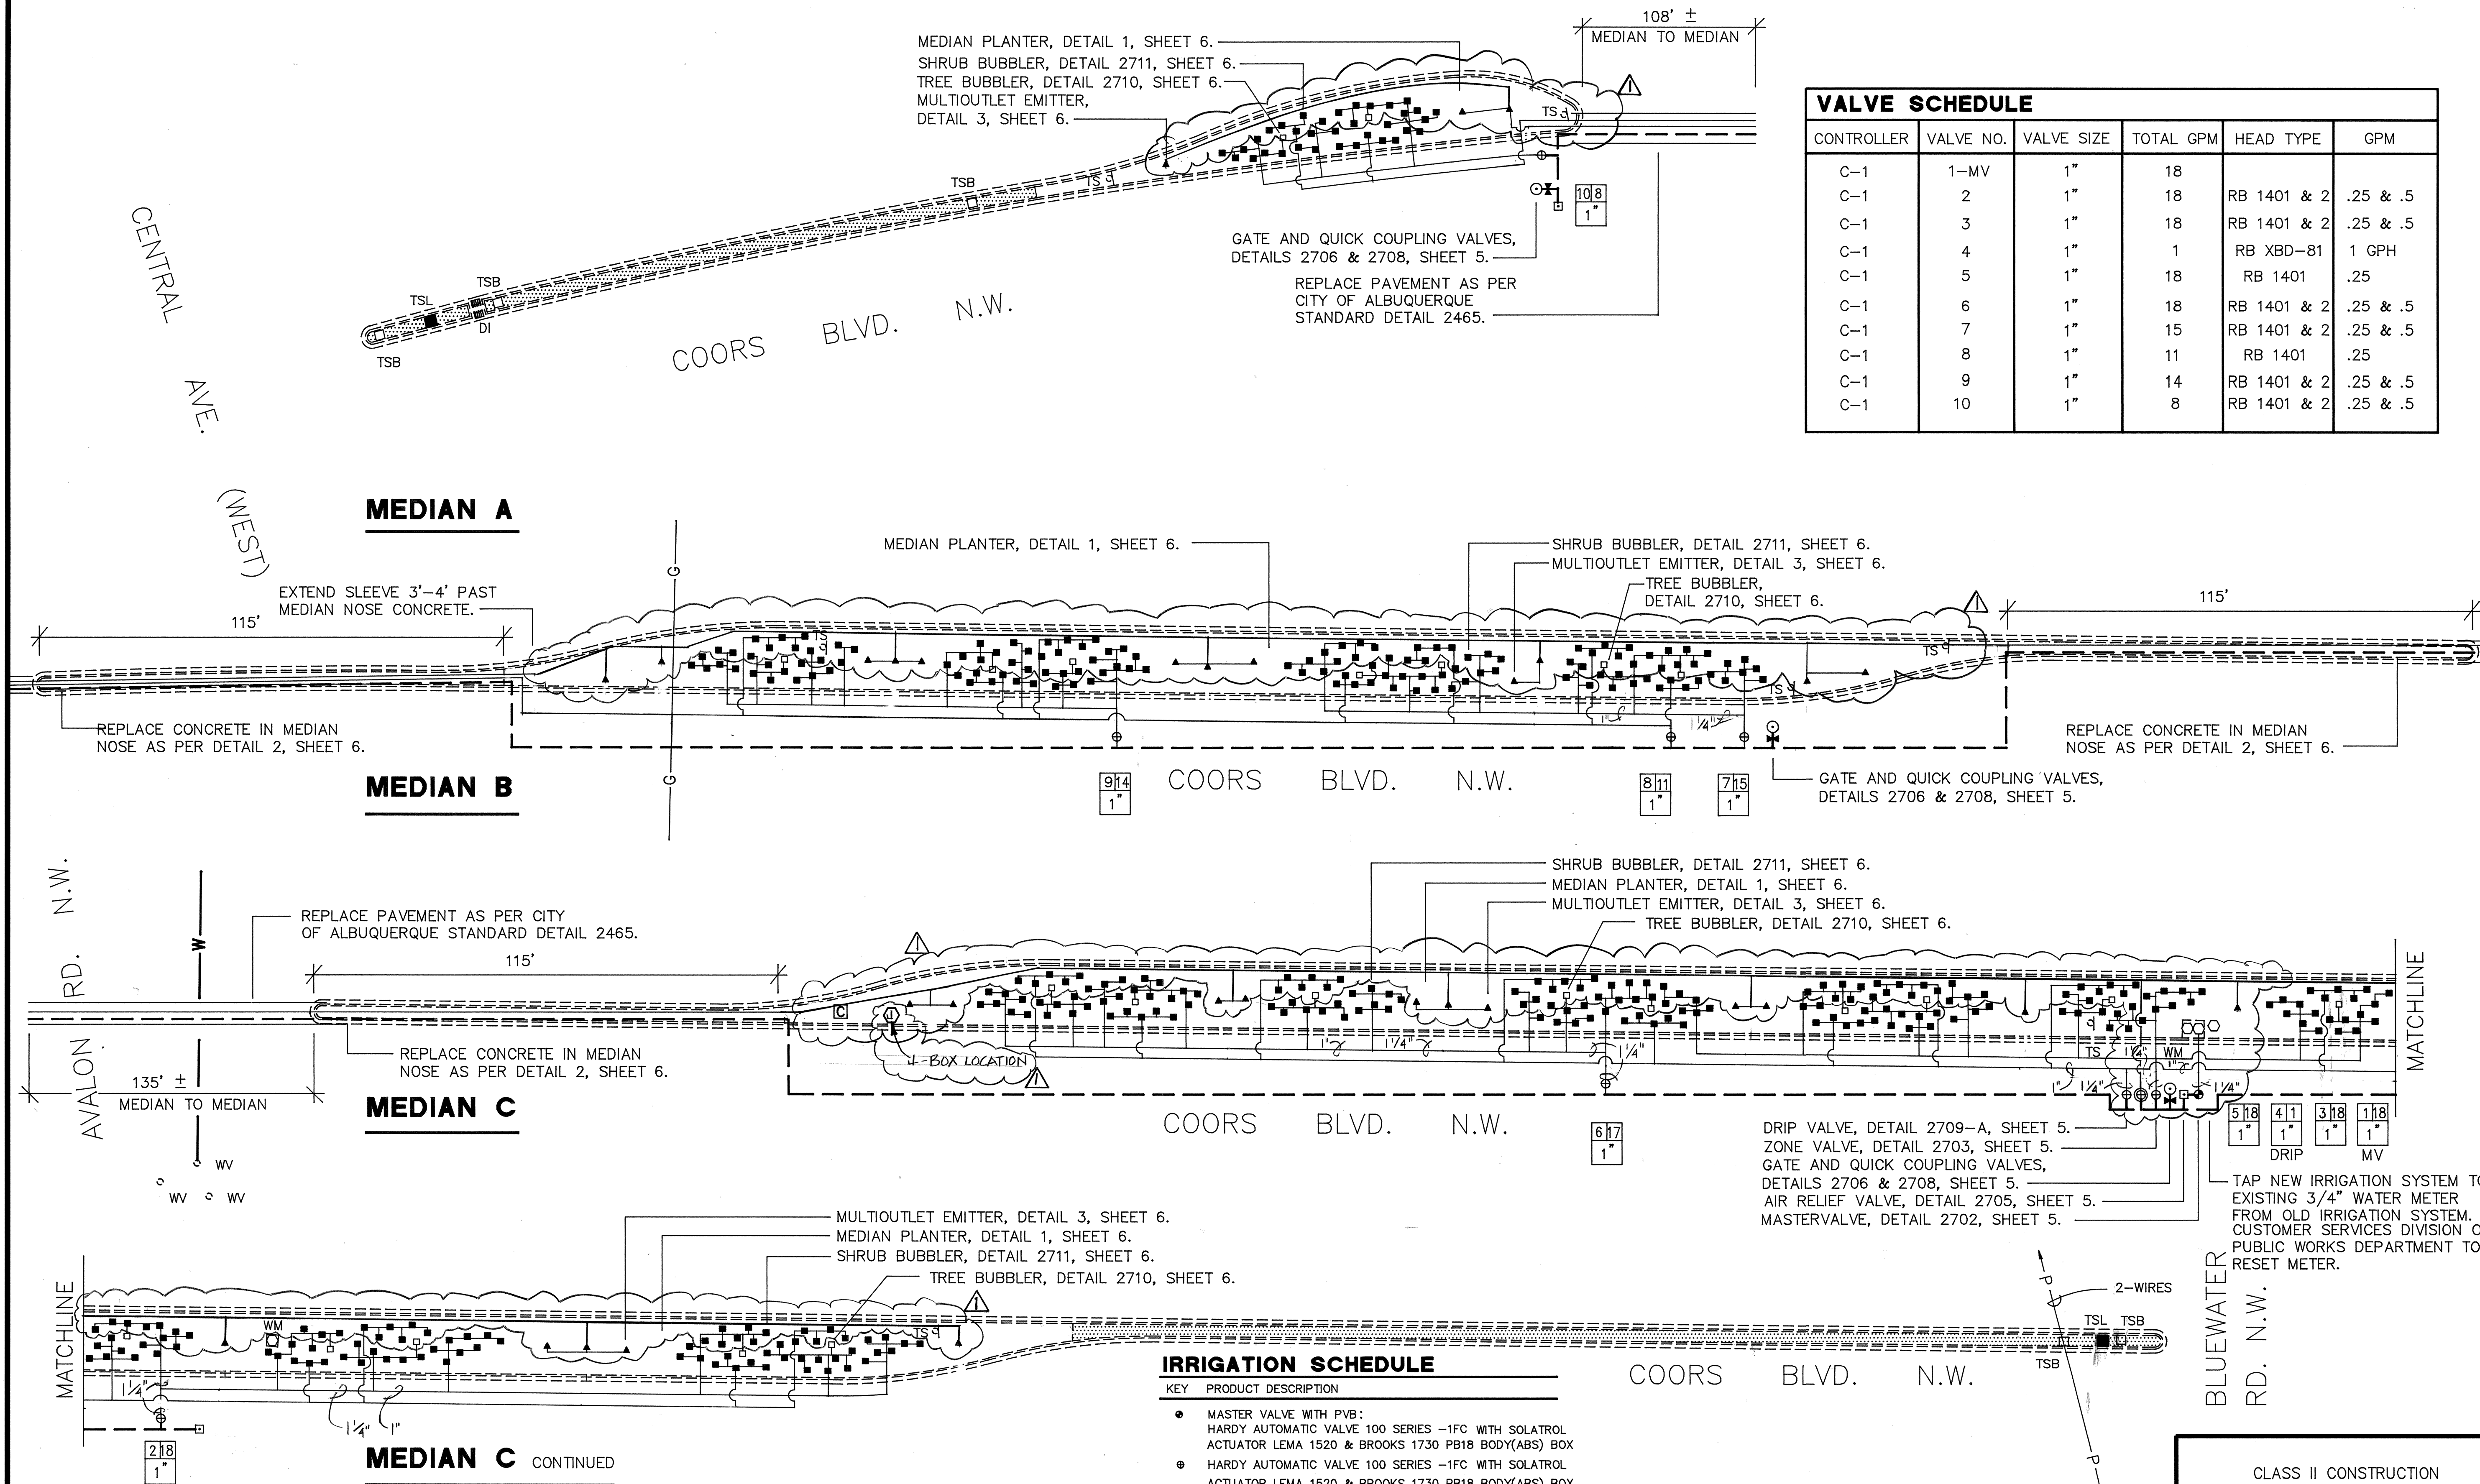


| VALVE SCHEDULE |           |            |           |             |          |
|----------------|-----------|------------|-----------|-------------|----------|
| CONTROLLER     | VALVE NO. | VALVE SIZE | TOTAL GPM | HEAD TYPE   | GPM      |
| C-1            | 1-MV      | 1"         | 18        |             |          |
| C-1            | 2         | 1"         | 18        | RB 1401 & 2 | .25 & .5 |
| C-1            | 3         | 1"         | 18        | RB 1401 & 2 | .25 & .5 |
| C-1            | 4         | 1"         | 1         | RB XBD-81   | 1 GPH    |
| C-1            | 5         | 1"         | 18        | RB 1401     | .25      |
| C-1            | 6         | 1"         | 18        | RB 1401 & 2 | .25 & .5 |
| C-1            | 7         | 1"         | 15        | RB 1401 & 2 | .25 & .5 |
| C-1            | 8         | 1"         | 11        | RB 1401     | .25      |
| C-1            | 9         | 1"         | 14        | RB 1401 & 2 | .25 & .5 |
| C-1            | 10        | 1"         | 8         | RB 1401 & 2 | .25 & .5 |

| IRRIGATION SCHEDULE |                                                                                                                                   |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| KEY                 | PRODUCT DESCRIPTION                                                                                                               |
| ●                   | MASTER VALVE WITH PVB:<br>HARDY AUTOMATIC VALVE 100 SERIES -1FC WITH SOLATROL ACTUATOR LEMA 1520 & BROOKS 1730 PB18 BODY(ABS) BOX |
| ●                   | HARDY AUTOMATIC VALVE 100 SERIES -1FC WITH SOLATROL ACTUATOR LEMA 1520 & BROOKS 1730 PB18 BODY(ABS) BOX                           |
| ⊕                   | WEATHERMATIC AUTOMATIC VALVE 11024-S-CR-10 W/ SOLATROL ACTUATOR LEMA 1524 & BROOKS 1730 PB18 BODY(ABS) BOX                        |
| ▲                   | RAINBIRD MULTI-OUTLET EMITTER XBD-81 W/EMITTER BOX SEB-6                                                                          |
| ■                   | RAINBIRD BUBBLER 1401                                                                                                             |
| □                   | RAINBIRD BUBBLER 1402                                                                                                             |
| □                   | RAINBIRD 2AV AIR RELIEF VALVE                                                                                                     |
| ○                   | RAINBIRD 33DRS QUICK COUPLING VALVE ON RISER                                                                                      |
| —                   | SPEARS TRUE UNION SCH 80 PVC BALL VALVE                                                                                           |
| —                   | MAIN LINE CLASS 200 PVC, 2" DIAMETER                                                                                              |
| —                   | LATERAL LINE SCH. 40, 1" DIAMETER UNLESS OTHERWISE SPECIFIED                                                                      |
| —                   | PVC SLEEVE, 2 SIZES LARGER THAN PIPE TO BE SLEEVED                                                                                |
| —                   | ONE PER EACH PIPE TO BE SLEEVED                                                                                                   |
| ⊞                   | SOLATROL LEIT 8000 SERIES II CONTROLLER & XKIT 8830                                                                               |
| 215                 | ZONE VALVE NUMBER                                                                                                                 |
| 1"                  | GALLONS PER MINUTE FOR ZONE VALVE                                                                                                 |
| 1"                  | ZONE VALVE SIZE                                                                                                                   |

GENERAL NOTES:

- SOME IRRIGATION LINES AND VALVES ARE SHOWN SCHEMATICALLY FOR CLARITY OF INTENT. LOCATE ALL LINES AND VALVES WITHIN MEDIANS EXCEPT WHERE SHOWN AS SLEEVED.
- ALL LATERAL IRRIGATION LINES TO BE 1" DIAMETER.
- ALL IRRIGATION MAIN LINE TO BE 2" DIAMETER.
- ALL NEW IRRIGATION SLEEVES TO BE INSTALLED SUCH THAT THEY EXTEND 3'-4" PAST CONCRETE ON EACH END
- SOLATROL CONTROLLER REQUIRES MOUNTING TUBE SEALING KIT M-TGS 3100 & LOW VOLTAGE CABLE (WIRE) PRT # LVC W-21-00 WITH STRIP TOOL 300-2 & SPLICE KIT SPL12201.

- TRAFFIC SIGNAL CONDUIT EXISTS IN MEDIANS IN IMMEDIATE VICINITY OF ALL TRAFFIC SIGNALS. CALL 260-1990 FOR BLUESTAKING OF CONDUIT PRIOR TO ANY EXCAVATION.

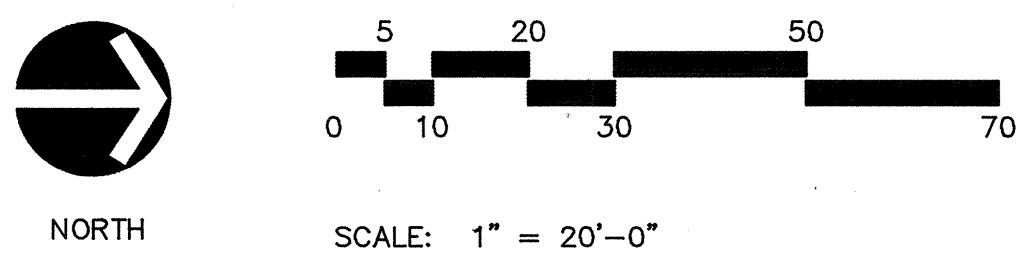

WALTER WEAVER INC.  
LANDSCAPE ARCHITECTS / ENVIRONMENTAL PLANNERS / GOLF COURSE ARCHITECTS  
809 COPPER AVE NE SUITE 100E ALBUQUERQUE, NEW MEXICO 87102 (505)243-3556

| AS BUILT INFORMATION |                |      | BENCH MARK          |      |                       | SURVEY INFORMATION |                      |      | FIELD NOTES            |             |     |
|----------------------|----------------|------|---------------------|------|-----------------------|--------------------|----------------------|------|------------------------|-------------|-----|
| CONTRACTOR           | WORK STAKED BY | DATE | INSPECTORS APPROVAL | DATE | FIELD VERIFICATION BY | DATE               | DRAWING CORRECTED BY | DATE | MICRO-FILM INFORMATION | RECORDED BY | NO. |
|                      |                |      |                     |      |                       |                    |                      |      |                        |             |     |





DESIGNED BY: WW, INC. DATE: 03/22/93  
DRAWN BY: WW, INC. DATE: 03/22/93  
CHECKED BY: WW, INC. DATE: 03/22/93


CLASS II CONSTRUCTION

| CITY OF ALBUQUERQUE<br>PARKS AND GENERAL SERVICES<br>DESIGN AND DEVELOPMENT |              |              |             |              |         |
|-----------------------------------------------------------------------------|--------------|--------------|-------------|--------------|---------|
| TITLE: IRRIGATION PLAN<br>COORS ROAD MEDIAN IMPROVEMENTS                    |              |              |             |              |         |
| APPROVALS                                                                   | ENGINEER     | DATE         | APPROVALS   | ENGINEER     | DATE    |
| DRC CHAIRMAN                                                                | 88 B. Bailey | 7-22-93      | WATER       | NA RWK       | 7-12-93 |
| TRANSPORTATION                                                              | 88 B. Bailey | 7-13-93      | WASTE WATER | NA RWK       | 7-12-93 |
| HYDROLOGY                                                                   | 88 B. Bailey | 7-13-93      |             |              |         |
| PARKS AND REC                                                               | 88 B. Bailey | 7-12-93      |             |              |         |
| PROJECT NO. 4674.90                                                         |              | MAP NO. K10Z |             | SHEET 3 OF 5 |         |




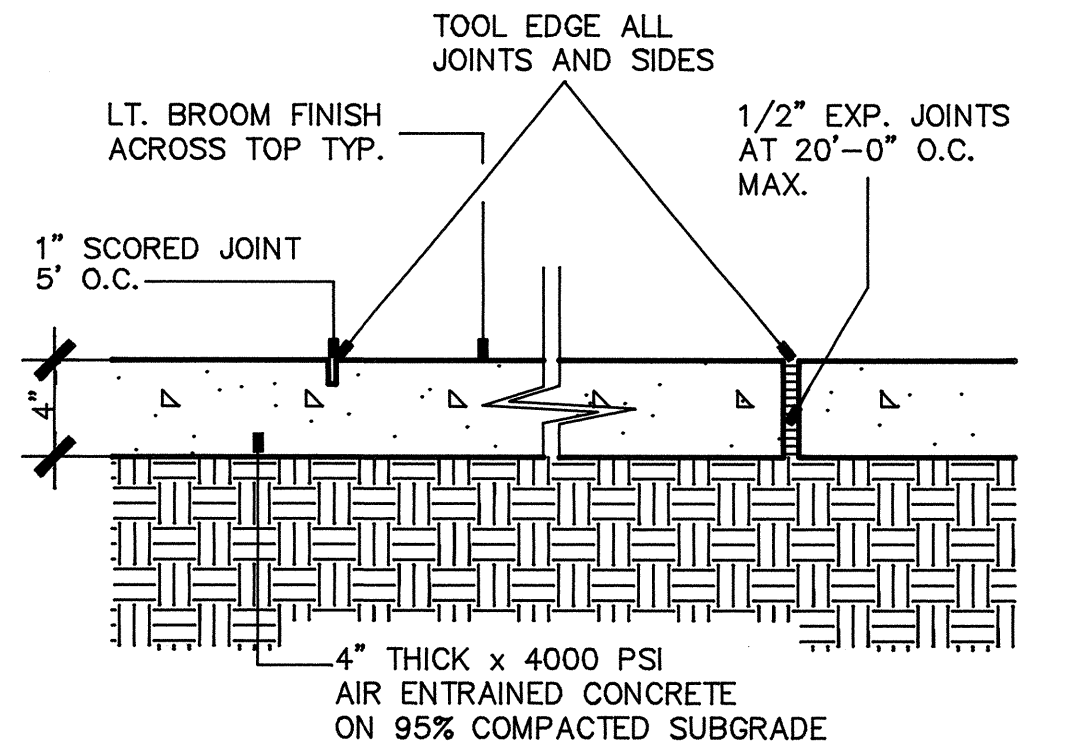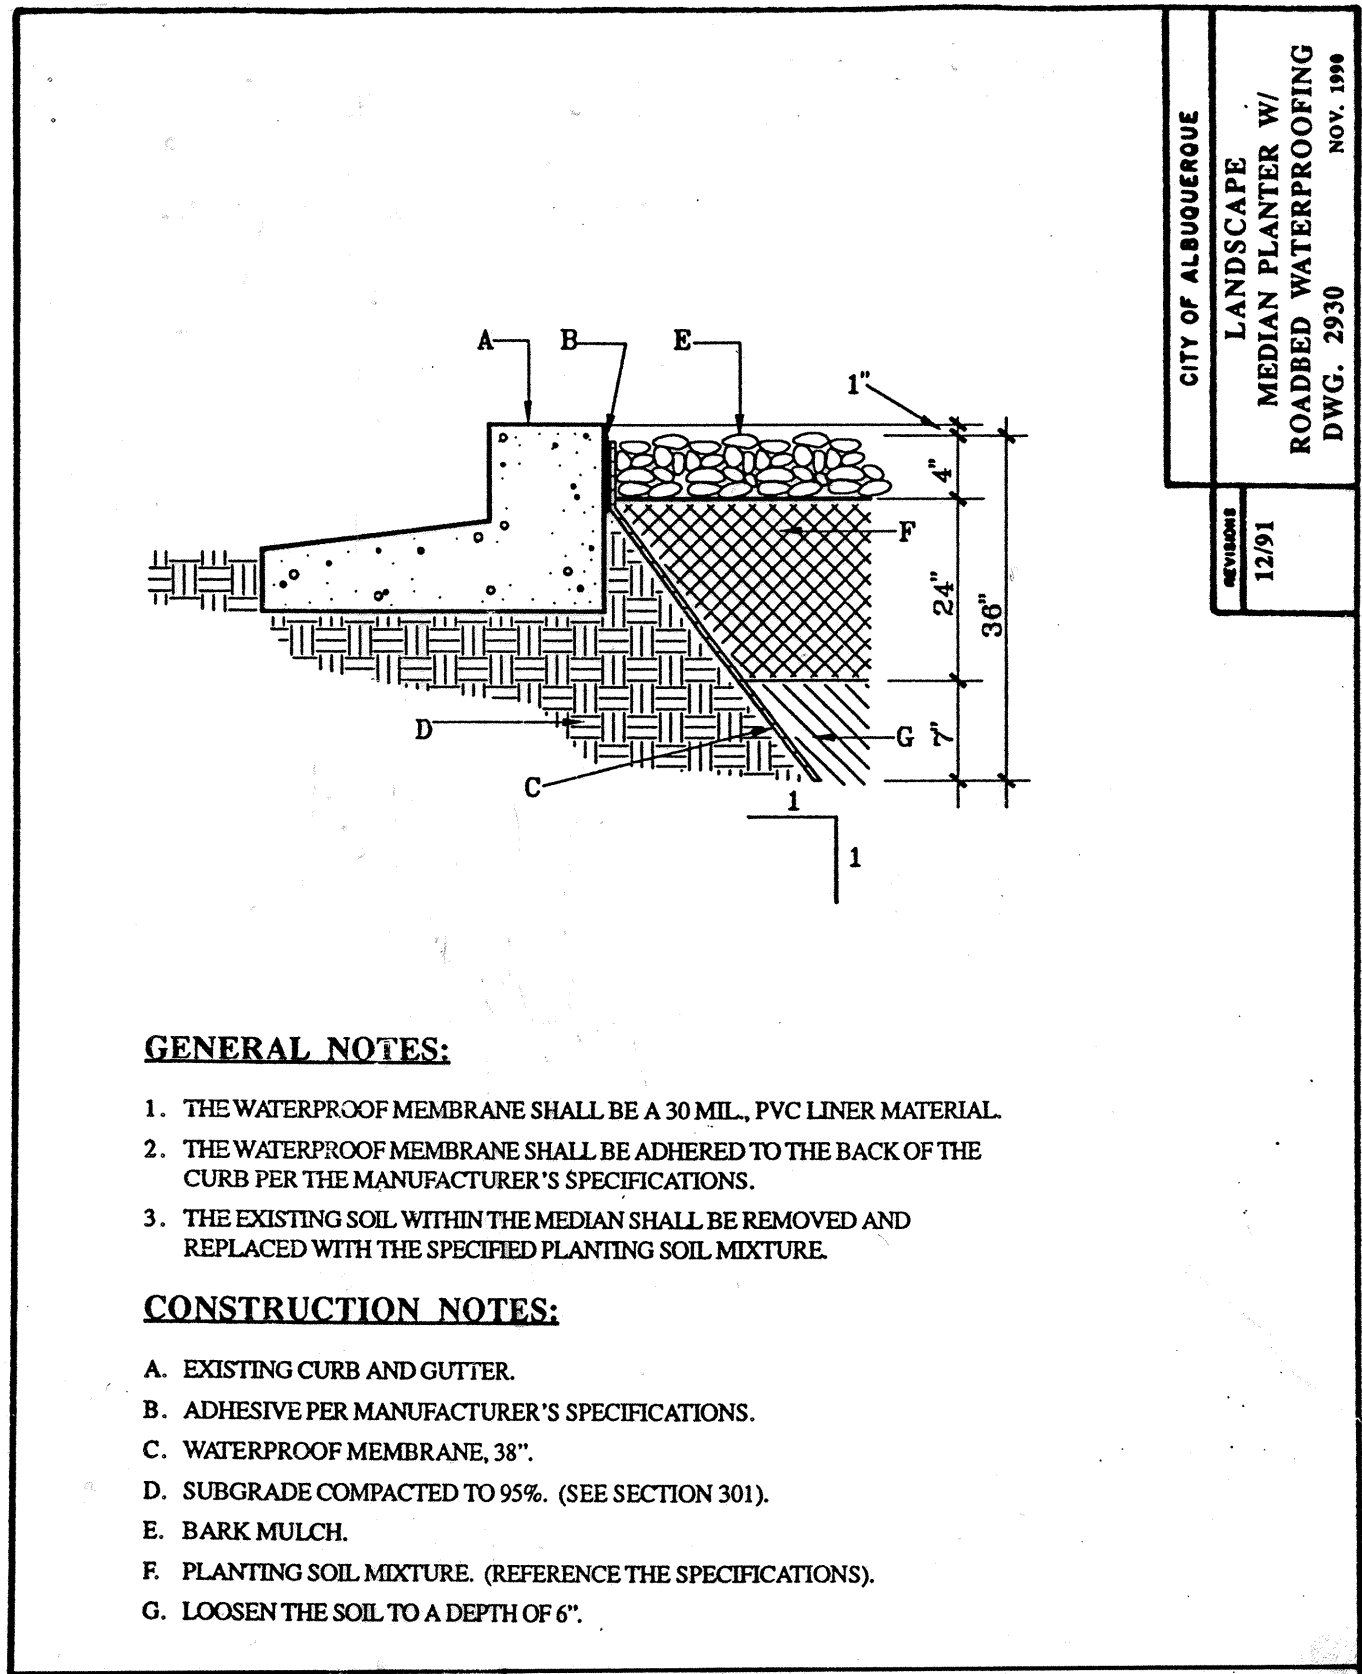



2 SIDEWALK N.T.S.

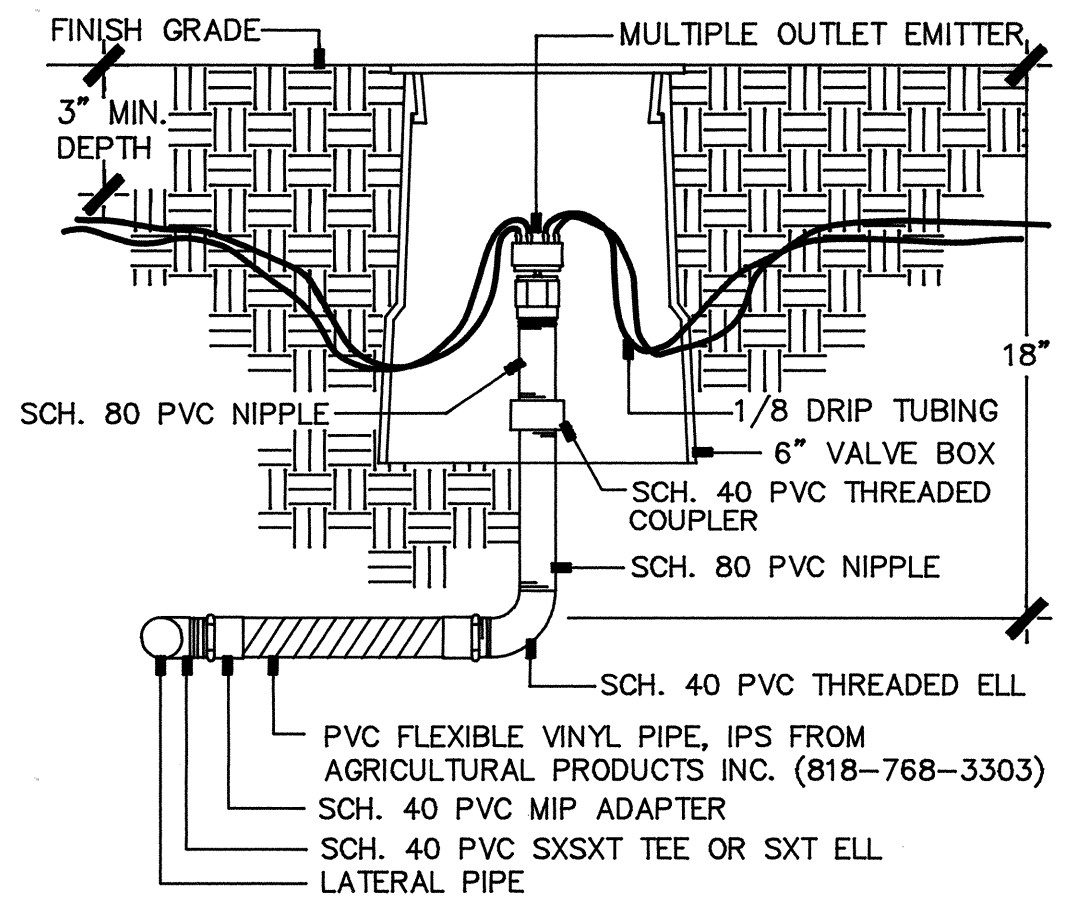

3 MULTIPLE OUTLET EMITTER N.T.S.

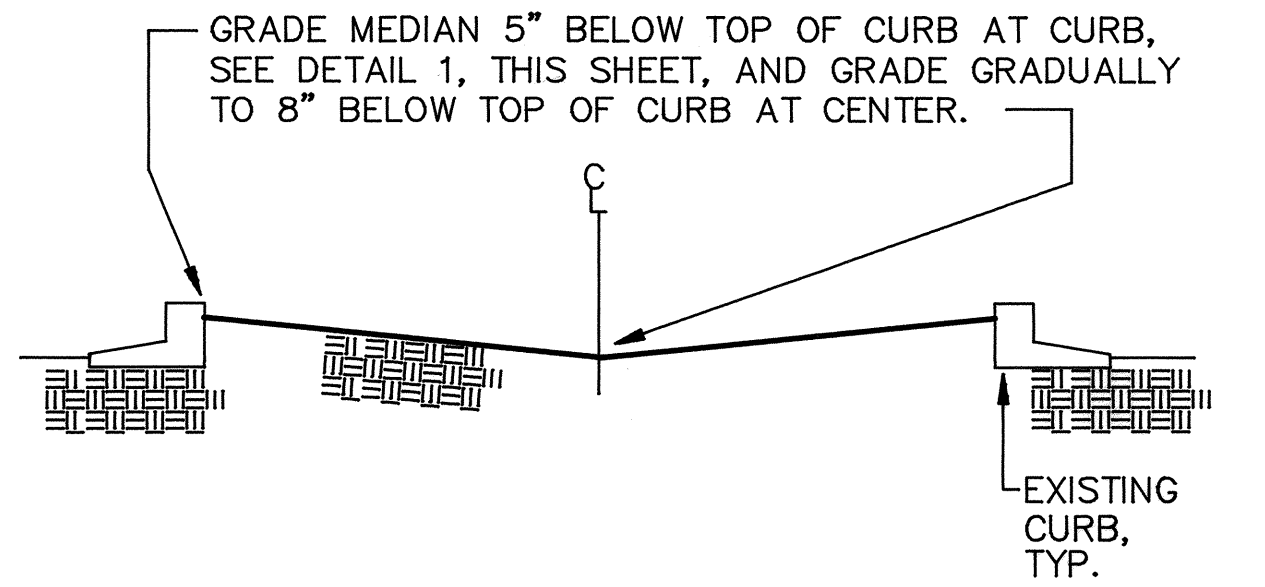


4 MEDIAN GRADING N.T.S.

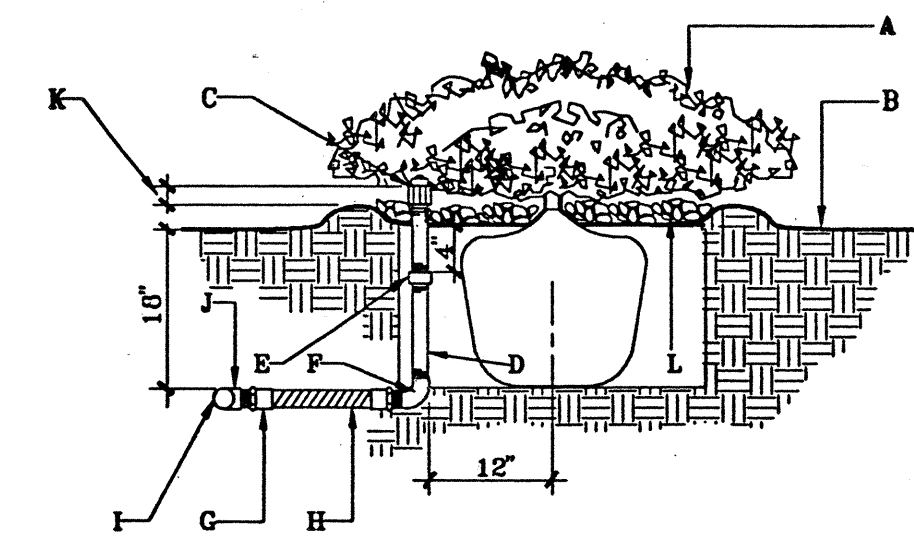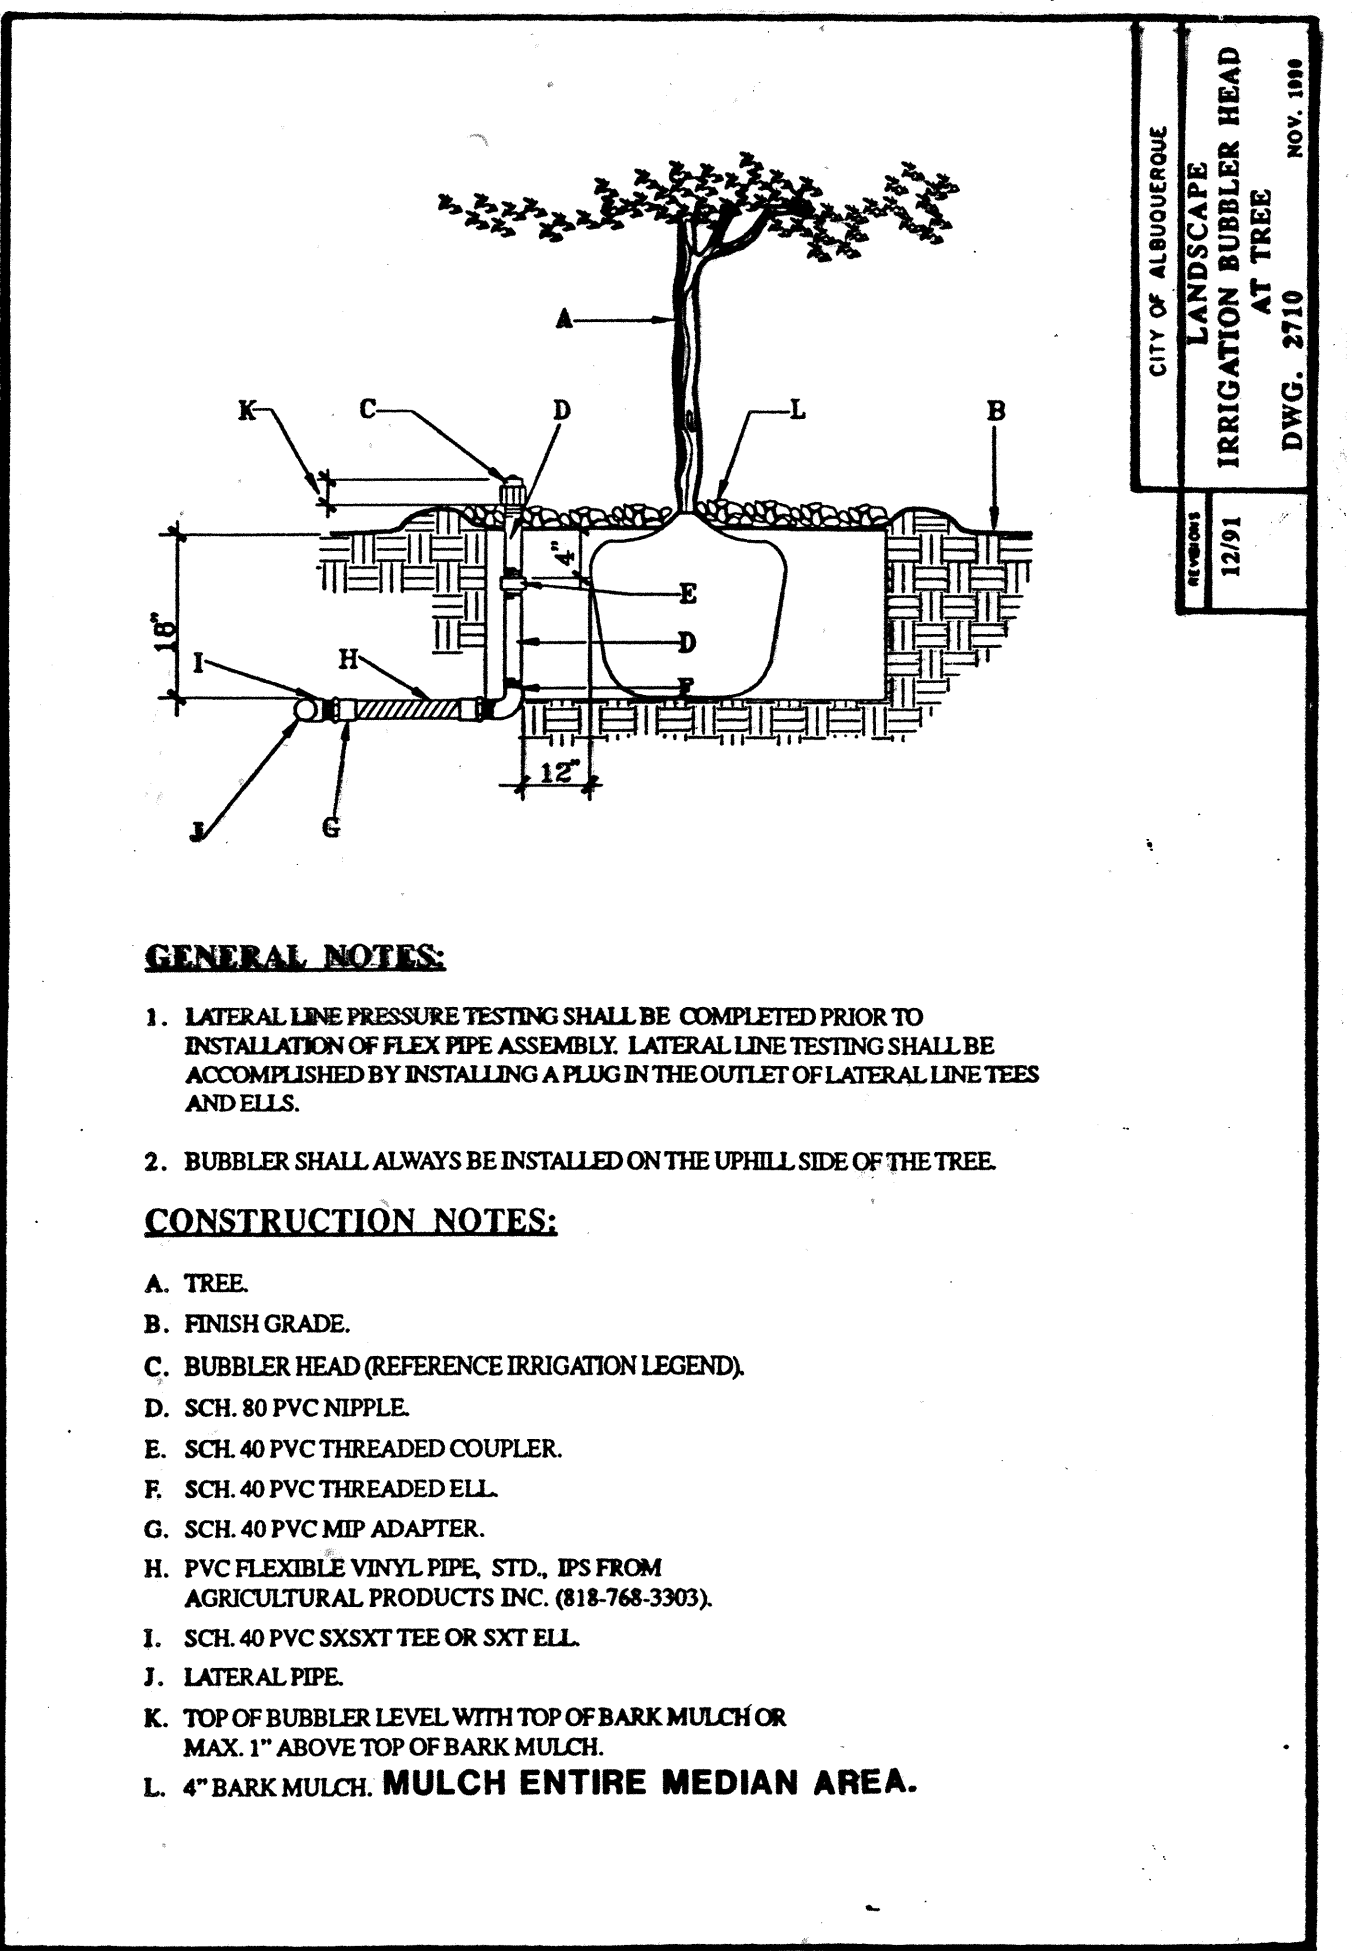


- GENERAL NOTES:**
- LATERAL LINE PRESSURE TESTING SHALL BE COMPLETED PRIOR TO INSTALLATION OF FLEX PIPE ASSEMBLY. LATERAL LINE TESTING SHALL BE ACCOMPLISHED BY INSTALLING A PLUG IN THE OUTLET OF LATERAL LINE TEES AND ELLS.
  - BUBBLER SHALL ALWAYS BE INSTALLED ON THE UPHILL SIDE OF THE SHRUB.
- CONSTRUCTION NOTES:**
- SHRUB.
  - FINISH GRADE.
  - BUBBLER HEAD (REFERENCE IRRIGATION LEGEND).
  - SCH. 80 PVC NIPPLE.
  - SCH. 40 PVC THREADED COUPLER.
  - SCH. 40 PVC THREADED ELL.
  - SCH. 40 PVC MIP ADAPTER.
  - PVC FLEXIBLE VINYL PIPE STD. IPS FROM AGRICULTURAL PRODUCTS INC. (818-768-3303).
  - LATERAL PIPE.
  - SCH. 40 PVC SXST TEE OR SXT ELL.
  - TOP OF BUBBLER LEVEL WITH TOP OF BARK MULCH OR MAX. 1" ABOVE TOP OF BARK MULCH.
  - 4" BARK MULCH. MULCH ENTIRE MEDIAN AREA.

5 MEDIAN GRADING N.T.S.

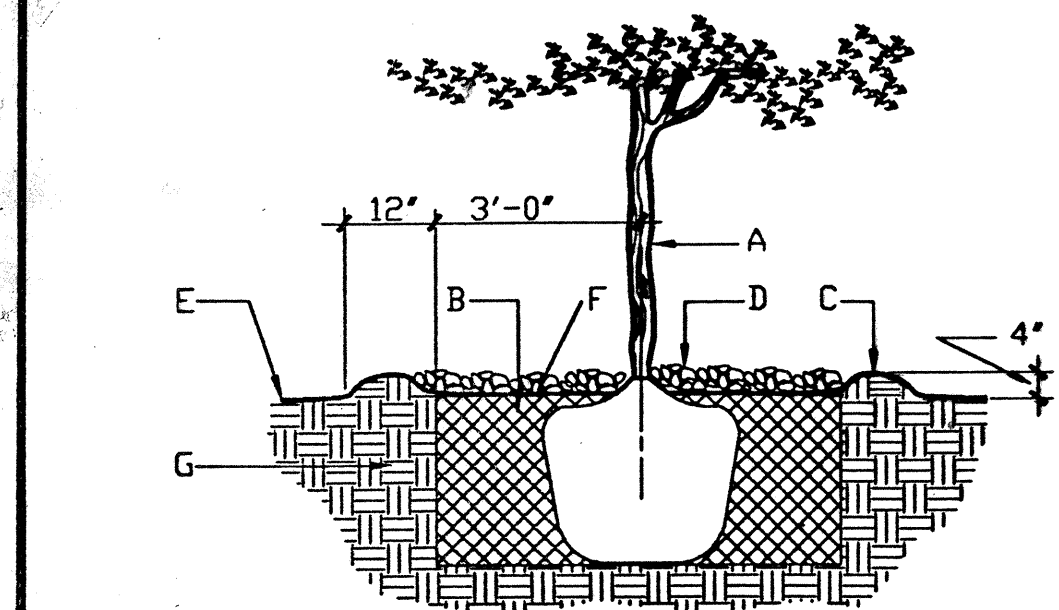

- GENERAL NOTES:**
- ROOTBALL SHALL BE PLACED ON UNDISTURBED SOIL TO PREVENT TREE FROM SETTLING.
  - TOP OF ROOTBALL INDICATES LEVEL AT WHICH TREE WAS GROWN AND DUG; THIS REPRESENTS THE LEVEL AT WHICH THE TREE SHOULD BE INSTALLED; THAT LEVEL MAY BE EXCEEDED BY ONLY A ONE INCH LAYER OF SOIL.
  - PRIOR TO BACKFILLING TREE, ALL WIRE, ROPE AND SYNTHETIC MATERIALS SHALL BE REMOVED FROM THE TREE AND THE PLANTING PIT.
  - PRIOR TO BACKFILLING ALL BURLAP SHALL BE CUT AWAY EXCEPT FROM BOTTOM OF THE ROOTBALL.
- CONSTRUCTION NOTES:**
- TREE.
  - BACKFILL WITH EXISTING SOIL.
  - EARTH BERM AROUND WATER RETENTION BASIN.
  - 4" DEPTH OF BARK MULCH. MULCH ENTIRE MEDIAN AREA.
  - FINISH GRADE.
  - UNDISTURBED SOIL.

6 MEDIAN GRADING N.T.S.

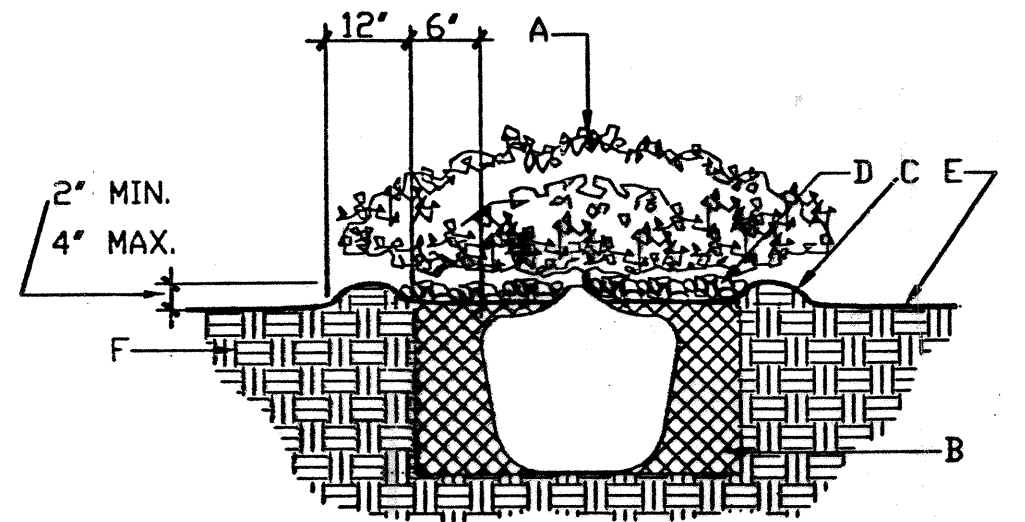


- GENERAL NOTES:**
- THE OUTSIDE DIAMETER OF THE WATER RETENTION BASIN SHALL BE TWICE THE DIAMETER OF THE SHRUB PLANTING PIT.
- CONSTRUCTION NOTES:**
- SHRUB.
  - BACKFILL WITH EXISTING SOIL.
  - EARTH BERM AROUND WATER RETENTION BASIN.
  - 4" DEPTH OF BARK MULCH. MULCH ENTIRE MEDIAN AREA.
  - FINISH GRADE.
  - UNDISTURBED SOIL.


7 MEDIAN GRADING N.T.S.

| CITY OF ALBUQUERQUE<br>PARKS AND GENERAL SERVICES<br>DESIGN AND DEVELOPMENT |                    |              |             |              |         |
|-----------------------------------------------------------------------------|--------------------|--------------|-------------|--------------|---------|
| TITLE: DETAILS<br>COORS ROAD MEDIAN IMPROVEMENTS                            |                    |              |             |              |         |
| APPROVALS                                                                   | ENGINEER           | DATE         | APPROVALS   | ENGINEER     | DATE    |
| DRC CHAIRMAN                                                                | <i>[Signature]</i> | 7-22-93      | WATER       | N/A RWK      | 7-12-93 |
| TRANSPORTATION                                                              | <i>[Signature]</i> | 7-13-93      | WASTE WATER | N/A RWK      | 7-12-93 |
| HYDROLOGY                                                                   | <i>[Signature]</i> | 7-12-93      |             |              |         |
| PARKS AND REC                                                               | <i>[Signature]</i> | 7-12-93      |             |              |         |
| PROJECT NO. 4574.90                                                         |                    | MAP NO. K10Z |             | SHEET 5 OF 5 |         |



**WALTER WEAVER INC.**  
LANDSCAPE ARCHITECTS / ENVIRONMENTAL PLANNERS / GOLF COURSE ARCHITECTS  
809 COPPER AVE NE SUITE 100E ALBUQUERQUE, NEW MEXICO 87102 (505)243-3556

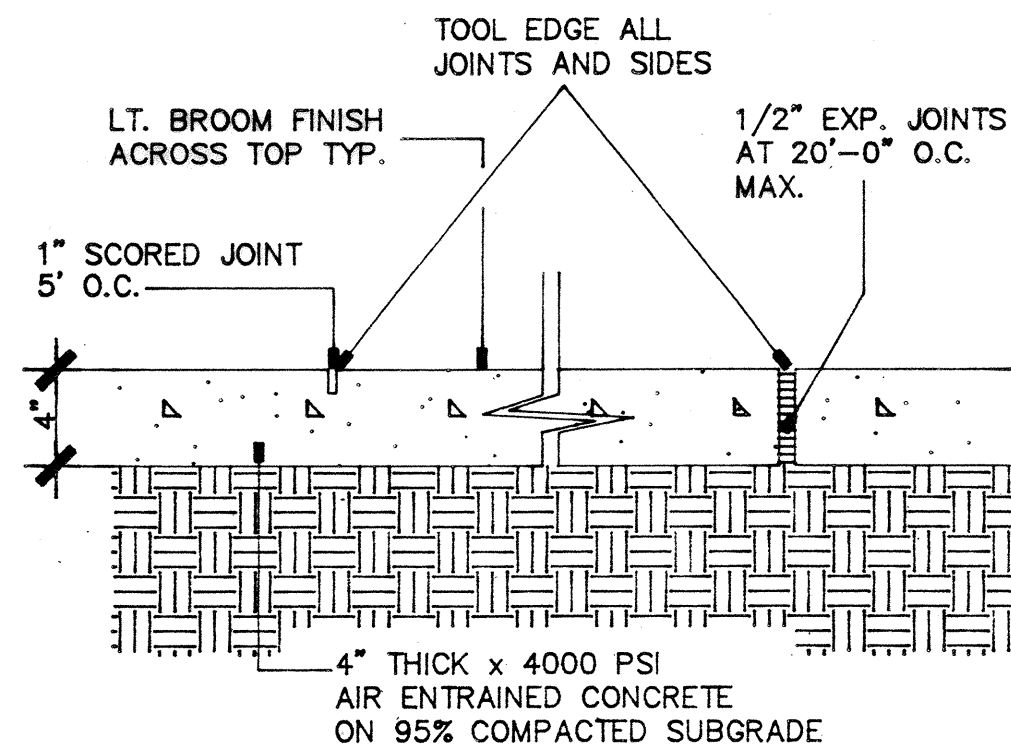


1 CONCRETE PAVING N.T.S.

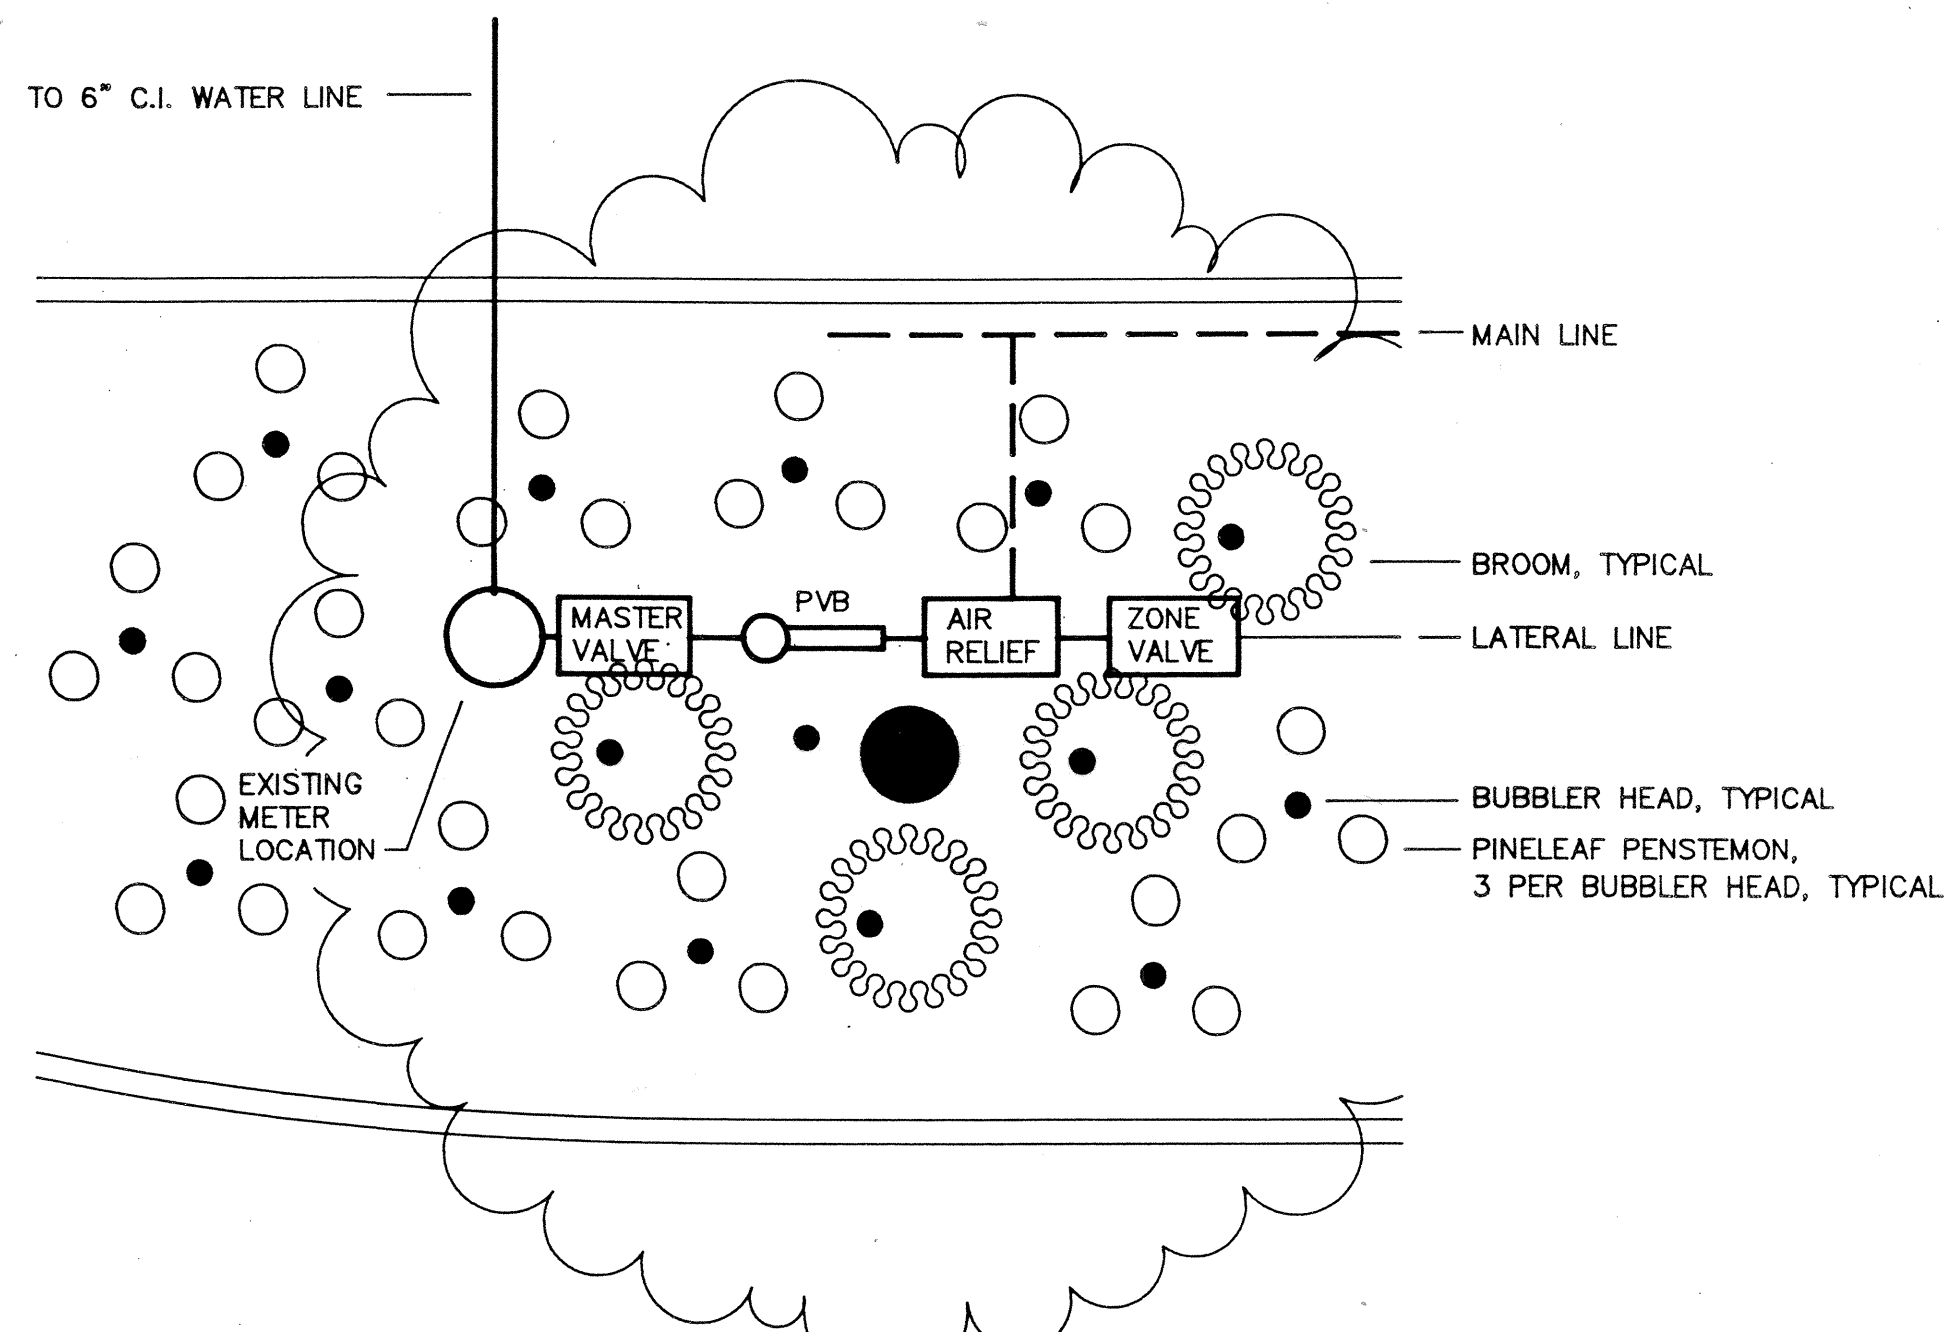


2 VALVE & HEAD PLACEMENT SCALE: 1/4" = 1'-0"

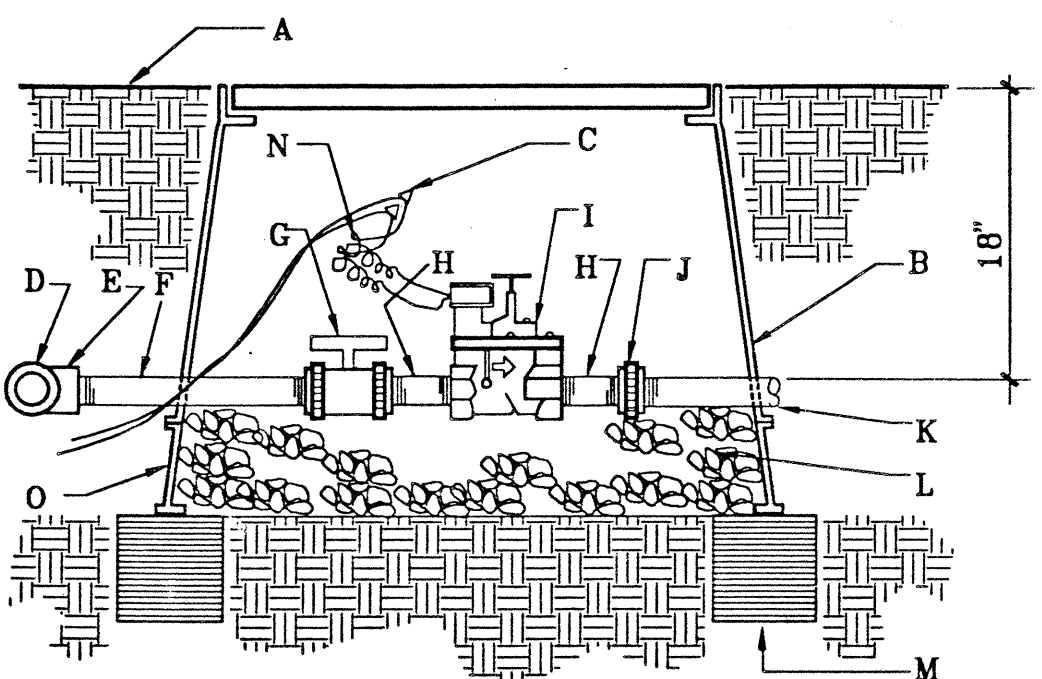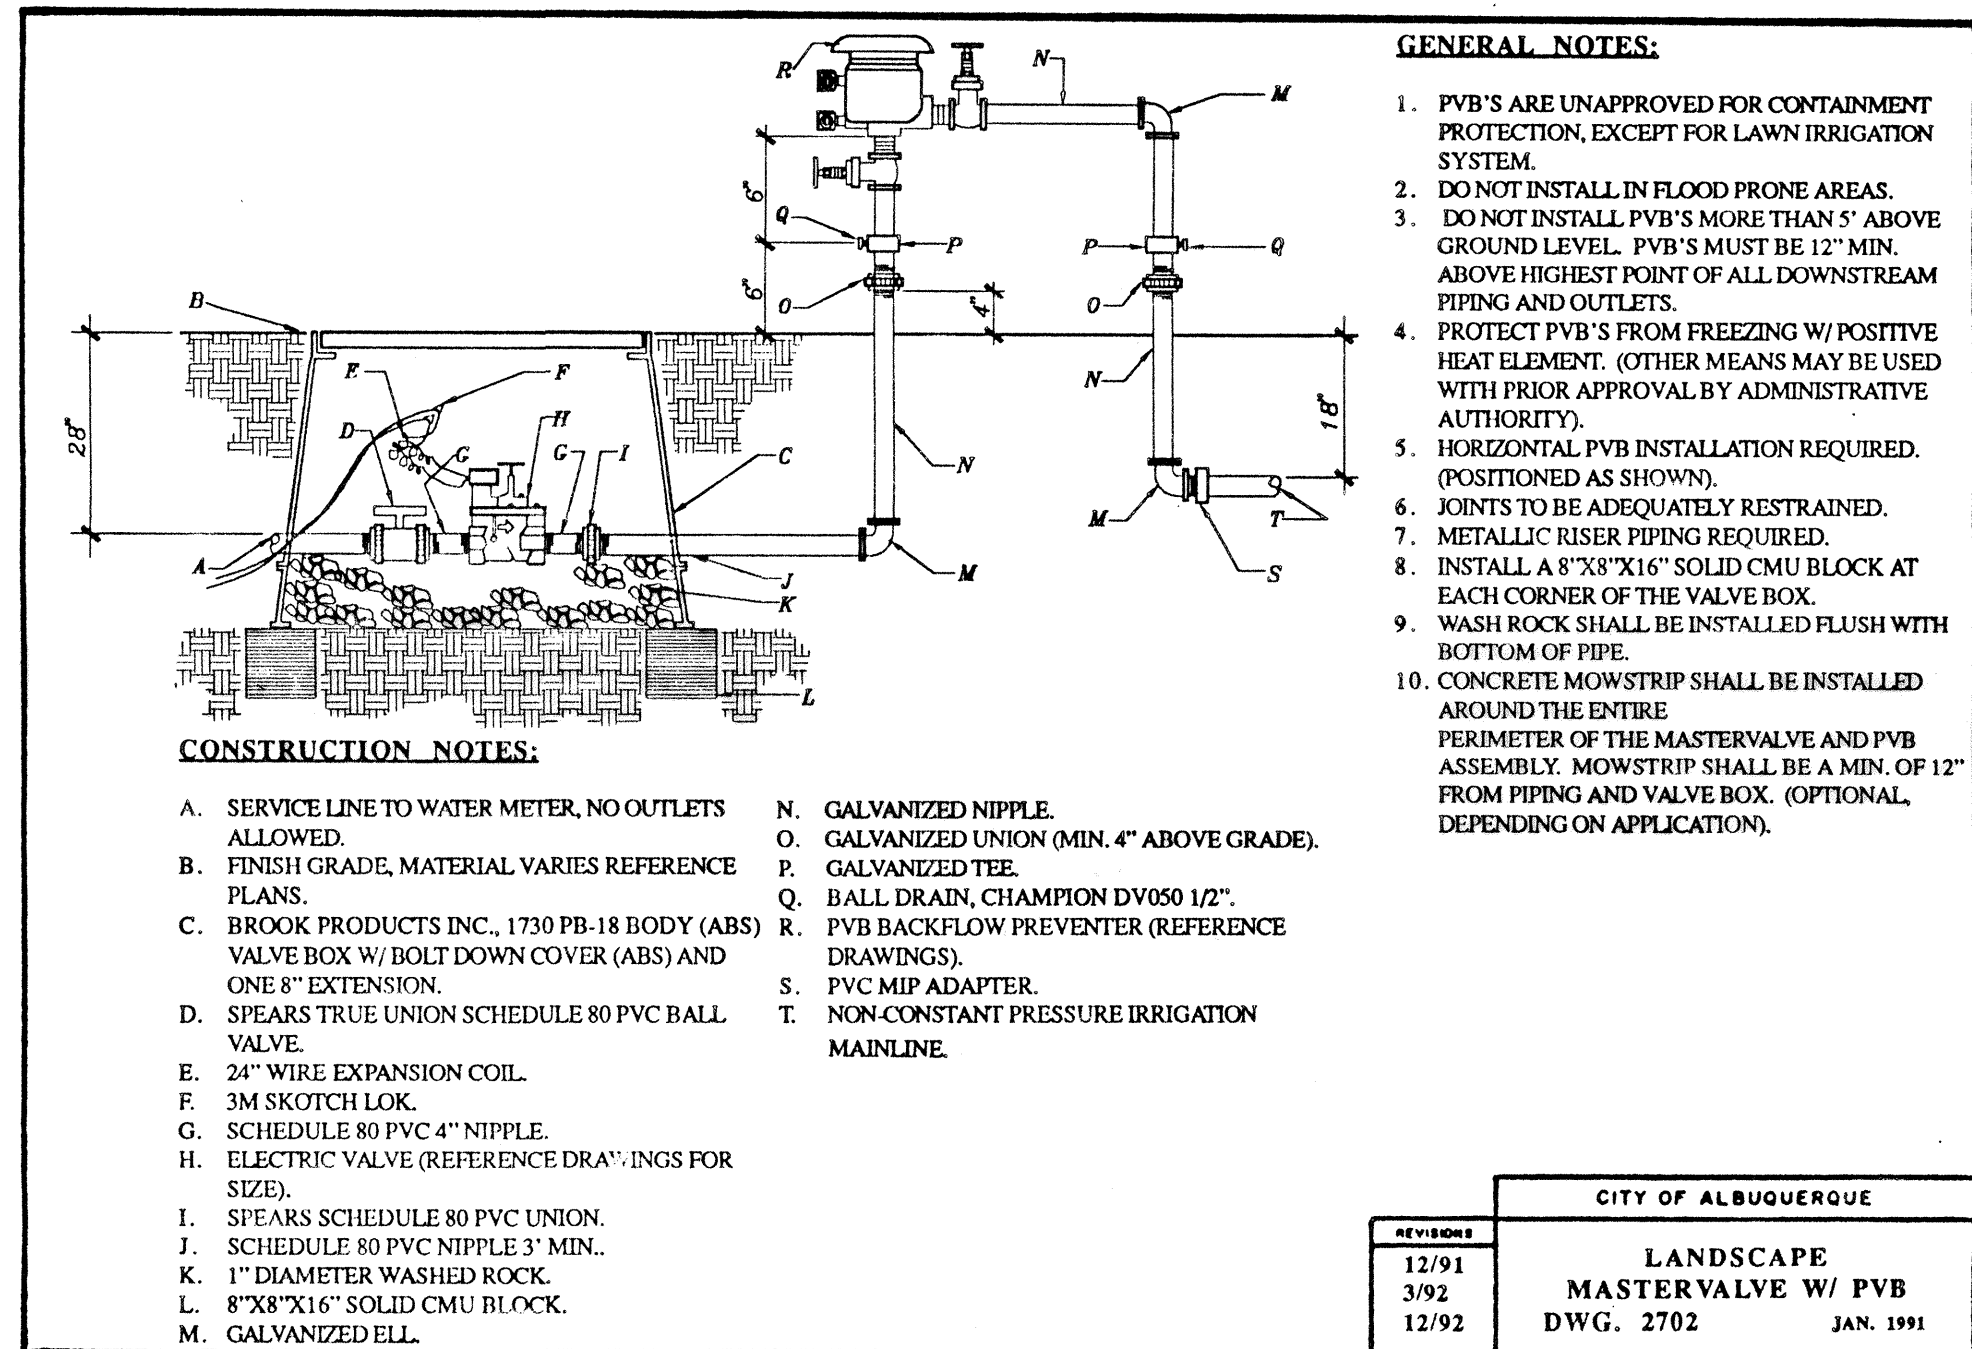


- GENERAL NOTES:**
1. INSTALL AN 8"x8"x16" SOLID CMU BLOCK AT EACH END OF THE VALVE BOX.
  2. WASH ROCK SHALL BE INSTALLED FLUSH WITH BOTTOM OF PIPE AND VALVE.
- CONSTRUCTION NOTES:**
- A. FINISH GRADE.
  - B. BROOKS PRODUCTS INC., 1730 PB-18 BODY (ABS) VALVE BOX WITH 1730 BOLT DOWN COVER (ABS) AND ONE 8" EXTENSION.
  - C. 3M SCOTCHLOK CONNECTORS.
  - D. IRRIGATION MAINLINE.
  - E. IRRIGATION MAINLINE SERVICE TEE OR ELL.
  - F. SCHEDULE 80 PVC 12" NIPPLE.
  - G. SPEARS TRUE UNION SCHEDULE 80 PVC BALL VALVE.
  - H. SCHEDULE 80 PVC 4" NIPPLE.
  - I. ELECTRIC VALVE. REFERENCE THE DRAWING FOR SIZE.
  - J. SPEARS SCHEDULE 80 PVC UNION.
  - K. LATERAL LINE.
  - L. 1" DIAMETER WASHED ROCK.
  - M. 8"x8"x16" SOLID CMU BLOCK.
  - N. 24" WIRE EXPANSION COIL.

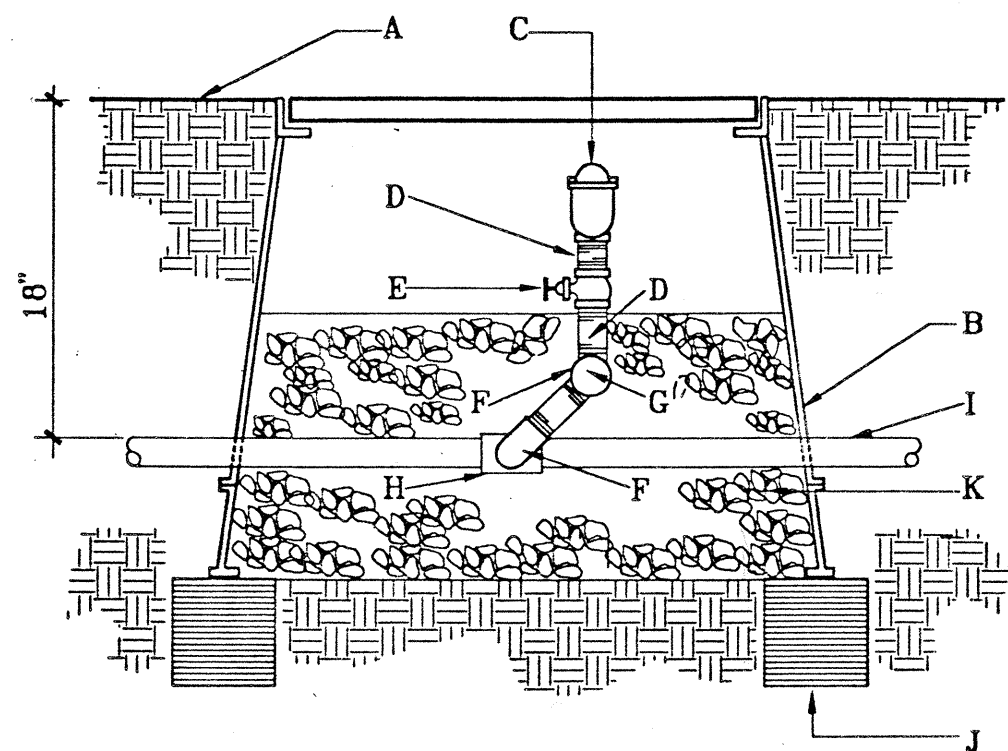

- GENERAL NOTES:**
1. INSTALL AN 8"x8"x16" SOLID CMU BLOCK AT EACH END OF THE VALVE BOX.
  2. WASH ROCK SHALL BE INSTALLED FLUSH WITH BOTTOM OF GATE VALVE.
  3. AIR RELIEF VALVE SHALL BE INSTALLED DOWNSTREAM OF THE MASTERVALVE.
- CONSTRUCTION NOTES:**
- A. FINISH GRADE.
  - B. BROOKS PRODUCTS INC., 1730 PB-18 BODY (ABS) VALVE BOX WITH 1730 BOLT DOWN COVER (ABS) AND ONE 8" EXTENSION. WHEN AIR RELIEF VALVE IS INSTALLED IN PLAYING FIELD USE 4" PIPE WITH PLASTIC LID.
  - C. AIR RELIEF VALVE (REFERENCE THE DRAWINGS).
  - D. SCHEDULE 80 PVC NIPPLE.
  - E. GATE VALVE.
  - F. SCHEDULE 40 PVC ST. ELL.
  - G. SCHEDULE 40 PVC ELL.
  - H. IRRIGATION MAINLINE TEE.
  - I. IRRIGATION MAINLINE.
  - J. 8"x8"x16" SOLID CMU BLOCK.
  - K. 1" DIAMETER WASHED ROCK.

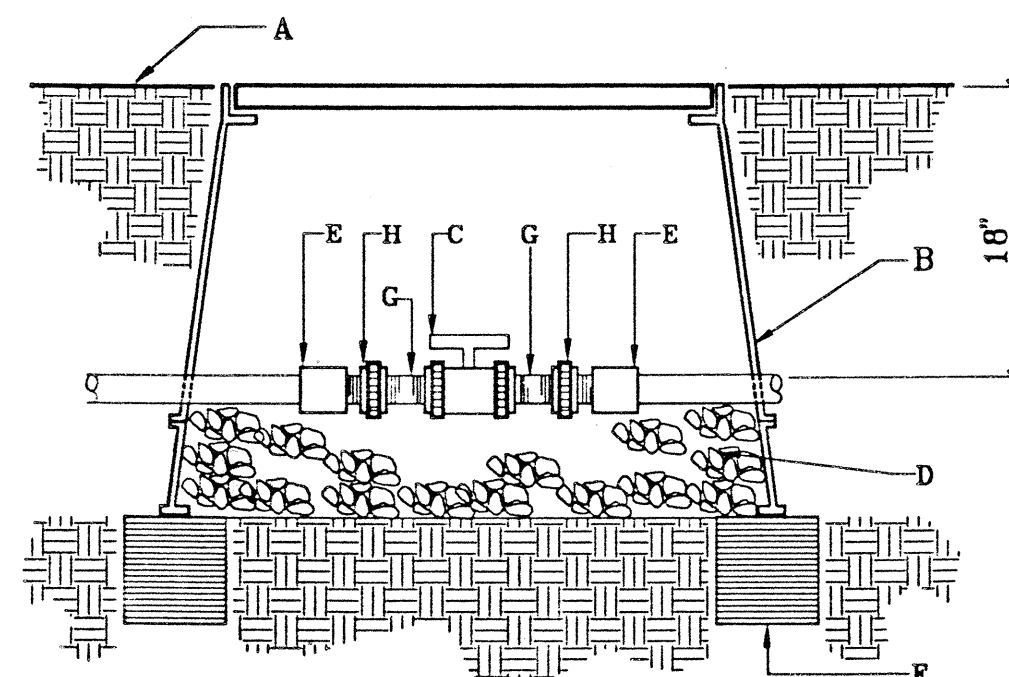

- GENERAL NOTES:**
1. INSTALL AN 8"x8"x16" SOLID CMU BLOCK AT EACH END OF THE VALVE BOX.
  2. WASH ROCK SHALL BE INSTALLED FLUSH WITH BOTTOM OF PIPE AND VALVE.
- CONSTRUCTION NOTES:**
- A. FINISH GRADE.
  - B. BROOKS PRODUCTS INC., 1730 PB-18 BODY (ABS) VALVE BOX WITH 1730 BOLT DOWN COVER (ABS) AND ONE 8" EXTENSION.
  - C. SPEARS TRUE UNION SCHEDULE 80 PVC BALL VALVE.
  - D. 1" DIAMETER WASHED ROCK.
  - E. PVC MIP ADAPTER.
  - F. 8"x8"x16" SOLID CMU BLOCK.
  - G. SCHEDULE 80 PVC 4" NIPPLE.
  - H. SPEARS SCHEDULE 80 PVC UNION.

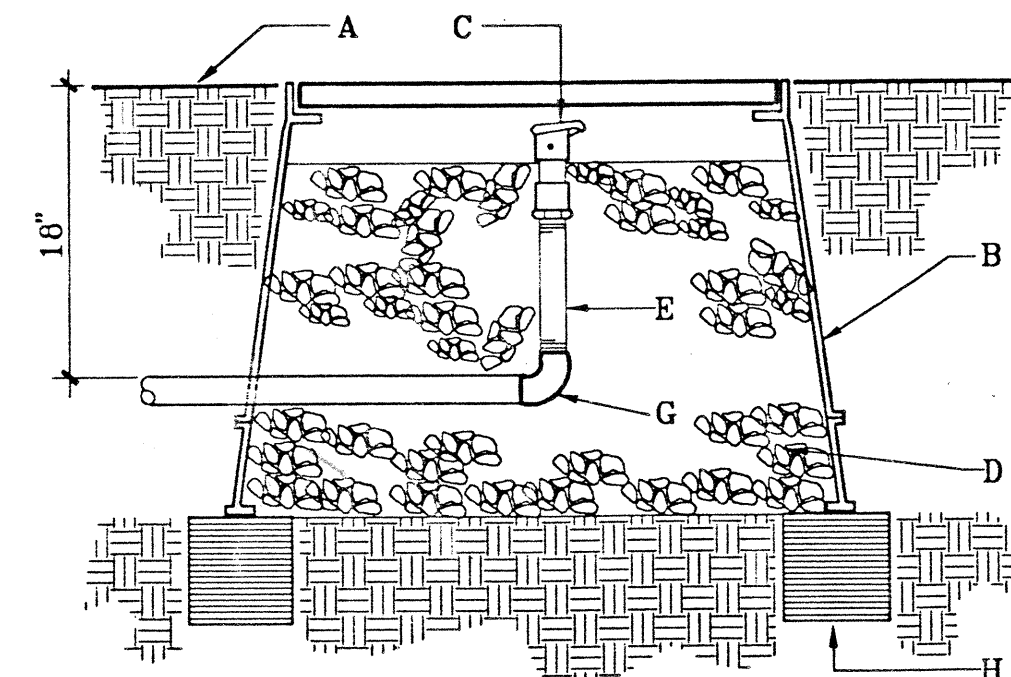

- GENERAL NOTES:**
1. INSTALL AN 8"x8"x16" SOLID CMU BLOCK AT EACH CORNER OF THE VALVE BOX.
  2. INSTALL 1" DIAMETER WASHED ROCK BELOW THE VALVE BOX. EXTEND WASHED ROCK UP TO COLLAR OF QUICK COUPLER VALVE.
  3. INSTALL A GATE VALVE IMMEDIATELY UPSTREAM OF QUICK COUPLER VALVE.
- CONSTRUCTION NOTES:**
- A. FINISH GRADE.
  - B. BROOKS PRODUCTS INC., 1730 PB-18 BODY (ABS) VALVE BOX WITH 1730 BOLT DOWN COVER (ABS) AND ONE 8" EXTENSION. WHEN QUICK COUPLER VALVE IS INSTALLED IN PLAYING FIELD USE 4" PIPE WITH PLASTIC LID.
  - C. RAINBIRD 33 DRC QUICK COUPLER VALVE.
  - D. 1" DIAMETER WASHED ROCK.
  - E. 12" SCH. 80 PVC RISER.
  - F. IRRIGATION MAINLINE.
  - G. SCHEDULE 40 PVC ELL. SXT.
  - H. 8"x8"x16" SOLID CMU BLOCK.

CLASS II CONSTRUCTION

CITY OF ALBUQUERQUE  
PARKS AND GENERAL SERVICES  
DESIGN AND DEVELOPMENT

TITLE: DETAILS  
COORS ROAD MEDIAN IMPROVEMENTS

| APPROVALS           | ENGINEER           | DATE         | APPROVALS   | ENGINEER           | DATE            |
|---------------------|--------------------|--------------|-------------|--------------------|-----------------|
| DRC CHAIRMAN        | <i>[Signature]</i> | 7-19-93      | WATER       | <i>[Signature]</i> | N/A RUC 6-14-93 |
| TRANSPORTATION      | <i>[Signature]</i> | 6-16-93      | WASTE WATER | <i>[Signature]</i> | N/A RUC 6-14-93 |
| HYDROLOGY           | <i>[Signature]</i> | 7-1-93       |             |                    |                 |
| PARKS AND REC       | <i>[Signature]</i> | 6/1/93       |             |                    |                 |
| PROJECT NO. 4574.90 | MAP NO. K10Z       | SHEET 6 OF 7 |             |                    |                 |

WALTER WEAVER INC.  
LANDSCAPE ARCHITECTS / ENVIRONMENTAL PLANNERS / GOLF COURSE ARCHITECTS  
809 COPPER AVE NE SUITE 100E ALBUQUERQUE, NEW MEXICO 87102 (505)243-3556



DESIGNED BY: WW, INC. DATE: 05/12/93  
DRAWN BY: WW, INC. DATE: 05/12/93  
CHECKED BY: WW, INC. DATE: 05/12/93