

PROJECT # 1007948

SHEET INDEX

1. SITE PLAN FOR BUILDING PERMIT
2. LANDSCAPE PLAN
3. GRADING AND DRAINAGE PLAN
4. ELEVATIONS
5. MASTER UTILITY PLAN

PROJECT NUMBER: 1007948


APPLICATION NUMBER: _____

This plan is consistent with the specific Site Development Plan approved by the Environmental Planning Commission (EPC), dated _____ and the Findings and Conditions in the Official Notification of Decision are satisfied.

Is an Infrastructure List required? Yes No If Yes, then a set of approved DRG plans with a work order is required for any construction within Public Right-of-Way or for construction of public improvements.


DRB SITE DEVELOPMENT PLAN SIGNOFF APPROVAL:

| | |
|--|------------------|
| _____ Traffic Engineer, Transportation Division | 09/23/09 Date |
| _____ Utilities Development | 9/23/09 Date |
| _____ Christina Sandoval Parks & Recreation Department | 9/23/09 Date |
| _____ Bradley L. Bly City Engineer | 11/13/09 Date |
| _____ Environmental Health Department (conditional) | 9/23/09 Date |
| _____ Solid Waste Management | 11/17/09 Date |
| _____ DRB Chairperson, Planning Department | 11/18/09 Date |

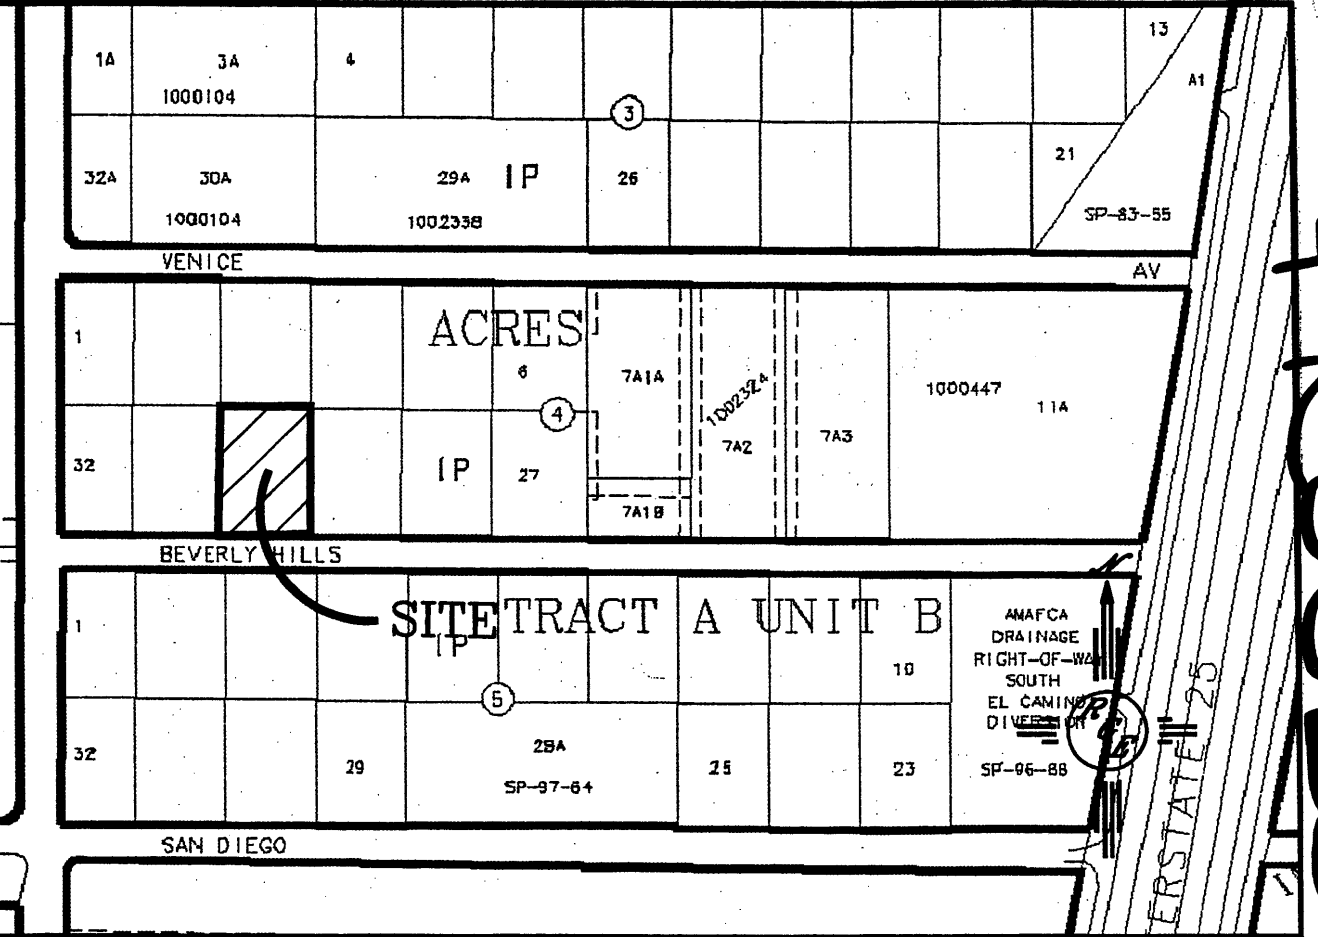


VICINITY MAP: B-18-7


LEGAL DESCRIPTION:
Lot 30, Block 4 North Albuquerque Acres, Tract A, Unit B

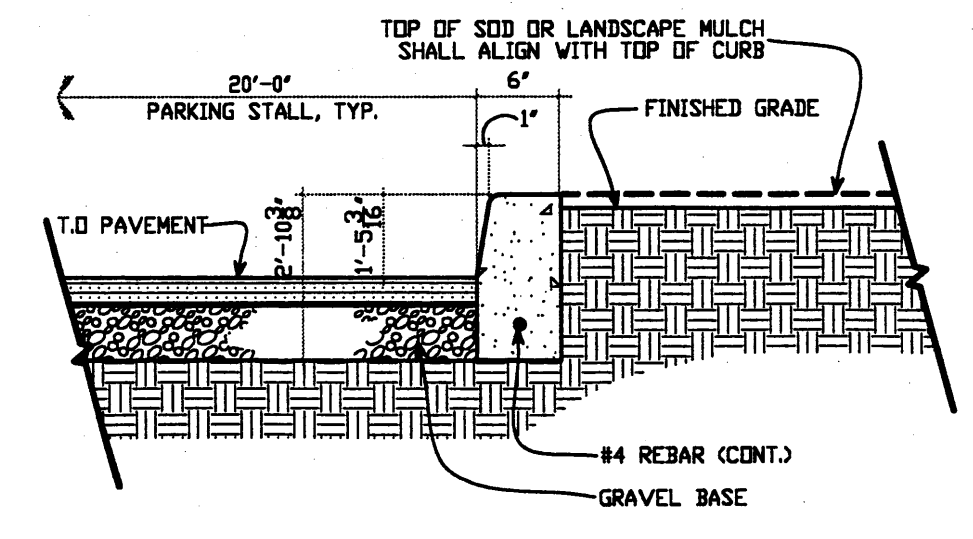


HEADER CURB DETAIL
NTS

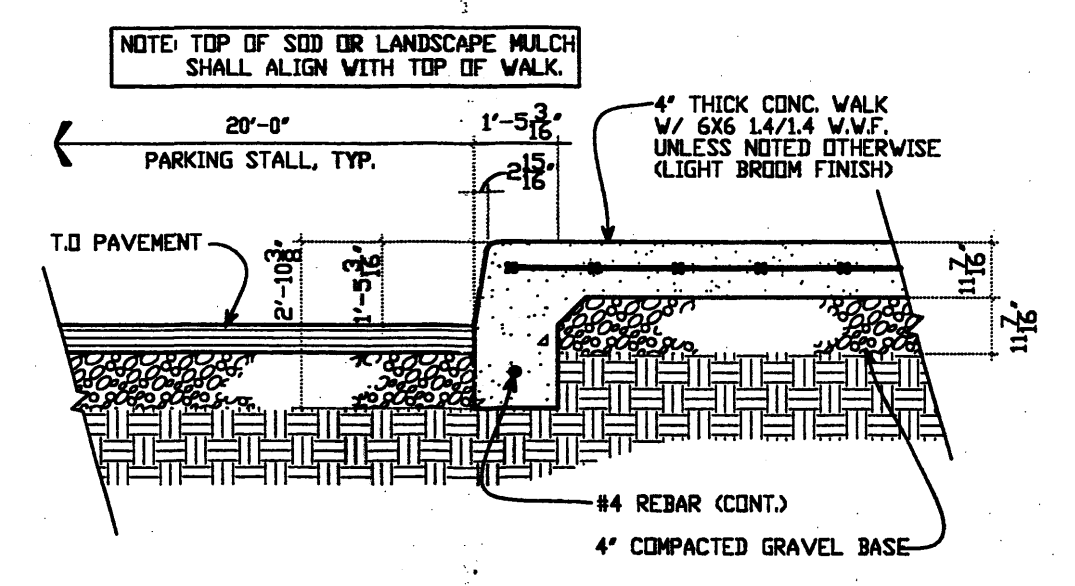


SIDEWALK/CURB DETAIL
NTS

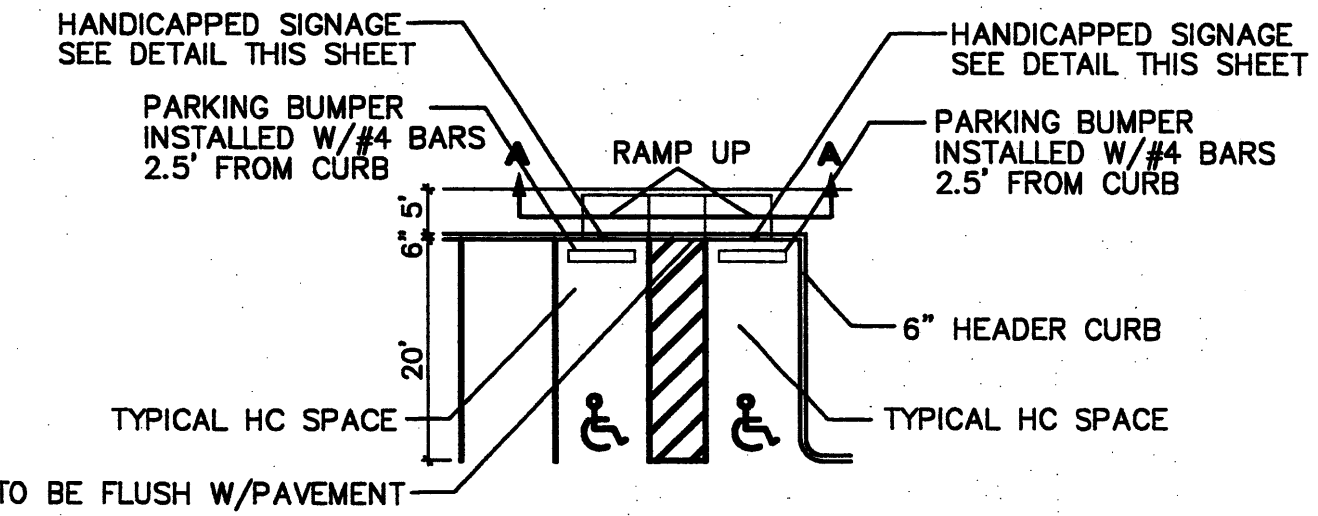


HC PARKING DETAIL SECTION A-A
NTS

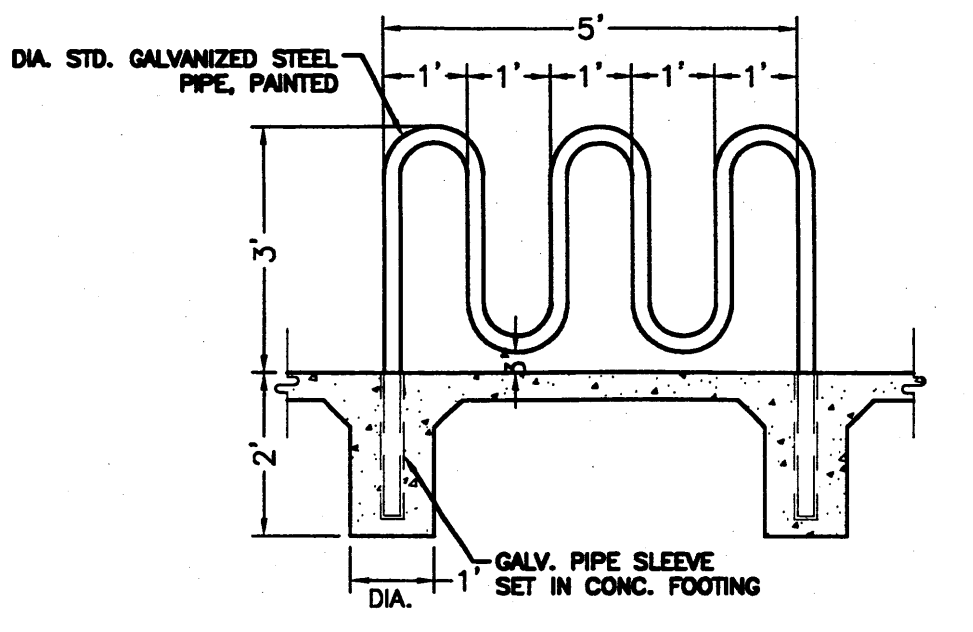


BIKE RACK DETAIL
NTS

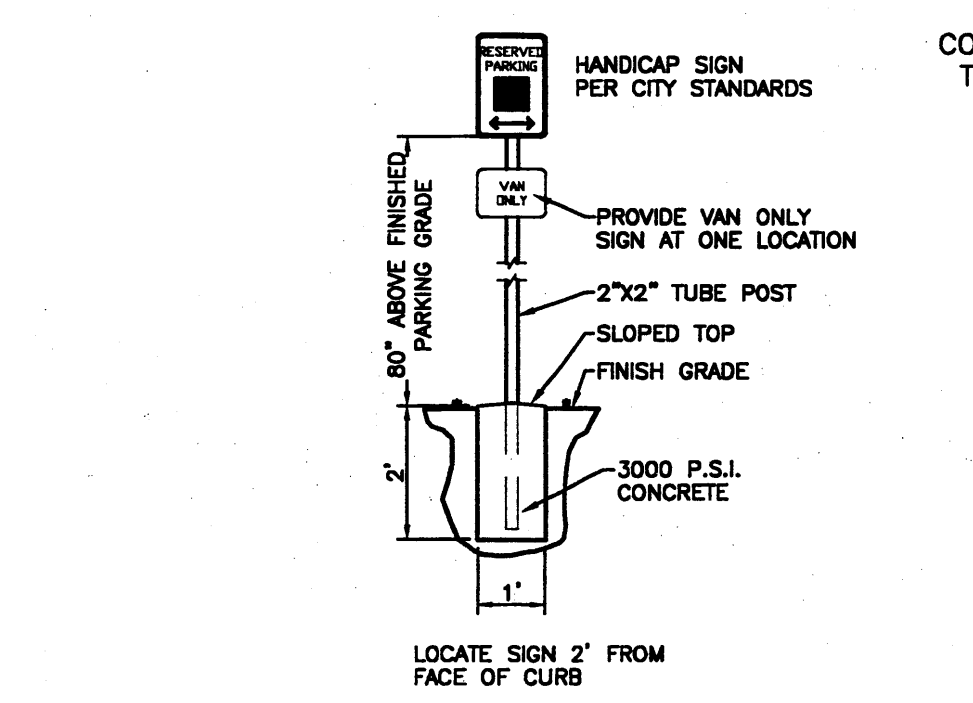

HANDICAP SIGN DETAIL
NTS

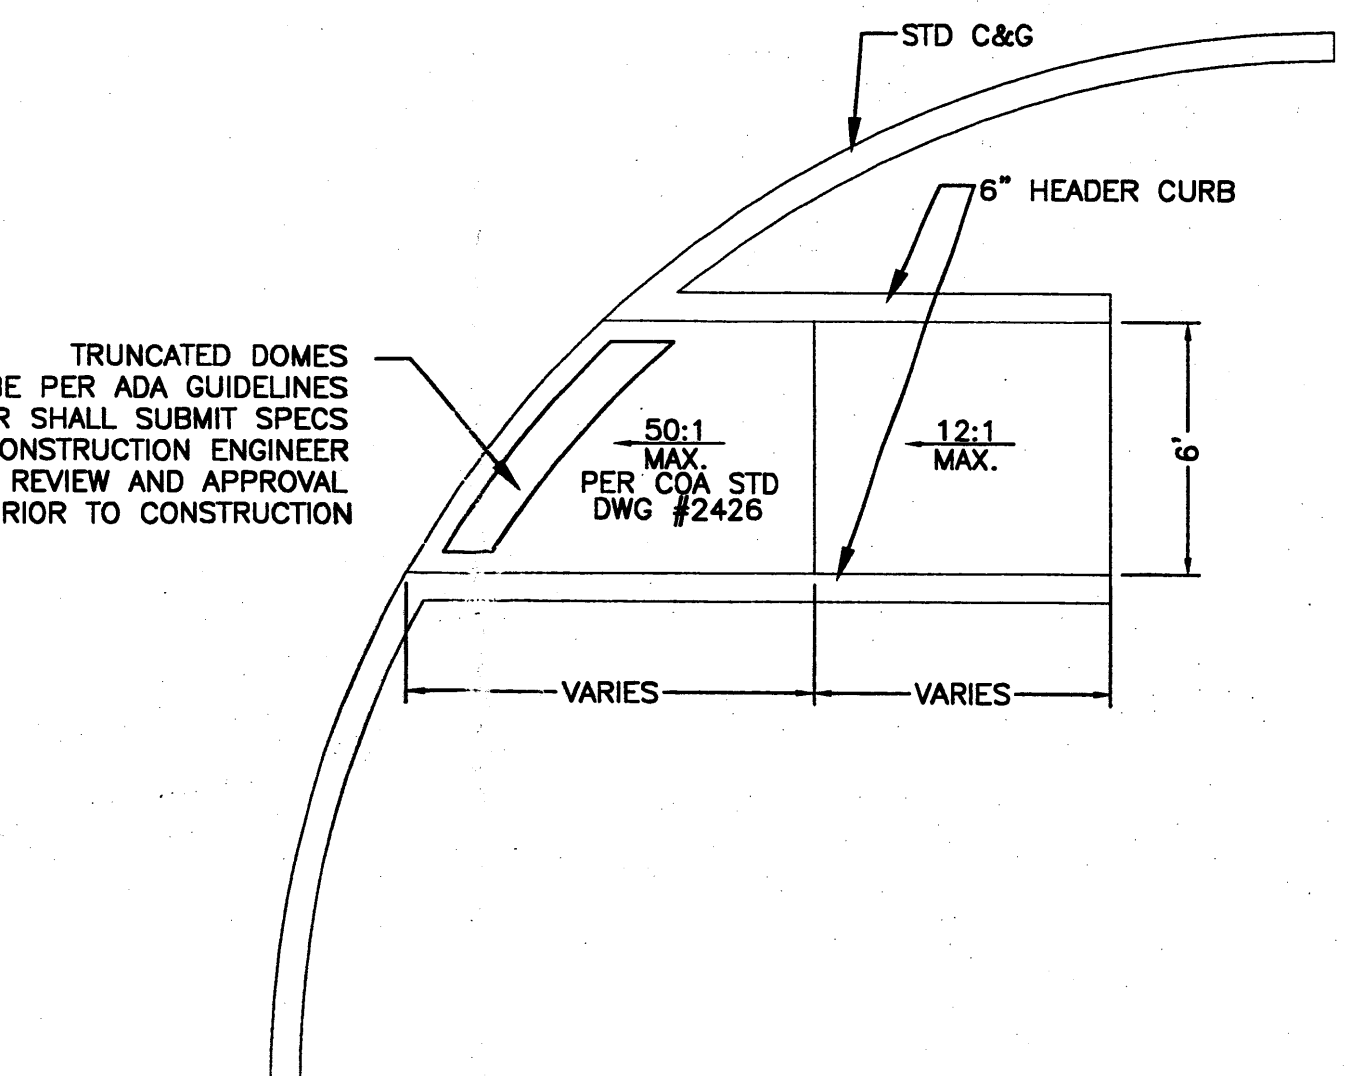

UNI-DIRECTIONAL WHEELCHAIR RAMP DETAIL (TYP.)
NTS

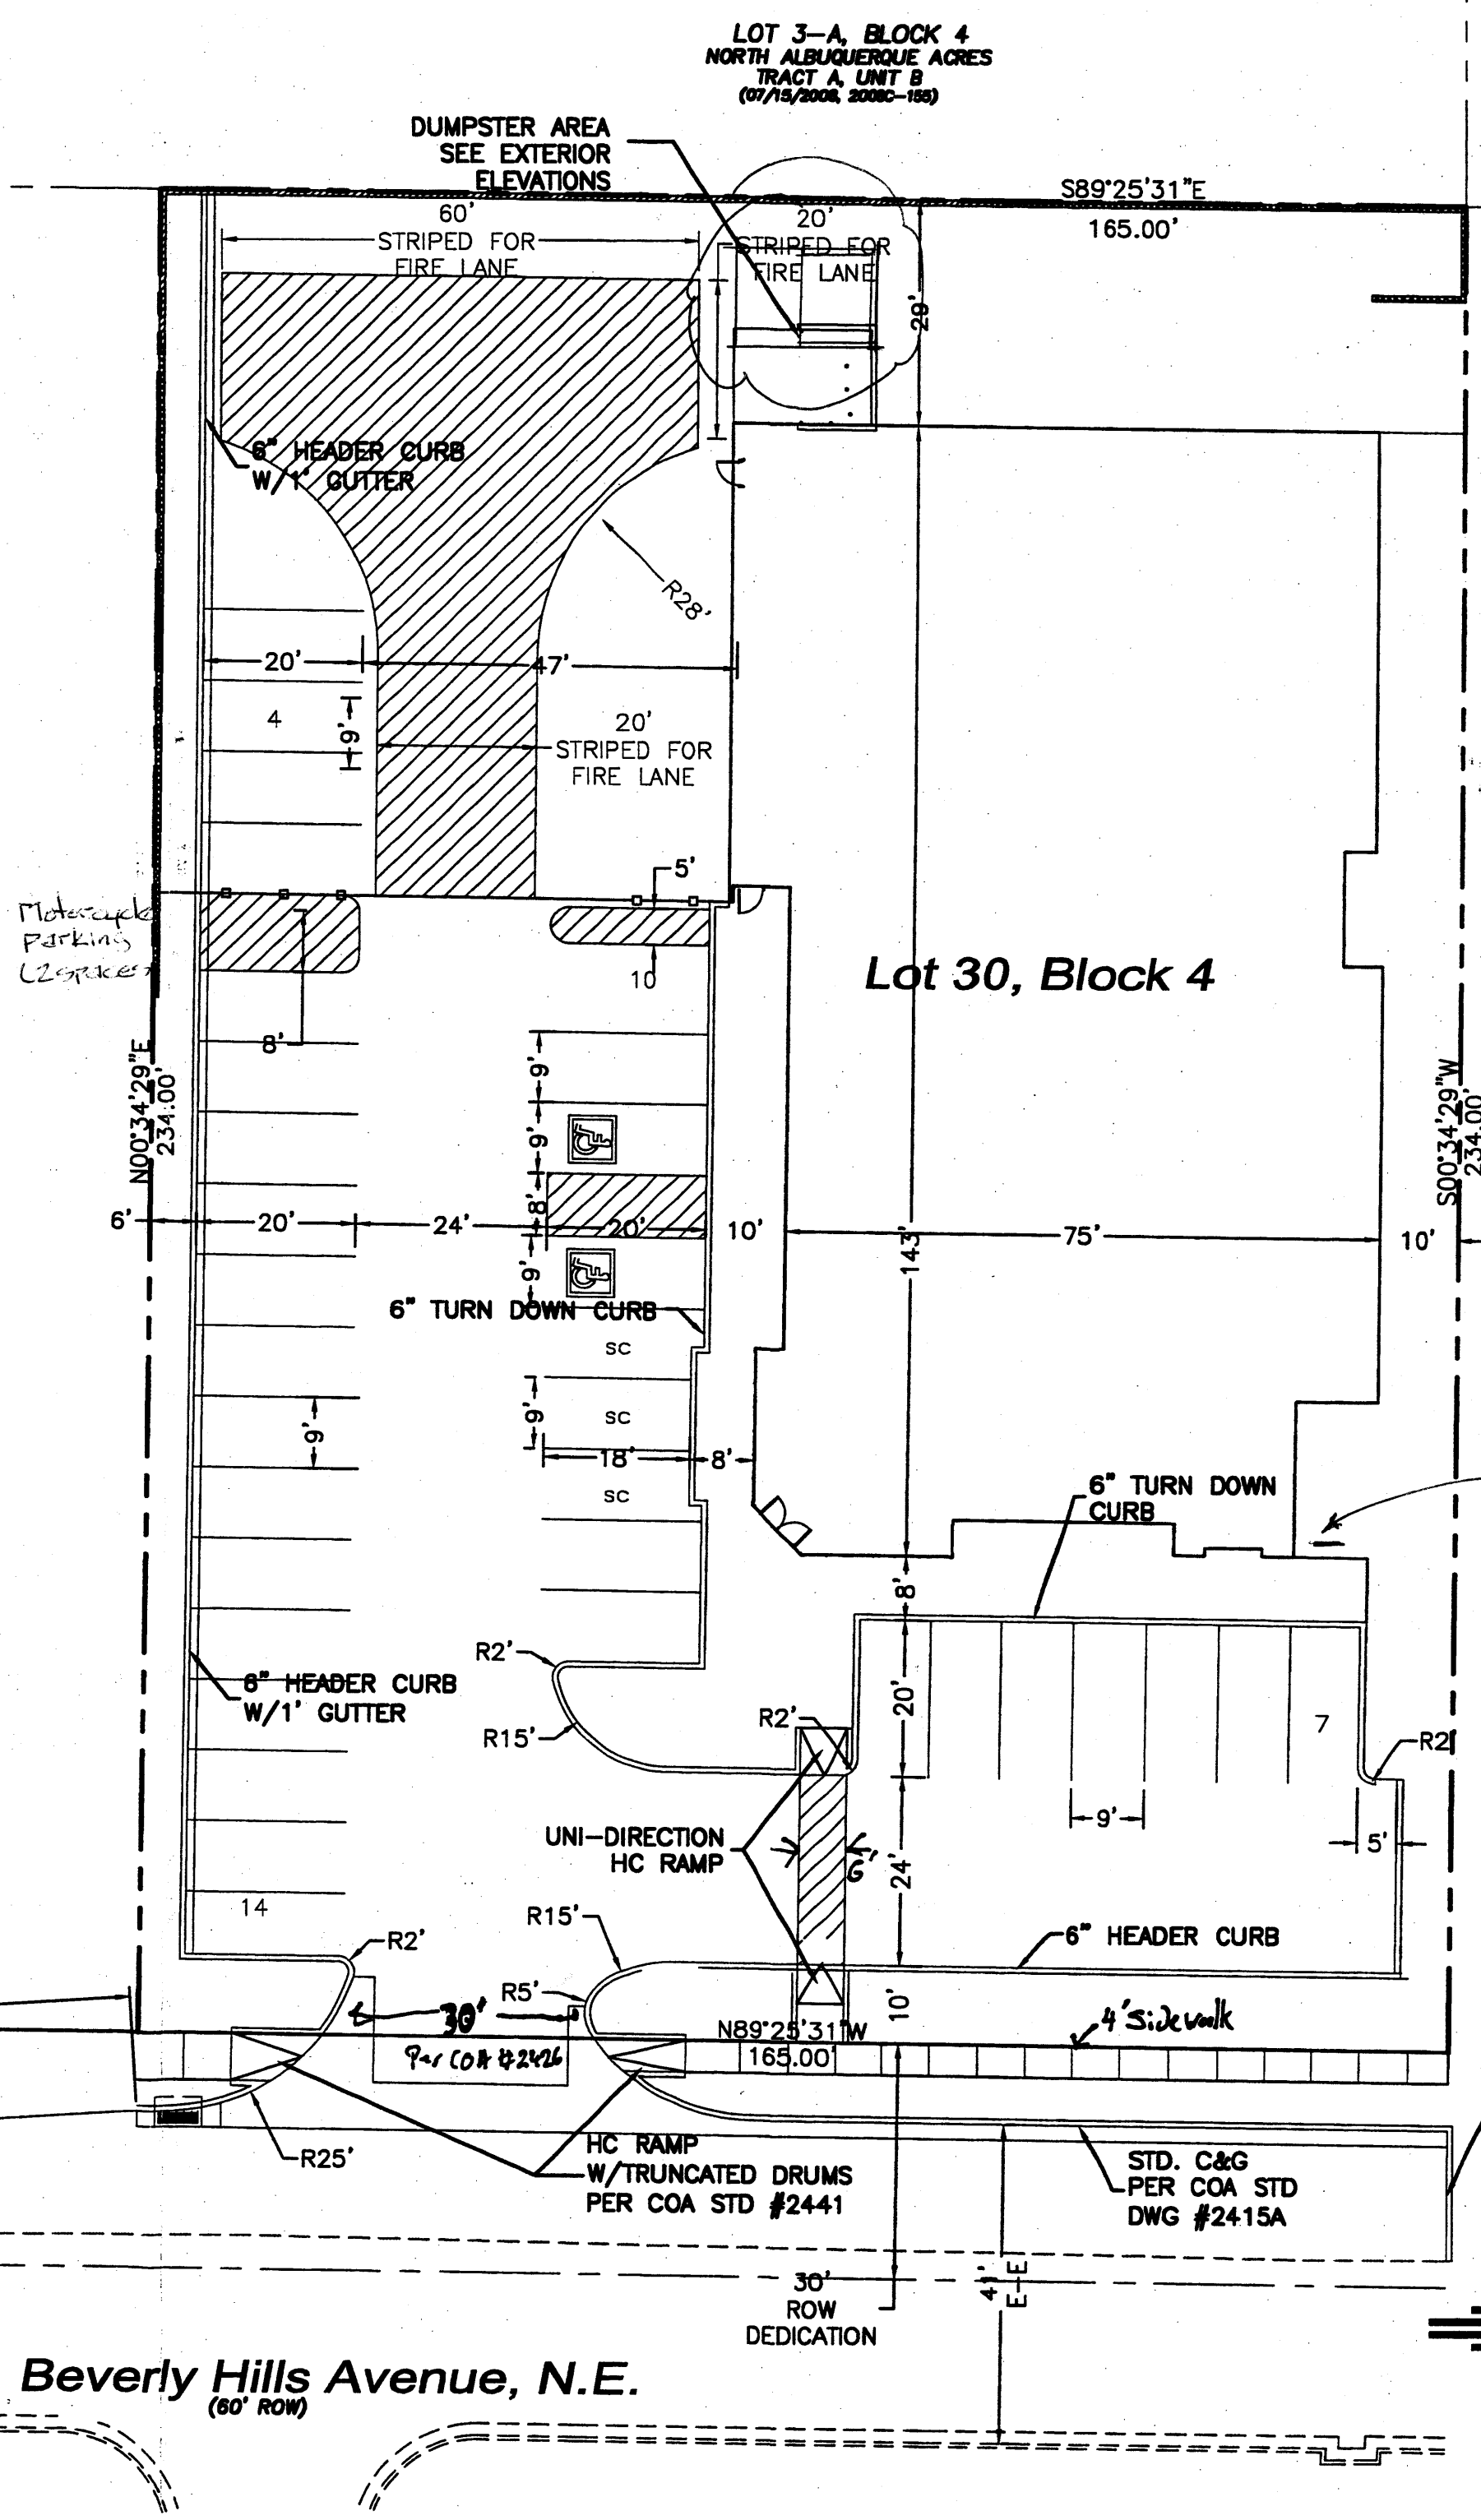

NOTES:


1. APPROVAL OF THIS PLAN DOES NOT CONSTITUTE OR IMPLY EXEMPTION FROM WATER WASTE PROVISIONS OF THE WATER CONSERVATION LANDSCAPING AND WATER WASTE ORDINANCE WATER WASTE MANAGEMENT IS THE SOLE RESPONSIBILITY OF THE PROPERTY OWNER.
2. LANDSCAPE MAINTENANCE SHALL BE THE RESPONSIBILITY OF THE OWNERS.
3. ALL WHEELCHAIR RAMPS SHALL BE BUILT PER COA STD DWG #2441.
4. HVAC EQUIPMENT ON THE ROOF SHALL BE SCREENED BY EXTERIOR SCREEN WALL.
5. NO OFF PREMISE OR POLE MOUNTED SIGNAGE SHALL BE ALLOWED.
6. ALL WIRELESS TELECOMMUNICATION FACILITIES SHALL BE CONCEALED AND ARCHITECTURALLY INTEGRATED WITH THE SITE AND SURROUNDING AREA.
7. VINYL COATED, PLASTIC REFLECTIVE TYPE AWNINGS, FASCIA, BUILDING PANELS, SIGN RACEWAYS OR ROOFS SHALL NOT BE PERMITTED.
8. FREE STANDING LIGHTING SHALL INCLUDE UNIFORM 20' HIGH POLES WITH FULLY SHIELDED FIXTURES. ALL FIXTURES SHOULD BE HORIZONTALLY-MOUNTED LENSES SHOULD NOT PROJECT BELOW THE HOUSING. LIGHTING LEVELS MUST CONFORM TO ZONING CODE LIMITATIONS.
9. MAXIMUM BUILDING HEIGHT SHALL BE 26'.

SITE DATA


| | |
|---|----------------------------|
| LOT SIZE: | 0.8864 AC± |
| EXISTING ZONING: | IP |
| PROPOSED ZONING: | IP |
| PROPOSED USE: | OFFICE/WAREHOUSE |
| BUILDING SIZE: | 10,777 SF |
| | 7020 SF OFFICE |
| | 3796 SF WAREHOUSE |
| FAR: | .28 |
| PARKING PROVIDED: | 34 SPACES (3 SMALL CAR) |
| PARKING REQUIRED W/10% BUS CREDIT: | 34 SPACES |
| HC PARKING PROVIDED: | 2 SPACES |
| BIKE SPACES PROVIDED: | 4 SPACES |
| LANDSCAPE PROVIDED: | 4681 SF |
| LANDSCAPE REQUIRED (15% OF NET LOT AREA): | 4175 SF |

LEGEND

| | |
|-------|------------------------|
| ===== | EXISTING CURB & GUTTER |
| ----- | PROPOSED CURB & GUTTER |
| ----- | BOUNDARY LINE |
| ----- | EXISTING BOUNDARY LINE |
| ----- | PROPOSED 6' SIDEWALK |
| ----- | CENTERLINE |
| ----- | RIGHT-OF-WAY |
| ----- | LIMITS OF CONSTRUCTION |

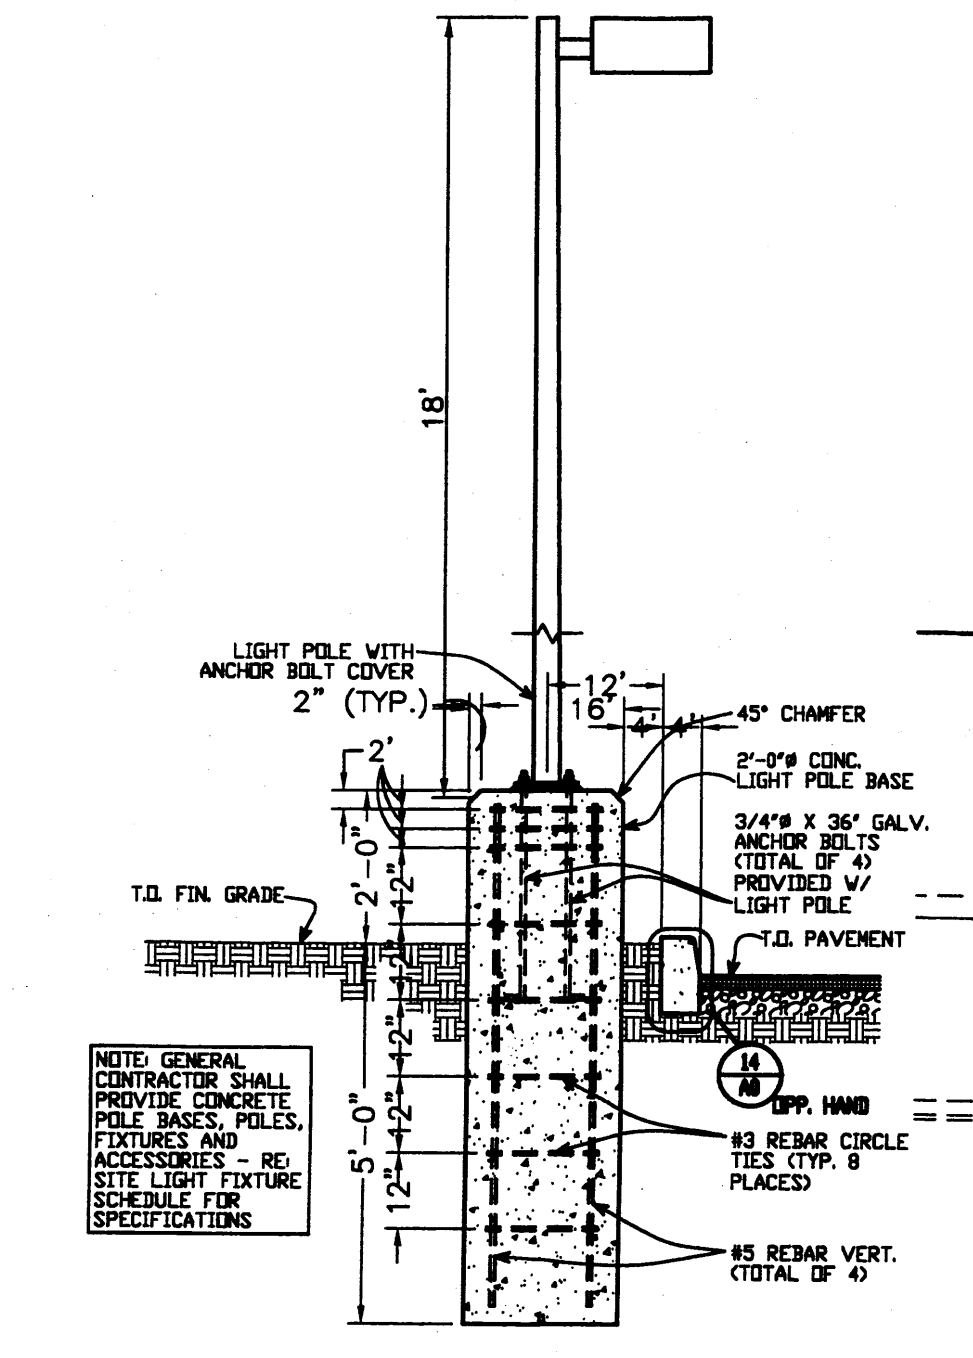


LIGHT POLE DETAIL
NTS

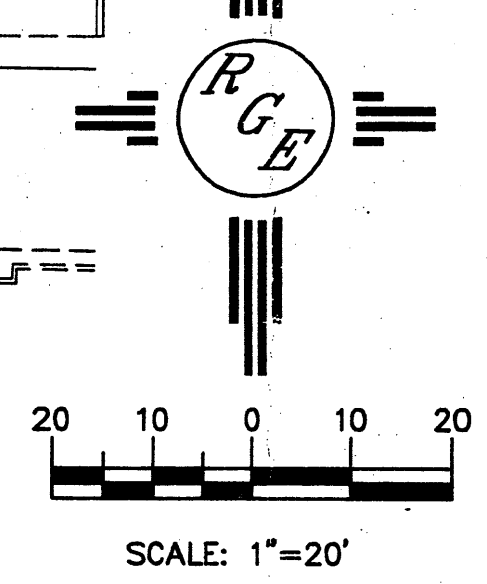


| | | |
|-----------------|--|---------------------|
| ENGINEER'S SEAL | HB | DRAWN BY WCVJ |
| | SITE PLAN FOR BUILDING PERMIT <i>Rio Grande Engineering</i> 1606 CENTRAL AVENUE SUITE 201 ALBUQUERQUE, NM 87106 (505) 872-0999 | DATE 7-28-09 |
| | | 2010-L10017-4-22-09 |
| | | SHEET # 1 |
| | | JOB # 2910 |

EROSION CONTROL NOTES:

1. CONTRACTOR IS RESPONSIBLE FOR OBTAINING A TOPSOIL DISTURBANCE PERMIT PRIOR TO BEGINNING WORK.
2. CONTRACTOR IS RESPONSIBLE FOR MAINTAINING RUN-OFF ON SITE DURING CONSTRUCTION.
3. CONTRACTOR IS RESPONSIBLE FOR CLEANING ALL SEDIMENT THAT GETS INTO EXISTING RIGHT-OF-WAY.
4. REPAIR OF DAMAGED FACILITIES AND CLEANUP OF SEDIMENT ACCUMULATIONS ON ADJACENT PROPERTIES AND IN PUBLIC FACILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR.
5. ALL EXPOSED EARTH SURFACES MUST BE PROTECTED FROM WIND AND WATER EROSION PRIOR TO FINAL ACCEPTANCE OF ANY PROJECT.

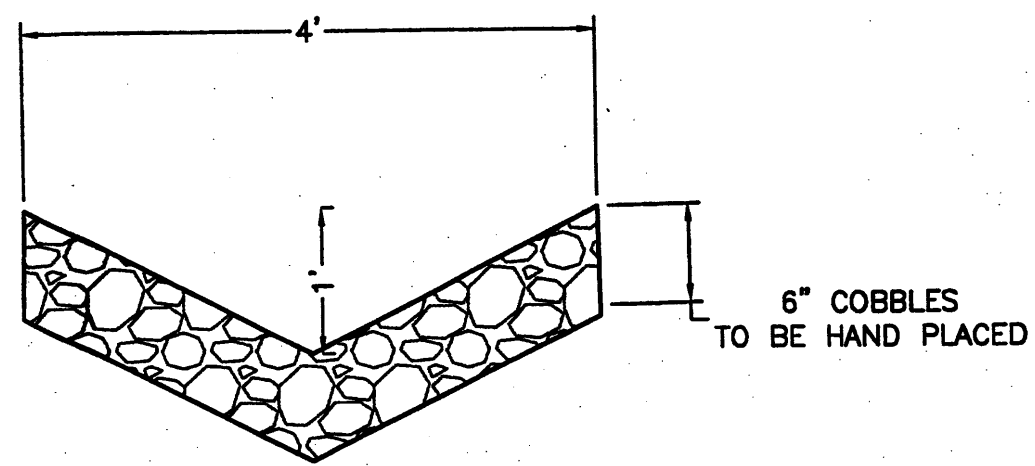


COBBLE SWALE DETAIL
NTS

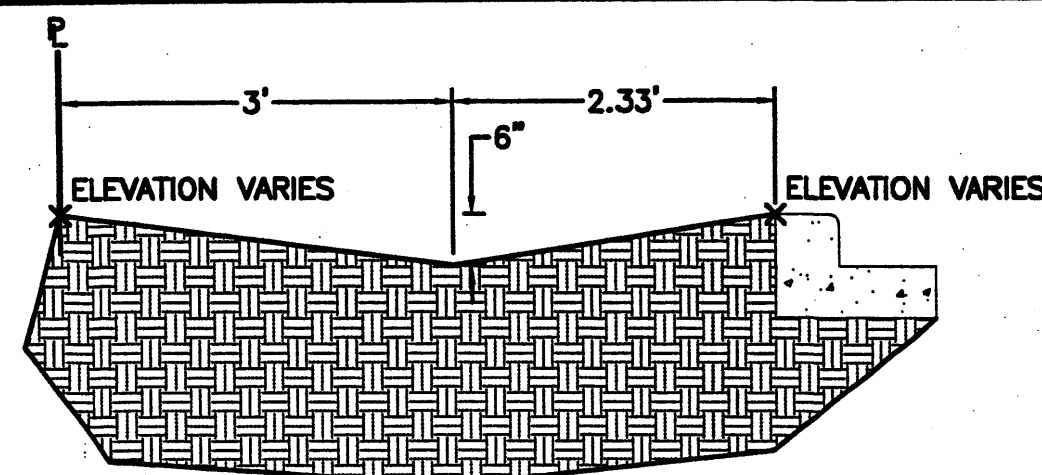

SECTION A-A
NTS

CAUTION:

EXISTING UTILITIES ARE NOT SHOWN. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO CONDUCT ALL NECESSARY FIELD INVESTIGATIONS PRIOR TO ANY EXCAVATION TO DETERMINE THE ACTUAL LOCATION OF UTILITIES & OTHER IMPROVEMENTS.

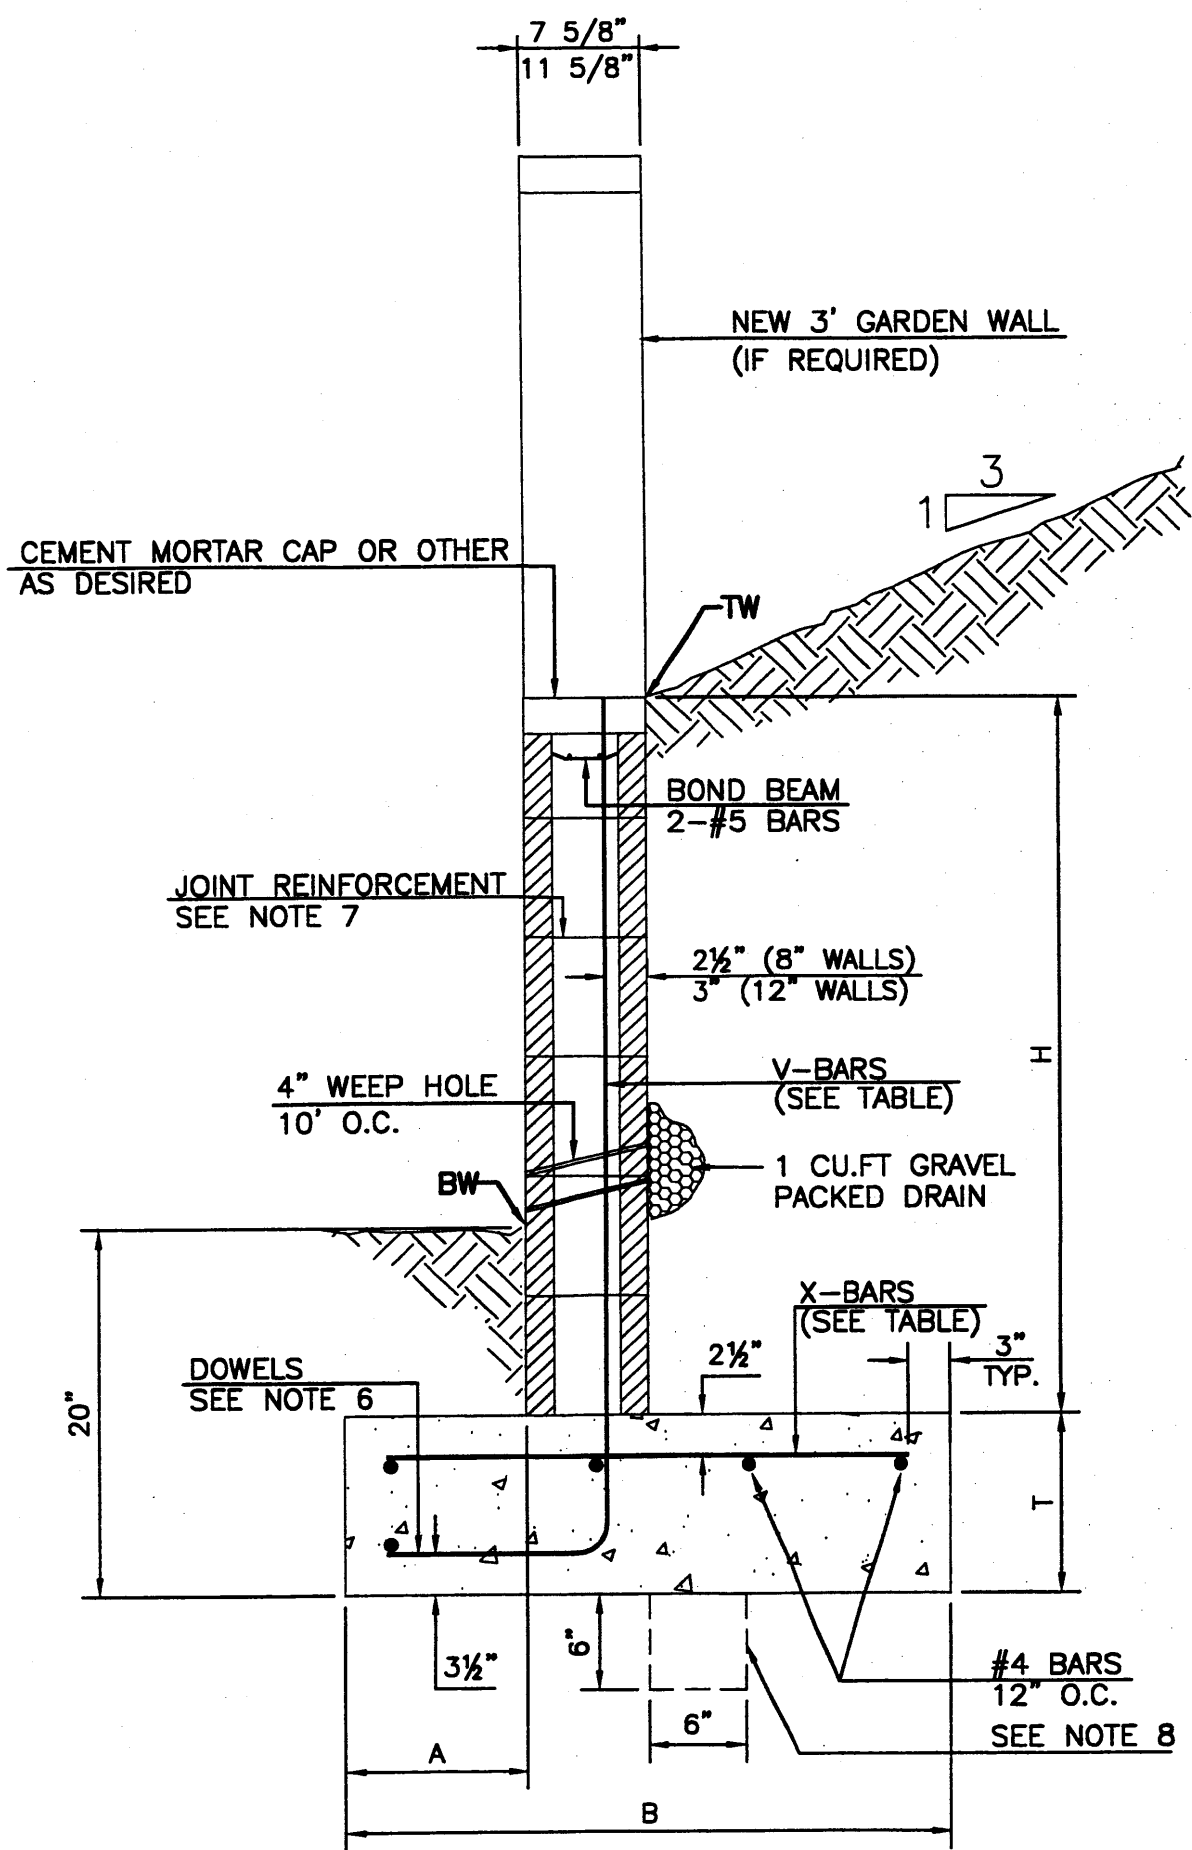

RETAINING WALL DETAIL
NTS

8 INCH REINFORCED CONCRETE MASONRY WALL




| H | A | B | T | V-BARS | X-BARS |
|---------|-----|---------|-----|--------------|--------------|
| ft.-in. | in. | ft.-in. | in. | | |
| 3'-4" | 8" | 2'-6" | 10" | #4 @32" O.C. | #4 @32" O.C. |
| 4'-0" | 10" | 2'-10" | 10" | #4 @32" O.C. | #4 @32" O.C. |
| 4'-8" | 12" | 3'-6" | 12" | #4 @24" O.C. | #4 @24" O.C. |
| 5'-4" | 14" | 3'-10" | 12" | #4 @16" O.C. | #4 @16" O.C. |
| 6'-0" | 16" | 4'-4" | 12" | #4 @16" O.C. | #4 @16" O.C. |
| 6'-8" | 18" | 4'-10" | 14" | #5 @16" O.C. | #5 @16" O.C. |

12 INCH REINFORCED CONCRETE MASONRY WALL

| H | A | B | T | V-BARS | X-BARS |
|---------|-----|---------|-----|--------------|--------------|
| ft.-in. | in. | ft.-in. | in. | | |
| 5'-4" | 14" | 3'-8" | 10" | #4 @24" O.C. | #4 @24" O.C. |
| 6'-0" | 15" | 4'-2" | 12" | #4 @16" O.C. | #4 @16" O.C. |
| 6'-8" | 16" | 4'-6" | 12" | #5 @24" O.C. | #5 @24" O.C. |
| 7'-4" | 18" | 4'-10" | 12" | #6 @16" O.C. | #6 @16" O.C. |
| 8'-0" | 20" | 5'-4" | 12" | #7 @24" O.C. | #7 @24" O.C. |

GENERAL NOTES:

1. ALL CONCRETE IS TO BE 4000 PSI @ 28 DAYS.
2. MINIMUM COMPACTION UNDER FOOTINGS IS TO BE 95% PER ASTM D 1557 FOR A DEPTH OF 12" MOISTURE CONTENT IS TO BE ± 2.0%.
3. BACKFILL AGAINST WALLS IS TO BE HAND-PLACED AND COMPACTED.
4. ALL BARS ARE TO BE GRADE 60, ASTM 615.
5. TRUSS TYPE DUR-O-WALL EVERY OTHER COURSE.
6. DOWELS SHALL BE AT LEAST EQUAL IN SIZE AND SPACING TO V-BARS, SHALL PROJECT A MINIMUM OF 30 BAR DIA. INTO THE FILLED BLOCK CORES, AND SHALL EXTEND TO THE TOE OF THE FOOTING.
7. JOINT REINFORCEMENT CONSISTING OF 9GA. LONGITUDINAL WIRE AND 3/16" CROSS RODS SHALL BE PROVIDED AT 8" CENTERS VERTICALLY.
8. PROVIDE KEY FOR 8" AND 12" WALLS WHERE H EXCEEDS 6'-0"
9. USE EITHER EXPANSION JOINTS ON 20' CENTERS OR PILLASTERS EVERY 16'.

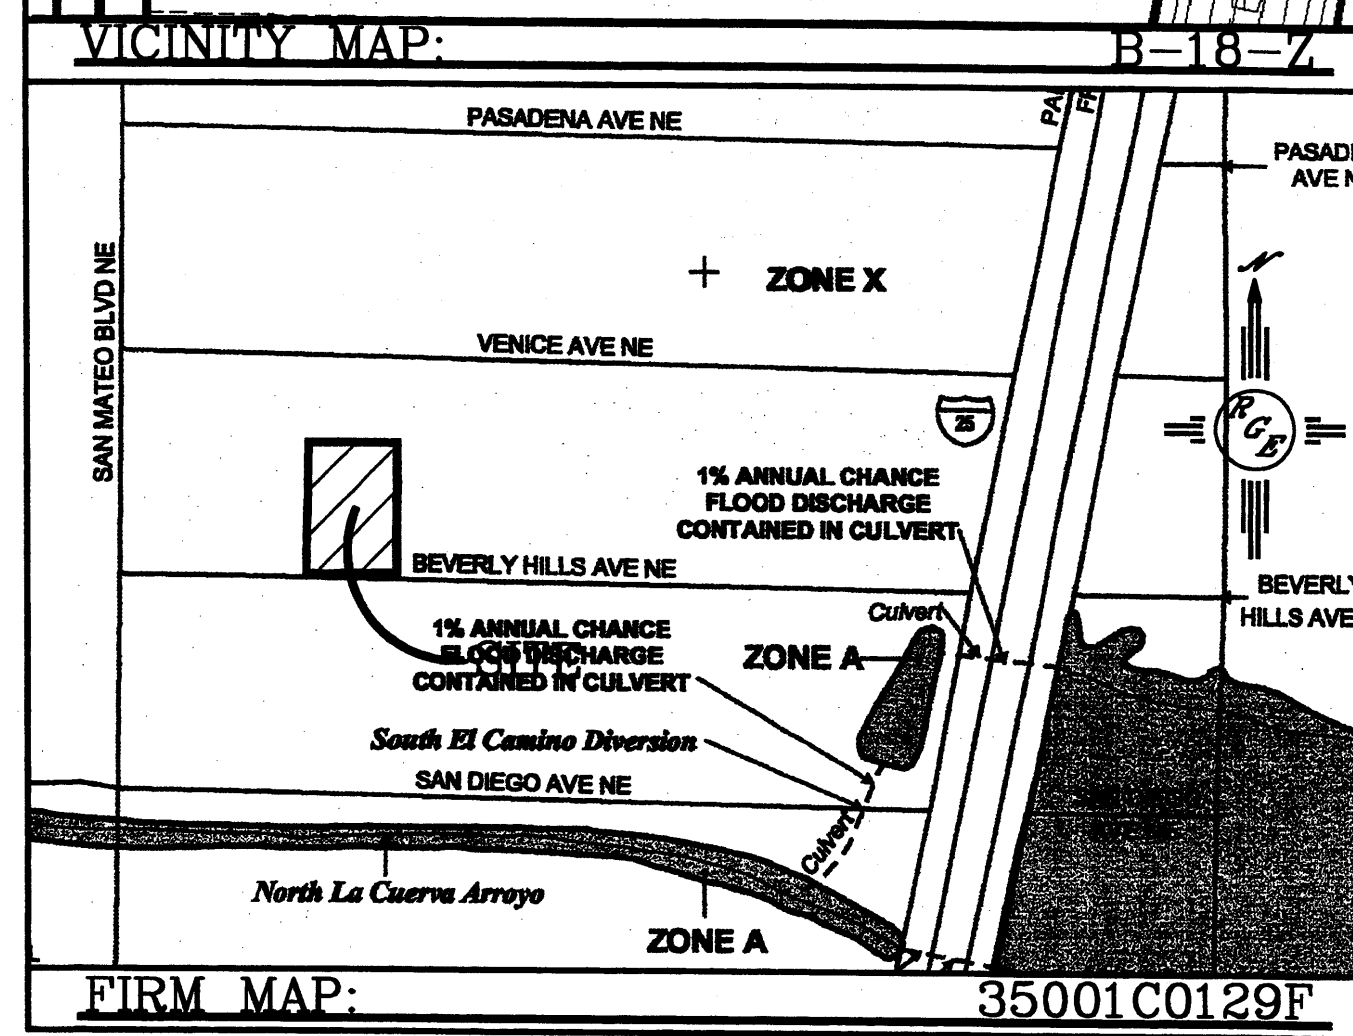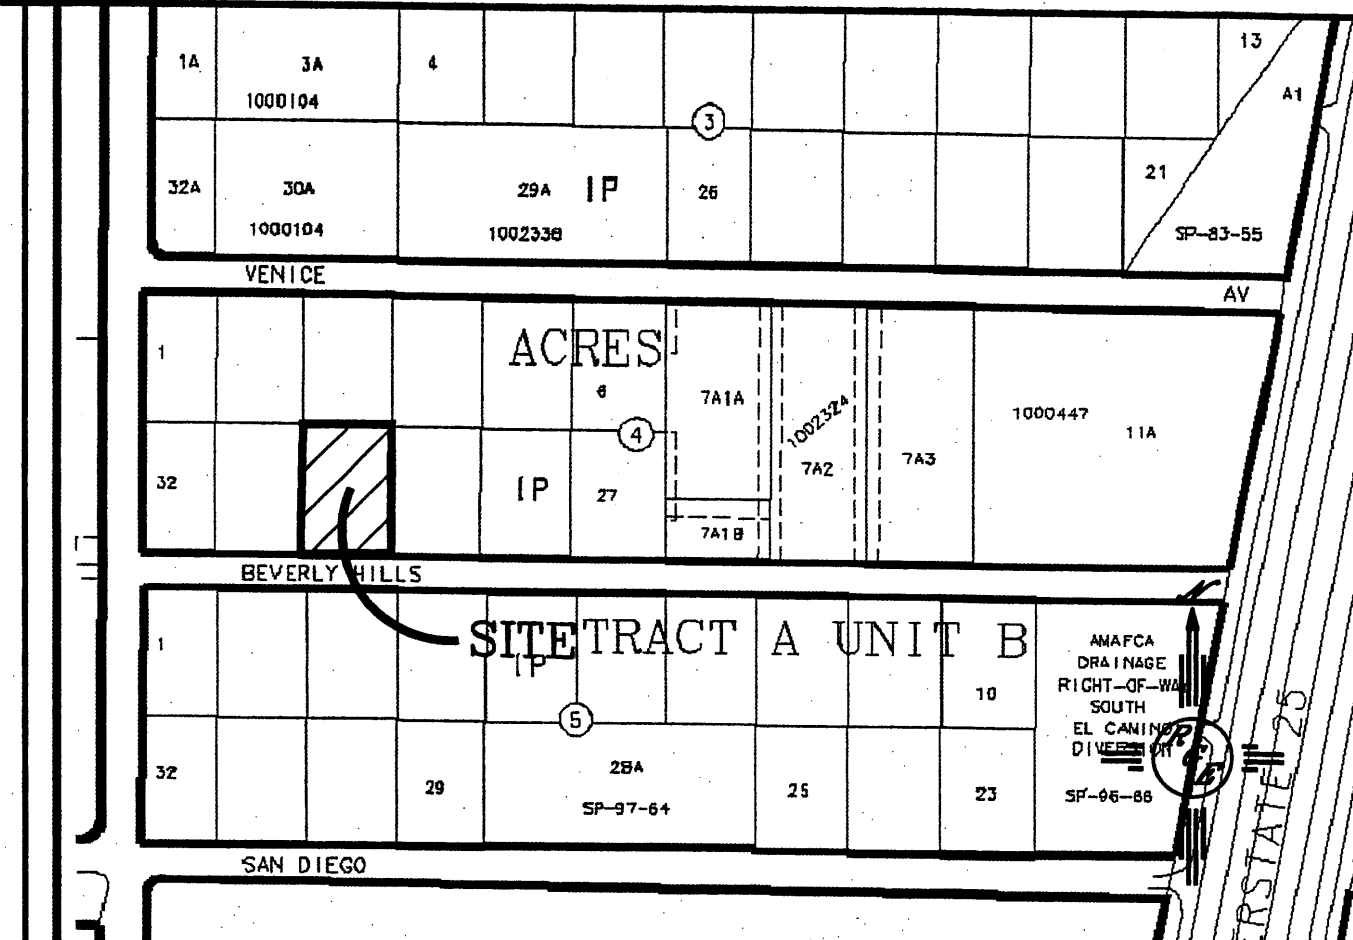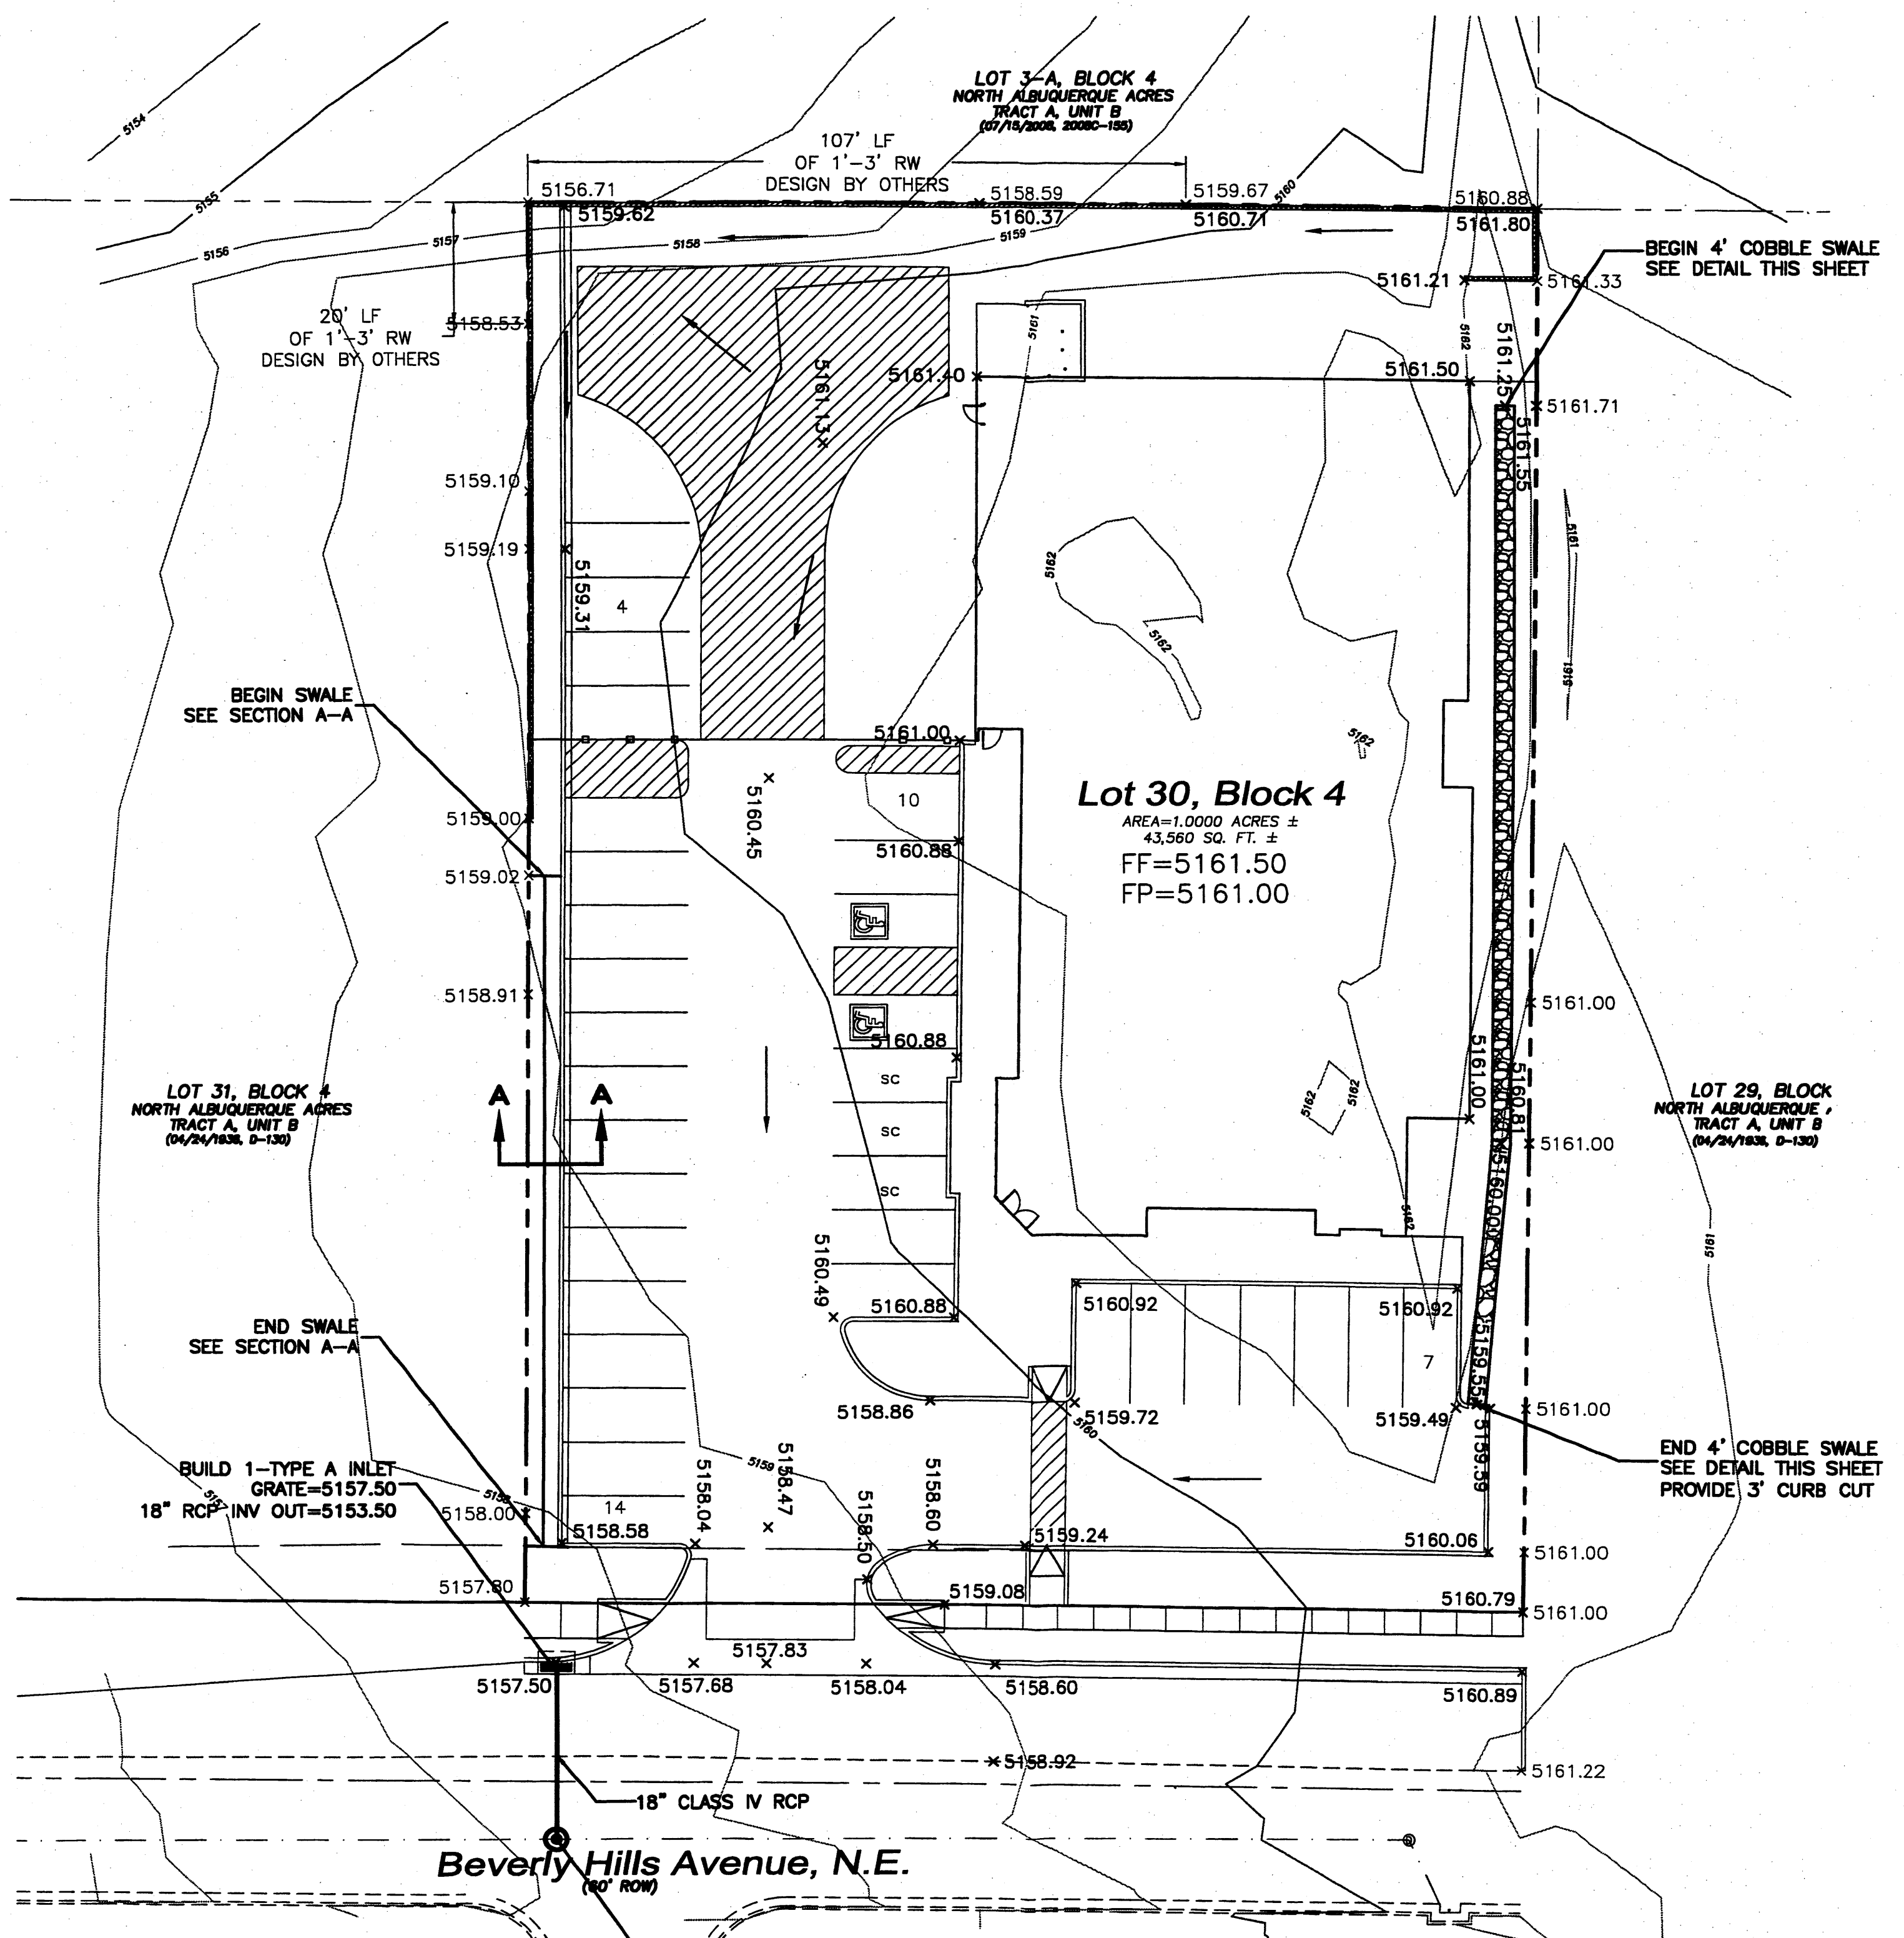


LEGAL DESCRIPTION:
Lot 30, Block 4 North Albuquerque Acres, Tract A, Unit B

NOTES:
1. ALL SPOT ELEVATIONS REPRESENT FLOWLINE ELEVATION UNLESS OTHERWISE NOTED.

LEGEND

| | |
|--|------------------------------|
| | EXISTING STORM SEWER MANHOLE |
| | EXISTING STORM SEWER INLET |
| | EXISTING STORM SEWER LINE |
| | PROPOSED SNGL "A" INLET |
| | PROPOSED STORM SEWER LINE |
| | EXISTING CURB & GUTTER |
| | PROPOSED CURB & GUTTER |
| | BOUNDARY LINE |
| | EXISTING BOUNDARY LINE |
| | PROPOSED SIDEWALK |
| | PROPOSED PERIMETER WALL |
| | PROPOSED RETAINING WALL |
| | EXISTING CONTOUR |
| | EXISTING INDEX CONTOUR |
| | FLOW ARROW |
| | EXISTING SPOT ELEVATION |
| | PROPOSED SPOT ELEVATION |
| | CENTERLINE |
| | RIGHT-OF-WAY |

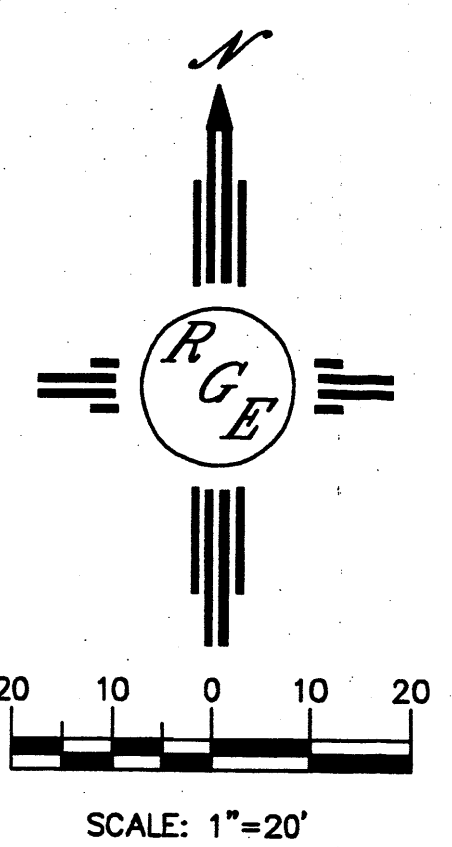


| | | |
|-----------------|---|---------------------|
| ENGINEER'S SEAL | HB | DRAWN BY WCUJ |
| | GRADING AND DRAINAGE PLAN | DATE 5-14-09 |
| | | 2010-LAYOUT-4-22-09 |
| | Rio Grande Engineering 1608 CENTRAL AVENUE SUITE 201 ALBUQUERQUE, NM 87106 (505) 872-0999 | SHEET # 3 |
| | | JOB # 2910 |


LOT 3-A, BLOCK 4
NORTH ALBUQUERQUE ACRES
TRACT A, UNIT B
(07/19/2008, 2008C-155)

PLANT LEGEND








All plants shall be sized per American Standard for Nursery Stock. Installation size shall indicate the greater of height or spread. In cases where Type O plants have been pruned for rejuvenation, measurement should be by spread of roots rather than by the height of the plant.

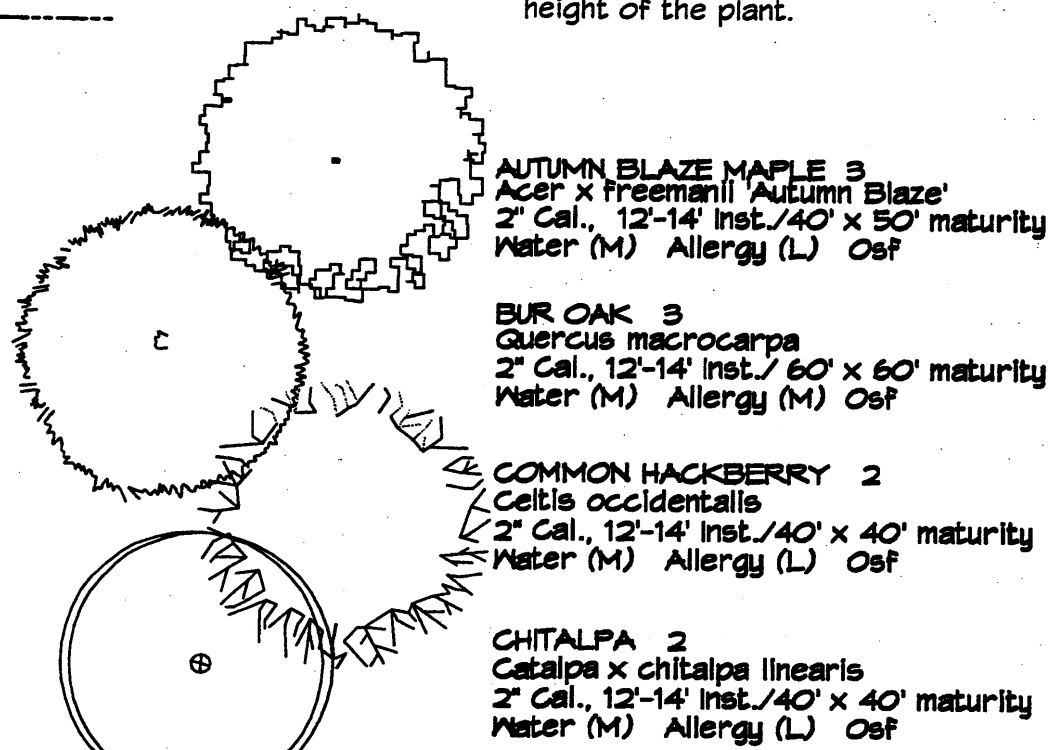


SHRUBS/ORNAMENTAL TREES
FIFTEEN GAL

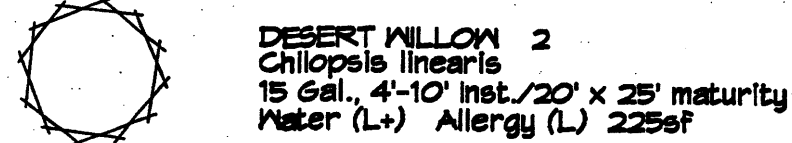


SHRUBS/ORNAMENTAL GRASSES
FIVE GAL

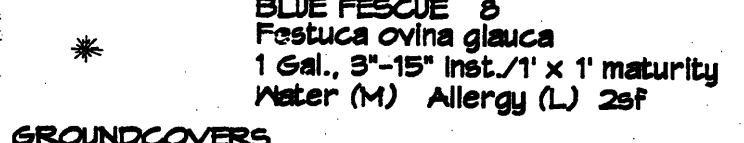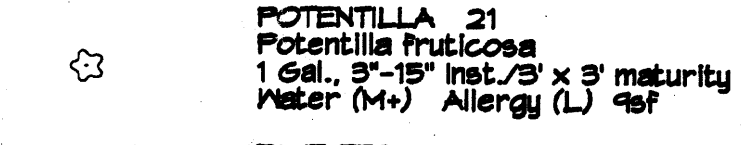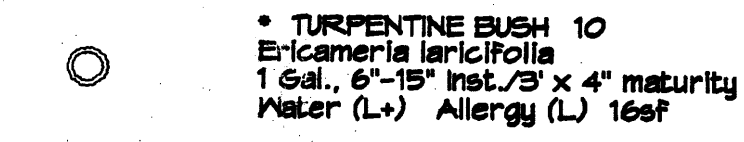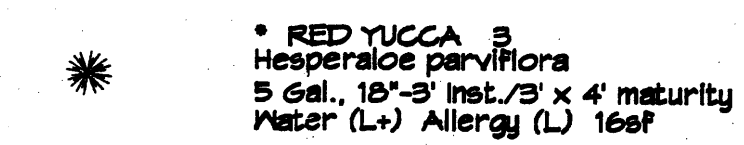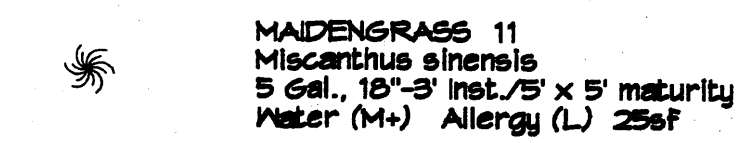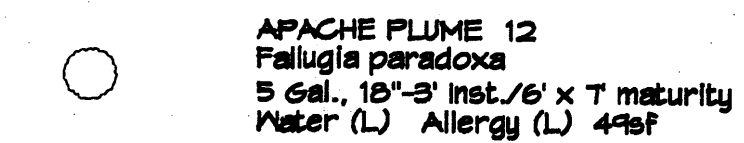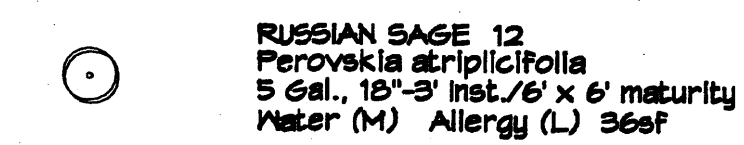

GROUNDCOVERS

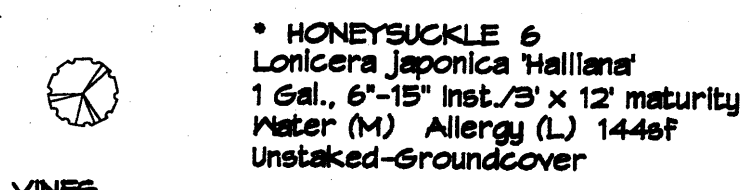

VINES

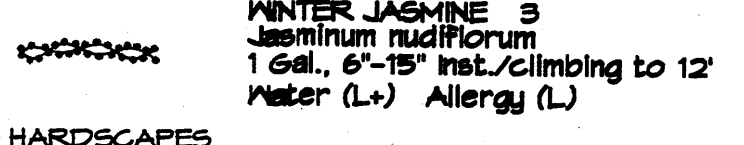

HARDSCAPES



* DENOTES EVERGREEN PLANT MATERIAL

LANDSCAPE NOTES:
Landscape maintenance shall be the responsibility of the Property Owner. The Property Owner shall maintain street trees in a living, healthy, and attractive condition.

It is the intent of this plan to comply with the City of Albuquerque Water Conservation Landscaping and Water Waste Ordinance planting restriction approach. Approval of this plan does not constitute or imply exemption from water waste provisions of the Water Conservation Landscaping and Water Waste Ordinance.

Water management is the sole responsibility of the Property Owner. All landscaping will be in conformance with the City of Albuquerque Zoning Code, Street Tree Ordinance, Pollen Ordinance, and Water Conservation Landscaping and Water Waste Ordinance. In general, water conservative, environmentally sound landscape principles will be followed in design and installation.

Plant beds shall achieve 75% live ground cover at maturity.

Santa Fe Brown Gravel over Filter Fabric to a minimum depth of 3" shall be placed in all landscape areas which are not designated to receive native seed.

IRRIGATION NOTES:
Irrigation shall be a complete underground system with Trees to receive 1 Netafim spiral (50' length) with 3 loops at a final radius of 4.5' from tree trunk, pinned in place. Netafim shall have emitters 12" o.c. with a flow of .6 gph. Shrubs to receive (2) 1.0 GPH Drip Emitters. Drip and Bubbler systems to be tied to 1/2" poly pipe with flush caps at each end. Trees and shrubs shall be on separate valves.


Run time per each shrub drip valve will be approximately 15 minutes per day. Tree drip valve shall run 1.5 hours, 3 times per week. Run time will be adjusted according to the season.

Point of connection for irrigation system is unknown at current time and will be coordinated in the field. Irrigation will be operated by automatic controller.

Location of controller to be field determined and power source for controller to be provided by others.



Irrigation maintenance shall be the responsibility of the Property Owner.

Water and Power source shall be the responsibility of the Developer/Builder.

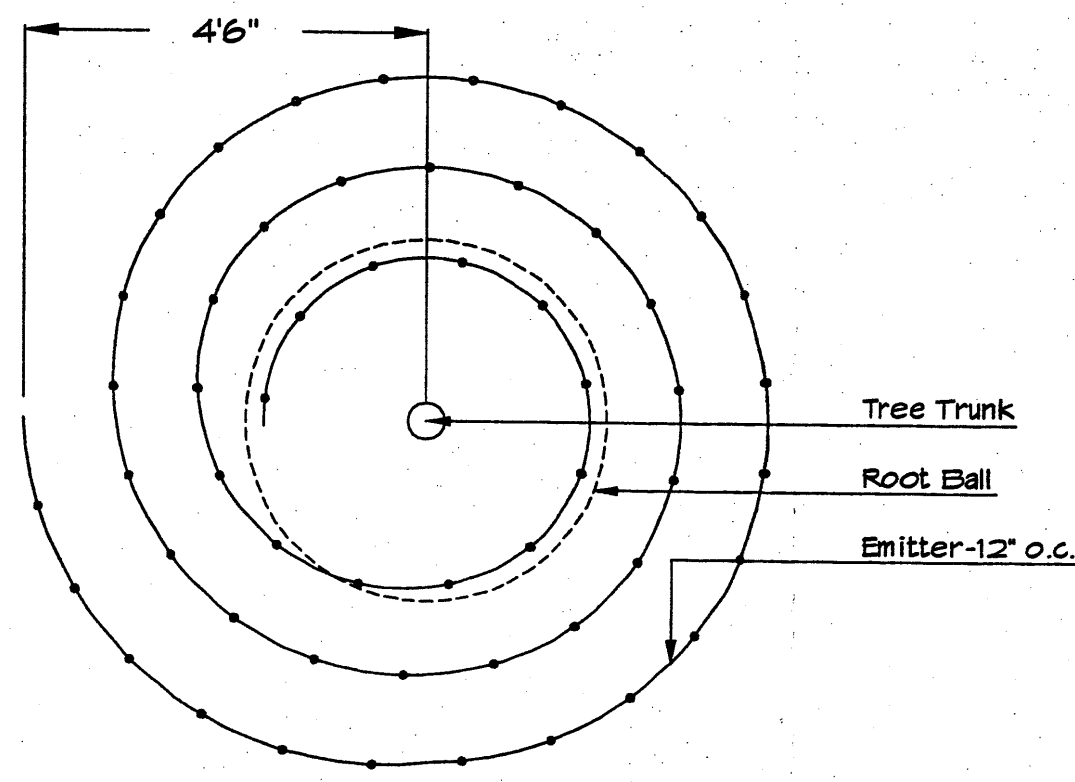


Netafim Spiral Detail

GRAVEL ACCENT DETAIL

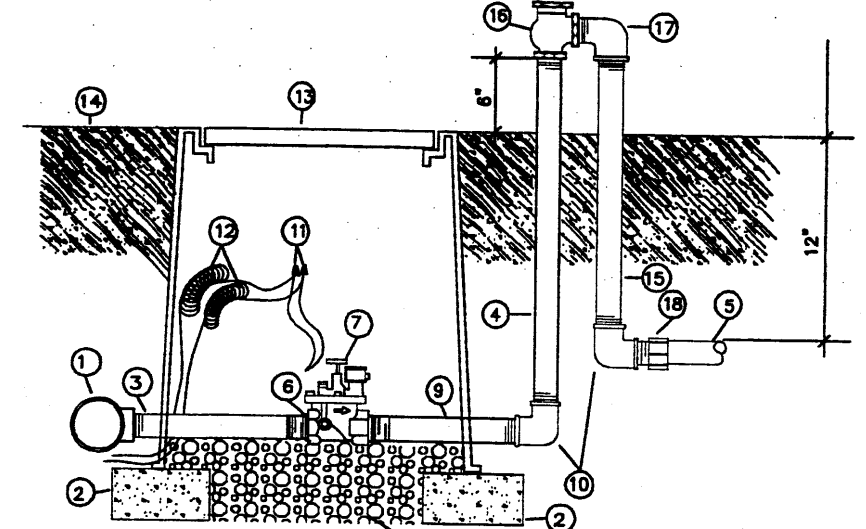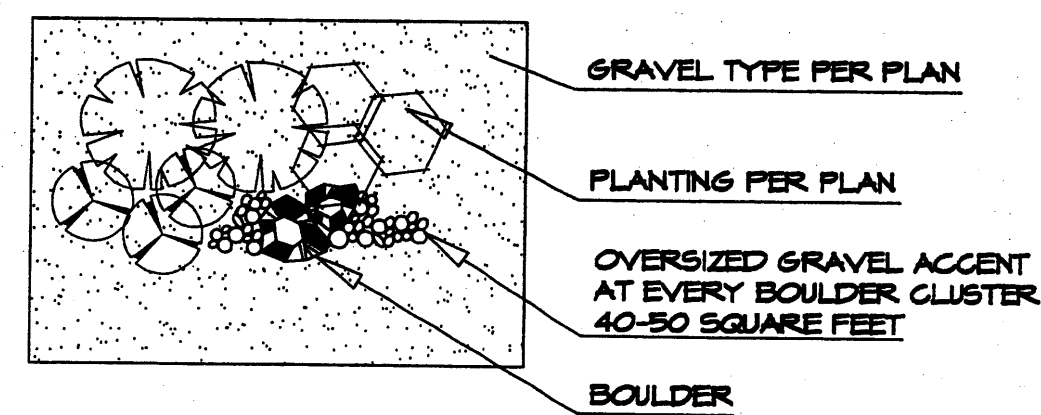

- 1 MAINLINE FITTING
- 2 CHU BLOCK
- 3 GALVANIZED NIPPLE
- 4 24" TO 36" GALVANIZED NIPPLE
- 5 LATERAL PIPE
- 6 REDUCER BUSHING
- 7 AUTOMATIC VALVE (SEE LEGEND)
- 8 GRAVEL
- 9 GALVANIZED NIPPLE
- 10 GALVANIZED ELBOW
- 11 WATERPROOF WIRE CONNECTOR
- 12 WIRE EXPANSION LOOPS
- 13 VALVE BOX
- 14 FINISH GRADE
- 15 GALVANIZED NIPPLE - 18" TO 24" LENGTH
- 16 ATMOSPHERIC VACUUM BREAKER
- 17 GALVANIZED STREET ELL
- 18 TOE NIPPLE OR MALE ADAPTER
- 19 GALVANIZED NIPPLE


AUTOMATIC VALVE W/ ATMOSPHERIC VACUUM BREAKER

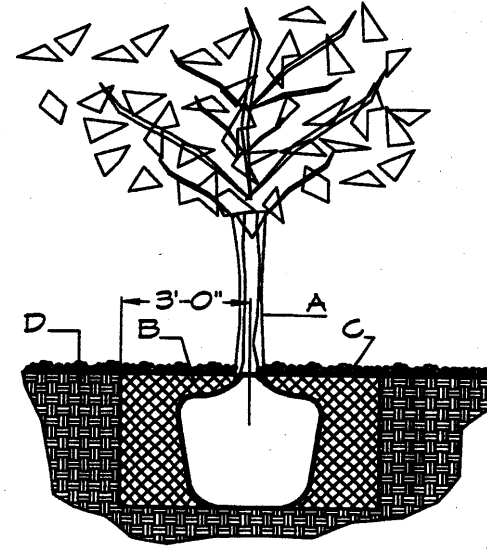

TREE PLANTING DETAIL

GENERAL NOTES:
1. ROOTBALL SHALL BE PLACED ON UNDISTURBED SOIL TO PREVENT TREE FROM SETTLING.
2. TOP OF ROOTBALL INDICATED LEVEL AT WHICH TREE WAS GROWN AND DUG; THIS REPRESENTS THE LEVEL AT WHICH THE TREE SHOULD BE INSTALLED; THAT LEVEL MAY BE EXCEEDED BY ONLY A ONE INCH LAYER OF SOIL.
3. PRIOR TO BACKFILLING TREE, ALL WIRE, ROPE AND SYNTHETIC MATERIALS SHALL BE REMOVED FROM THE TREE AND THE PLANTING PIT.
4. PRIOR TO BACKFILLING ALL BURLAP SHALL BE CUT AWAY EXCEPT FROM BOTTOM OF THE ROOTBALL.

CONSTRUCTION NOTES:
A. TREE
B. BACKFILL WITH EXISTING SOIL.
C. 3" DEPTH OF GRAVEL MULCH.
D. UNDISTURBED SOIL.

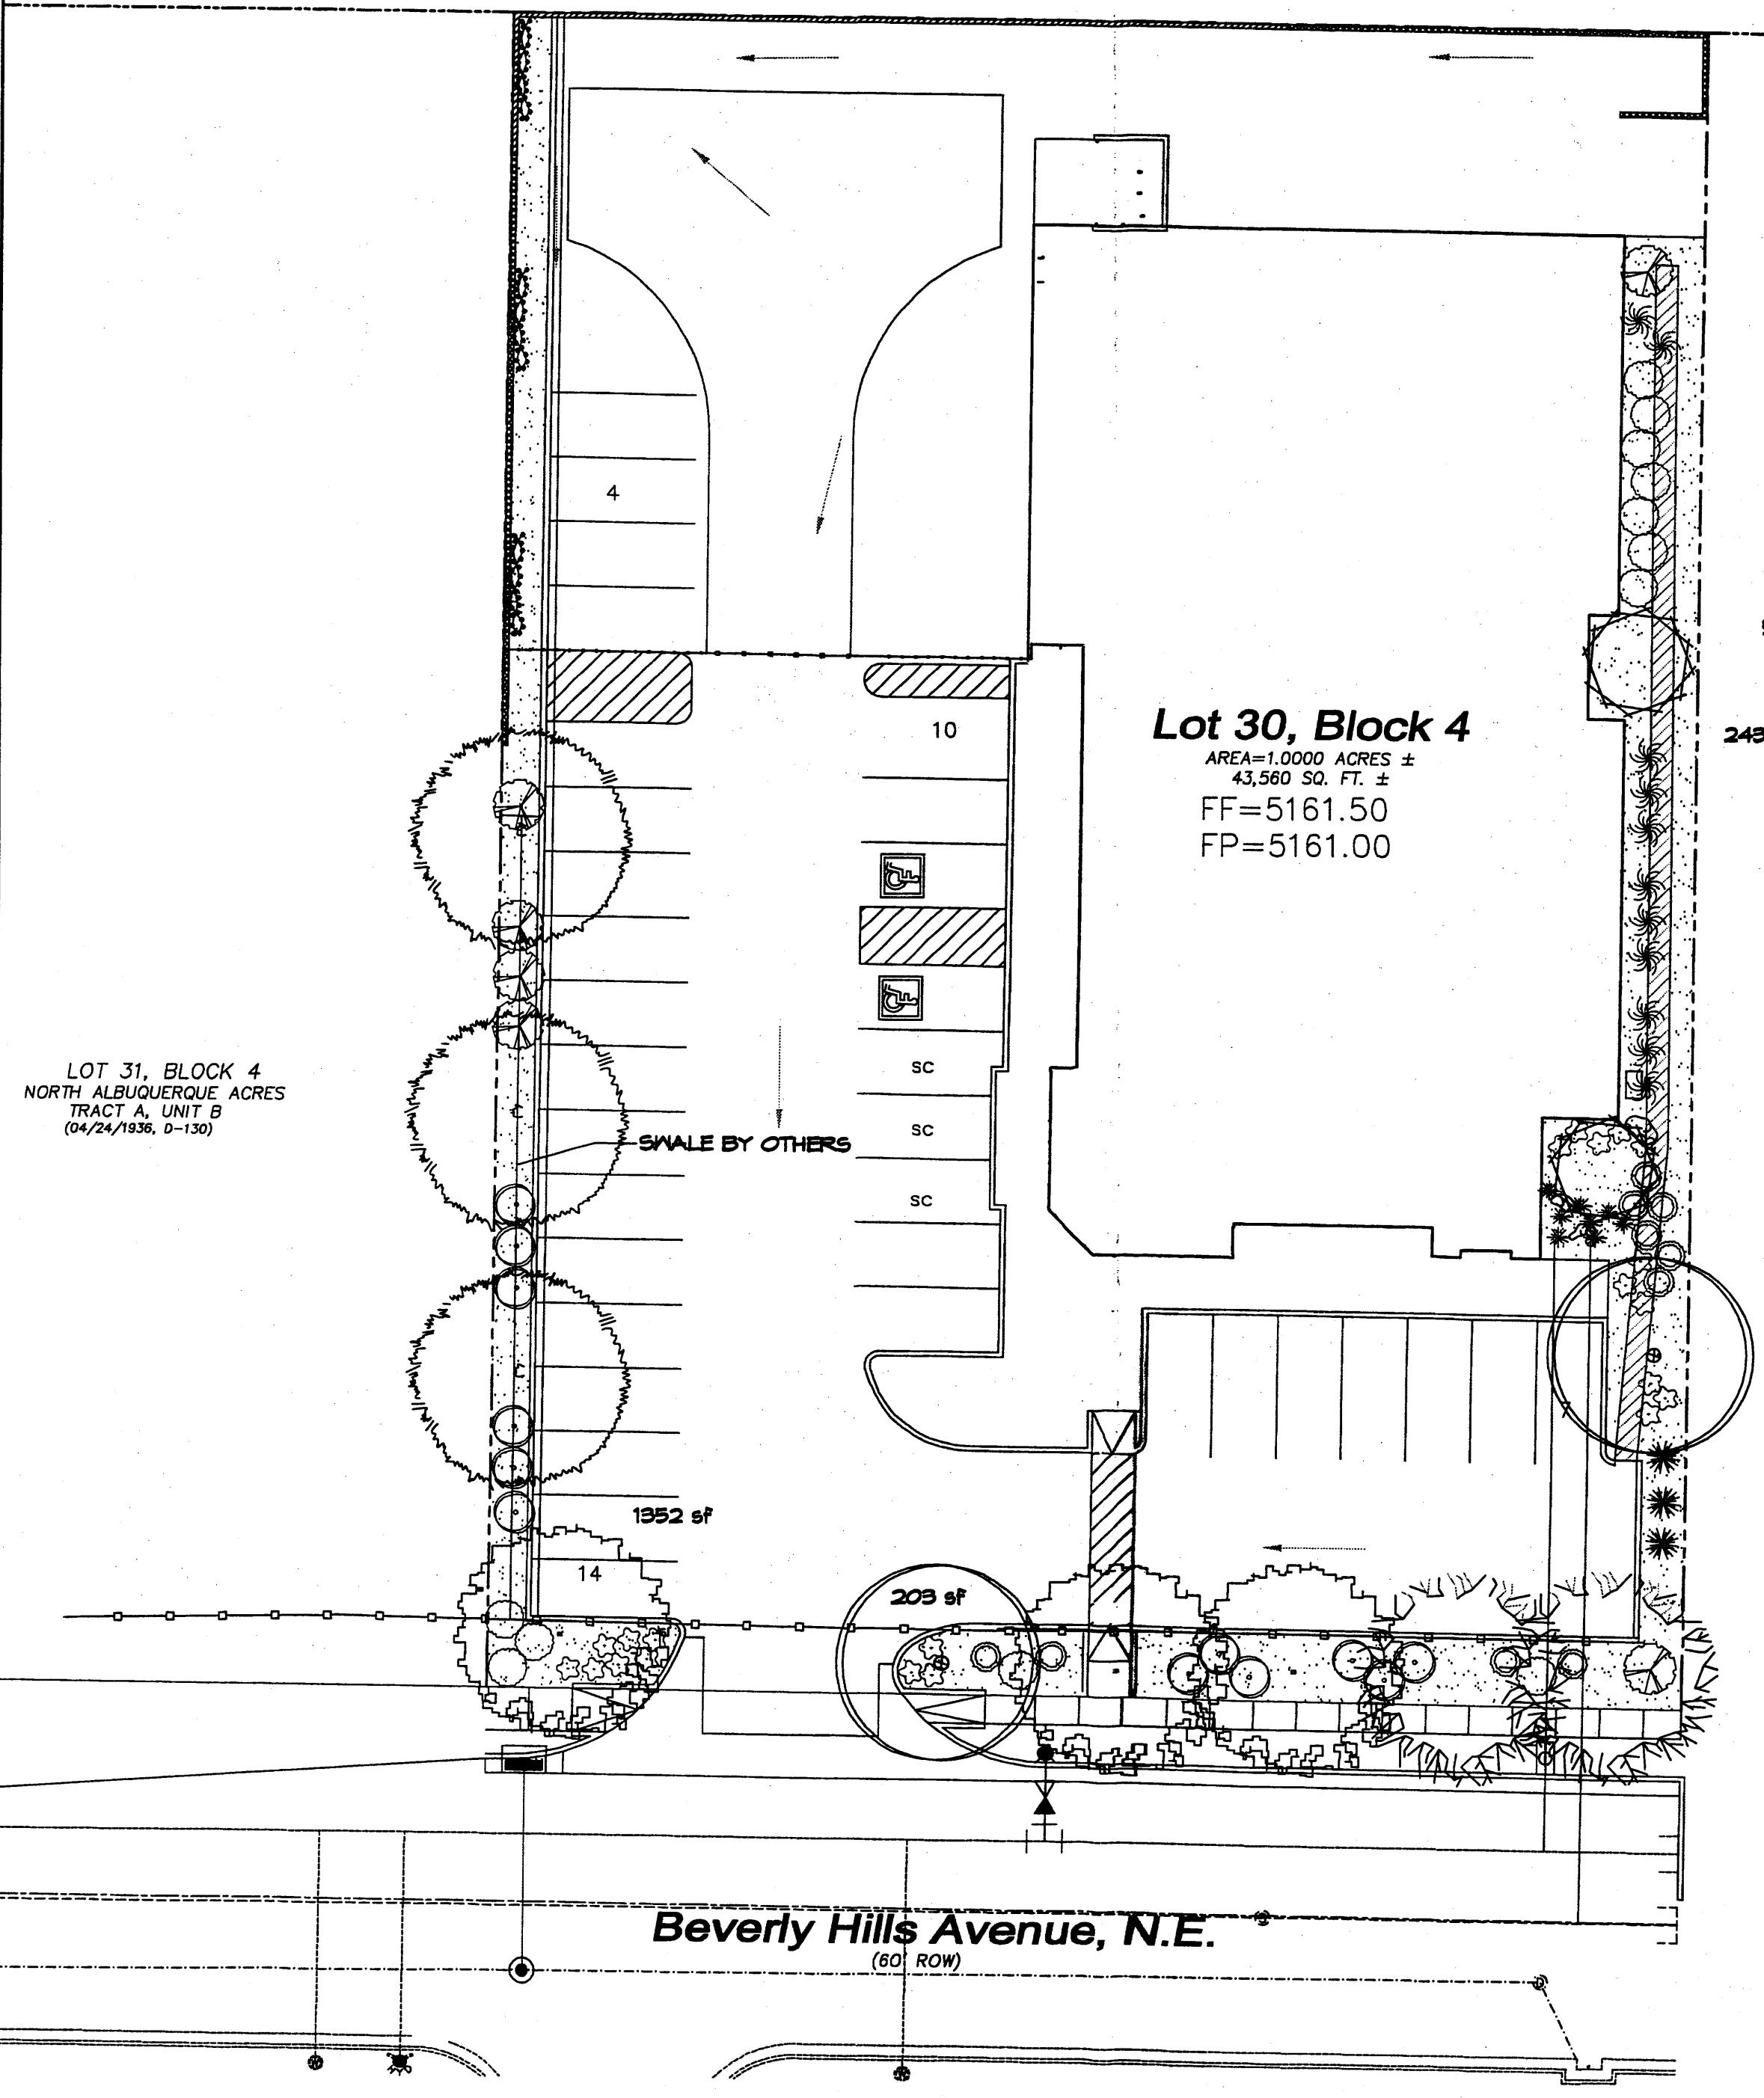

LANDSCAPE CALCULATIONS

| | | |
|---|------------|-------------|
| TOTAL LOT AREA | 43560 | square feet |
| TOTAL BUILDINGS AREA | 10716 | square feet |
| NET LOT AREA | 32784 | square feet |
| LANDSCAPE REQUIREMENT | 15% | |
| TOTAL LANDSCAPE REQUIREMENT | 4918 | square feet |
| TOTAL BED PROVIDED | 4494 | square feet |
| GROUNDCOVER REQ. | 75% | square feet |
| TOTAL GROUNDCOVER REQUIREMENT | 3371 | square feet |
| TOTAL GROUNDCOVER PROVIDED | 3470 (71%) | square feet |
| TOTAL SOD AREA (max. 20% of landscape required) | 0 | square feet |
| TOTAL LANDSCAPE PROVIDED | 4494 (14%) | square feet |

STREET TREE REQUIREMENTS - Minimum 2" Caliper

Street trees required under the City of Albuquerque Street Tree Ordinance are as follows:
Name of Street: Beverly Hills Ave. NE
Required # 6 Provided # 6



PARKING LOT TREE REQUIREMENTS - Minimum 2" Caliper

Shade trees required under the City of Albuquerque Parking Lot Tree Ordinance are as follows:
1 Shade tree per 10 spaces
Required # 4 Provided # 4

NOTE TO CLIENT:


Should The Hilltop not receive a grading and Drainage plan during the design process or the on-site grades differ from the grading and Drainage plan received, The Hilltop reserves the right to apply slope stabilization materials where the specified gravel will not be suitable. Gravel smaller than 2-4" cobblestone will not stay on a slope greater than 3:1. If the grades are greater than what was originally designed, we will request an in-field change-order to lay cobblestone or rip-rap, in lieu of the specified gravel, to stabilize the slope. All vegetative material shall remain per plan.

GRAPHIC SCALE

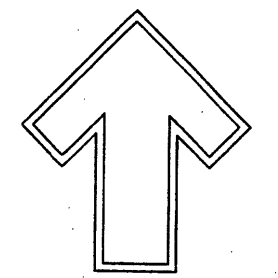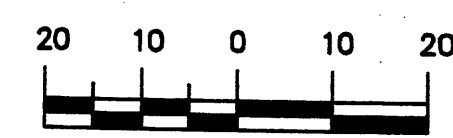


Cont. Lic. #26458
7809 Edith N.E.
Albuquerque, NM 87184
Ph. (505) 898-9690
Fax (505) 898-7737
cmj@hilltoplandscaping.com

LANDSCAPE ARCHITECT'S SEAL

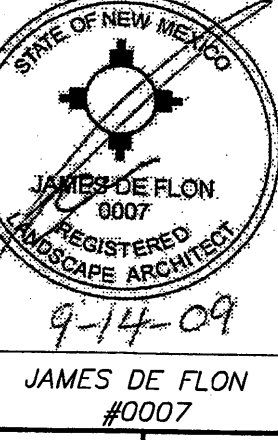


HB CONSTRUCTION OFFICE
1111 BEVERLY HILLS AVE. NE
ALBUQUERQUE, NM
LANDSCAPE PLAN

All creative ideas contained herein remain the property of The Hilltop Landscape Architects and this is an original design and must not be copied or copied unless applicable fees have been paid or job order placed.

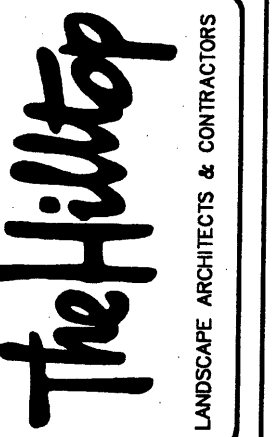

DRAWN BY: rmc
REVISION # 1
DATE 2/9-14-09

SHEET #
L1 OF L1

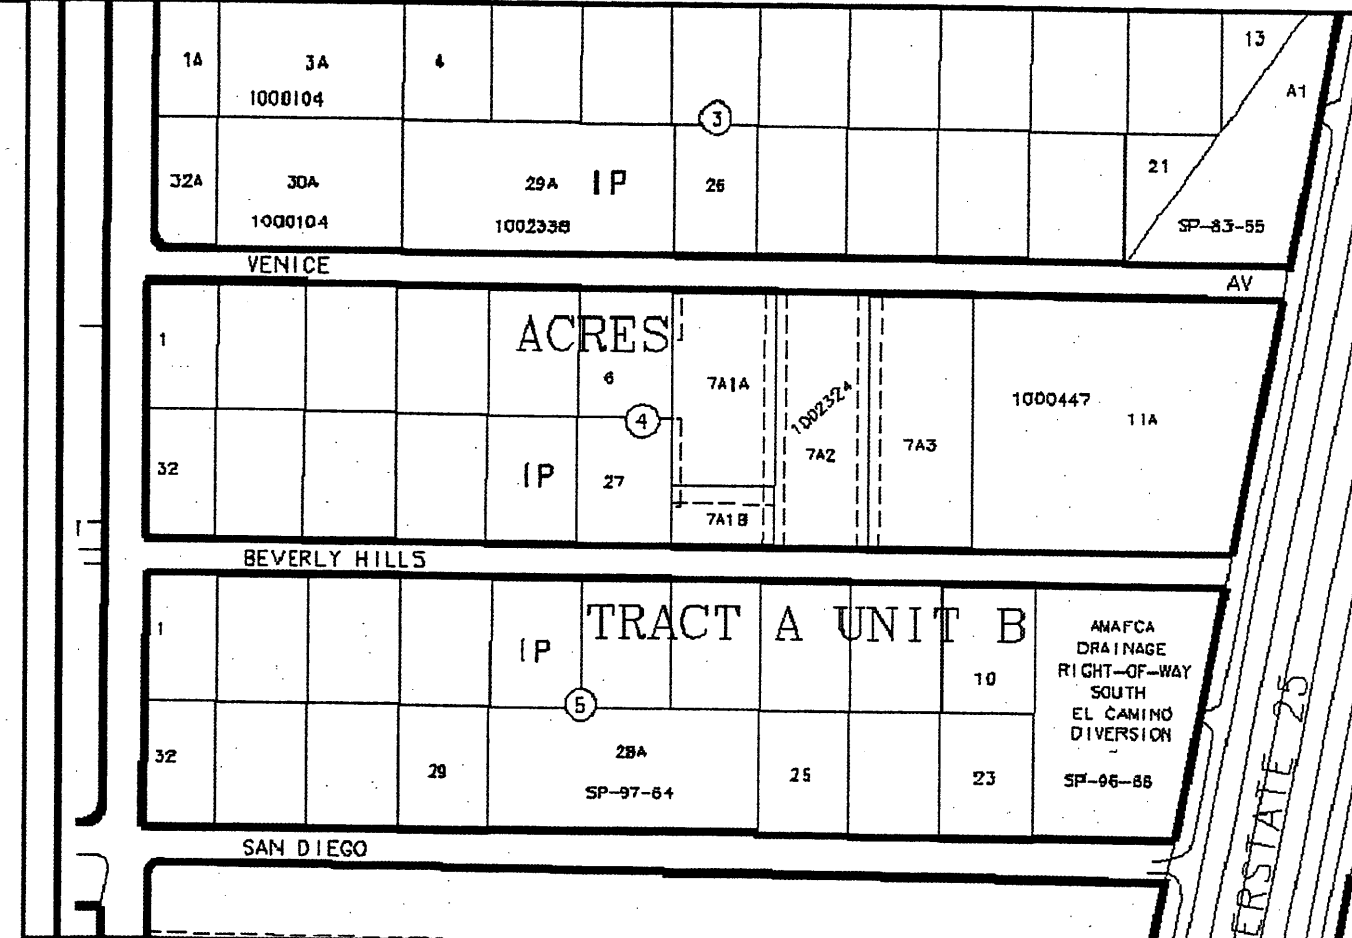

VICINITY MAP: B-18-7

LEGAL DESCRIPTION:
 Lot 30, Block 4 North Albuquerque Acres, Tract A, Unit B

LEGEND

| | |
|-------|------------------------|
| ===== | EXISTING CURB & GUTTER |
| ===== | PROPOSED CURB & GUTTER |
| ----- | BOUNDARY LINE |
| ----- | EXISTING BOUNDARY LINE |
| ----- | PROPOSED SIDEWALK |
| ----- | CENTERLINE |
| ----- | RIGHT-OF-WAY |

PARKING CALCULATIONS:

WAREHOUSE 1SP/ 2000 SQFT
 3,790 SQ.FT. / 2,000 = 2 SPACES

BUSINESS 1SP/ 200 SQ. FT.
 6,780 SQ.FT./ 200 = 34 SPACES

SUBTOTAL PARKING REQUIRED = 36 EACH
 - 10% REDUCTION FOR BEING 300FT FROM TRANSIT ROUTE SYSTEM

TOTAL SPACES REQUIRED 32
 H.C. SPACES REQUIRED 26-35 = 2 SPACES


LOT 3-A, BLOCK 4
 NORTH ALBUQUERQUE ACRES
 TRACT A, UNIT B
 (07/14/2008, 2008-108)

S89°25'31"E
 165.00'


Lot 30, Block 4
 AREA=1.000 ACRES ±
 43,560 SQ. FT. ±

LOT 29, BLOCK 4
 NORTH ALBUQUERQUE ACRES
 TRACT A, UNIT B
 (04/24/1938, 0-130)

LOT 31, BLOCK 4
 NORTH ALBUQUERQUE ACRES
 TRACT A, UNIT B
 (04/24/1938, 0-130)

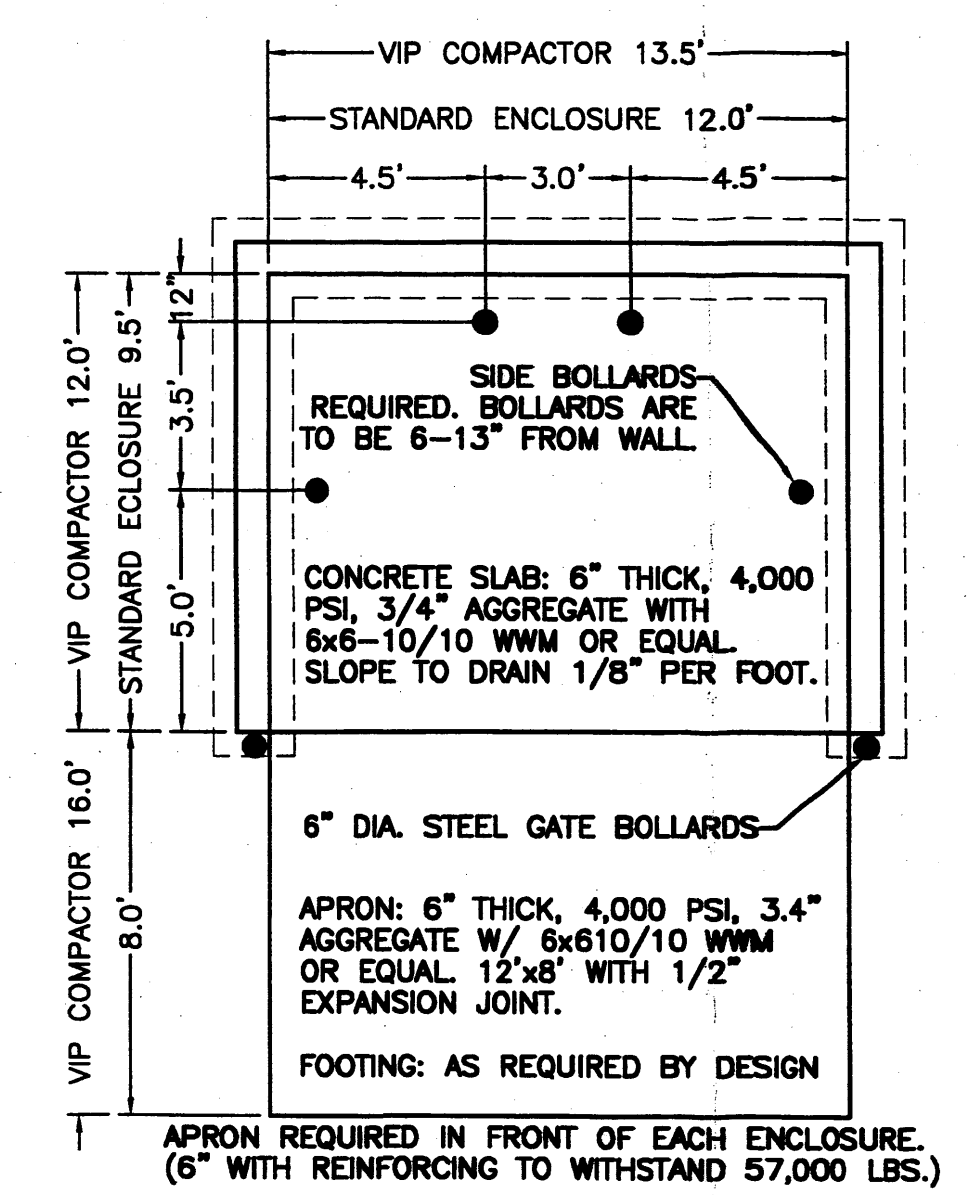



APRON REQUIRED IN FRONT OF EACH ENCLOSURE.
 (6" WITH REINFORCING TO WITHSTAND 57,000 LBS.)

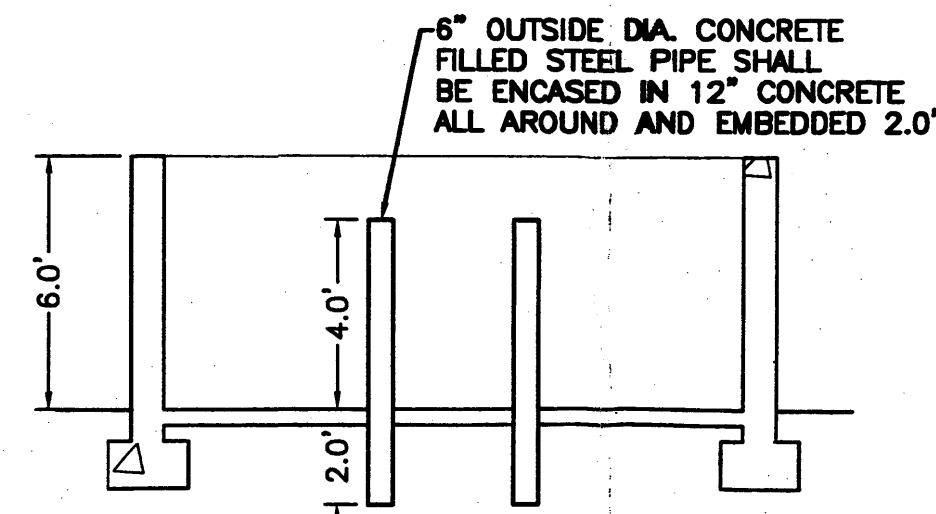


NOTE: THESE ARE THE MINIMUM REQUIREMENTS FOR TRASH ENCLOSURES. DESIGNS MAY VARY TO FIT THE SELECTED ENCLOSURE.

DUMPSTER ENCLOSURE DETAIL

NTS

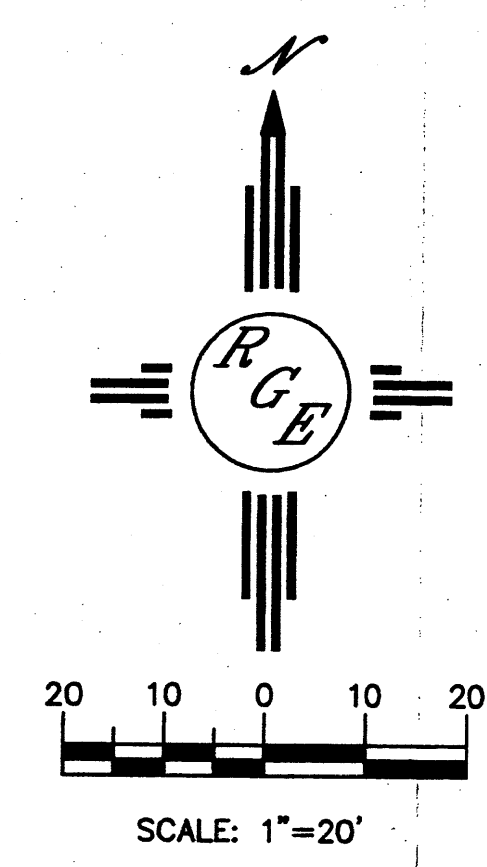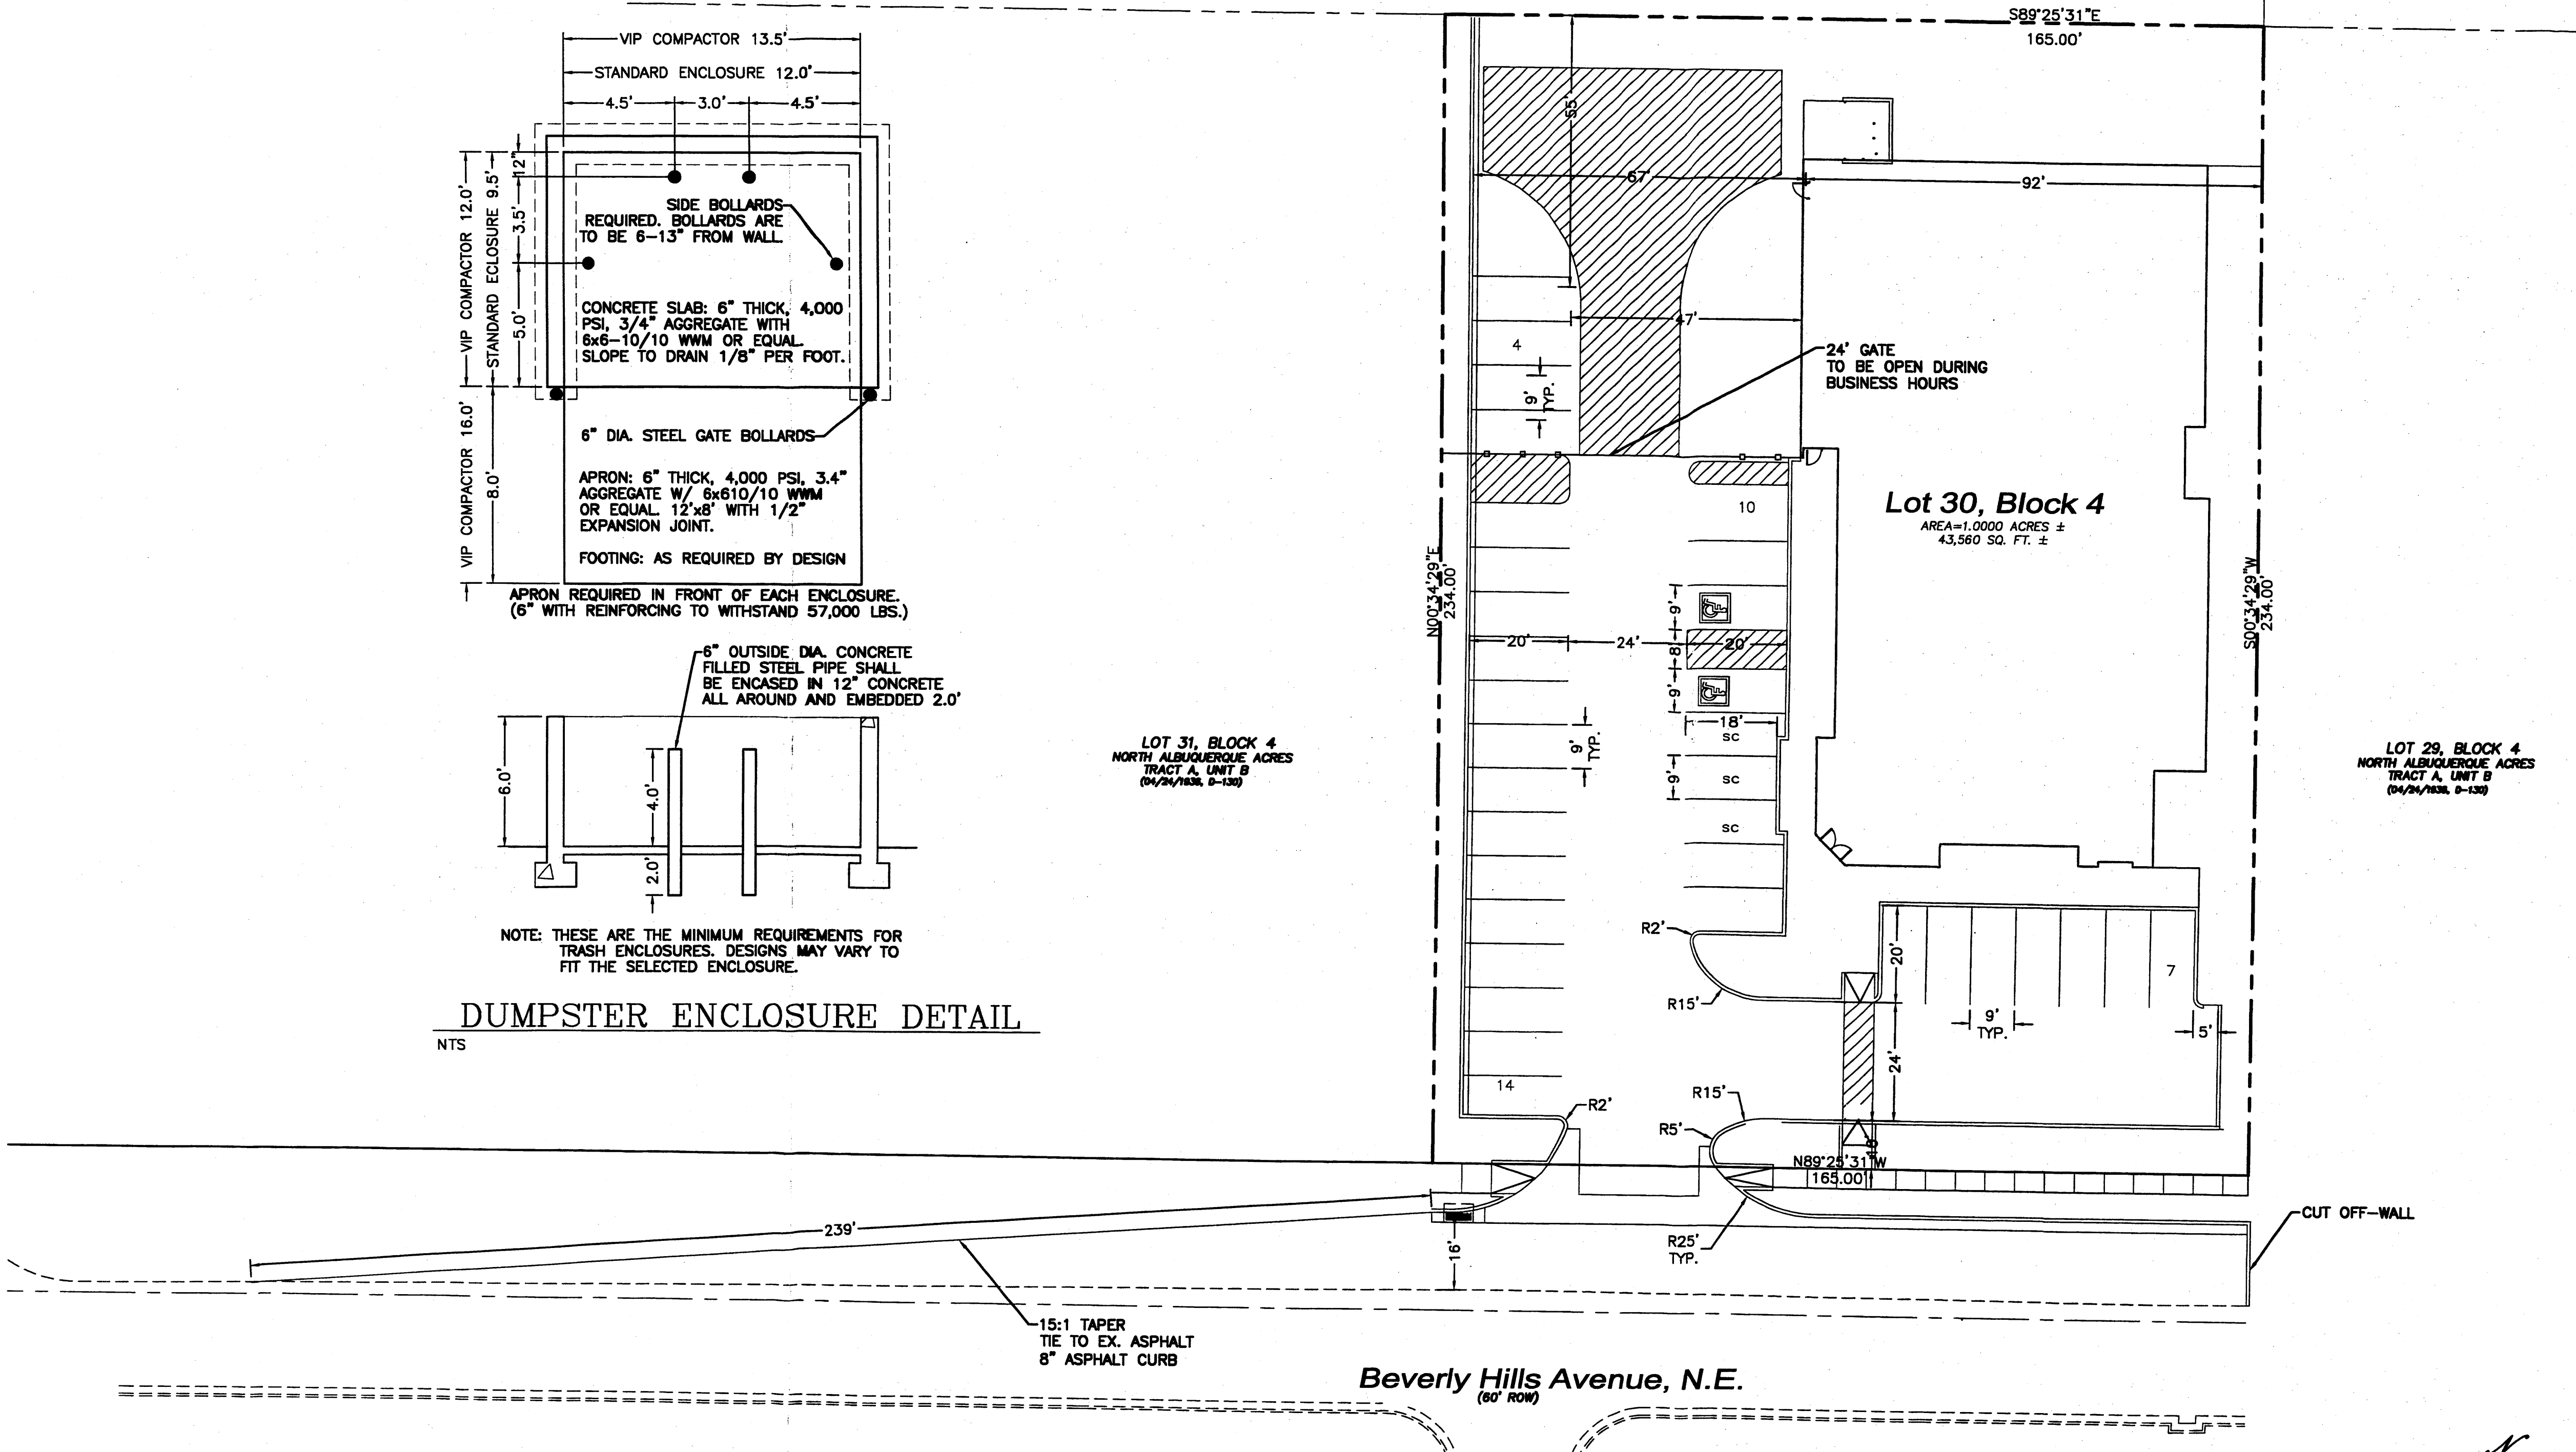


| | | |
|-----------------|-----------------------------------|----------------------------|
| ENGINEER'S SEAL | HB | DRAWN BY WCUJ |
| | TRAFFIC CIRCULATION LAYOUT | DATE 5-08-09 |
| | | 2910-LAYOUT-4-23-08 |
| | SHEET # | JOB # 2910 |
| | | DAVID SOULE P.E. #14522 |

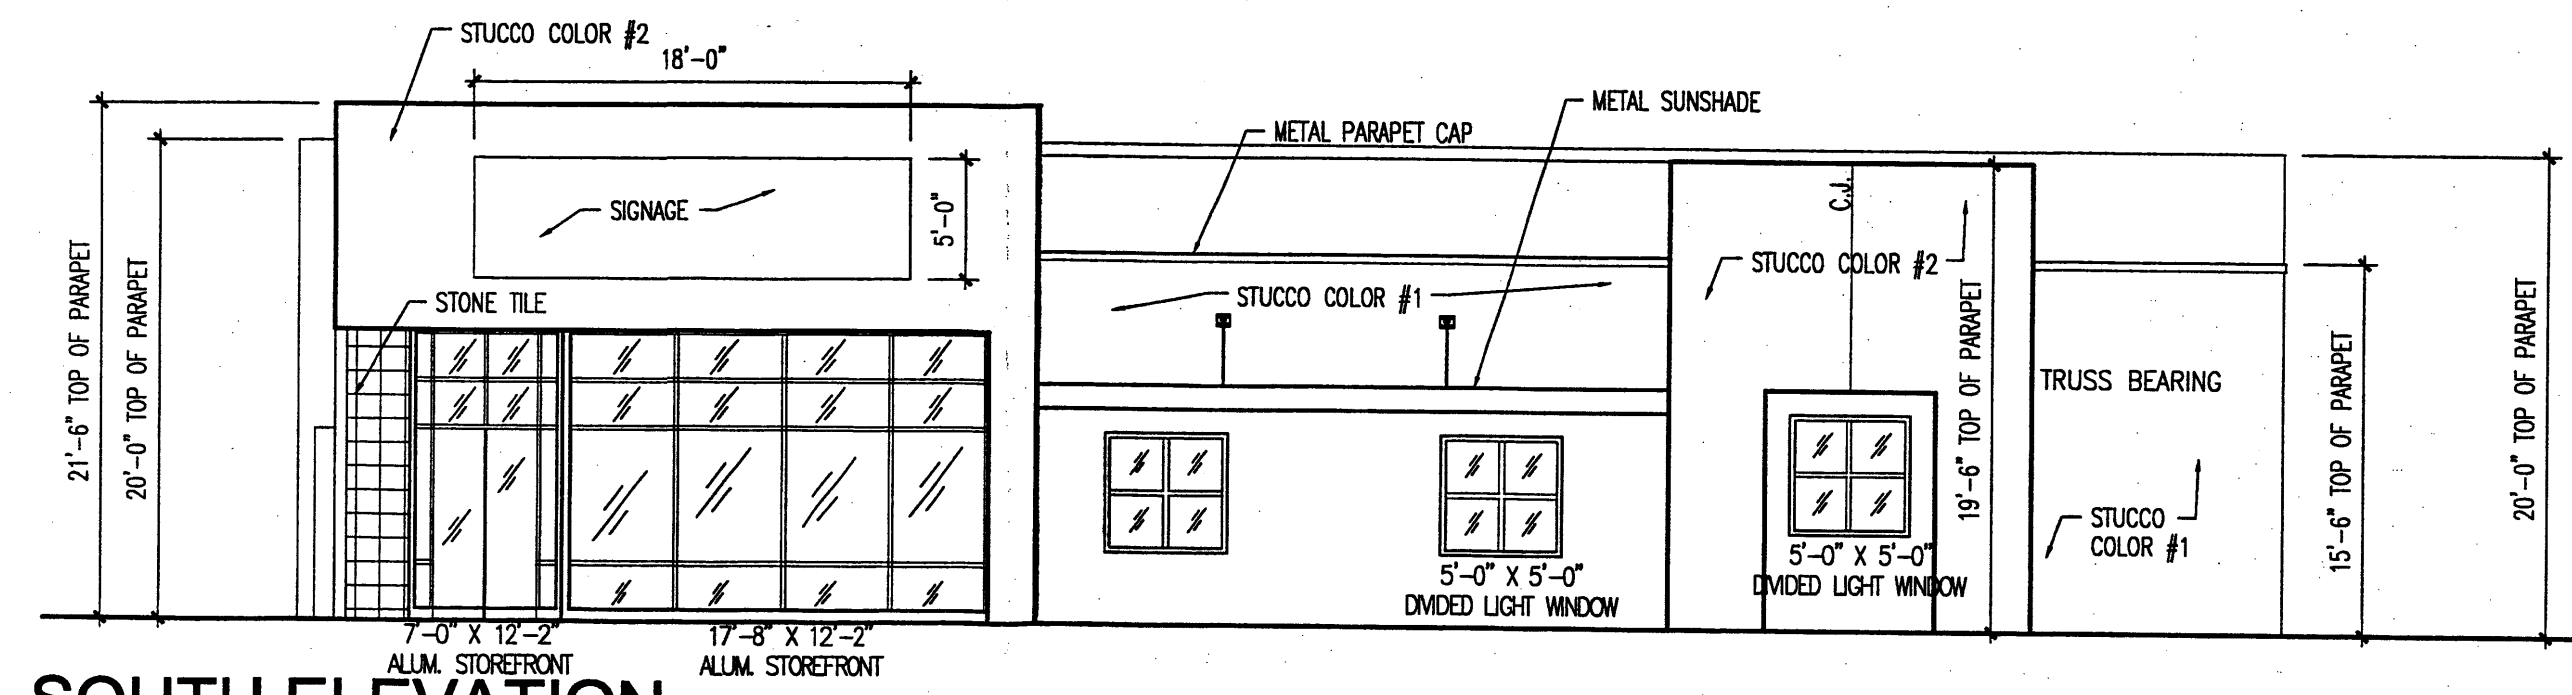


SOUTH ELEVATION

SCALE: 1/8" = 1'-0"

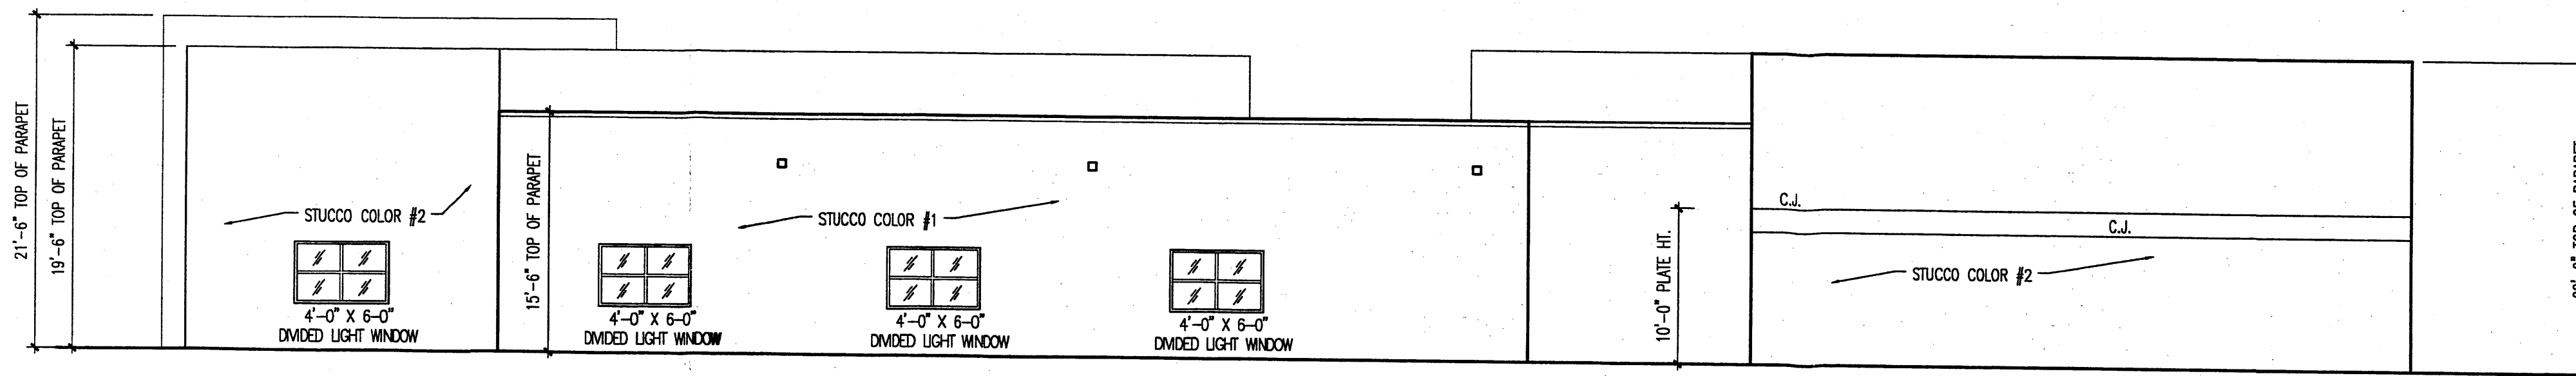


EAST ELEVATION

SCALE: 1/8" = 1'-0"

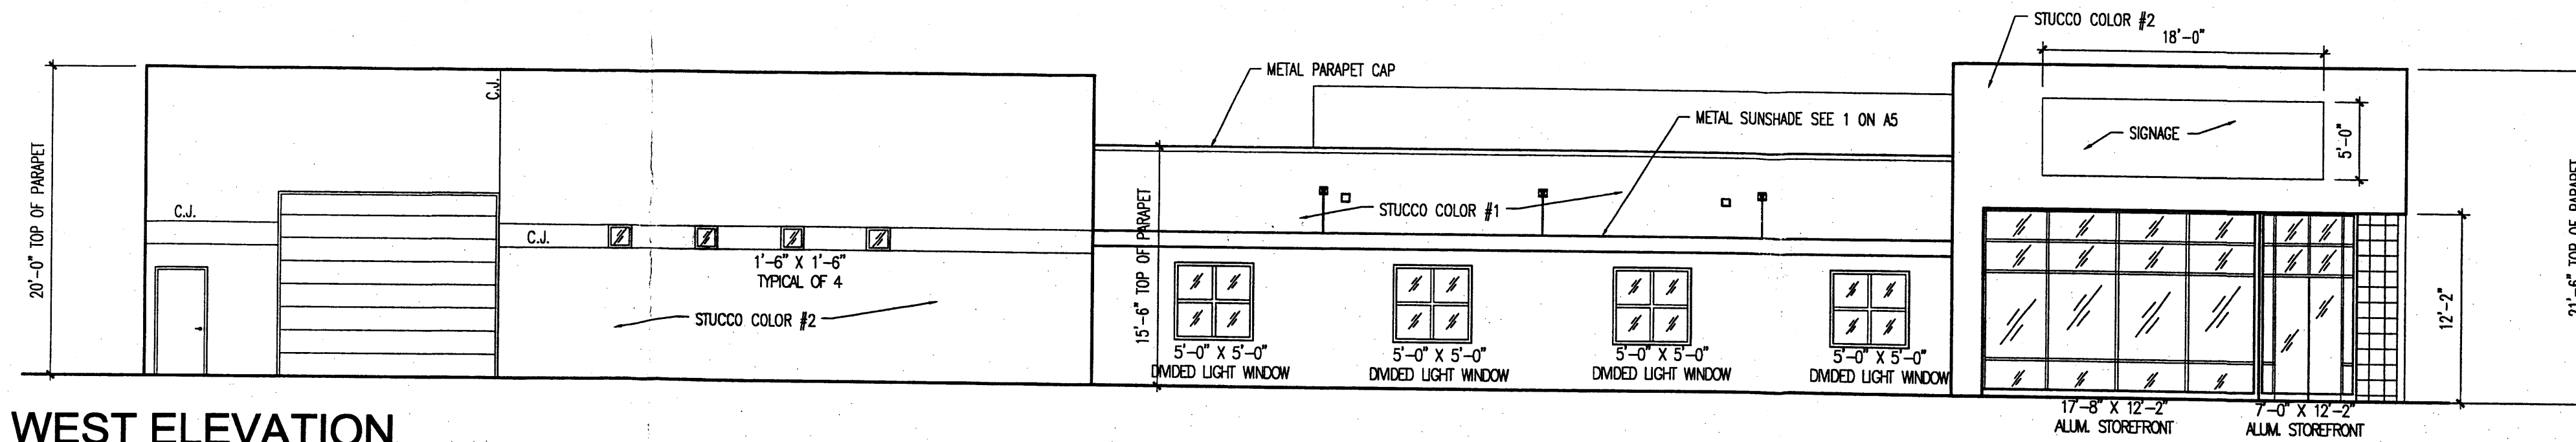

WEST ELEVATION

SCALE: 1/8" = 1'-0"

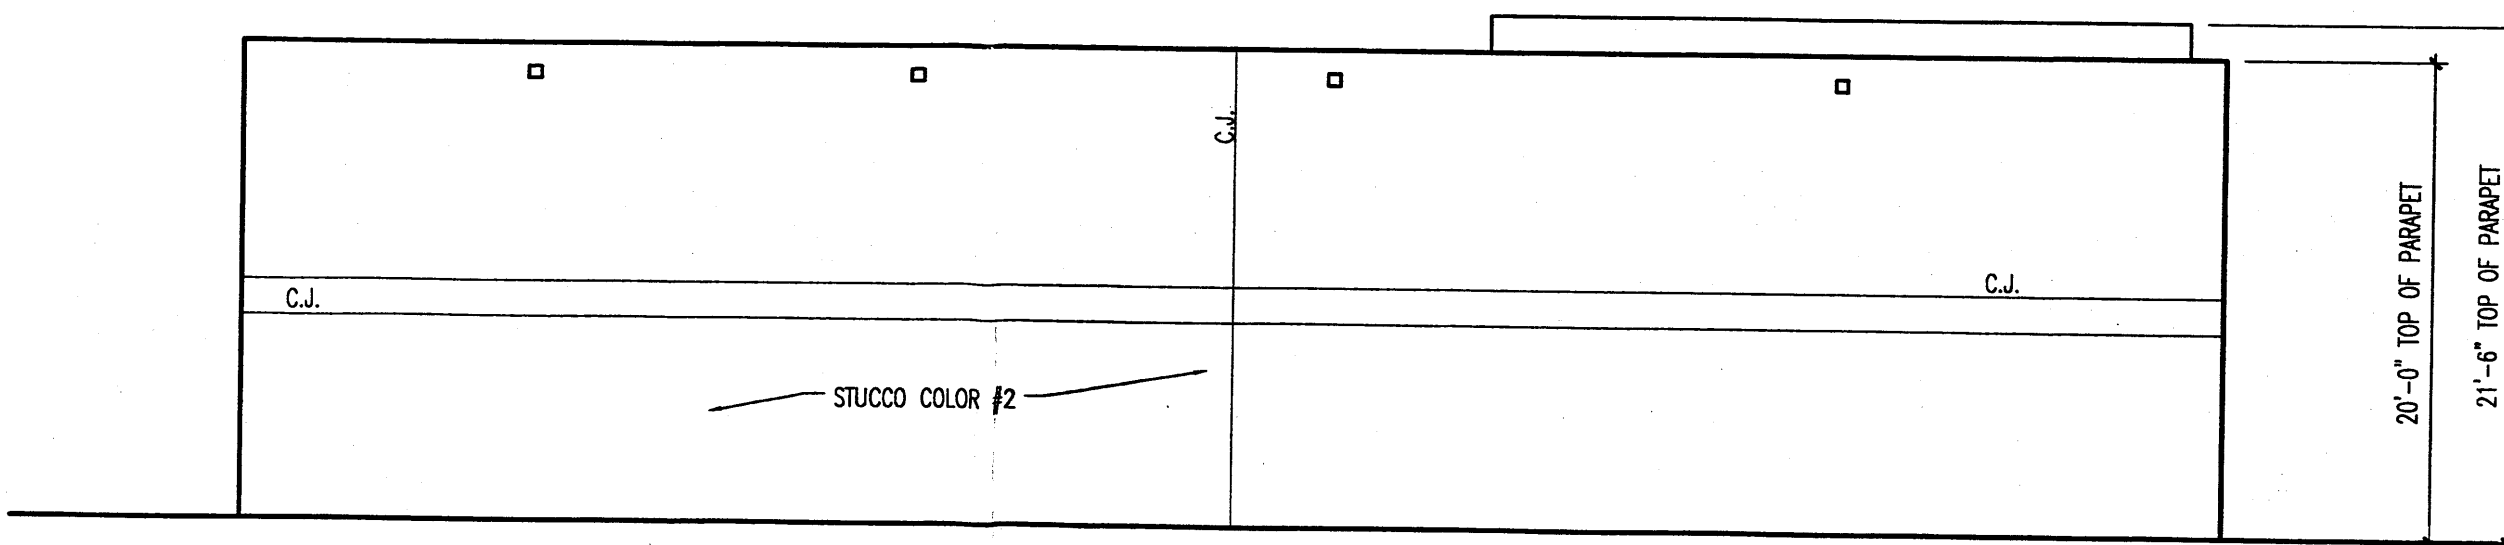

NORTH ELEVATION

SCALE: 1/8" = 1'-0"

GENERAL NOTES

- STUCCO UNDERLAYMENT TO BE ONE PLY 15LBS, 20PSI, GRADE D. WEATHERLAP EDGES 4 INCHES MIN. ATTACH WITH LARGE HEAD PLASTIC WASHER HEAD SCREWS OR 1 INCH CROWN STAPLES.
- INSTALL 17GA STUCCO NETTING OVER SHEATHING AND UNDERLAYMENT PROVIDING 1 INCH LAP AT ENDS.
- APPLY THREE COAT PORTLAND CEMENT PLASTER IN ACCORDANCE WITH ASTM C926, MANUFACTURER'S INSTRUCTIONS, AND APPLICABLE CODES.
- SCRATCH COAT TO BE APPLIED WITH A MIN 3/8 INCH THICKNESS WITH SUFFICIENT TROWEL PRESSURE TO KEY PLASTER INTO METAL STUCCO NETTING AND METAL LATH. PRIOR TO INITIAL SET, SCRATCH HORIZONTALLY TO PROVIDE KEY FOR BROWN COAT.
- BROWN COAT TO BE APPLIED WITH A MIN 3/8 INCH THICKNESS WITH SUFFICIENT TROWEL PRESSURE TO KEY PLASTER INTO SCRATCH COAT. RIGID SURFACE TO A TRUE PLANE. EMBED FIBERGLASS REINFORCEMENT INTO WET BROWN COAT. FLOAT OR LIGHTLY BROOM TO PROVIDE FOR BOND WITH FINISH COAT.
- MOIST CURE SCRATCH AND BROWN COATS WITH FOG SPRAY OF CLEAR WATER WITH FREQUENT APPLICATIONS TO MAINTAIN PLASTER MOISTURE FOR A MIN OF 48 HOURS FOLLOWING APPLICATION.
- EXTERIOR FINISH COAT TO BE FACTORY MIXED, WATER BASED, ACRYLIC POLYMER COATING WITH GRADED AGGREGATE AND INTEGRAL COLOR. APPLY OVER CURED SCRATCH AND BROWN COATS TO A MIN 1/8 INCH THICKNESS. FINISH TEXTURE AND THICKNESS TO MATCH OWNER APPROVED SAMPLE.
- STUCCO COLOR #1 = EL REY 106 "BUCKSKIN"
- STUCCO COLOR #2 = EL REY 121 "SANDALWOOD"

| No | Revision Item | Date |
|----|---------------|----------|
| 1 | | DD/MM/YY |
| | | |
| | | |

SCOTT ANDERSON
ARCHITECT
7604 Rio Penasco NW Albuquerque, New Mexico 87120
Phone: (505) 401-7575 Email: scottanderson@comcast.net

HB CONSTRUCTION OFFICE BUILDING
1111 BEVERLY HILLS AVE, NE
ALBUQUERQUE, NM 87113

| DRAWING TITLE | | |
|---------------------|-------------|--|
| EXTERIOR ELEVATIONS | | |
| DESIGNED | PROJECT NO. | |
| DRAWN | SCALE | |
| CHECKED | DRAWING NO. | |
| REVISION | | |
| DATE 8/04/09 | | |