

architect 13013 g REVISIONS

> te Suil SE and Rd. [ampton lnn a 300 Woodward]

1buquerque


Ph. (505) 898-9690 Fax (505) 898-7737

cm j@hilltoplandscaping.com
All creative ideas contained Herein remains the
property of The Hilltop Landscape Architects and Contractors and are protected by copyright laws. This is an original design and must not be released or copied unless applicable fees have been paid or job order laced. All plants shall be sized per American Standard for Nursery Stock.

SP 0 Suite: SE

Hampton Inn and 1300 Woodward Rd. SAlbuquerque, NIM


01-01-13

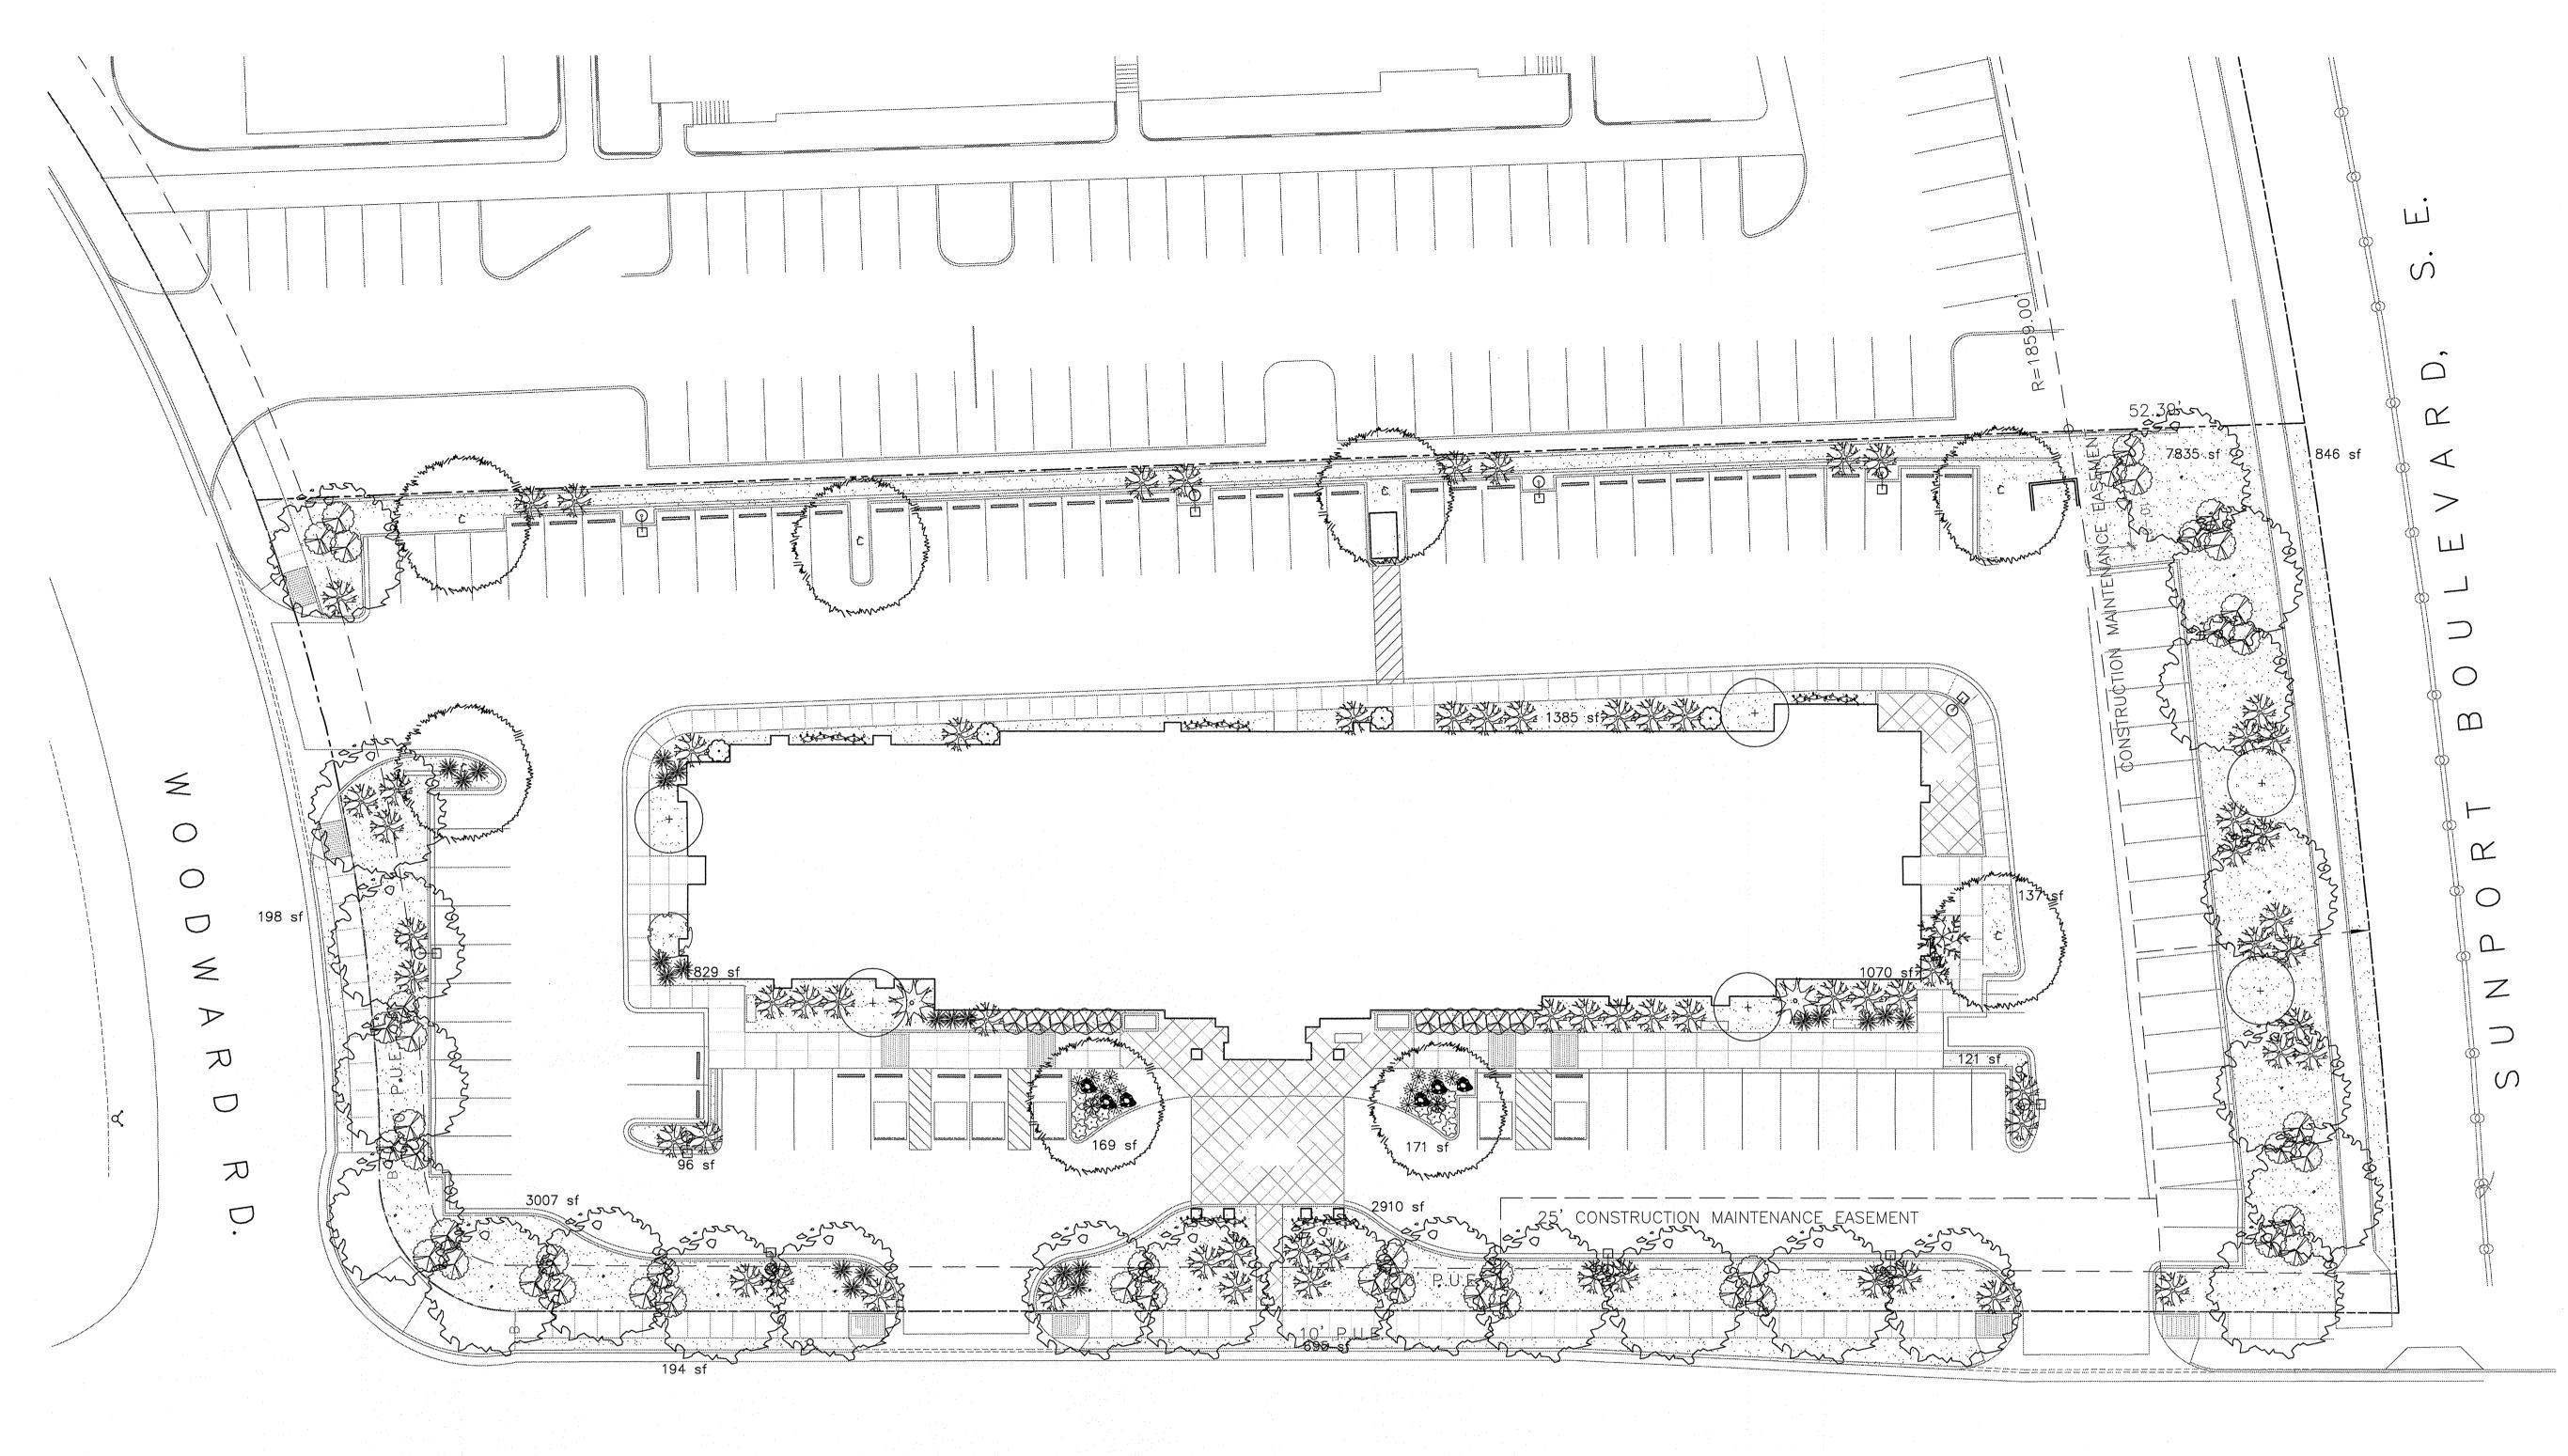

TRANSPORT STREET, S. E.


PLANT LEGEND

All plants shall be sized per American Standard for Nursery Stock. Installation size shall indicate the greater of height or spread. In cases where Type O plants have been pruned for rejuvenation, measurement should be by spread of roots rather than by the height of the plant.

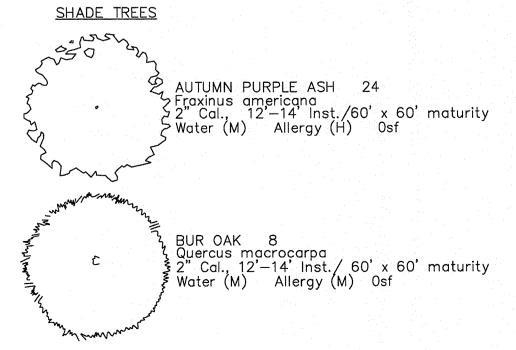


SHRUBS/ORNAMENTAL GRASSES

NEW MEXICO OLIVE 6 Forestiera neomexicana 5 Gal., 4'-10' Inst./15' x 15' maturity Water (M) Allergy (L) 225sf



* PARNEY COTONEASTER 1 Cotoneaster lacteus 5 Gal., 2'-4' Inst./8' x 12' maturity Water (M) Allergy (L) 144sf

BUTTERFLY BUSH 1




ROSE OF SHARON 2 Hibiscus syriacus 5 Gal., 2'—4' Inst./10' x 10' maturity Water (M) Allergy (L) 100sf

Buddleia davidii 5 Gal., 12"-3' Inst./10' x 10' maturity Water (M) Allergy (L) 100sf

* INDIAN HAWTHORN 10 Raphiolepis indica

* NANDINA 4 Nandina domestica 5 Gal., 2'-4' Inst./8' x 5' maturity Water (M+) Allergy (L) 25sf



REGAL MIST 2 Muhlenbergia capillaris 1 Gal., 12"—3' Inst./3' x 3' maturity Water (M) Allergy (L) 9sf

5 Gal., 18"-3' Inst./6' x 6' maturity Water (M) Allergy (L) 36sf

<u>GROUNDCOVERS</u>



* TAM JUNIPER 68
Juniperus sabina 'Tamariscifolia'
1 Gal., 6"-15" Inst./4' x 15' maturity
Water (L+) Allergy (L) 225sf

Unstakèd-Groundcover

* HONEYSUCKLE 45 Lonicera japonica 'Halliana' 1 Gal., 6"-15" Inst./3' x 12' maturity Water (M) Allergy (L) 144sf

POTENTILLA 10
Potentilla fruticosa
1 Gal., 3"-15" Inst./3' x 3' maturity
Water (M+) Allergy (L) 9sf * BANK'S ROSE 5 Rosa banksiae 1 Gal., 6"-15" Inst./climbing to 20' Water (M) Allergy (L) BLUE MIST SPIREA 12 Caryopteris clandonensis

<u>HARDSCAPES</u> 1 Gal., 12"—3' Inst./3' x 3' maturity Water (M) Allergy (L) 9sf Ø 🐧

<u>VINES</u>

3/4" GRAY GRAVEL WITH FILTER FABRIC TO A MINIMUM 3" DEPTH

* DENOTES EVERGREEN PLANT MATERIAL

OVERSIZED GRAVEL & BOULDERS

GRAPHIC SCALE 20 10 0 SCALE: 1"=20'

It is the intent of this plan to comply with the City Of Albuquerque Water Conservation Landscaping and Water Waste Ordinance planting restriction approach. Approval of this plan does not constitute or imply exemption from water waste provisions of the Water Conservation Landscaping and Water Waste Ordinance.

Water management is the sole responsibility of the Property Owner. All landscaping will be in conformance with the City of Albuquerque Zoning Code, Street Tree Ordinance, Pollen Ordinance, and Water Conservation Landscaping and Water Waste Ordinance. In general, water conservative, environmentally sound landscape principles will be followed in design and installation.

Plant beds shall achieve 75% live ground cover at maturity.

_ Gravel over Filter Fabric to a minimum depth of 3" shall be placed in all landscape areas which are not designated to receive native

IRRIGATION NOTES:

Irrigation shall be a complete underground system with Trees to receive 1 Netafim spiral (50' length) with 3 loops at a final radius of 4.5' from tree trunk, pinned in place. Netafim shall have emitters 12" o.c. with a flow of .6 gph. Shrubs to receive (2) 1.0 GPH Drip Emitters. Drip and Bubbler systems to be tied to 1/2" polypipe with flush caps at each end. Trees and shrubs shall be on separate valves.

Run time per each shrub drip valve will be approximately 15 minutes per day. Tree drip valve shall run 1.5 hours, 3 times per week. Run time will be adjusted according to the season.

Point of connection for irrigation system is unknown at current time and will be coordinated in the field. Irrigation will be operated by automatic controller.

Location of controller to be field determined and power source for controller to be provided by others.

Irrigation maintenance shall be the responsibility of the Property Owner.

Water and Power source shall be the responsibility of the Developer/Builder.

STREET TREE REQUIREMENTS - Minimum 2" Caliper

Street trees required under the City Of Albuquerque Street Tree Ordinance are as follows:

Name of Street: WOODARDS/TRANSPORT/SUNPORT Required 24 Provided 24

PARKING LOT TREE REQUIREMENTS - Minimum 2" Caliper


Shade trees required under the City Of Albuquerque Parking Lot Tree Ordinance are as follows:

1 Shade tree per 10 spaces. Required 8 Provided 8


NOTE TO CLIENT:

Should The Hilltop not receive a Grading and Drainage plan during the design process or the on—site grades differ from the Grading and Drainage plan received, The Hilltop reserves the right to apply slope stabilization materials where the specified gravel will not be suitable Gravel smaller than 2-4" cobblestone will not stay on a slope greater than 3:1. If the grades are greater than what was originally designed, we will request an infield change-order to lay cobblestone or rip-rap, in lieu of the specified gravel, to stabilize the slope. All vegetative material shall remain per plan.

HEAVY DUTY POLYSULFONE POPETS are designed to provide reliable amd long life BRASS CANOPY resistant to damagecaused during normal installation or when vandalism BONNET is vandal resistant. It cannot be removed by rotating the TEST COCKS are vandalresistant reducing damage caused by normal tampering experienced in the field DOUBLE GUIDED CHECK ASSEMBLY MALE ENDS are used on reduces check valve fouling and chattering the 765 to reduce thread thereby providing long life and reliable togetherleak areas operation_ ENGINEERED PLASTIC AND BRASS INTERNAL MOVING PARTS Gre FULL PORT SHUTOFF VALVES minimize head resistant to chemical and mineral deposit build—ups. ALL BRONZE BODY provides durability and long life.

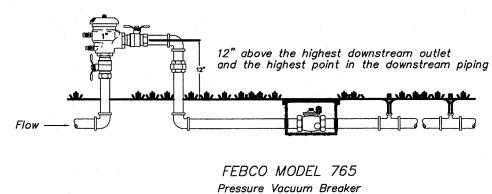




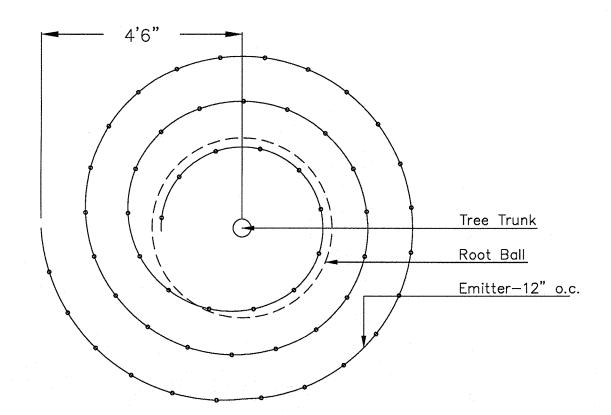

Netafim Spiral Detail

LANDSCAPE CALCULATIONS

		_
TOTAL LOT AREA	82764	square feet
TOTAL BUILDINGS AREA	16338	square feet
NET LOT AREA	66426	square feet
LANDSCAPE REQUIREMENT	15%	
TOTAL LANDSCAPE REQUIREMENT	9963	square feet
TOTAL BED PROVIDED	19663	square feet
GROUNDCOVER REQ.	75%	square feet
TOTAL GROUNDCOVER REQUIREMENT	14747	square feet
TOTAL GROUNDCOVER PROVIDED	15300	square feet
TOTAL PONDING AREA	0	square feet
TOTAL SOD AREA	0.	square feet
(max. 20% of landscape required)		
TOTAL NATIVE SEED AREA	0	square feet
TOTAL LANDSCAPE PROVIDED	19663	square feet

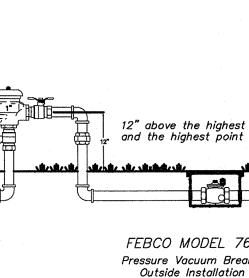


TREE PLANTING DETAIL

GENERAL NOTES:

1. ROOTBALL SHALL BE PLACED ON UNDISTURBED SOIL TO PREVENT TREE FROM SETTLING. 2. TOP OF ROOTCOLLAR INDICATED LEVEL AT WHICH TREE WAS GROWN AND DUG; THIS REPRESENTS THE LEVEL AT WHICH THE TREE SHOULD BE INSTALLED; THAT LEVEL MAY BE EXCEEDED BY ONLY A ONE INCH LAYER

3. PRIOR TO BACKFILLLING TREE, ALL WIRE, ROPE AND SYNTHETIC MATERIALS SHALL BE REMOVED FROM THE TREE AND THE PLANTING PIT. 4. PRIOR TO BACKFILLING ALL BURLAP SHALL BE CUT AWAY EXCEPT FROM BOTTOM OF THE ROOTBALL. CONSTRUCTION NOTES:

- A. TREE B. BACKFILL WITH EXISTING SOIL
- C. 3" DEPTH OF GRAVEL MULCH. D. UNDISTRUBED SOIL.

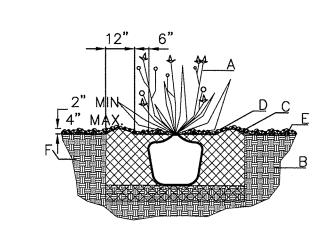

SHRUB PLANTING DETAIL


GENERAL NOTES:

1. THE OUTSIDE DIAMETER OF THE WATER RETENTION BASIN SHALL BE TWICE THE DIAMETER OF THE SHRUB PLANTING PIT.

CONSTRUCTION NOTES:

- A. SHRUB. B. BACKFILL WITH EXISTING SOIL. EARTH BERM AROUND WATER RETENTION BASIN.
- D. 3" DEPTH OF GRAVEL MULCH. E. FINISH GRADE.
- F. UNDISTURBED SOIL.

GRAVEL ACCENT DETAIL

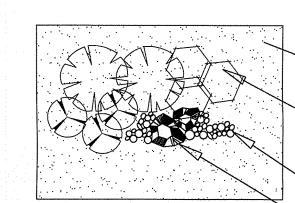

GRAVEL TYPE PER PLAN


PLANTING PER PLAN

OVERSIZED GRAVEL ACCENT AT EVERY BOULDER CLUSTER 40-50 SQUARE FEET

BOULDER


PLANT LEGEND

All plants shall be sized per American Standard for Nursery Stock. Installation size shall indicate the greater of height or spread. In cases where Type O plants have been pruned for rejuvenation, measurement should be by spread of roots rather than by the height of the plant.

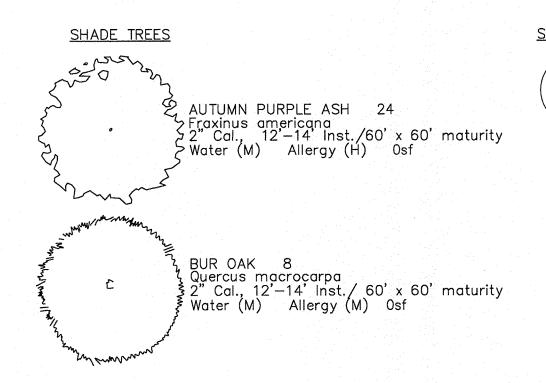


SHRUBS/ORNAMENTAL GRASSES


NEW MEXICO OLIVE 6 Forestiera neomexicana 5 Gal., 4'-10' Inst./15' x 15' maturity Water (M) Allergy (L) 225sf




Cotoneaster lacteus 5 Gal., 2'-4' Inst./8' x 12' maturity Water (M) Allergy (L) 144sf BUTTERFLY BUSH 1 Buddleia davidii 5 Gal., 12"—3' Inst./10' x 10' maturity Water (M) Allergy (L) 100sf





* INDIAN HAWTHORN 10 Raphiolepis indica Water (M) Allergy (L) 36sf





REGAL MIST 2 Muhlenbergia capillaris 1 Gal., 12"—3' Inst./3' x 3' maturity Water (M) Allergy (L) 9sf





GROUNDCOVERS

* TAM JUNIPER 68 Juniperus sabina 'Tamariscifolia' Water (L+) Allergy (L) 225sf

1 Gal., 6"-15" Inst./3' x 12' maturity

<u>VINES</u>

<u>HARDSCAPES</u>

POTENTILLA 10 Potentilla fruticosa 1 Gal., 3"—15" Inst./3' x 3' maturity Water (M+) Allergy (L) 9sf Secretary .

BLUE MIST SPIREA 12 Caryopteris clandonensis 1 Gal., 12"-3' Inst./3' x 3' maturity Water (M) Allergy (L) 9sf

1 Gal., 6"-15" Inst./4' x 15' maturity

* HONEYSUCKLE 45 Lonicera japonica 'Halliana' Water (M) Allergy (L) 144sf Unstakèd-Groundcover

* BANK'S ROSE 5 Rosa banksiae 1 Gal., 6"—15" Inst./climbing to 20' Water (M) Allergy (L)

OVERSIZED GRAVEL & BOULDERS

3/4" GRAY GRAVEL WITH FILTER FABRIC TO A MINIMUM 3" DEPTH

* DENOTES EVERGREEN PLANT MATERIAL

1buquerque

peter butterfield

LANDSCAPING LAND DETAILS

REVISIONS

1/8/13 Ret. Woll/Shade Trees

1/9/13 Rev.SiteP/Shade Trees

LANDSCAPE ARCHITECTS & CONTRACTORS

Albuquerque, NM 87184

Ph. (505) 898-9690

Fax (505) 898-7737

cm i@hilltoplandscaping.com All creative ideas contained Herein remains the

property of The Hilltop Landscape Architects and Contractors and are protected by copyright laws. This is an original design and must not be released or copied unless applicable fees have been paid or job order

for Nursery Stock.

Cont. Lic. #26458


7909 Edith N.E.

0

13013 gle

architect

5 01-01-13

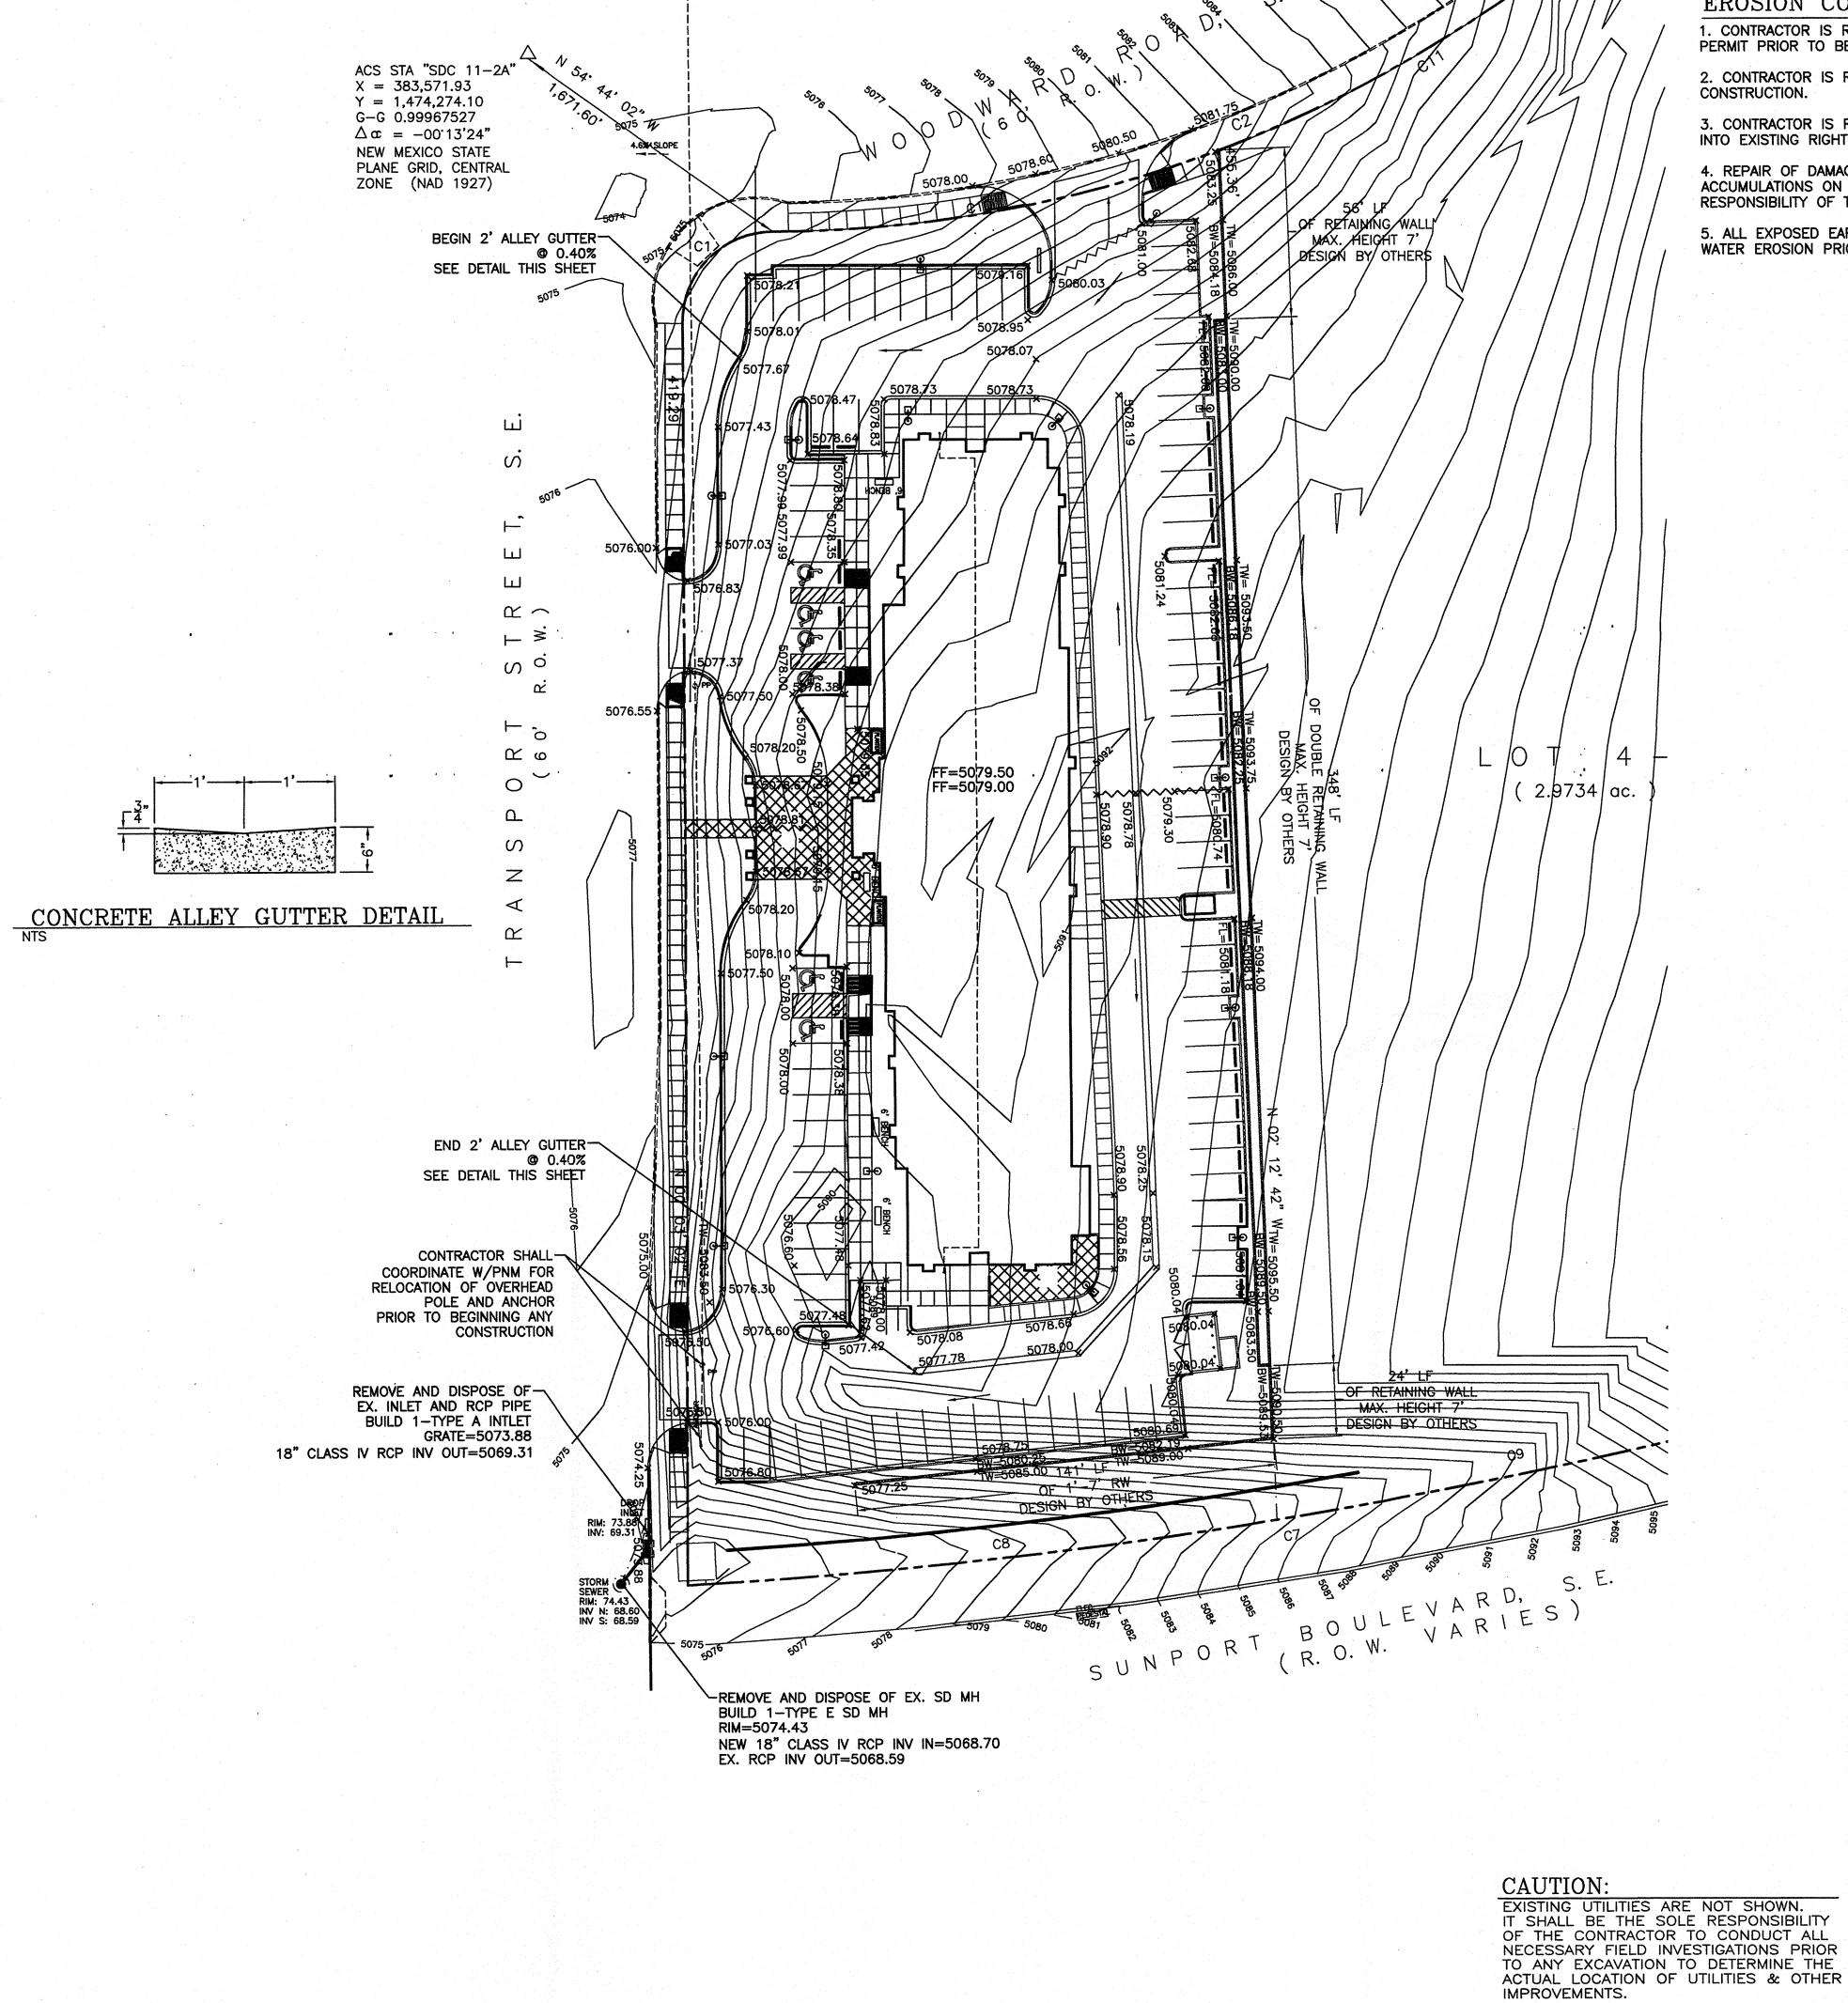

EROSION CONTROL NOTES:


1. CONTRACTOR IS RESPONSIBLE FOR OBTAINING A TOPSOIL DISTURBANCE PERMIT PRIOR TO BEGINNING WORK.

2. CONTRACTOR IS RESPONSIBLE FOR MAINTAINING RUN-OFF ON SITE DURING CONSTRUCTION.

3. CONTRACTOR IS RESPONSIBLE FOR CLEANING ALL SEDIMENT THAT GETS INTO EXISTING RIGHT-OF-WAY.

4. REPAIR OF DAMAGED FACILITIES AND CLEANUP OF SEDIMENT ACCUMULATIONS ON ADJACENT PROPERTIES AND IN PUBLIC FACILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR.

5. ALL EXPOSED EARTH SURFACES MUST BE PROTECTED FROM WIND AND WATER EROSION PRIOR TO FINAL ACCEPTANCE OF ANY PROJECT.

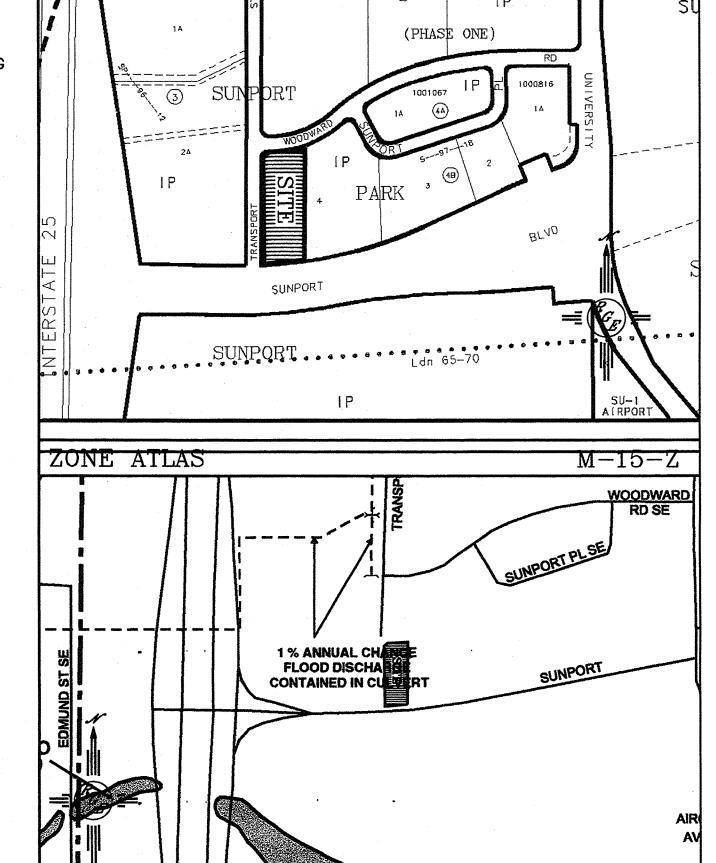

LEGAL DESCRIPTION:
LOTS 4-A, BLOCK 4-B, SUNPORT PARK

5 4-A, BLOCK 4-B, SUNFORT

NOTES:

1. ALL SPOT ELEVATIONS REPRESENT FLOWLINE ELEVATION UNLESS OTHERWISE NOTED.

35001C0342E

LEGEND ____541

PROPOSED INDEX CONTOUR

SLOPE TIE

1
× 4048.25


EXISTING SPOT ELEVATION

1.
× 4048.25 PROPOSED SPOT ELEVATION
BOUNDARY


EXISTING CURB


PROPOSED RETAINING WALL (DESIGN BY OTHERS)

= PROPOSED CURB



HC RAMP 12:1 SLOPE MAX.

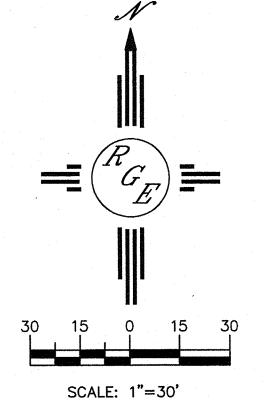

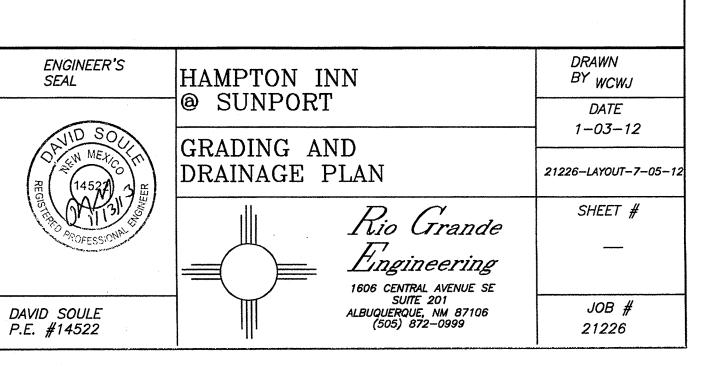

NOTICE TO CONTRACTORS

1. AN EXCAVATION/CONSTRUCTION PERMIT WILL BE REQUIRED BEFORE BEGINNING ANY WORK WITHIN CITY RIGHT-OF-WAY. AN APPROVED COPY OF THESE PLANS MUST BE SUBMITTED AT THE TIME OF APPLICATION FOR THIS PERMIT.

2. ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED, EXCEPT AS OTHERWISE STATED OR PROVIDED HEREON, SHALL BE CONSTRUCTED IN ACCORDANCE WITH CITY OF

ALBUQUERQUE INTERIM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 1985.

3. TWO WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE, 765-1234, FOR LOCATION OF EXISTING UTILITIES.

4. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATIONS OF ALL CONSTRUCTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM AMOUNT OF DELAY.

5. BACKFILL COMPACTION SHALL BE ACCORDING TO RESIDENTIAL STREET USE.

6. MAINTENANCE OF THESE FACILITIES SHALL BE THE RESPONSIBILITY OF THE OWNER OF THE PROPERTY SERVED.

7. WORK ON ARTERIAL STREETS SHALL BE PERFORMED ON A 24-HOUR BASIS.

8. CONTRACTOR SHALL DETERMINE LOCATION OF ANY UNDERGROUND FACILITY IN OR NEAR WORK AREAS, INCLUDING REQUESTS TO OWNERS/OPERATORS OF SAID FACILITIES PER SECTION 62-14-5 NMSA 1978.

9. CONTRACTOR SHALL PLAN ALL EXCAVATION TO MINIMIZE INTERFERENCE OR DAMAGE OF UNDERGROUND FACILITIES.

10. CONTRACTOR SHALL PROVIDE ADVANCE TELEPHONE NOTICE OF COMMENCEMENT, EXTENT AND DURATION OF ALL EXCAVATION WORK TO THE ONE—CALL NOTIFICATION SYSTEM, OR TO OWNERS/OPERATORS OF ANY EXISTING UNDERGROUND FACILITY IN OR NEAR THE EXCAVATION AREA THAT ARE NOT MEMBERS OF THE ONE—CALL NOTIFICATION CENTER; IN ORDER THAT OWNERS/OPERATORS MAY LOCATE AND MARK UNDERGROUND FACILITY PER SECTION 62—14—5 NMSA 1978 PRIOR TO ANY COMMENCEMENT OF WORK. CONTRACTOR SHALL REQUEST REAFFIRMATION OF LOCATION EVERY TEN (10) WORKING DAYS AFTER INITIAL REQUEST.

11. CONTRACTOR SHALL MAINTAIN EIGHTEEN (18) INCHES BETWEEN EXISTING UNDERGROUND FACILITIES FOR WHICH HAVE BEEN PREVIOUSLY IDENTIFIED AND MARKED BY THE OWNERS/OPERATORS OF SAID FACILITIES. CUTTING EDGE OR POINT OF ANY MECHANICAL EXCAVATING EQUIPMENT UTILIZED IN EXCAVATION AREA WILL BE USED IN A MANNER NECESSARY TO PREVENT DAMAGE TO EXISTING UNDERGROUND FACILITIES.


12. CONTRACTOR SHALL PROVIDE SUPPORT FOR EXISTING UNDERGROUND FACILITIES IN ORNEAR EXCAVATION AREA AS NECESSARY TO PREVENT DAMAGE TO SAID FACILITIES.

13. CONTRACTOR SHALL BACKFILL ALL EXCAVATIONS IN A MANNER AND WITH MATERIALS AS MAY BE NECESSARY TO PREVENT DAMAGE TO AND PROVIDE RELIABLE SUPPORT DURING AND FOLLOWING BACK FILLING ACTIVITIES FOR PREEXISTING UNDERGROUND FACILITIES IN OR NEAR EXCAVATION AREA.

14. CONTRACTOR SHALL IMMEDIATELY NOTIFY BY TELEPHONE THE OWNER/OPERATOR OF ANY UNDERGROUND FACILITY WHICH MAY HAVE BEEN DAMAGED OR DISLODGED DURING EXCAVATION WORK.

15. CONTRACTOR SHALL NOT MOVE OR OBLITERATE MARKINGS MADE PURSUANT TO CHAPTER 62, ARTICLE 14 NMSA 1978, OR FABRICATE MARKINGS IN A UNMARKED LOCATION FOR THE PURPOSE OF CONCEALING OR AVOIDING LIABILITY FOR VIOLATION OF OR NONCOMPLIANCE WITH THE PROVISIONS OF CHAPTER 62, ARTICLE 11 NMSA 1978.

16. CONTRACTOR SHALL NOTIFY NEW MEXICO UTILITIES 3 DAYS IN ADVANCE OF CONSTRUCTION.

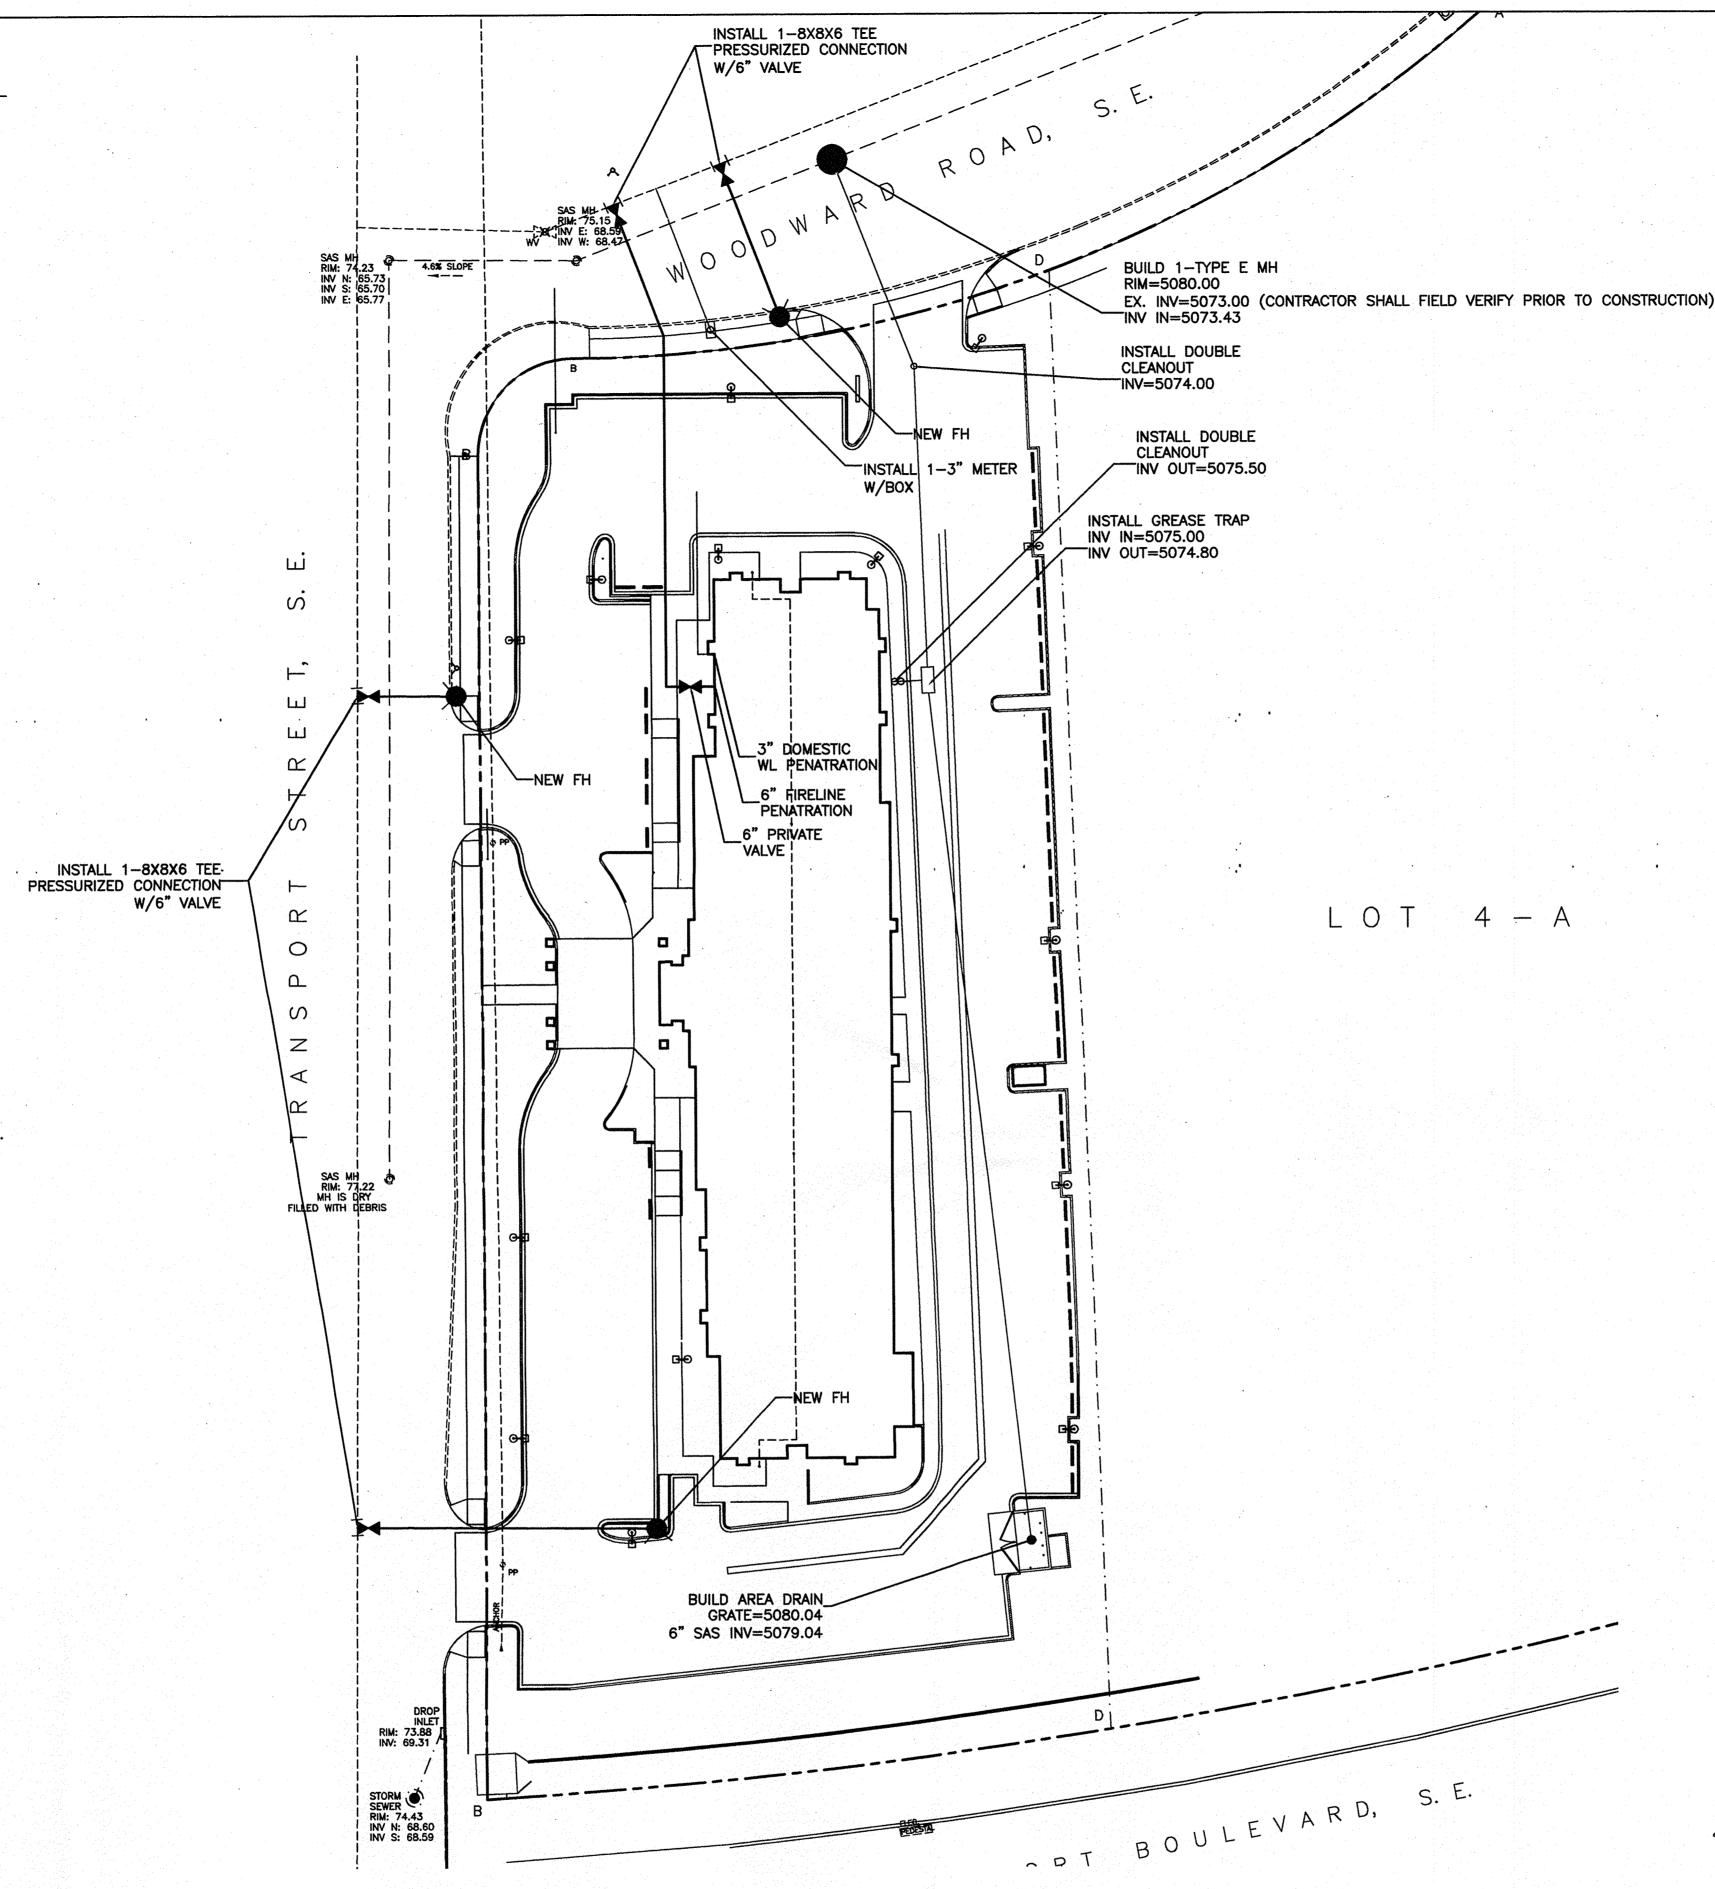

GENERAL NOTES

1. 4' MINIMUM BURY REQUIRED FOR ALL UTILITIES UNLESS OTHERWISE NOTED.

2. REFERENCE ARCHITECTURAL PLANS FOR WATER LINE RISER LOCATIONS.

3. CLEAN OUTS ARE TO BE BUILT PER UNIFORM PLUMBING

CODE STANDARDS.

4. ALL BLOCKING IS PER CITY OF ALBUQUERQUE STANDARD

5. ALL PIPE MATERIAL TO BE USED PER UPC.

NOTES:

1. WATER SHUT-OFF SHALL BE COORDINATED WITH ABCWUA

2. ONLY WATER SYSTEMS PERSONNEL ARE AUTHORIZED TO OPERATE VALVES.


3. NOTIFY ABCWUA THREE(3) WORKING DAYS IN


ADVANCE OF EXECUTION OF THE WATER SHUT-OFF PLAN

4. BOTH THE NEW FH AND 2" METER SHALL BE GRATED PAPER EASEMENTS TO THE COA.

LEGEND

0	EXISTING SAS MANHOLE
	EXISTING SANITARY SEWER LINE
	PROPOSED SAS MANHOLE
0	PROPOSED SAS CLEANOUT
8" SAS	PROPOSED SANITARY SEWER LINE
	SANITARY SEWER SERVICE LINE
EX. 12* WL	EXISTING WATER LINE
0	PROPOSED METER
H	PROPOSED VALVE W/BOX
*	PROPOSED FIRE HYDRANT
	WATER SERVICE LINE
8" WL	PROPOSED WATER LINE
	PROPOSED STORM SEWER LINE
	EXISTING CURB & GUTTER
	PROPOSED CURB & GUTTER
	CENTERLINE
	RIGHT-OF-WAY
	DRY UTILITY TRENCH
	BOUNDARY LINE
	EASEMENT

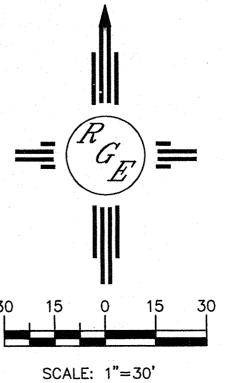

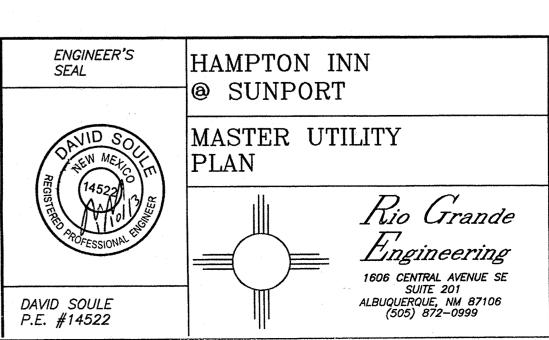

DRAWN

BY WCWJ


1-03-12

21226-LAYOUT-7-05-

SHEET #

JOB #

21226

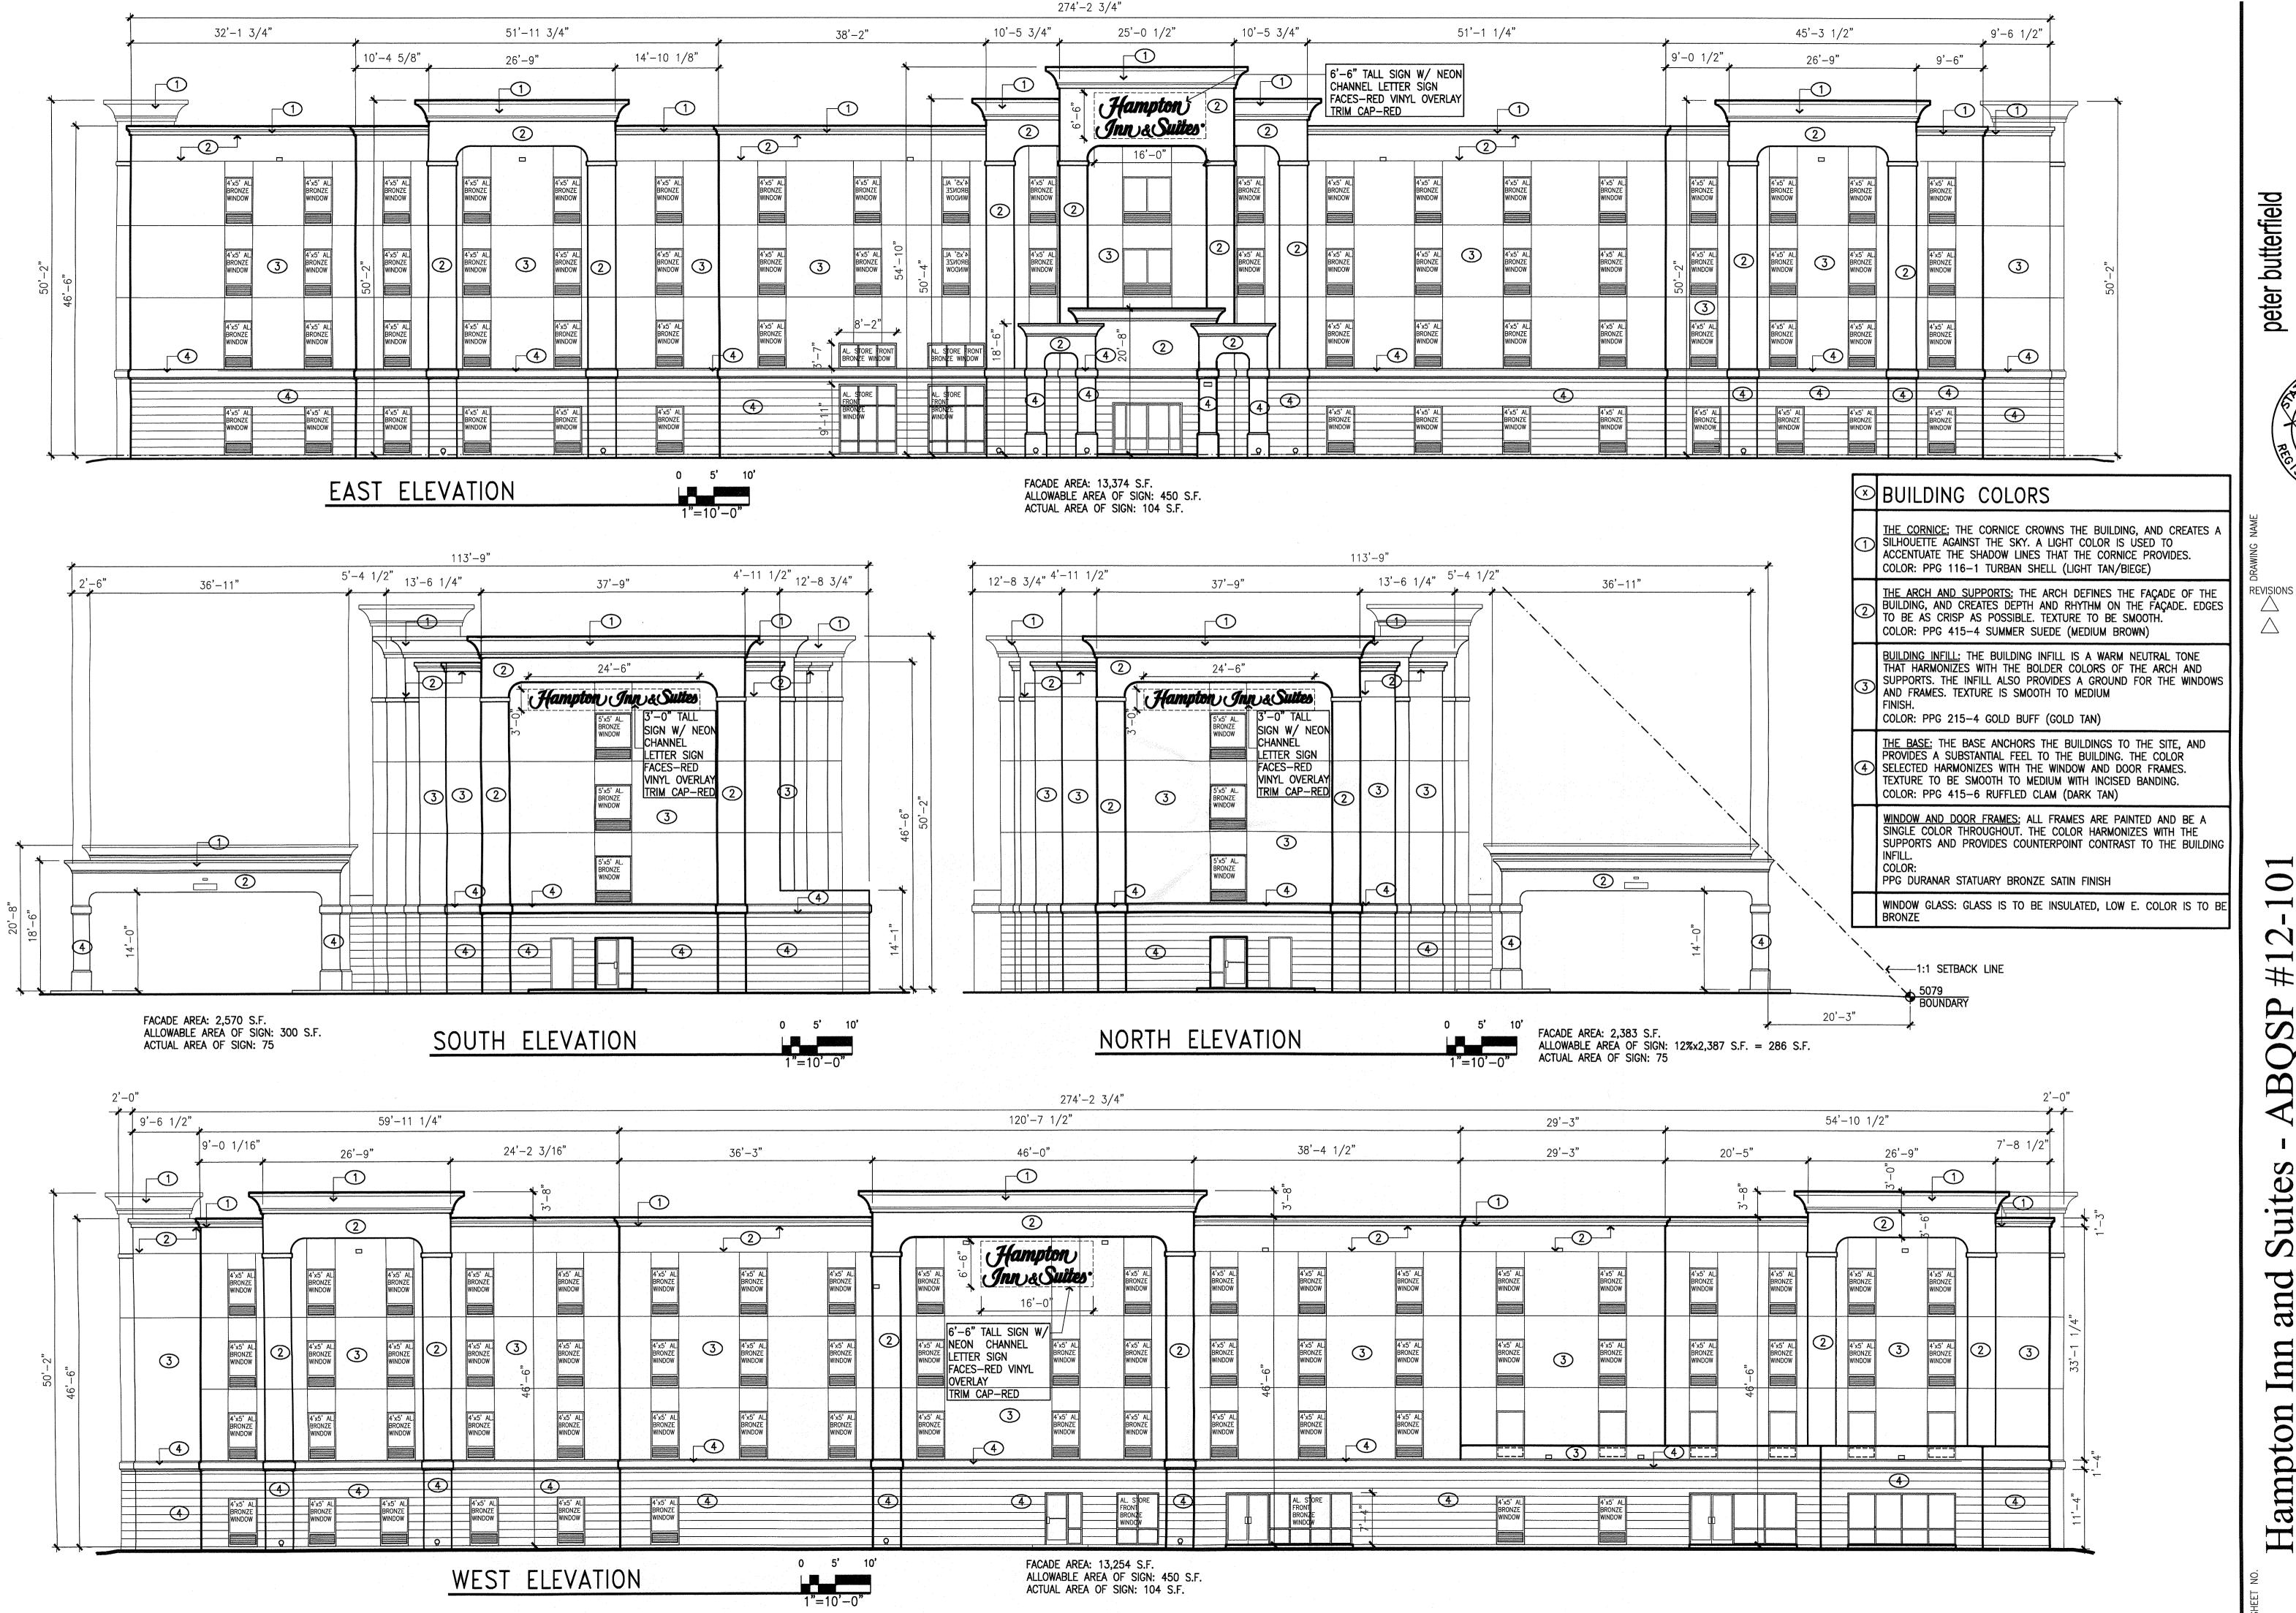

Hampton Inn and Suites - ABQSP #12-101 1300 Woodward Drive SE Albuquerque, NM

architect

1/3/13

A2