





WALL SIGN




Style: Front Lit Illuminated Light Source: LED Modules Light Source Color: 6500k White Primary Power Source Input Required: 277v Circuit Required: 20 Amp Dedicated Timer or Dusk to Dawn (Photo Cell): TBD Power Supply LED Driver Listed: UL Service Disconnect Switch: Yes - On Sign


Illumination: Internal



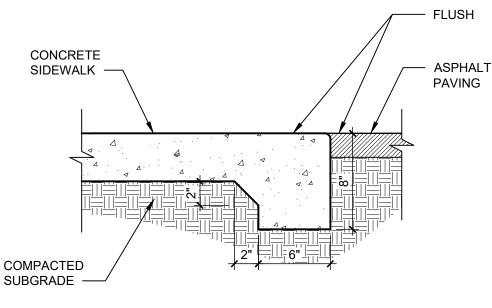




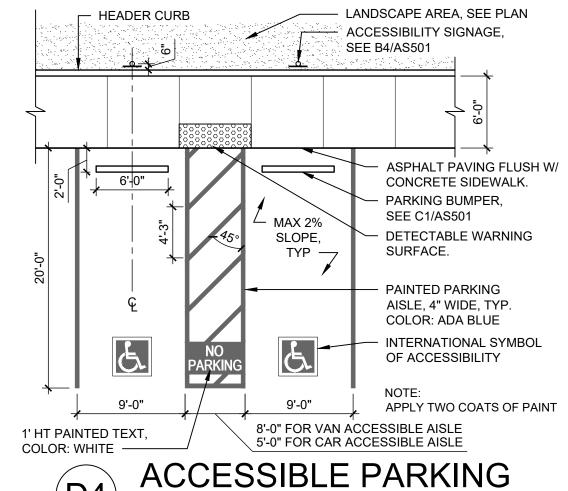

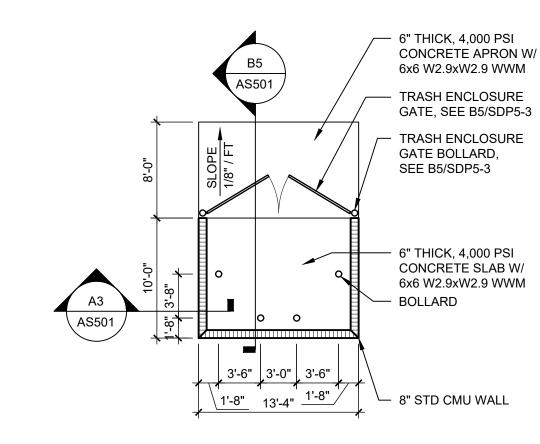

TRASH ENCLOSURE

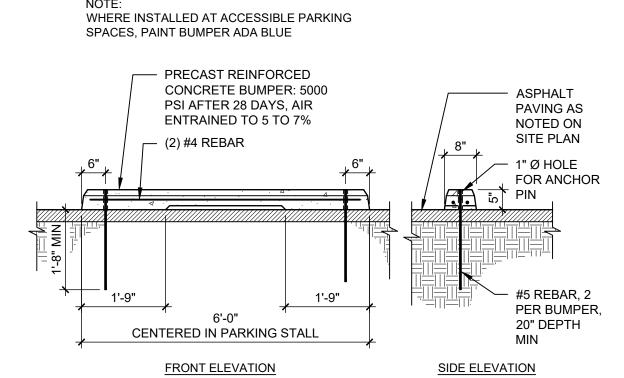



1/4" WIDE DRY JOINT

PLAN FOR LOCATIONS

8' WALK &

8' OC

24' OC

18' OC


LOCATIONS

EDGES

5' WALK

5' OC


15' OC

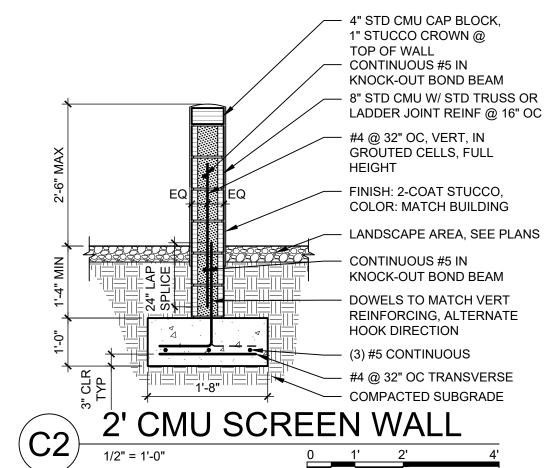



1. SEE SITE PLANS AND A1/AS501 FOR JOINTING.

TRAFFIC FLOW WITH 1/2" RADIUS ON EXPOSED EDGES 3. INTEGRAL COLOR WHERE NOTED ON PLANS. 4. FINISH GRADE FOR LANDSCAPE AREAS SHALL BE 1/2" BELOW TOP OF PAVING.

CAST-IN-PLACE CONCRETE PAVING, LIGHT BROOM FINISH PERPENDICULAR TO

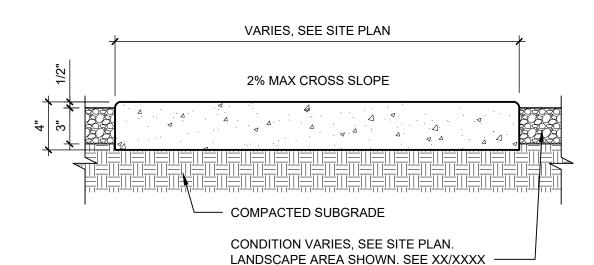

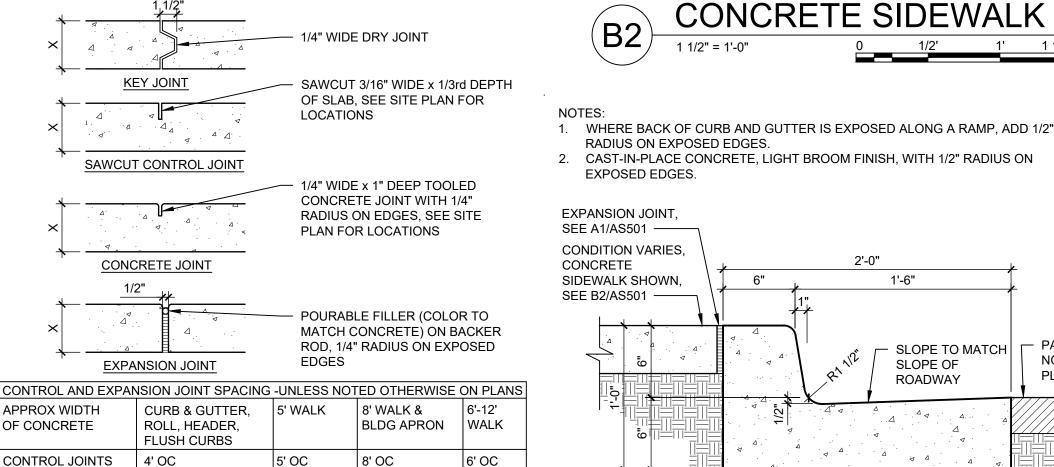


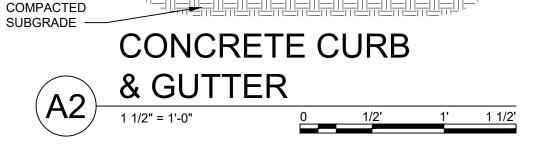


PAVING AS

NOTED ON


PLANS

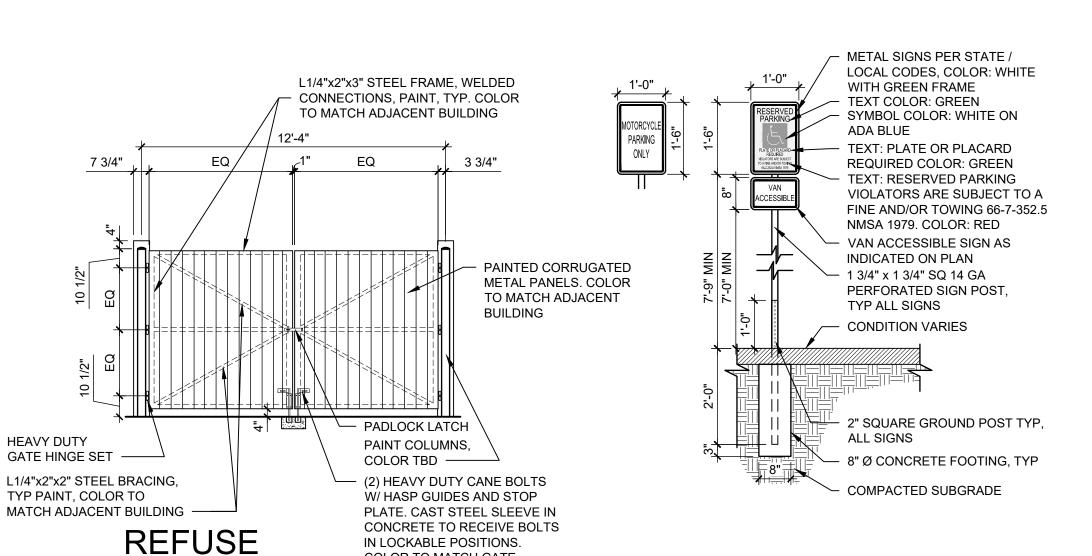



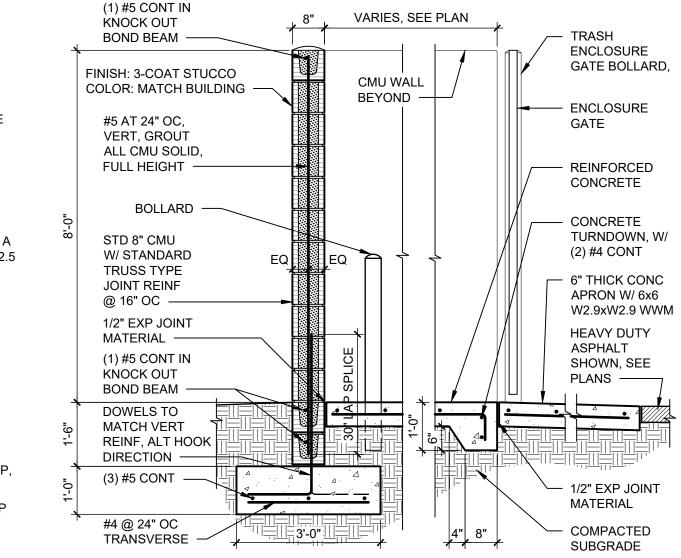

TRASH ENCLOSURE CMU WALL AND GATE

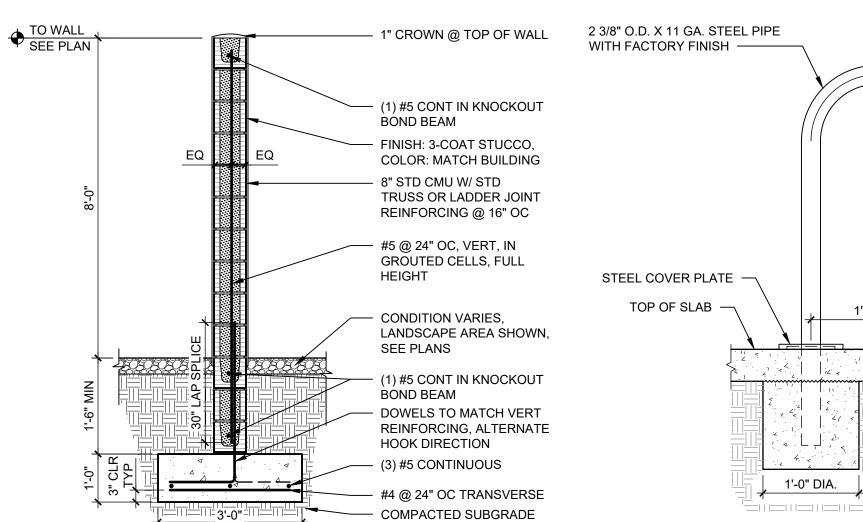



(A4)

COLOR TO MATCH GATE

ENCLOSURE GATE

8' CMU SCREEN WALL

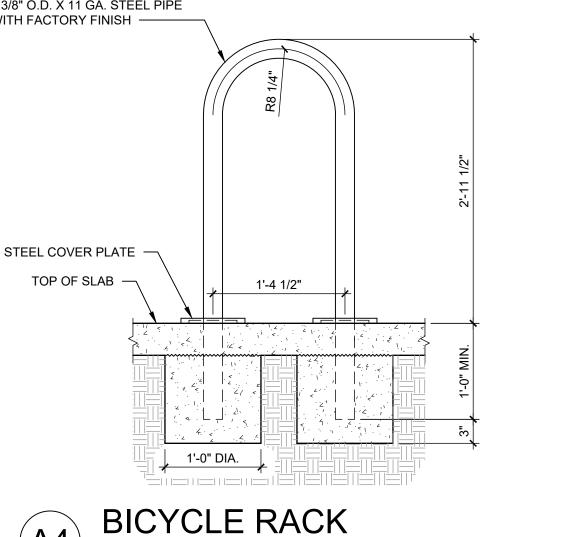

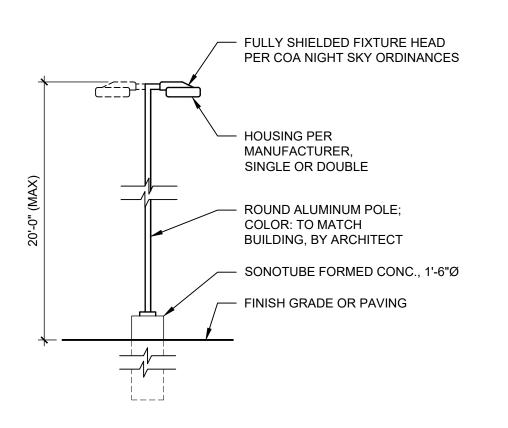

SITE DETAILS

PARKING LIGHT POLE

CONCRETE JOINTS & JOINT SPACING

KEY JOINT

SAWCUT CONTROL JOINT

CONCRETE JOINT

EXPANSION JOINT

4' OC

CURB & GUTTER,

ROLL, HEADER,

FLUSH CURBS

APPROX WIDTH

CONTROL JOINTS

EXPANSION JOINTS 16' OC

OF CONCRETE