

8 IN CONCRETE TURNDOWN EDGE

8 1 CONCRETE TURNDOWN EDGE

6' - 0"

- 2x2x 1/4" STL TUBE, TYP.

- 2" x 2" x 1/4" TUBE STEEL. EXTEND BELOW GRADE & ENCASE IN

CORRUGATED SHEET METAL PANELS

POWDER COATED

BASKETBALL GOAL

NEW 10'-0"

SEE DETAIL

B2/AS-131.

CRUSHER FINE

WALKWAY & EDGING

TURNDOWN EDGE.

/ 1/2" EXPANSION

JOINT WITH

SEALANT.

OR GALVANIZED

FASTENED TO TUBE STEEL FRAME

TO MATCH EXISTING

BASKETBALL BACKBOARD

AND GOAL PER

SPECIFICATIONS.

(6) 1/2" DIA.x3" HEADED ANCHOR STUDS

**EQUALLY SPACED OR AS REQUIRED BY** 

6" CONCRETE SLAB BASKETBALL COURT:

GA.WELDED WIRE FABRIC IN CENTER OF SLAB

4,000 PSI CONCRETE WITH 6" X 6" X 10

OVER 10" OF COMPACTED SUBGRADE.

3000 PSI CONCRETE FOOTING.

DEPTH AND DIMENSIONS AT MOST


STRINGENT REQUIREMENT BETWEEN DETAILS AND RECOMMENDATIONS

BY BASKETBALL GOAL MANUFACTURER.

A1 BASKETBALL GOAL DETAIL

GOAL POST MANUFACTURER. -

2'-6" MINIMUM CONCRETE FOOTING

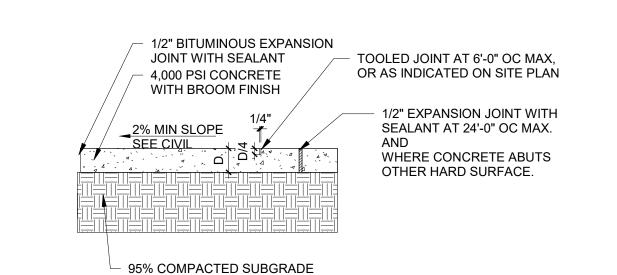


NOTES:

1. SEE GEOTECHNICAL REPORT FOR ADDITIONAL REQUIREMENTS AND

- INFORMATION.
  2. SEE SITE PLAN FOR FOR CONCRETE JOINT PATTERN.
  3. VERIFY SIDEWALK LAYOUT WITH ARCHITECT PRIOR TO FORMING AND POURING
- CONCRETE. NO EXCEPTIONS.

  4. HEAVY DUTY CONCRETE SHALL BE 6" THICK WITH 6X6X10 GA. WELDED WIRE FABRIC IN CENTER OF SLAB.
- STANDARD DUTY CONCRETE SHALL BE 4" THICK.
   TURN DOWN EDGE AT ALL EXPOSED EDGES OF CONCRETE PAVEMENT. SEE DETAIL E1 THIS SHEET.


## CONCRETE PAVEMENT (E2) CONCRETE CURB RAMP 1/8" = 1'-0"

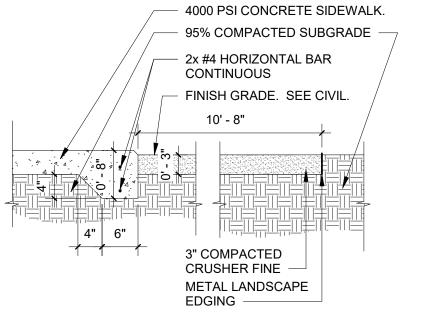

NOTE: CONTRACTOR SHALL INSTALL A 3" DEPTH OF 'MOUNTAINAIR BROWN' CRUSHER FINES AS AVAILABLE FROM JPR GRAVEL (505-877-4913). INSTALL CRUSHER FINES OVER FILTER FABRIC, MIN. 3 OZ/SY NONWOVEN NEEDLE PUNCHED POLYPROPLYENE (MIRAFI MSCAPE OR EQUIVALENT). OVERLAP FABRIC ENDS 3", TURN DOWN EDGES 6". TOP OF CRUSHER FINES SHALL BE 1" BELOW TOP OF ADJACENT PAVING. PROVIDE SAMPLE OF CRUSHER FINES FOR REVIEW AND APPROVAL PRIOR TO INSTALLATION.

NOTE: 3/4" CHAMFER TOP CORNER

## CRUSHER FINE PATH 3/4" = 1'-0"

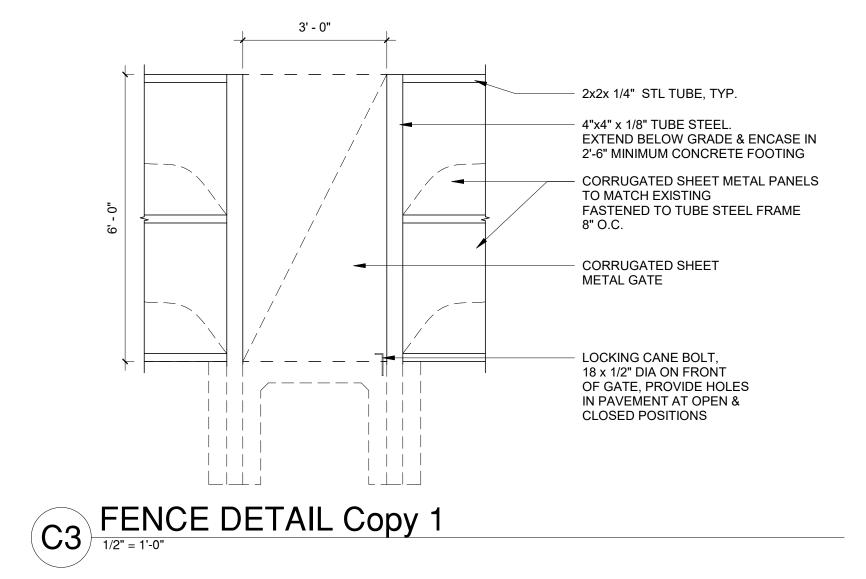

6' - 0" 6' - 0" 6' - 0"

DETECTABLE WARNING


FINISH AT CONCRETE

└ HEADER CÜRB. SEE CIVIL

ACCESSIBLE RAMP

CONCRETE SIDEWALK OR PAVING -

ACCESSIBLE RAMP.

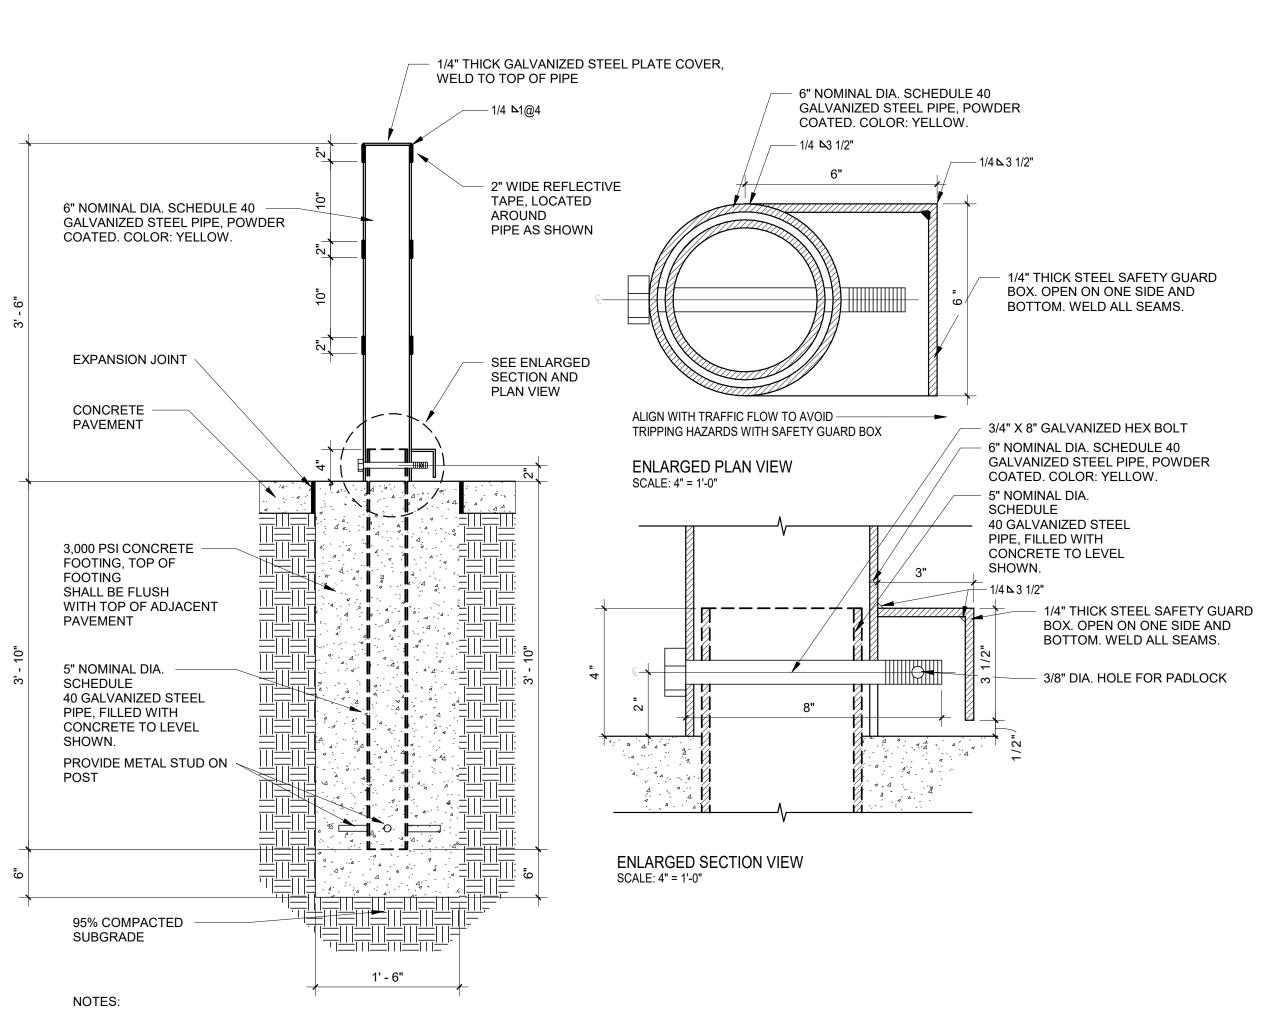

1. ALL CUT AREAS SHALL BE CLEANED THOROUGHLY WITH A WIRE BRUSH AND/OR SAND BLASTED AND REGALVANIZED. REGALVANIZING SHALL BE WITH SHERWIN WILLIAMS ZINC CLAD 7 PRIMER OR EQUAL.

A3 REMOVABLE BOLLARD

2. ALL METAL SHALL BE POWDER COATED, COLOR: YELLOW.

## **GENERAL NOTES**

- A. SUB GRADE PREPERATION AND SOIL COMPACTION AT ALL CONCRETE WORK SHALL COMPLY WITH REQUIREMENTS NOTED ON CIVIL DRAWINGS AND
- GEOTECHNICAL REPORT


  B. DROVIDE PROOM FINISH ON CONCRETE SIDEWALKS AND MOW STRIF
- B. PROVIDE BROOM FINISH ON CONCRETE SIDEWALKS AND MOW STRIPSC. VERIFY SIDEWALK LAYOUT WITH
- D. PAINT ALL EXPOSED STEEL.E. FURNISH AND INSTALL SELF LEVELING SEALANT AT ALL CONCRETE EXPANSION

fbt architects

P 505.883.5200 WEB: www.fbtarch.com

6501 Americas Pkwy NE., Ste. 300 Albuquerque, NM 87110

CONSULTANTS



## Cottonwood Classical Preparatory School - Portable Addition

7801 Jefferson St NE, Albuquerque, NM 87109

MAY 2021

MARK DATE DESCRIPTION

ISSUE:	
DATE:	MAY 2021
PROJECT NO:	00000
DRAWN BY:	Author
CHECKED BY:	Checker

SHEET TITLE

SITE DETAILS

AS-102

/2021 4:40:35 PM