



DRIVE UP EXPANSION
T-2813 ALBUQUERQUE
2120 LOUISIANA BLVD NE
ALBUQUERQUE, 87110 NM

SCOPE OF WORK

PARKING LOT RE-STRIPING, STALL PARKING SIGNAGE AND WAYFINDING DRIVE UP BEACONS WHERE SHOWN ON THE PLAN.

ZONING

MX-H - MIXED-USE HIGH INTENSITY

OFF-STREET PARKING LOT CODE REQUIREMENTS

- DRIVE AISLE = 24' MIN. WIDTH
- STANDARD PARKING STALL = 8.5' X 18' MIN. MAX OVERHANG = 2'
 COMPACT PARKING STALL = 7.5' X 15' MIN. MAX OVERHANG = 1.5'
- OWNER

TARGET CORP.
CONTACT: MATTHEW FLANSBURG
50 SOUTH 10TH ST, SUITE 400
MINNEAPOLIS, MN, 55403
MATTHEW.FLANSBURG@TARGET.COM

CIVIL ENGINEER

KIMLEY-HORN
CONTACT: JUSTIN BECKER P.E.
401 B ST, SUITE 600
SAN DIEGO, CA, 92101
619-744-0619
JUSTIN.BECKER@KIMLEY-HORN.COM



VICINITY MAP



SHEET INDEX

COVER SHEET	C0.0
OVERALL SITE PLAN	C0.1
IMPROVEMENT PLAN	C1.0
DETAILS	C2 0



© 2021 KIMLEY-HORN AND ASSOCIATES
3801 AUTOMATION WAY SUITE 210
FORT COLLINS, CO 80525
303-228-2300

No Description

DATE: XX/XX/2021

TARGET
T-2813 ALBUQUERQUE
2120 LOUISIANA BLVD NE

orject Number T-2813

Config:
Drawn By
Checked By

COVER SHEET

C0.0





Kimley >>> Horr
© 2021 KIMLEY-HORN AND ASSOCIATES, IN
3801 AUTOMATION WAY STITE 210

© 2021 KIMLEY-HORN AND ASSOCIATES, INC.

3801 AUTOMATION WAY SUITE 210
FORT COLLINS, CO 80525
303-228-2300
WWW.KIMLEY-HORN.COM

JIRED_				PARKING QUANTITY 312 STALLS 451 STALLS		
				312 STALLS		
ING I	MMERCIAL RETAIL	2 STALL/ 1000 SF	155,629 SF	451 STALLS		
<u>IDED</u>				433 STALLS		

PARKING QUANTITY SUMMARY

Date No Description

DATE: XX/XX/2021

2813 ALBUQUERQUE
20 LOUISIANA BLVD NE

PLAN


C0.1


Project Number T-2813


Config:
Drawn By CY
Checked By KR

OVERALL SITE

GRAPHIC SCALE IN FEET
0 20 40 80

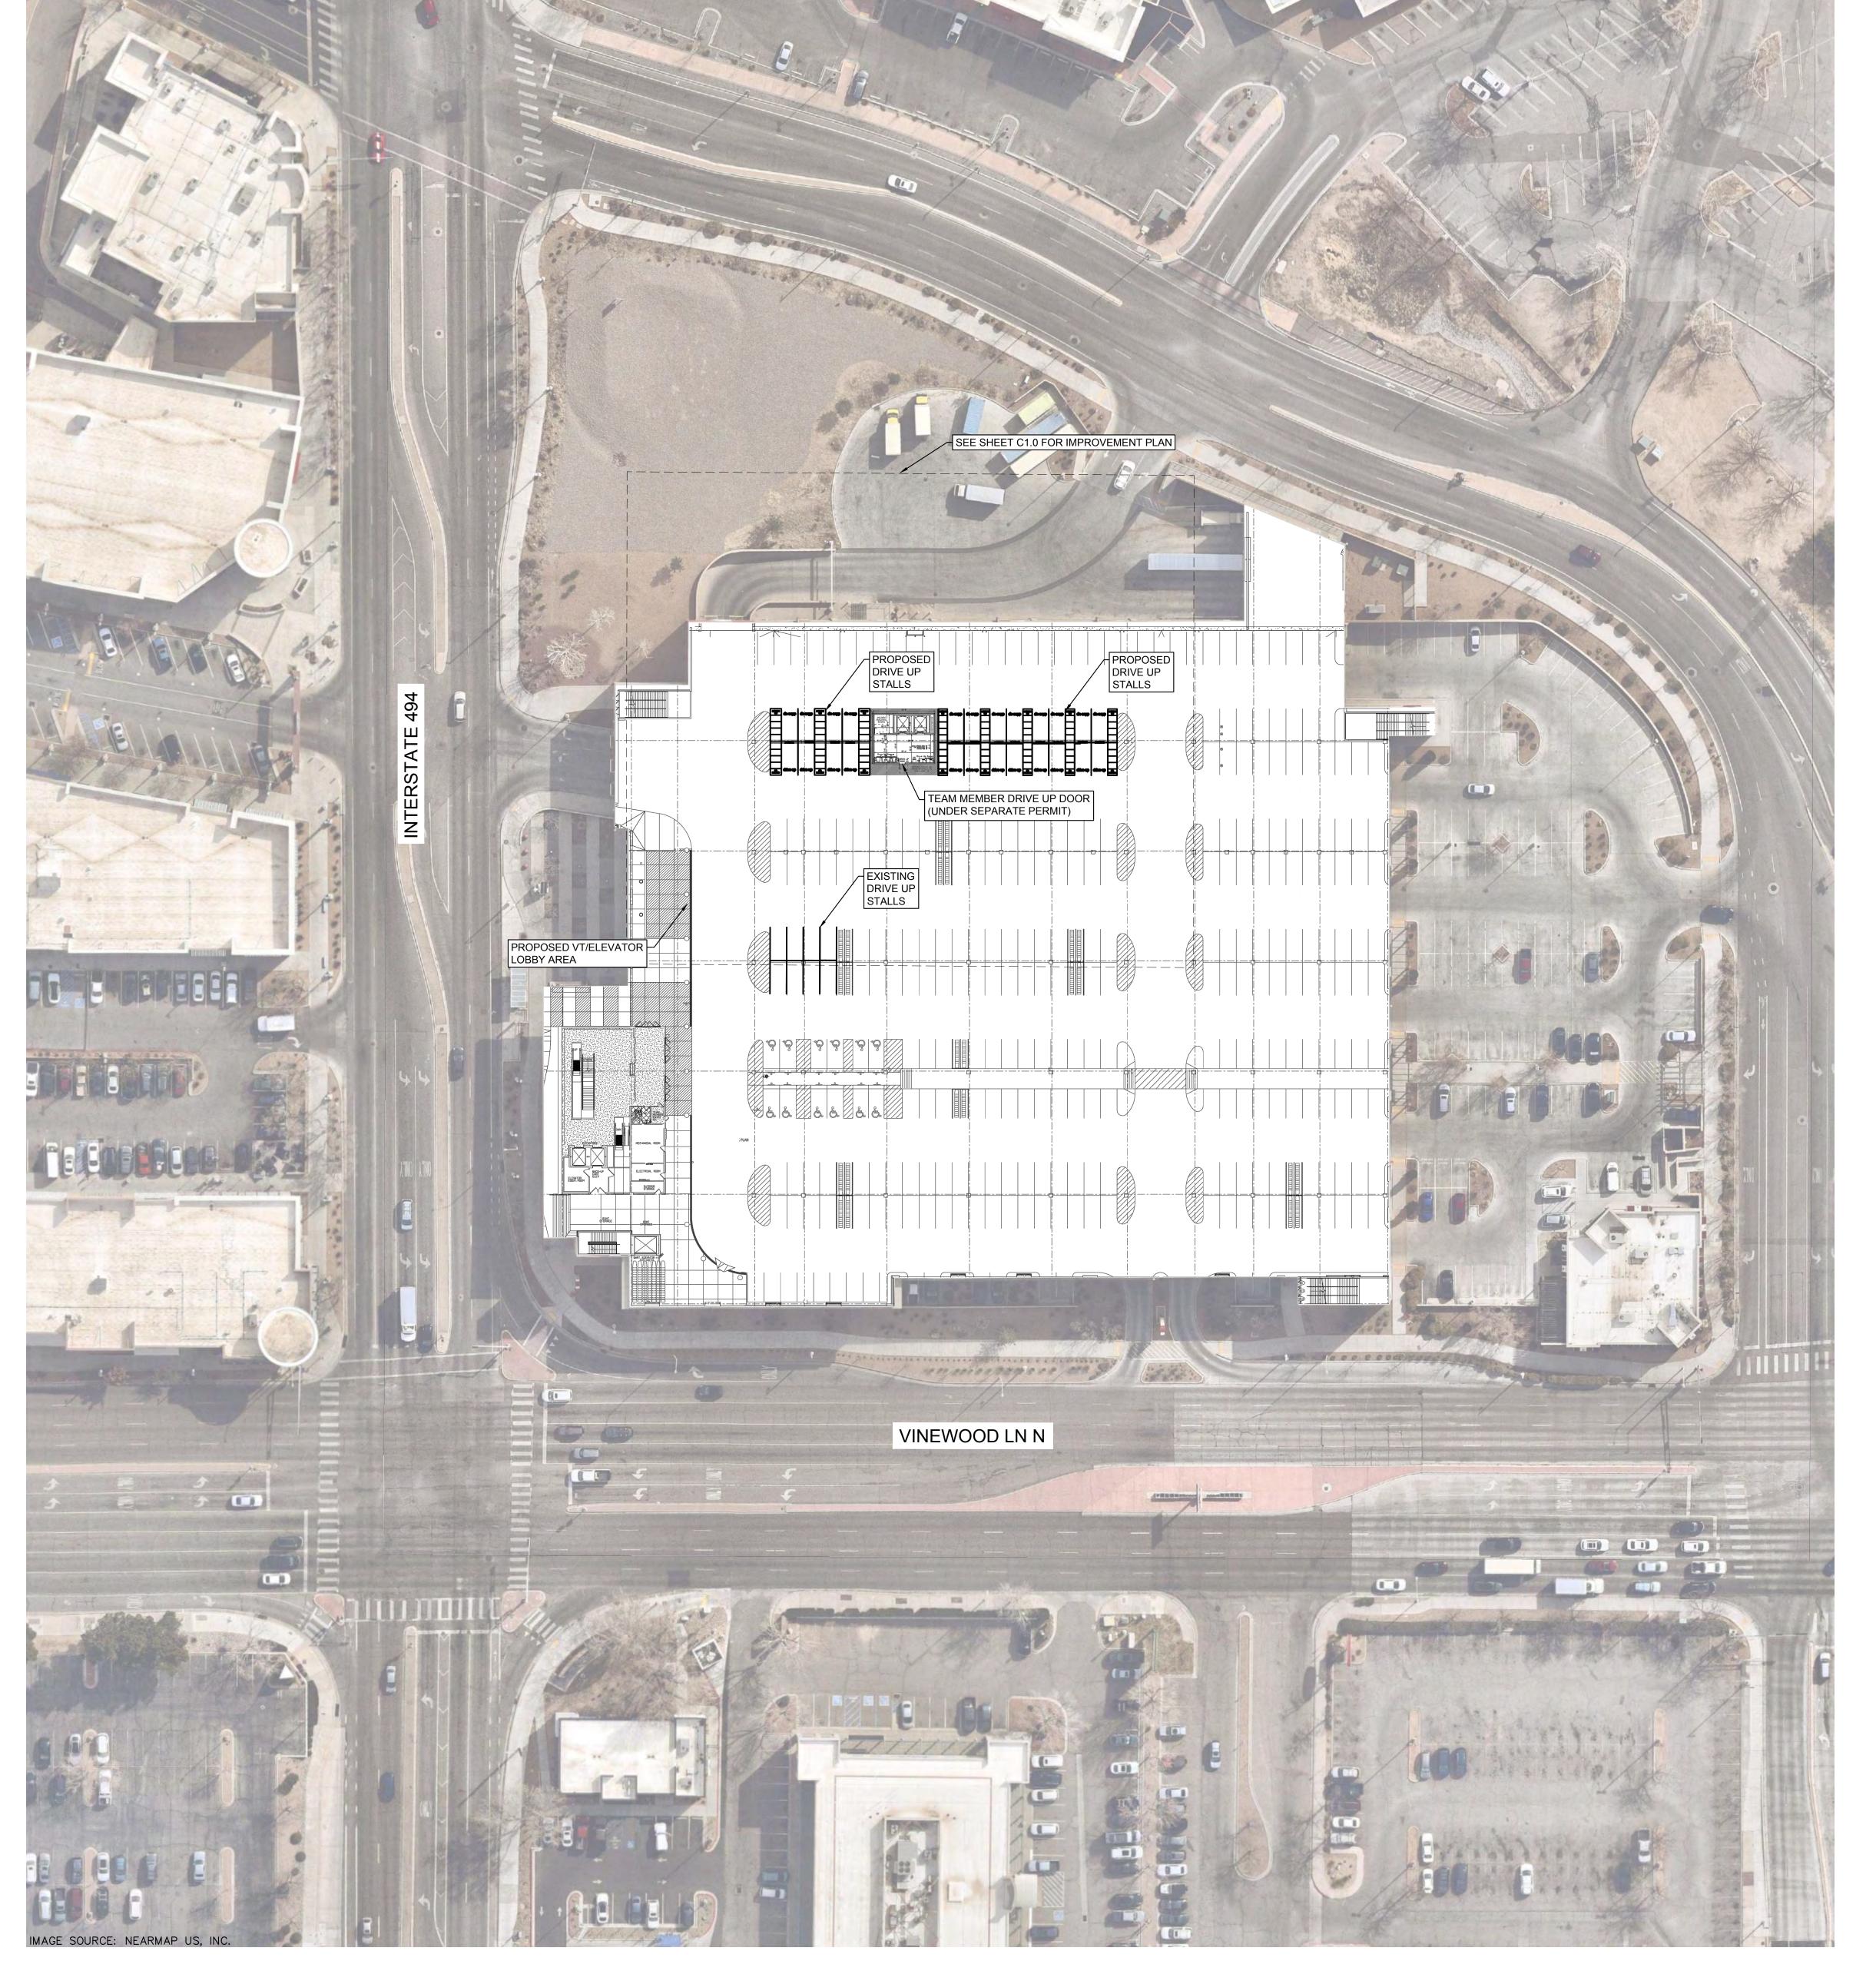

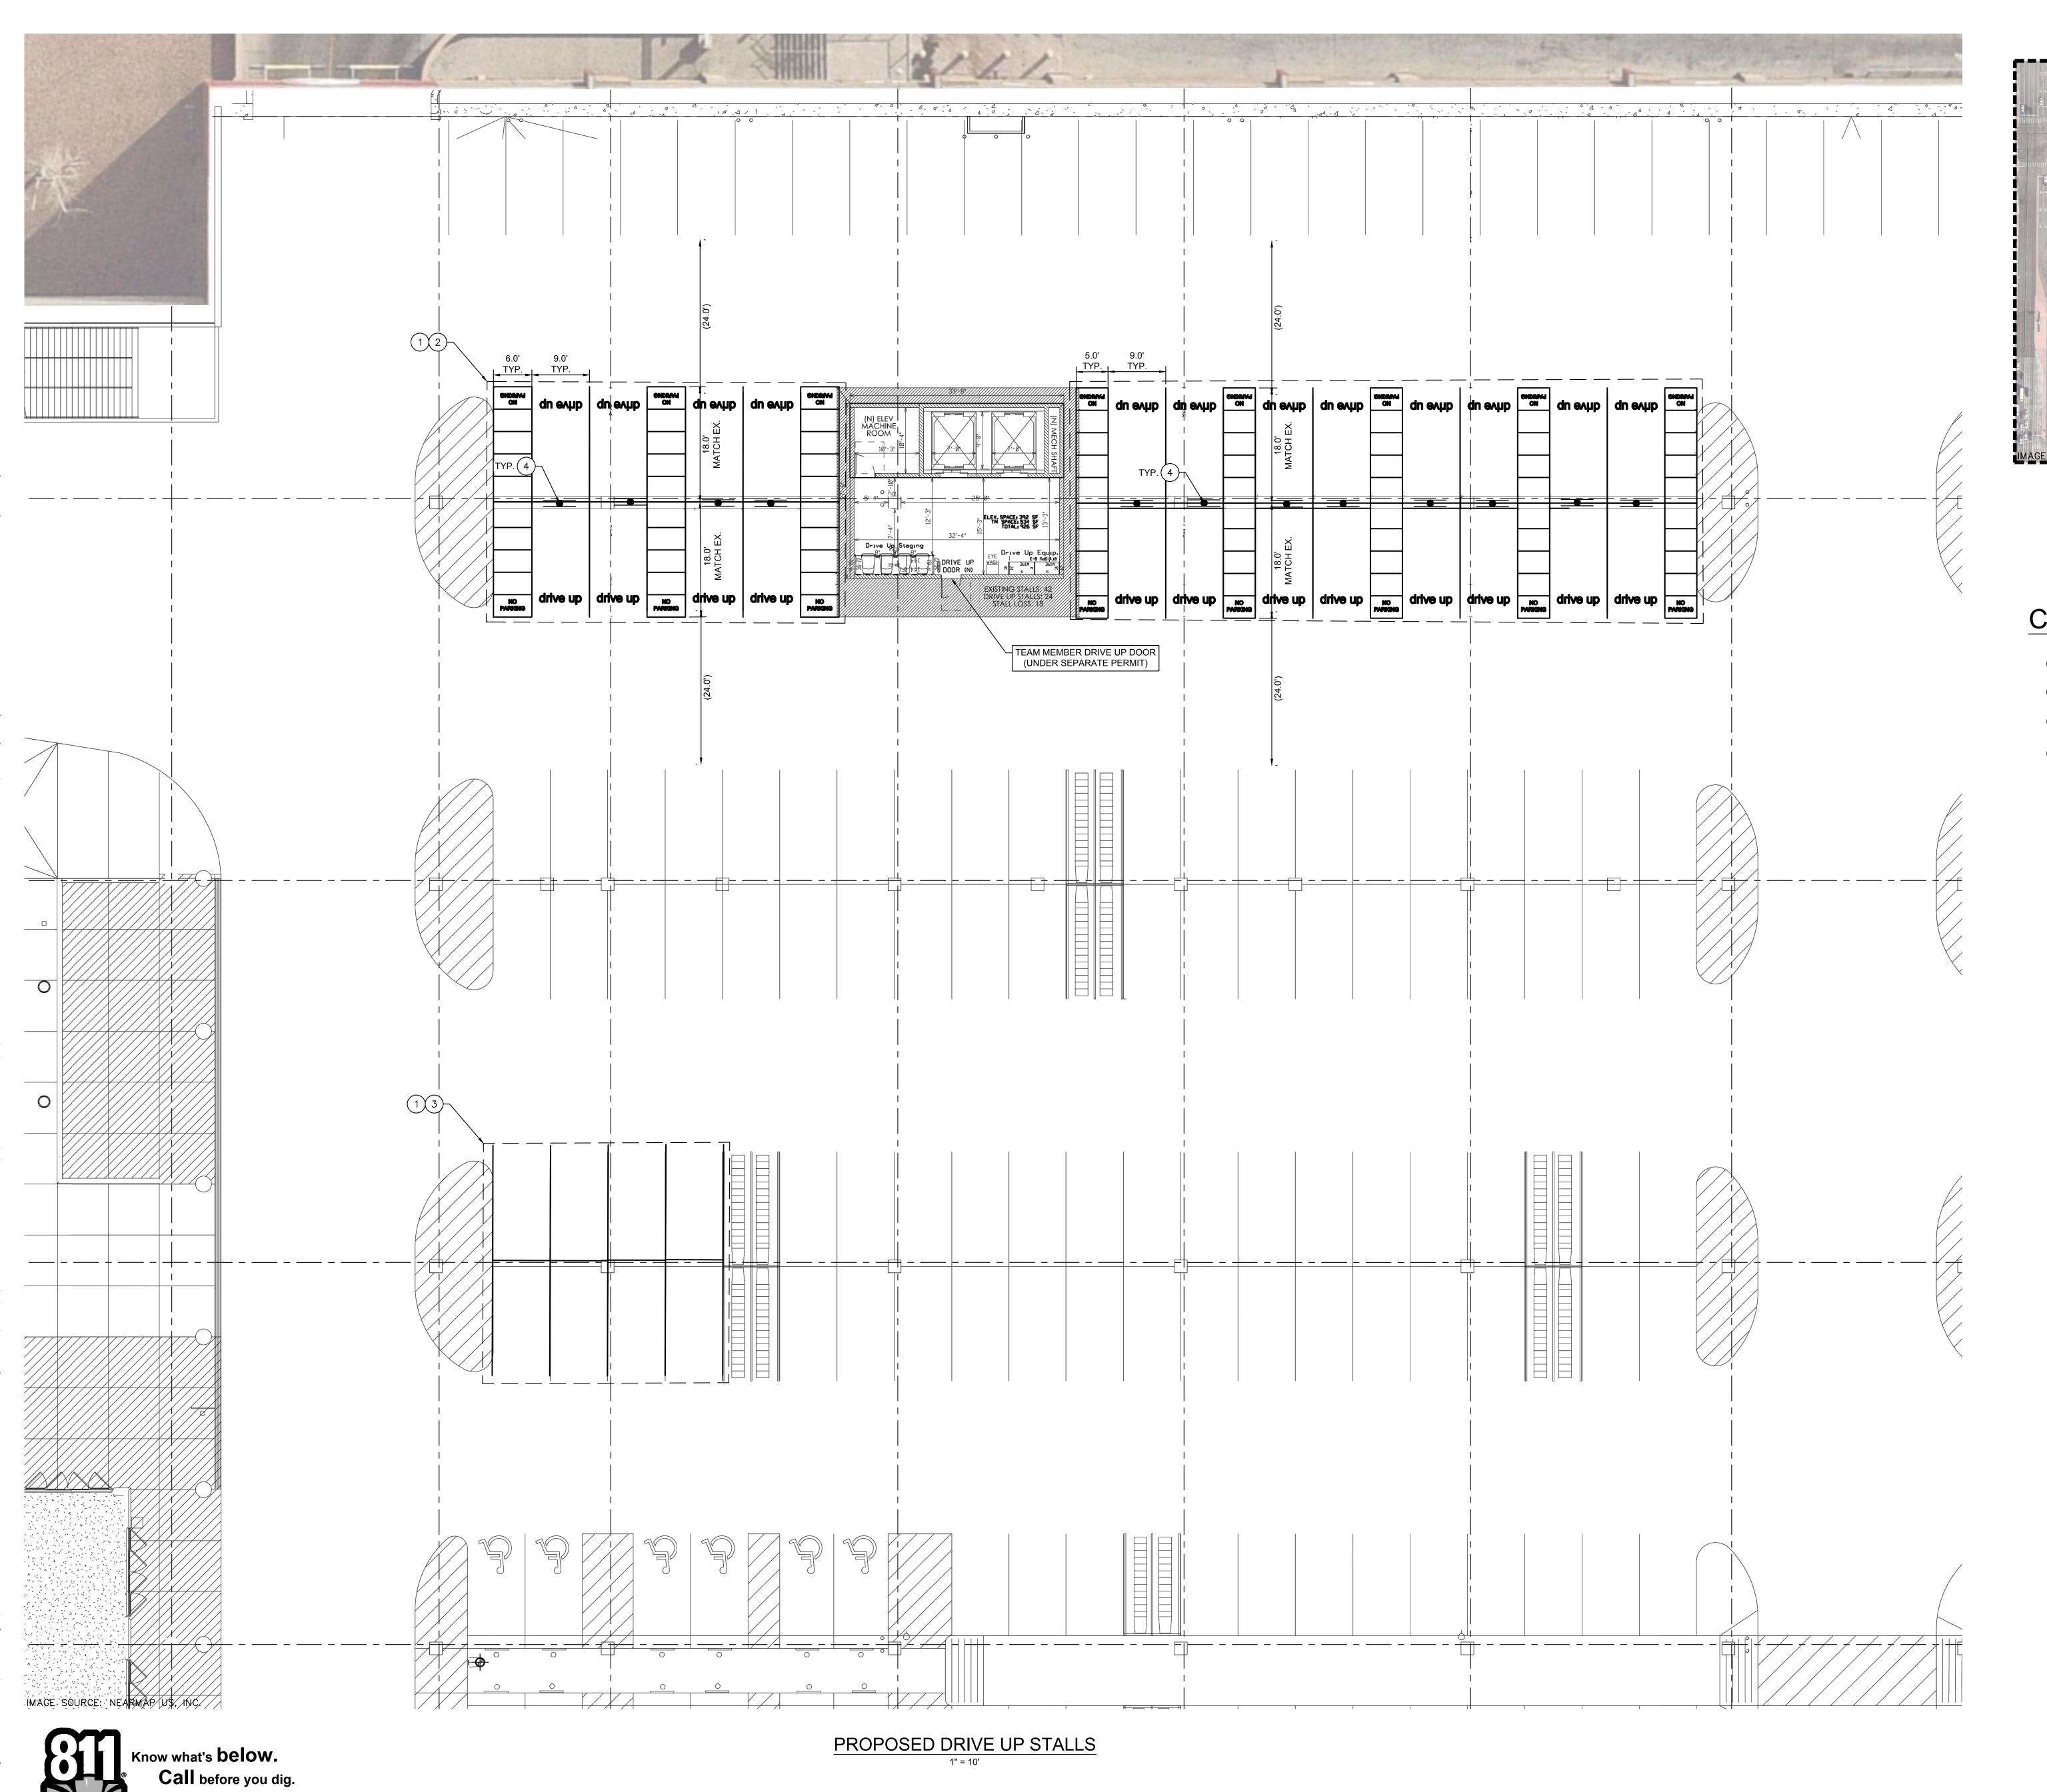

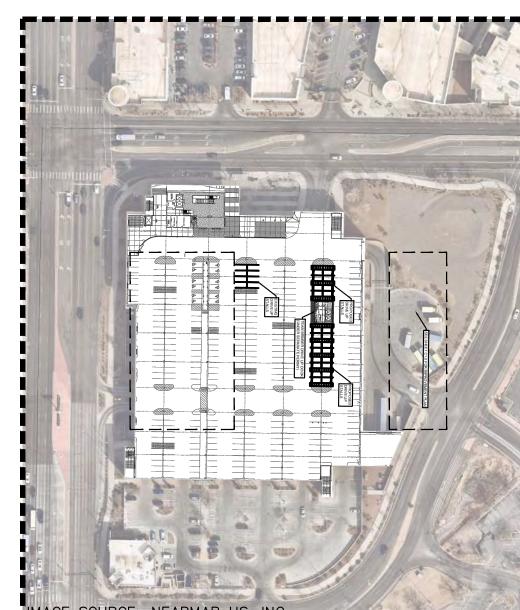

KEY MAP

CONSTRUCTION NOTES

- 1) SANDBLAST AND REMOVE EXISTING STRIPING AND DRIVE UP SIGNAGE.
- 2 INSTALL DRIVE UP STRIPING AND SIGNAGE PER DETAILS SHEET.
- RESTRIPE STANDARD PARKING STALLS USING 4" WIDE WHITE STRIPING.
- 4 INSTALL FLEXBOLLARD POST AND PANEL SIGN PER DETAILS SHEET.

DATE: XX/XX/2021

TARGET®

1000 NICOLLET MALL
MINNEAPOLIS, MN 55403

Kimley»Horn

© 2021 KIMLEY-HORN AND ASSOCIATES, INC 3801 AUTOMATION WAY SUITE 210 FORT COLLINS, CO 80525 303-228-2300 WWW.KIMLEY-HORN.COM

Date No Description

T-2813 ALBUQUERQUE
2120 LOUISIANA BLVD NE
ALBUQUERQUE, NM 87110

Project Number T-2813

Config:

Drawn By CY

Checked By KR

IMPROVEMENT

PLAN

C1.0

TARGET 1000 NICOLLET MALL MINNEAPOLIS, MN 55403

Kimley» Horn
© 2021 KIMLEY-HORN AND ASSOCIATES, INC.
3801 AUTOMATION WAY SUITE 210
FORT COLLINS, CO 80525
303-228-2300
WWW.KIMLEY-HORN.COM

Date No Description

DATE: XX/XX/2021

T-2813 ALBUQUERQUE
2120 LOUISIANA BLVD NE
ALBUQUERQUE, NM 87110

T-2813

DETAILS


C2.0

FEDERAL
HEATH


VISUAL COMMUNICATIONS

www.FederalHeath.com

Post & Panel Flexi-Sign for Drive-Up

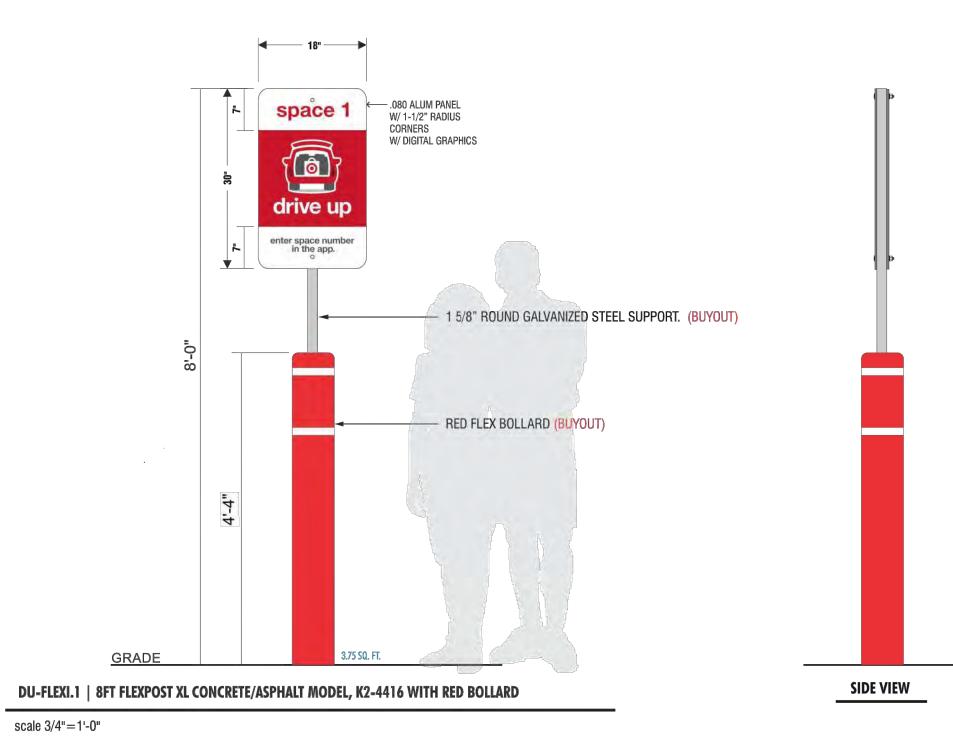

NOTE: ORDER CONCRETE ANCHORING KIT OR ASPHALT ANCHORING KIT AS REQUIRED.

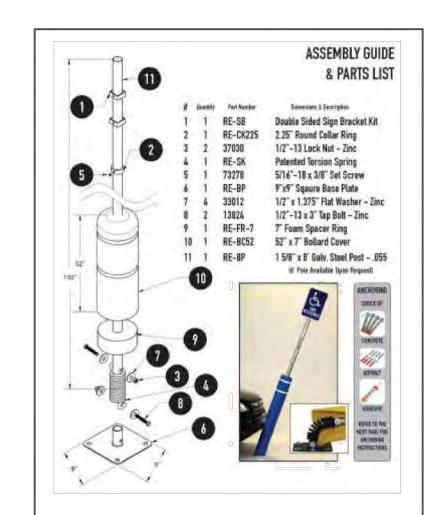


PRIMARY COLOR PALETTE

Use Target Red for savings messages.

Light Gray Dont use colors outside of this palette.

Use 100% or 85% black for headlines, subheads and body copy.

SHEET 11 of 28

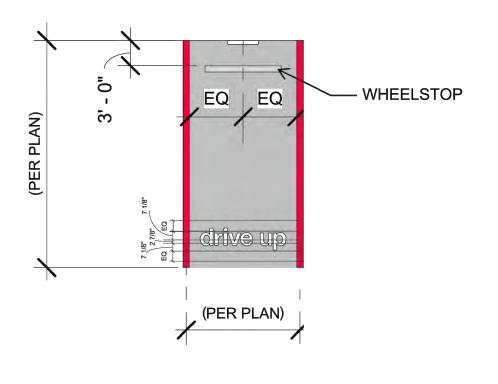

NOTES:


- ALL RED STRIPING IS 6" WIDE
 TARGET TO PROVIDE GC WITH "drive up" AND "NO
- PARKING" TEMPLATES


 SEE PLAN VIEW DIMENSIONS FOR EXACT
- LAYOUT OF SITE


 4. REFER TO C1.0 FOR EXACT DIMENSIONS

DRIVE UP STRIPING
N.T.S.

Know what's below.
Call before you dig.

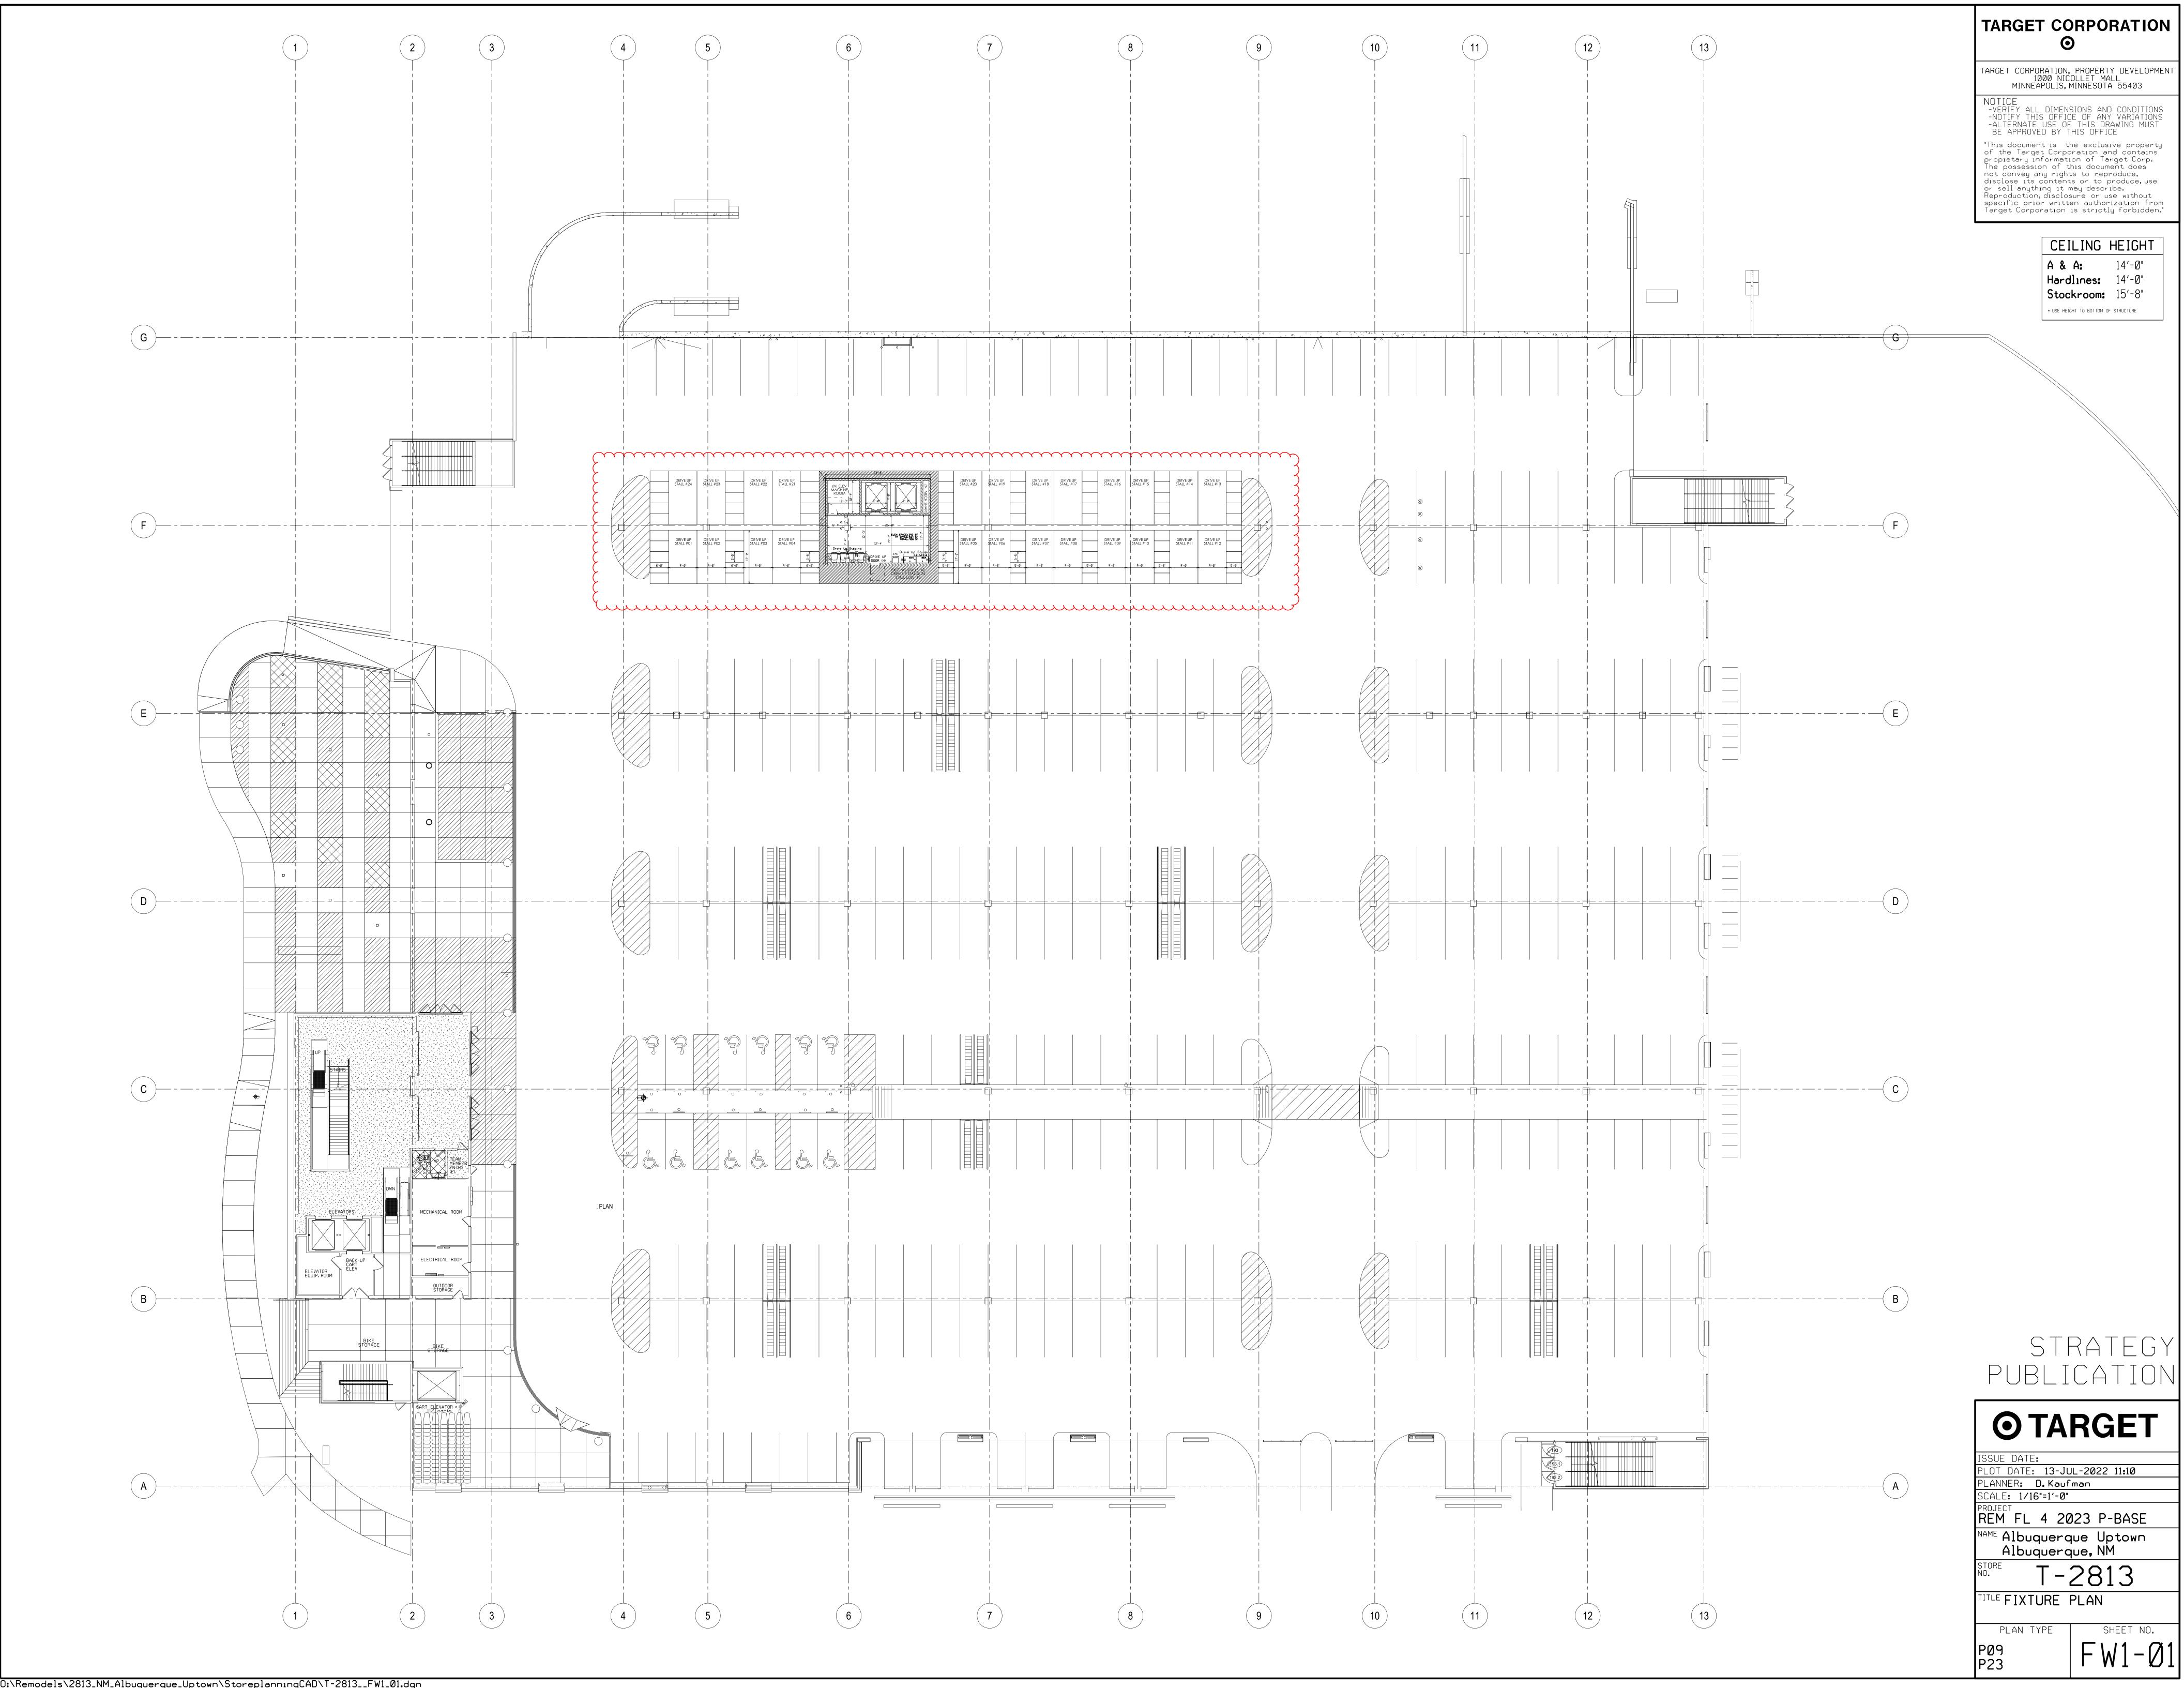

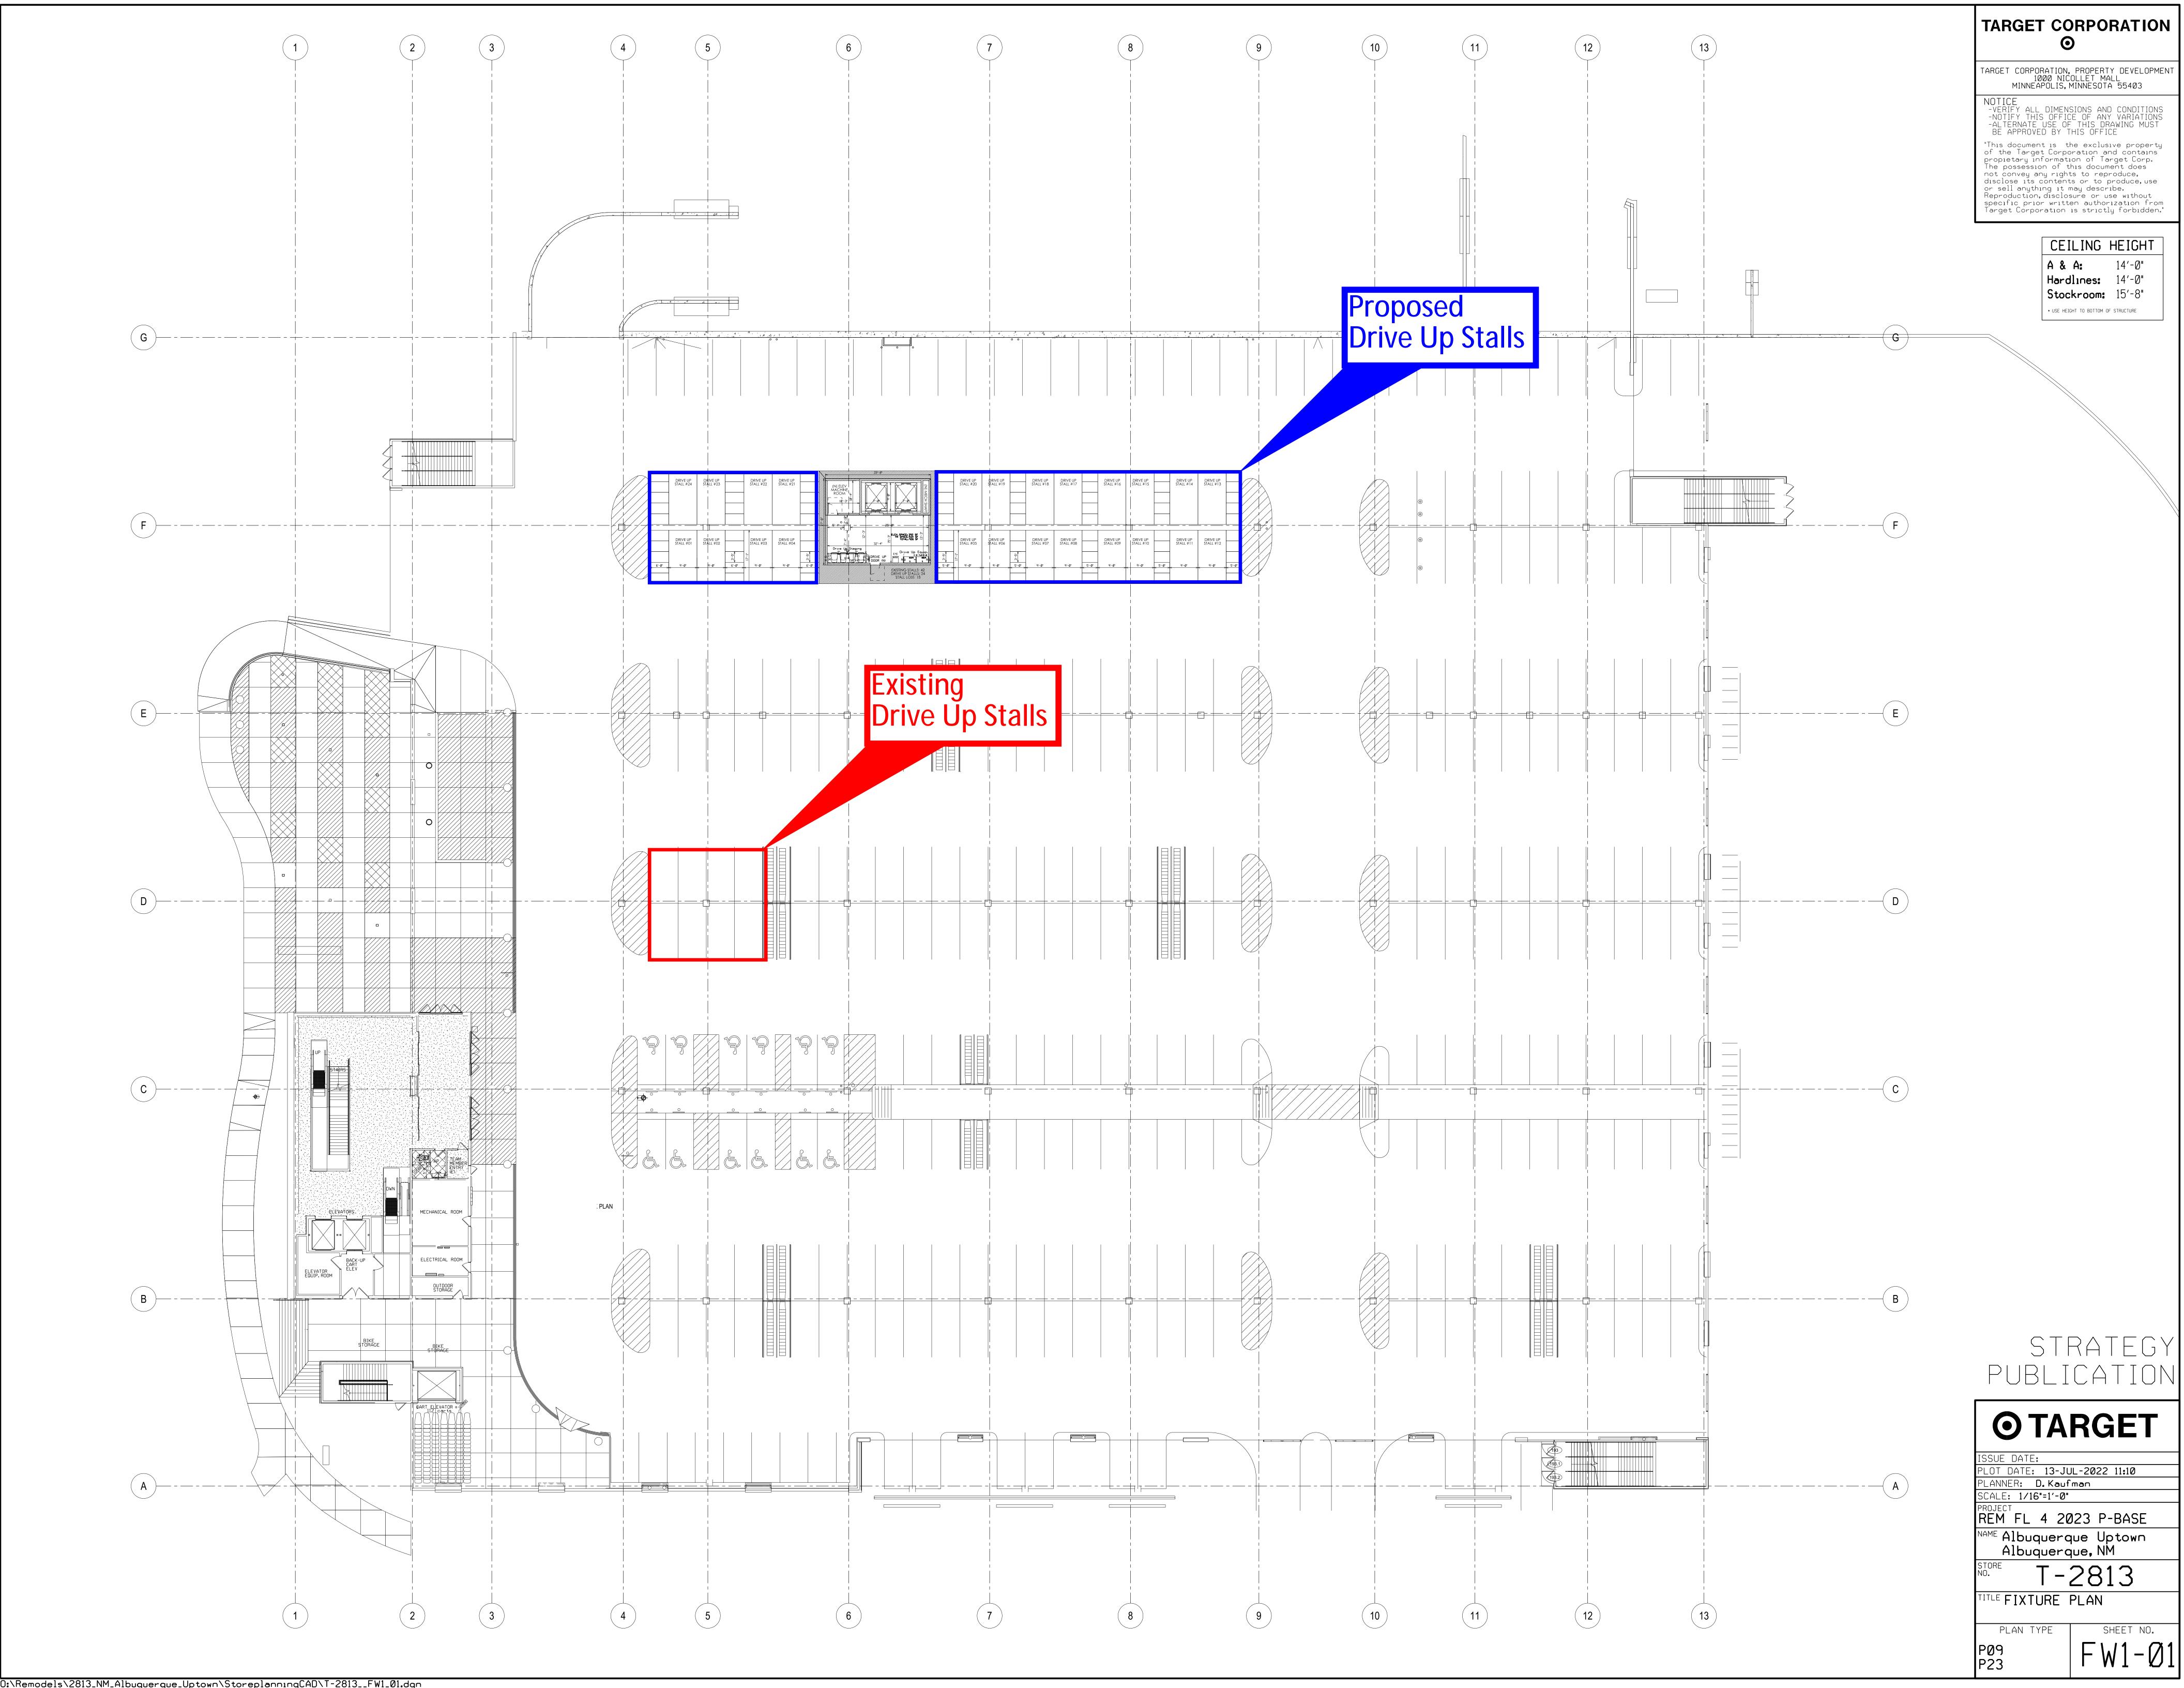

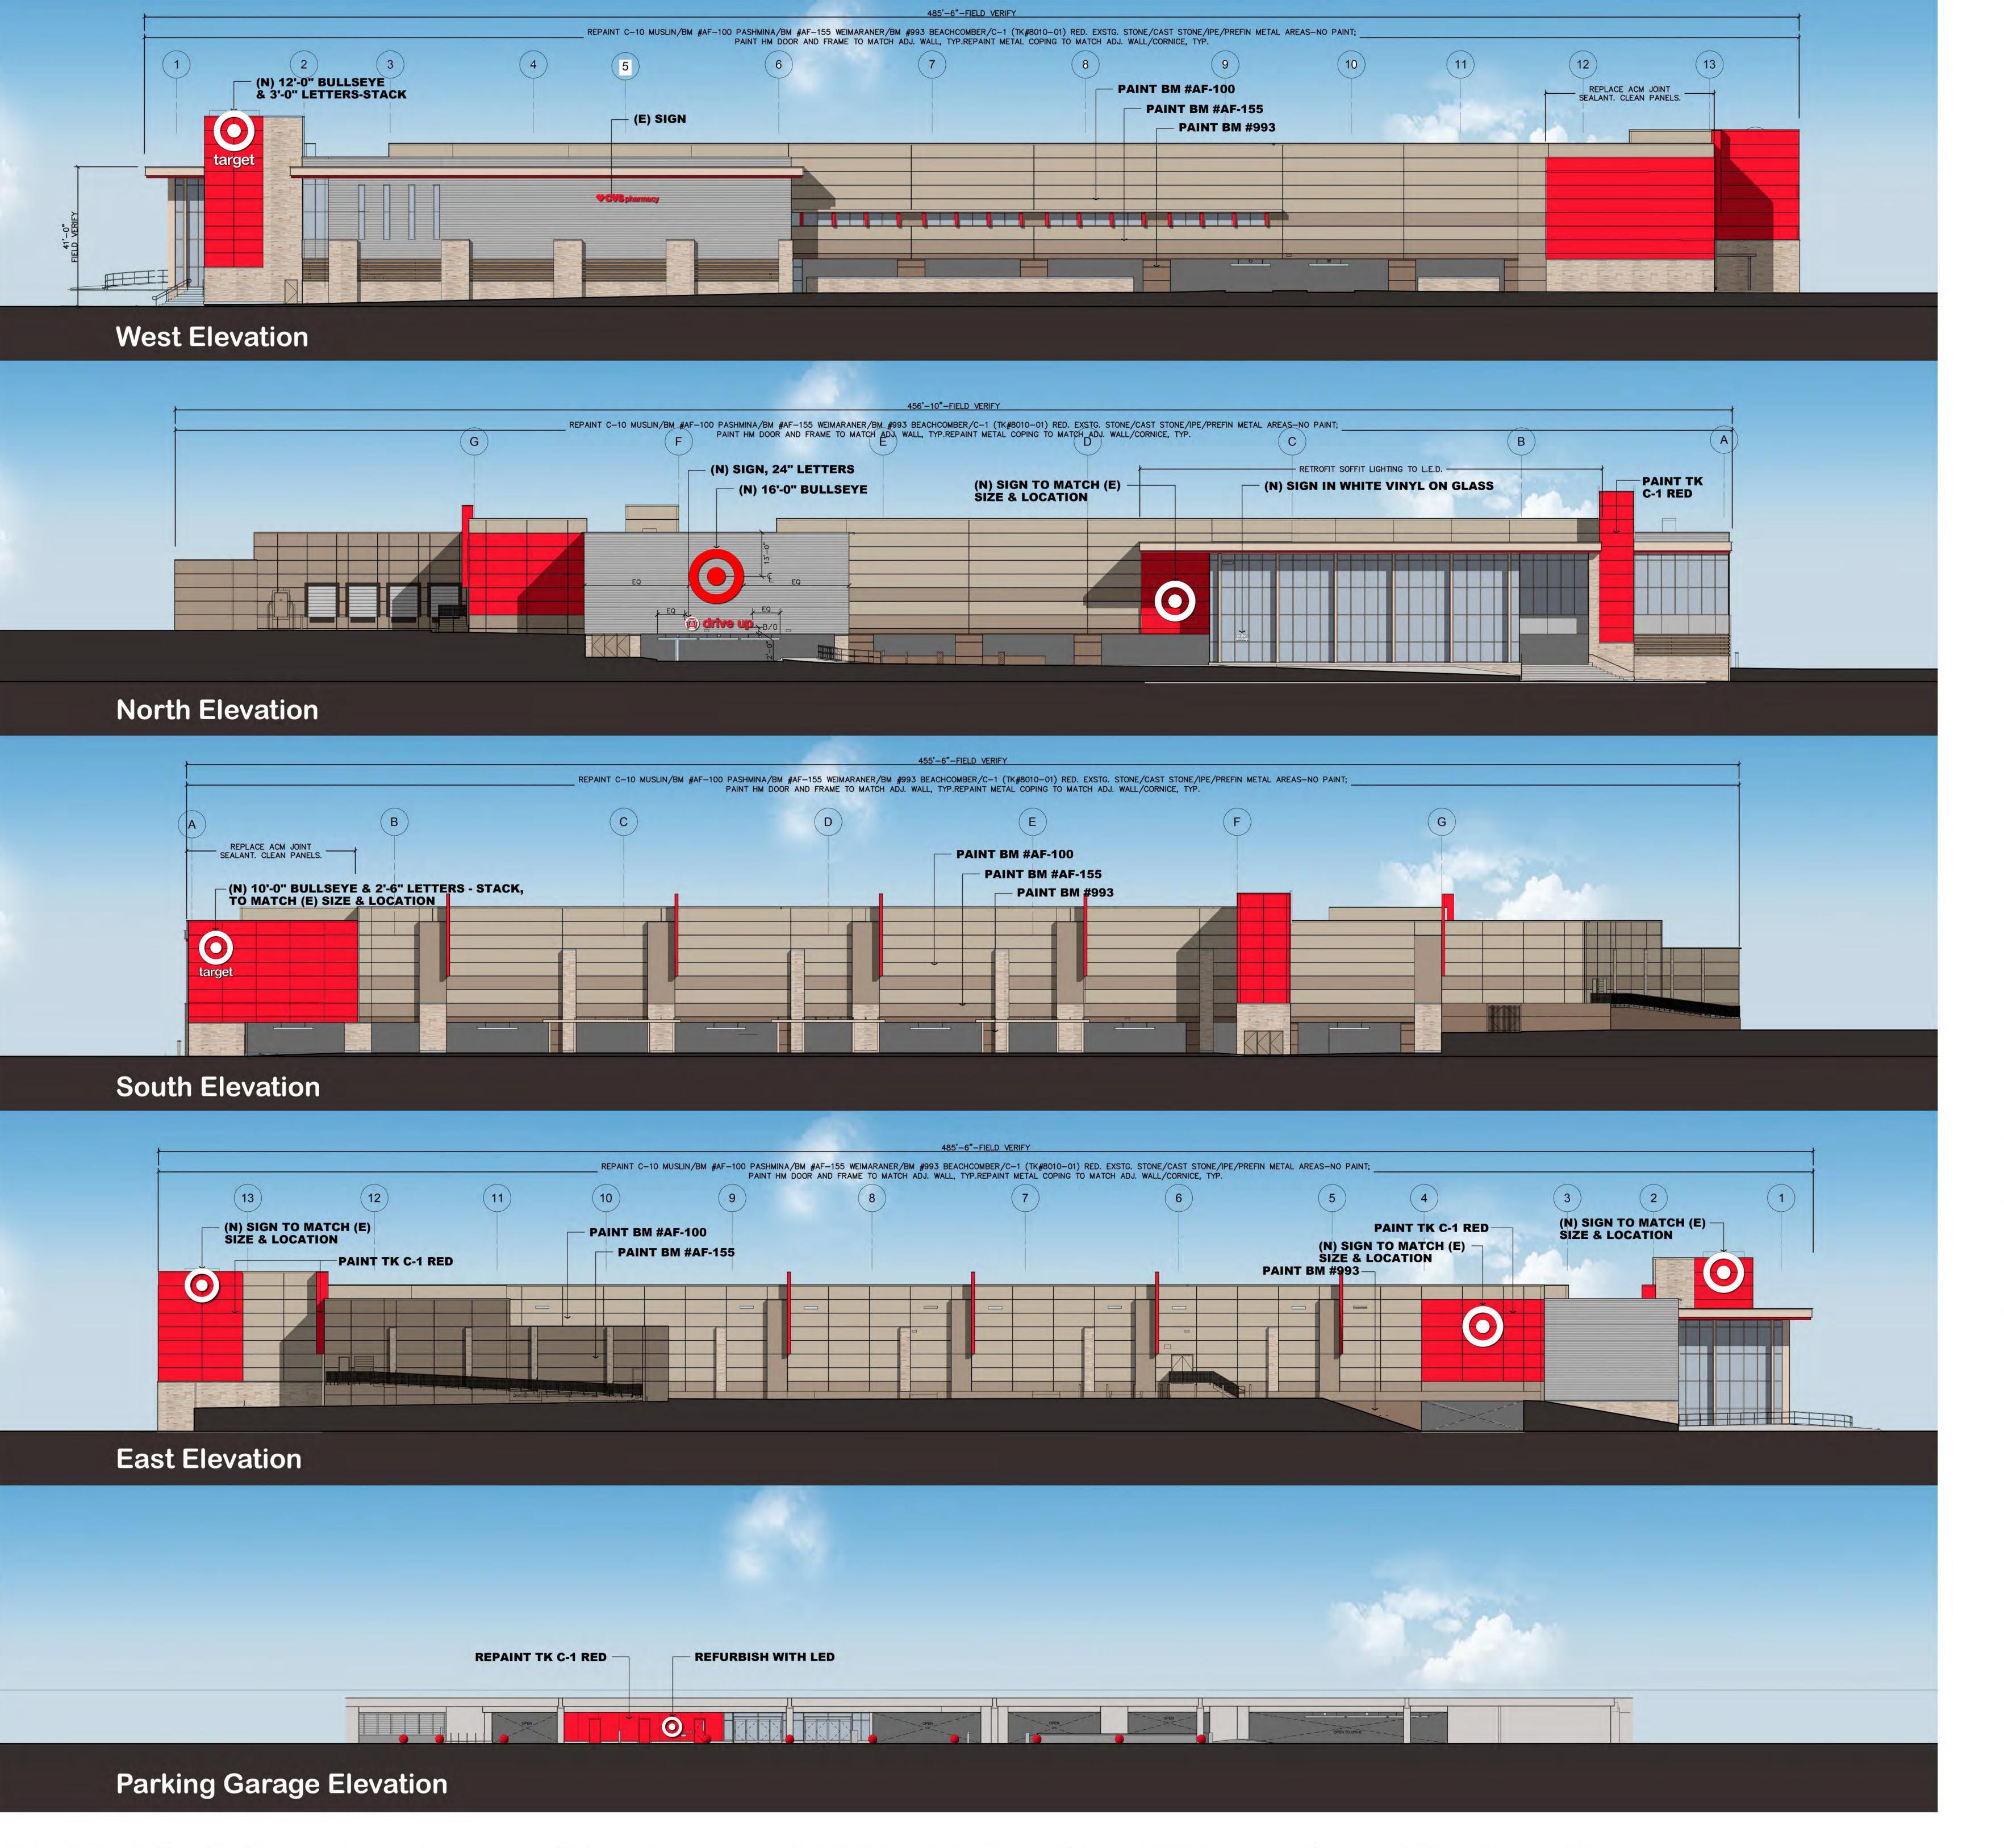




NOTE:

- * ALL COLORS ARE FOR REFERENCE ONLY.
- * EXISTING PREFINISHED METAL-NO PAINT, UNLESS **NOTED OTHERWISE**
- * EXISTING STONE, CAST STONE, IPE & PREFIN METAL AREAS-NO PAINT; PAINT HM DOOR AND FRAME TO MATCH ADJ. WALL, TYP.
- * RESEAL CAST STONE CAPS.
- *STORE EXTERIOR WALLS ARE PRIMARILY PRECAST **CONCRETE & STONE VENEER**
- *REPAINT BUS STOP C-1 RED-#TK8010-1
- *BEN-2: MODERN, COLOR......SILVER

GENERAL NOTE


- * AREA TO BE PAINTED STARTS AT TOP OF CURB OR REVEAL AND CONTINUES TO TOP OF PARAPET/FLASHING OR REVEAL. PAINT COLOR AND FINISH TRANSITIONS OCCUR AT EXISTING VERTICAL CONTROL JOINTS OR AT INSIDE BUILDING CORNERS, U.N.O.
- * ALL EXISTING WALL-MOUNTED ITEMS TO BE PAINTED TO MATCH ADJ. WALL SURFACE, U.N.O.
- * PATCH ALL VISIBLE HOLES FROM MOUNTING OF REMOVED SIGNS WITH LIKE MATERIALS. RESTORE WALL SURFACE TO 'LIKE NEW' APPEARANCE.

Proposed Elevations

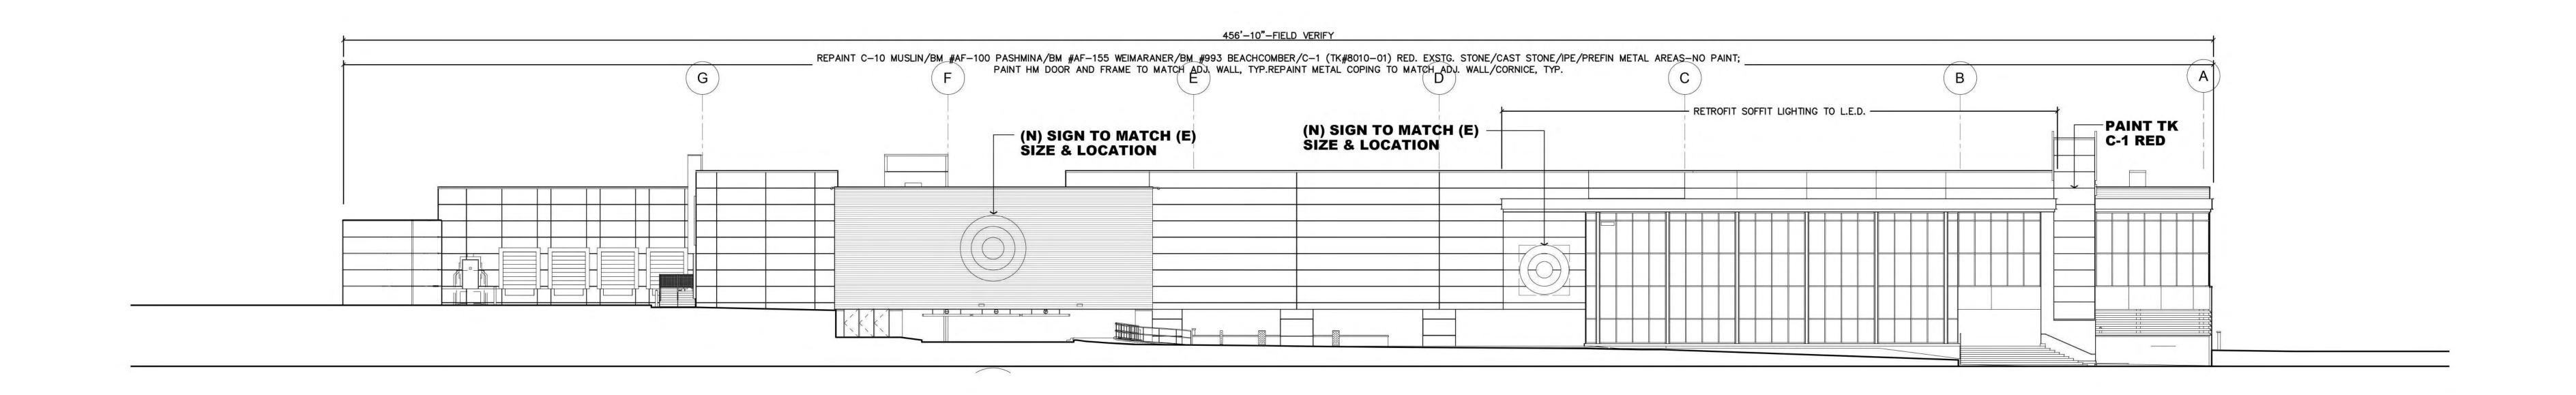




Existing Condition

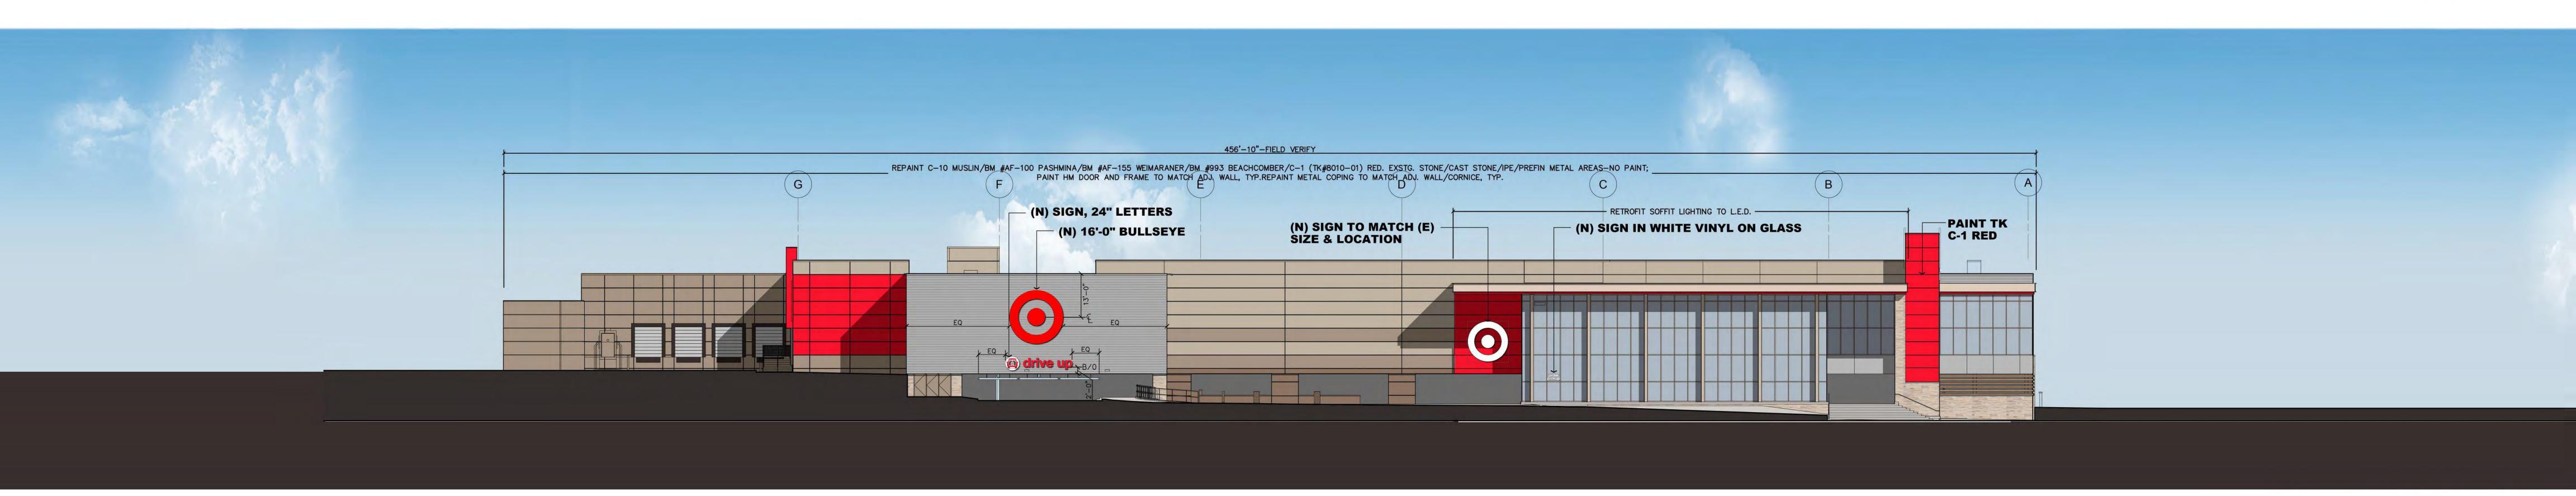

Proposed Front Elevation




Post & Panel Flexi-Sign for Drive-Up

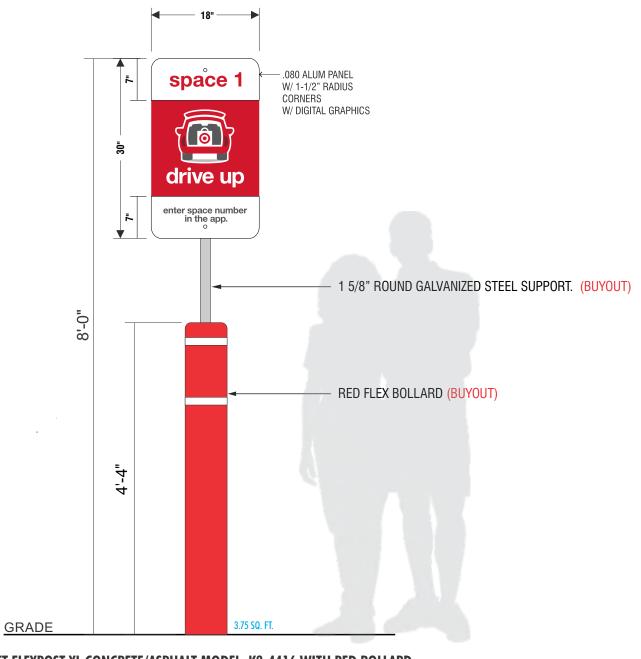

DU-FLEXI.1 | 8FT FLEXPOST XL CONCRETE/ASPHALT MODEL, K2-4416 WITH RED BOLLARD

scale 3/4"=1'-0"

NOTE: ORDER CONCRETE ANCHORING KIT OR ASPHALT ANCHORING KIT AS REQUIRED.

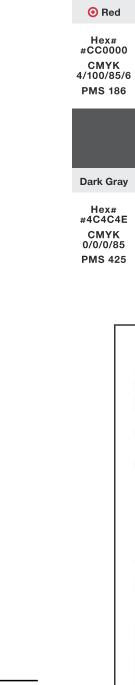

SIDE VIEW



CMYK 28/100/100/31

PMS 186 PMS 188

CMYK


Dark Gray Light Gray


Hex# #4C4C4E Hex# #BEBEBE CMYK 26/21/20/0 CMYK 0/0/0/85 PMS 425 PMS 421

PRIMARY COLOR PALETTE

Use 100% or 85% black for headlines, subheads and body copy. Use Target Red for savings messages.

Dont use colors outside of this palette.

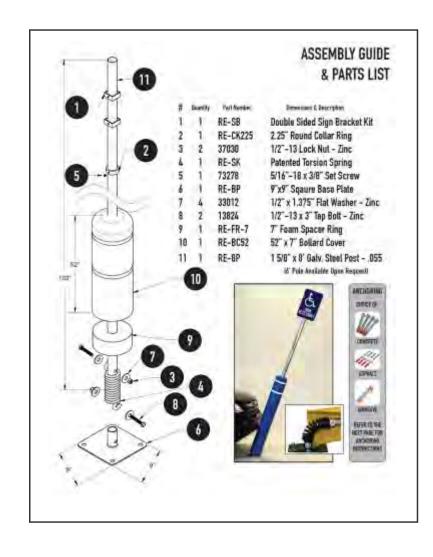

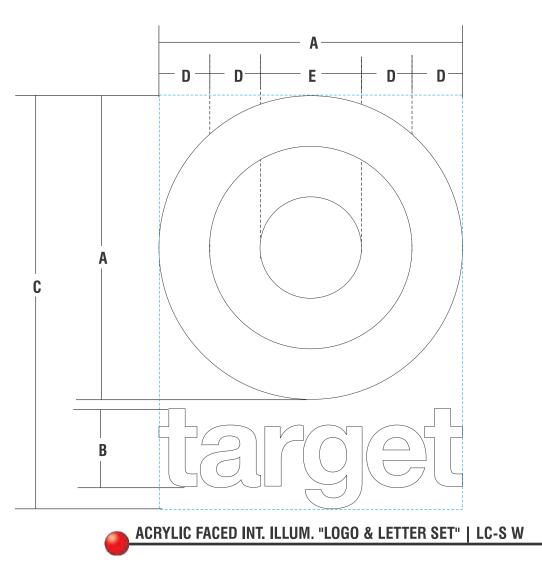


SCOPE OF WORK:


MANUFACTURE AND INSTALL CHANNEL LOGO & LETTERS



SIGN TYPE	A	В	C	D	Е	RETAINER	AMPS CIRCUITS	SQ.FT.
LL144/37 LC-W	12'-0"	3'-1"	16' 3-3/4"	2'-0"	4'-0"	1 ½"		195.7
LL132/34 LC-S W	11'-0"	2'-10"	14' 11-1/2"	1'-10"	3'-8"	1 ½"		164.5
LL120/30 LC-S W	10'-0"	2'- 6-7/8"	13' 7-1/8"	1'-8"	3'-4"	1"		135.9
LL108/27 LC-S W	9'-0"	2' 3-3/4"	12' 2-7/8"	1'-6"	3'-0"	1"		110.2
LL96/24 LC-S W	8'-0"	2'-0-5/8"	10' 10-1/2"	1'-4"	2'-8"	1"		87
LL84/21 LC-S W	7'-0"	1' 9-1/2"	9' 5-1/4"	1'-2"	2'-4"	1"		66.6
LL72/18 LC-S W	6'-0"	1' 6-1/2"	8' 1-7/8"	1'-0"	2'-0"	1"		48.9
LL60/15 LC-S W	5'-0"	1' 3-3/8"	6' 9-1/2"	10"	1′-8"	1"		34
LL48/12 LC-S W	4'-0"	1' 0-3/8"	5' 3-1/4"	8"	1'-4"	1"		21.75
LL36/9 LC-S W	3'-0"	9-1/4"	4'-1"	6"	1'-0"	1"		12.25
LL24/6 LC-S W	2'-0"	6-1/8"	2'-8 5/8"	4"	8"	1"		5.4

MATERIAL FIN	ISH COLORS		
WHITE Returns	7328 White ATUGLAS Acrylic	White Trimcap/Retainer	Sloan White LED

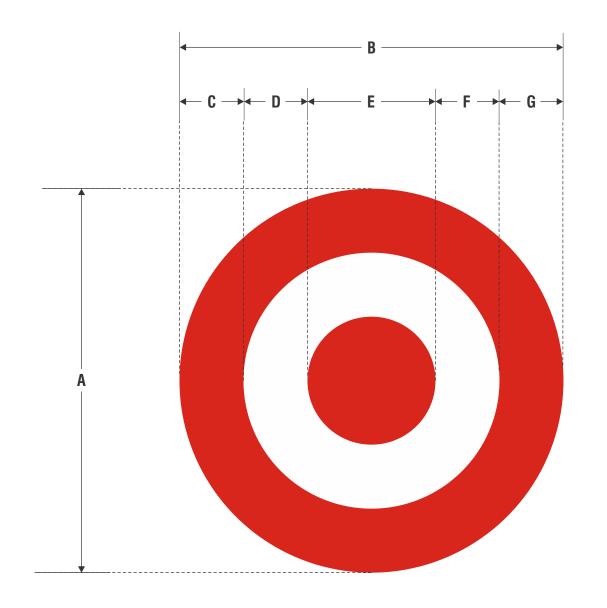

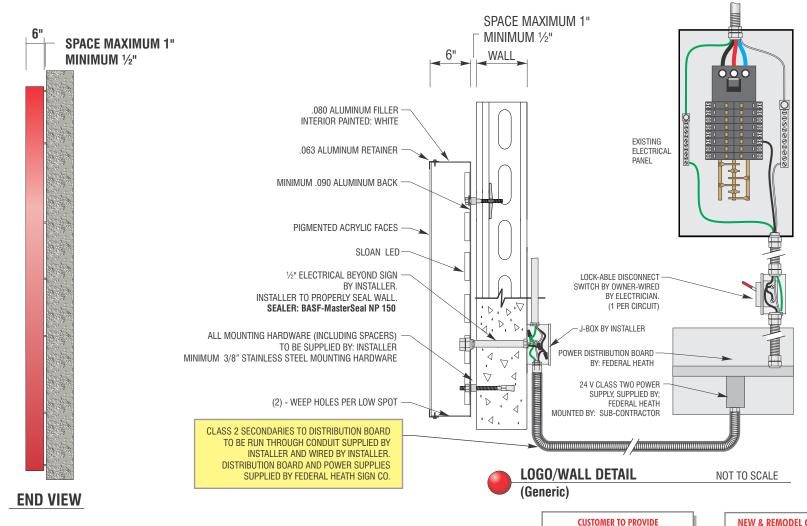

MANUFACTURE AND INSTALL CHANNEL LOGO AS SHOWN AND NOTED

SIGN TYPE	A	В	C	D	Ε	F	G	RETAINER	SQ.FT.	QTY
96 BULLSEYE-R	16'-0"	16'-0"	2'-8"	2'-8"	5'-4"	2'-8"	2'-8"	2"	201.0	1

ELECTRICAL REQUIREMENTS

Total: 0.0 Amps

(1) 120V 20A Circuit Required.

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS.

DEDICATED BRANCH CIRCUITS FOR SIGNS ONLY PER NEC CODE 600.5

MATERIAL FINISH COLORS

Faces

Modified Acrylic (Altuglas or Equiv.)

Trimcap/Retainer

MP# 82074LVG (FULL GLOSS)

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND LABOR BE SHARED WITH OTHER LOADS. PROPERLY SIZED GROUND WIRE THAT CAN BE TRACED BACK TO BREAKER PANEL IS REQUIRED.

INSTALLER REQUIREMENTS

ALL MOUNTING HARDWARE, SECONDARY WIRING AND CONDUITS ARE TO BE PROVIDED BY THE INSTALLATION CONTRACTOR. ALL PENETRATIONS IN THE WALL ARE TO BE SEALED WITH SILICONE AND TO BE WATERTIGHT.

ANY DEVIATION FROM FEDERAL HEATH REQUIREMENTS MAY RESULT IN DAMAGE TO OR IMPROPER OPERATION OF SIGNAGE, CAUSING DELAYS AND ADDITIONAL COSTS.

NEW & REMODEL CONSTRUCTION


ADEQUATE BEHIND THE WALL BACKING AND ACCESS IS REQUIRED FOR THE INSTALLATION OF NEW SIGNAGE. CUSTOMER TO FORWARD APPROVED SIGNAGE DRAWINGS TO THE ON SITE CONTACT TO INSURE THAT THE REQUIRED PROVISIONS ARE MADE DURING CONSTRUCTION, PRIOR TO THE SIGN INSTALLATION.

INSTALLER REQUIREMENTS FOR EIFS WALLS

IT IS THE RESPONSIBILITY OF THE INSTALLATION CONTRACTOR TO PROVIDE ANY WALL SPACERS REQUIRED TO KEEP EIFS WALL MATERIAL FROM BEING COMPACTED DURING INSTALLATION OF ANY MOUNTING BOLTS REQUIRED FOR SIGNAGE.


GENERAL NOTE


• INSTALLER SHALL VERIFY WALL CONDITION IN THE FIELD.
• TYPE, SIZE AND NUMBER OF FASTENERS TO BE DETERMINED.
• ALL BOLT HOLES TO BE DRILLED OR PUNCHED.
• ISOLATE ALL ALUMINUM FROM STEEL.

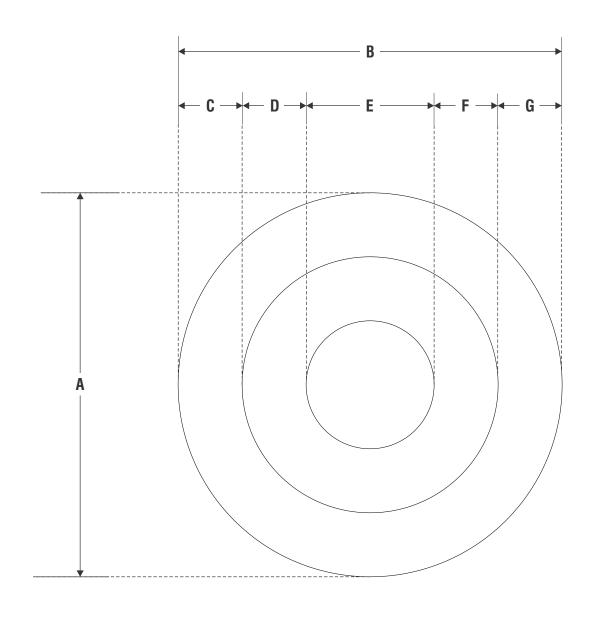

MANUFACTURE AND INSTALL CHANNEL LOGO AS SHOWN AND NOTED

SIGN TYPE	A	В	C	D	E	F	G	RETAINER	SQ.FT.	QTY
156 BULLSEYE-W	12'-0"	12'-0"	2'-0"	2'-0"	4'-0"	2'-0"	2'-0"		113.1	1

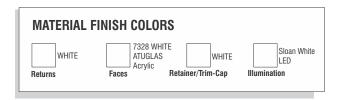

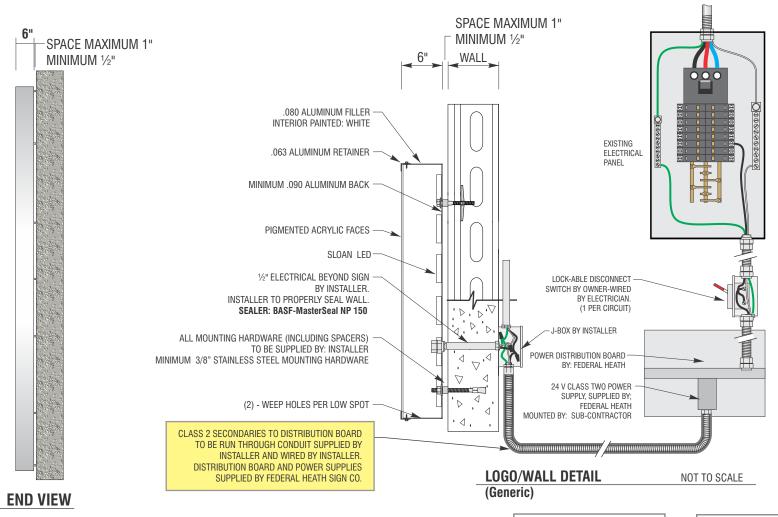

ELECTRICAL REQUIREMENTS

Total: 0.0 Amps

(1) 120V 20A Circuit Required.

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS.

CUSTOMER TO PROVIDE DEDICATED BRANCH CIRCUITS FOR SIGNS ONLY PER NEC CODE 600.5

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS. PROPERLY SIZED GROUND WIRE THAT CAN BE TRACED BACK TO BREAKER PANEL IS REQUIRED.

INSTALLER REQUIREMENTS

ALL MOUNTING HARDWARE, SECONDARY WIRING AND CONDUITS ARE TO BE PROVIDED BY THE INSTALLATION CONTRACTOR. ALL PENETRATIONS IN THE WALL ARE TO BE SEALED WITH SILICONE AND TO BE WATERTIGHT.

ANY DEVIATION FROM FEDERAL HEATH REQUIREMENTS MAY RESULT IN DAMAGE TO OR IMPROPER OPERATION OF SIGNAGE, CAUSING DELAYS AND ADDITIONAL COSTS.

NEW & REMODEL CONSTRUCTION


ADEQUATE BEHIND THE WALL BACKING AND ACCESS IS REQUIRED FOR THE INSTALLATION OF NEW SIGNAGE. CUSTOMER TO FORWARD APPROVED SIGNAGE DRAWINGS TO THE ON SITE CONTACT TO INSURE THAT THE REQUIRED PROVISIONS ARE MADE DURING CONSTRUCTION, PRIOR TO THE SIGN INSTALLATION.

INSTALLER REQUIREMENTS FOR EIFS WALLS IT IS THE RESPONSIBILITY OF THE INSTALLATION

IT IS THE RESPONSIBILITY OF THE INSTALLATION CONTRACTOR TO PROVIDE ANY WALL SPACERS REQUIRED TO KEEP EIFS WALL MATERIAL FROM BEING COMPACTED DURING INSTALLATION OF ANY MOUNTING BOLTS REQUIRED FOR SIGNAGE.


GENERAL NOTE


INSTALLER SHALL VERIFY WALL CONDITION IN THE FIELD.
 TYPE, SIZE AND NUMBER OF FASTENERS TO BE DETERMINED.
 ALL BOLT HOLES TO BE DRILLED OR PUNCHED.
 ISOLATE ALL ALUMINUM FROM STEEL.

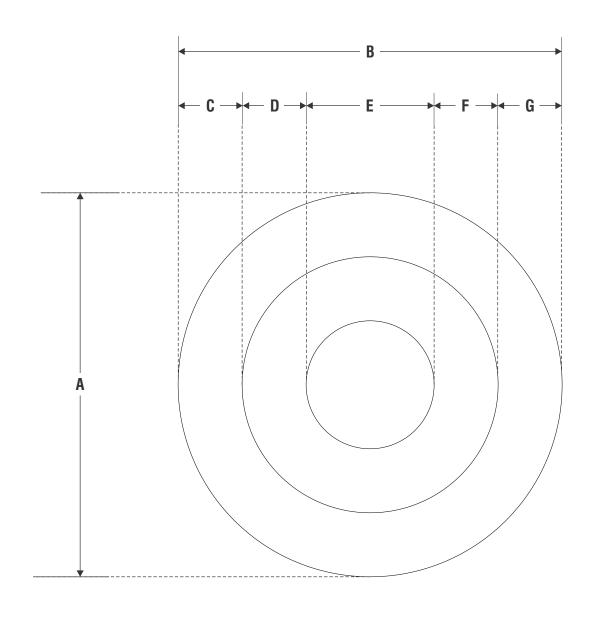

MANUFACTURE AND INSTALL CHANNEL LOGO AS SHOWN AND NOTED

SIGN TYPE	A	В	C	D	E	F	G	RETAINER	SQ.FT.	QTY
156 BULLSEYE-W	10'-0"	10'-0"	1'-8"	1'-8"	3'-4"	1'-8"	1'-8"	1"	78.5	1

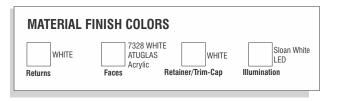

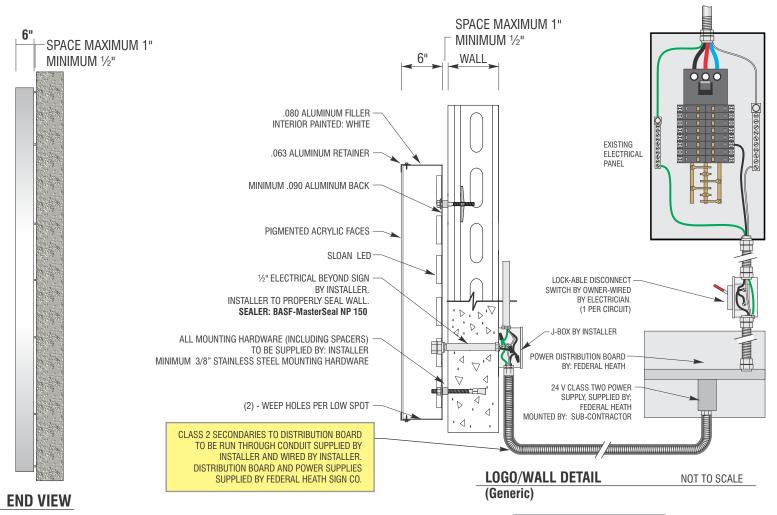

ELECTRICAL REQUIREMENTS

Total: 0.0 Amps

(1) 120V 20A Circuit Required.

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS.

CUSTOMER TO PROVIDE DEDICATED BRANCH CIRCUITS FOR SIGNS ONLY PER NEC CODE 600.5

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS. PROPERLY SIZED GROUND WIRE THAT CAN BE TRACED BACK TO BREAKER PANEL IS REQUIRED.

INSTALLER REQUIREMENTS

ALL MOUNTING HARDWARE, SECONDARY WIRING AND CONDUITS ARE TO BE PROVIDED BY THE INSTALLATION CONTRACTOR. ALL PENETRATIONS IN THE WALL ARE TO BE SEALED WITH SILICONE AND TO BE WATERTIGHT.

ANY DEVIATION FROM FEDERAL HEATH REQUIREMENTS MAY RESULT IN DAMAGE TO OR IMPROPER OPERATION OF SIGNAGE, CAUSING DELAYS AND ADDITIONAL COSTS.

NEW & REMODEL CONSTRUCTION


ADEQUATE BEHIND THE WALL BACKING AND ACCESS IS REQUIRED FOR THE INSTALLATION OF NEW SIGNAGE. CUSTOMER TO FORWARD APPROVED SIGNAGE DRAWINGS TO THE ON SITE CONTACT TO INSURE THAT THE REQUIRED PROVISIONS ARE MADE DURING CONSTRUCTION, PRIOR TO THE SIGN INSTALLATION.

INSTALLER REQUIREMENTS FOR EIFS WALLS IT IS THE RESPONSIBILITY OF THE INSTALLATION

CONTRACTOR TO PROVIDE ANY WALL SPACERS REQUIRED TO KEEP EIFS WALL MATERIAL FROM BEING COMPACTED DURING INSTALLATION OF ANY MOUNTING BOLTS REQUIRED FOR SIGNAGE.


GENERAL NOTE


• INSTALLER SHALL VERIFY WALL CONDITION IN THE FIELD.
• TYPE, SIZE AND NUMBER OF FASTENERS TO BE DETERMINED.
• ALL BOLT HOLES TO BE DRILLED OR PUNCHED.
• IS OLATE ALL ALLUMINUM FROM STEEL.

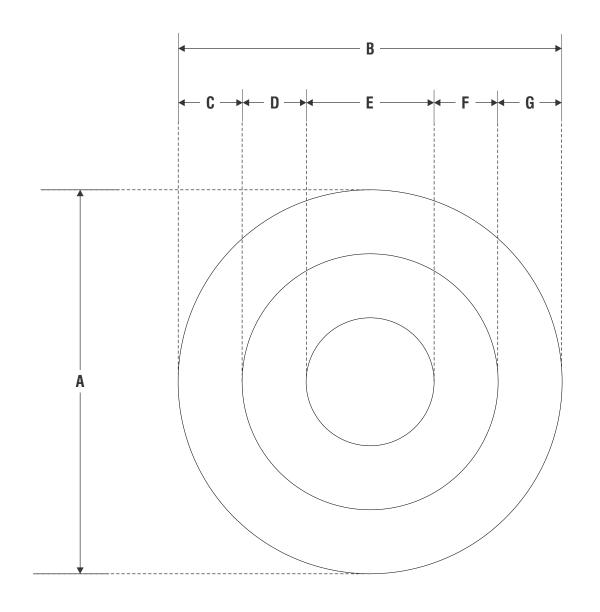

MANUFACTURE AND INSTALL CHANNEL LOGO AS SHOWN AND NOTED

SIGN TYPE	A	В	C	D	Ε	F	G	RETAINER	SQ.FT.	QTY
156 BULLSEYE-W	6'-0"	6'-0"	1'-0"	1'-0"	2'-0"	1'-0"	1'-0"	1"	28.3	1

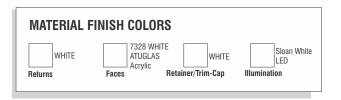

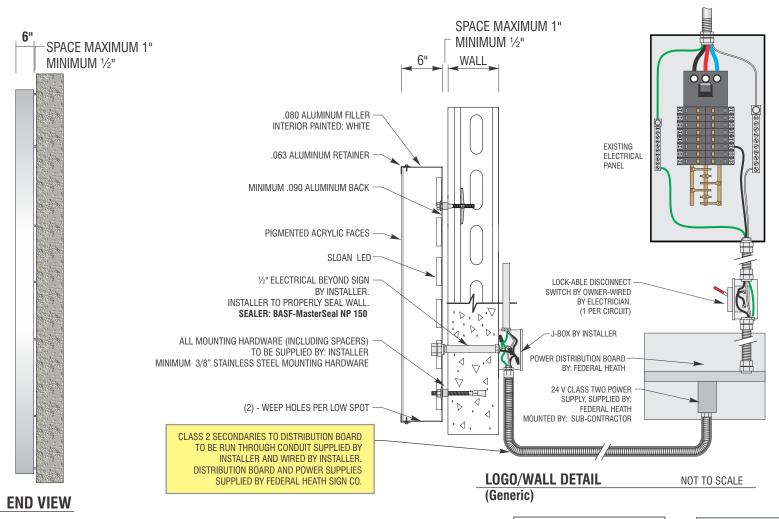

ELECTRICAL REQUIREMENTS

Total: 0.0 Amps

(1) 120V 20A Circuit Required.

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS.

DEDICATED BRANCH CIRCUITS FOR SIGNS ONLY PER NEC CODE 600.5

CUSTOMER TO PROVIDE

ALL BRANCH CIRCUITS SHALL BE DEDICATED TO SIGNS (INCLUDING GROUND AND NEUTRAL) AND SHALL NOT BE SHARED WITH OTHER LOADS. PROPERLY SIZED GROUND WIRE THAT CAN BE TRACED BACK TO BREAKER PANEL IS REQUIRED.

INSTALLER REQUIREMENTS

ALL MOUNTING HARDWARE, SECONDARY WIRING AND CONDUITS ARE TO BE PROVIDED BY THE INSTALLATION CONTRACTOR. ALL PENETRATIONS IN THE WALL ARE TO BE SEALED WITH SILICONE AND TO BE WATERTIGHT.

ANY DEVIATION FROM FEDERAL HEATH REQUIREMENTS MAY RESULT IN DAMAGE TO OR IMPROPER OPERATION OF SIGNAGE, CAUSING DELAYS AND ADDITIONAL COSTS.

NEW & REMODEL CONSTRUCTION

ADEQUATE BEHIND THE WALL BACKING AND ACCESS IS REQUIRED FOR THE INSTALLATION OF NEW SIGNAGE. CUSTOMER TO FORWARD APPROVED SIGNAGE DRAWINGS TO THE ON SITE CONTACT TO INSURE THAT THE REQUIRED PROVISIONS ARE MADE DURING CONSTRUCTION, PRIOR TO THE SIGN INSTALLATION.


INSTALLER REQUIREMENTS FOR EIFS WALLS IT IS THE RESPONSIBILITY OF THE INSTALLATION

IT IS THE RESPONSIBILITY OF THE INSTALLATION CONTRACTOR TO PROVIDE ANY WALL SPACERS REQUIRED TO KEEP EIFS WALL MATERIAL FROM BEING COMPACTED DURING INSTALLATION OF ANY MOUNTING BOLTS REQUIRED FOR SIGNAGE.

GENERAL NOTE

INSTALLER SHALL VERIFY WALL CONDITION IN THE FIELD.
 TYPE, SIZE AND NUMBER OF FASTENERS TO BE DETERMINED.
 ALL BOLT HOLES TO BE DRILLED OR PUNCHED.
 ISOLATE ALL ALUMINUM FROM STEEL.



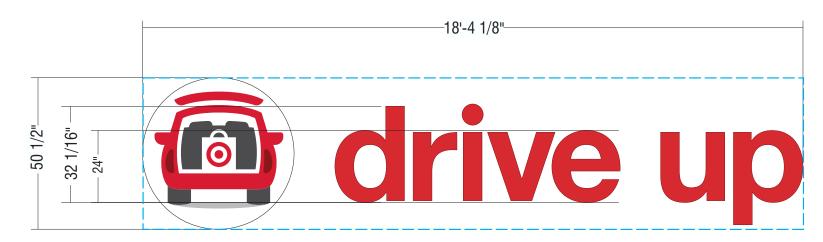

DU24R-LOGO ACRYLIC FACED INT. ILLUM. "LOGO & LETTER SET"

Scale: 3/8"=1'-0" 77.1 SQ.FT.


SCOPE OF WORK:


MANUFACTURE AND INSTALL CHANNEL LOGO & LETTERS



scale 3/32"=1'-0"


GENERIC (PARTIAL) ELEVATION NOTE: PLACEMENT CAN VARY

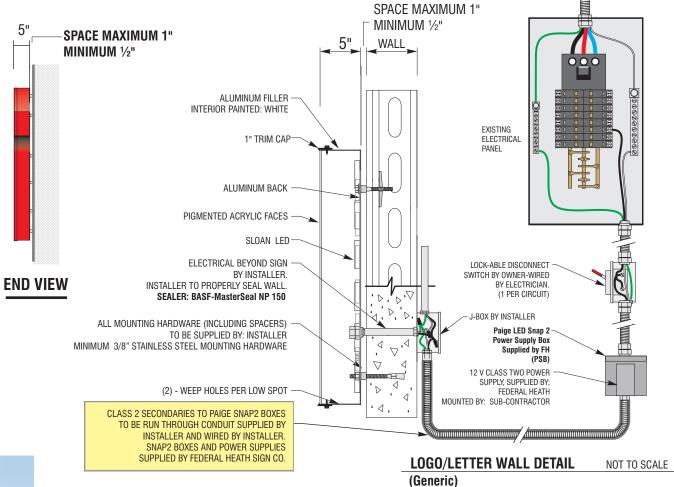

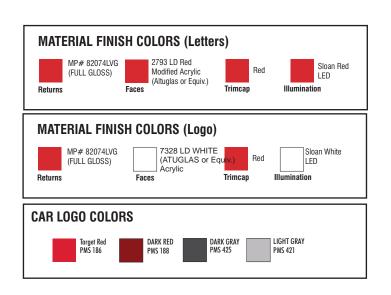

FIELD SURVEY REQUIRED

VERIFY GLASS V.O. & MULLION/DIVIDER SIZING PRIOR TO FABRICATION

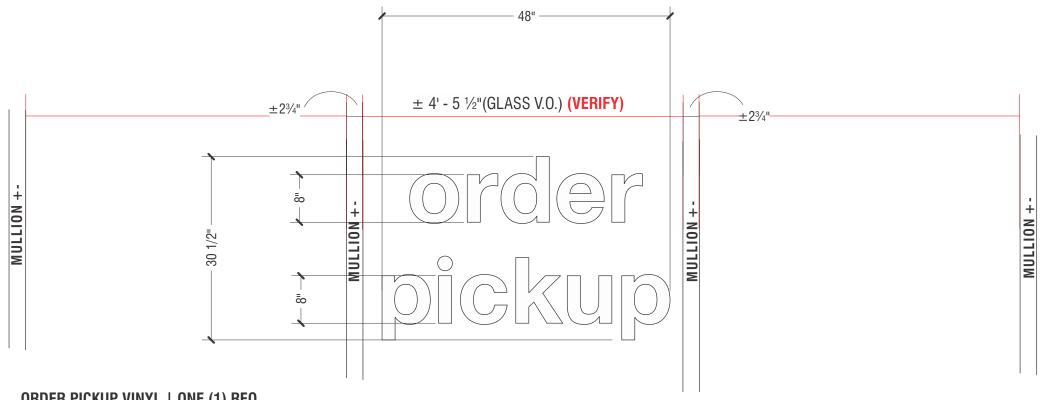

ORDER PICKUP VINYL | ONE (1) REQ.


SCALE: 3/4"=1'-0"

MANUFACTURE AND INSTALL FIRST SURFACE (*Verify IF; 1st or 2nd Surface Applied) OPAQUE WHITE VINYL LAYOUT

MATERIAL FINISH COLORS


3M 7725-10
WHITE OPAQUE
VINYL

10.16 SQ FT

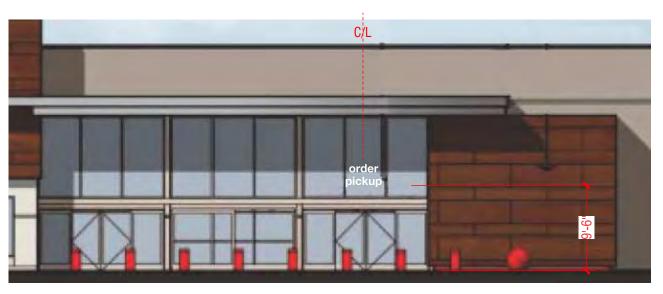

NORTH ELEVATION (Partial) STOREFRONT

scale 3/32"=1'-0"

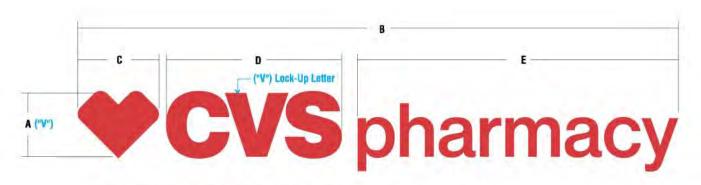

ACRYLIC FACED INTERNALLY ILLUMINATED CHANNEL LETTERS

MANUFACTURE AND INSTALL CHANNEL LOGO & LETTERS AS SHOWN AND NOTED

DESIGNATES HEIGHT OF LOGO (Heart)

SIGN TYPE	A	В	C	D	E	AMPS CIRCUITS	SQ.FT
CVS-12-CL	11 5/8"	9'-1 1/4"	1' 2 3/4"	2'-8"	4' -10 1/2"		9.48
CVS-16-CL	12 1/2"	12'-2 1/4"	1'-7 3/4"	3'- 6 3/4"	6'-6 1/4"		16.63
CVS-18-CL	17 1/2°	13'-9"	1'-10 1/4"	4'- 0 1/4"	7'-4"		20.62
CVS-20-CL	19 1/2*	15'-3"	2'-0 3/4"	4'- 5 1/2"	8'-1 3/4"		25.41
CVS-24-CL	23 3/8"	18'-3 3/4"	2'-5 3/4"	5'-4 1/4"	9'-9 1/4"		36.62
CVS-30-CL	29 1/8"	22'-10 "	3'-1"	6'-8"	12'-2 1/4"		57.08
CVS-32-CL	31 1/8"	24'-4 3/4"	3'-3 1/2"	7'-1 1/2"	13'-0 1/4"		65.05
CVS-36-CL	34 7/8"	27'-4 3/4"	3'-8 1/4"	8'-0"	14-71/2"		82.18



