


8/24/2023 3:20:02 PM

1 ELECTRICAL SITE PLAN
ES101 1" = 20'-0"

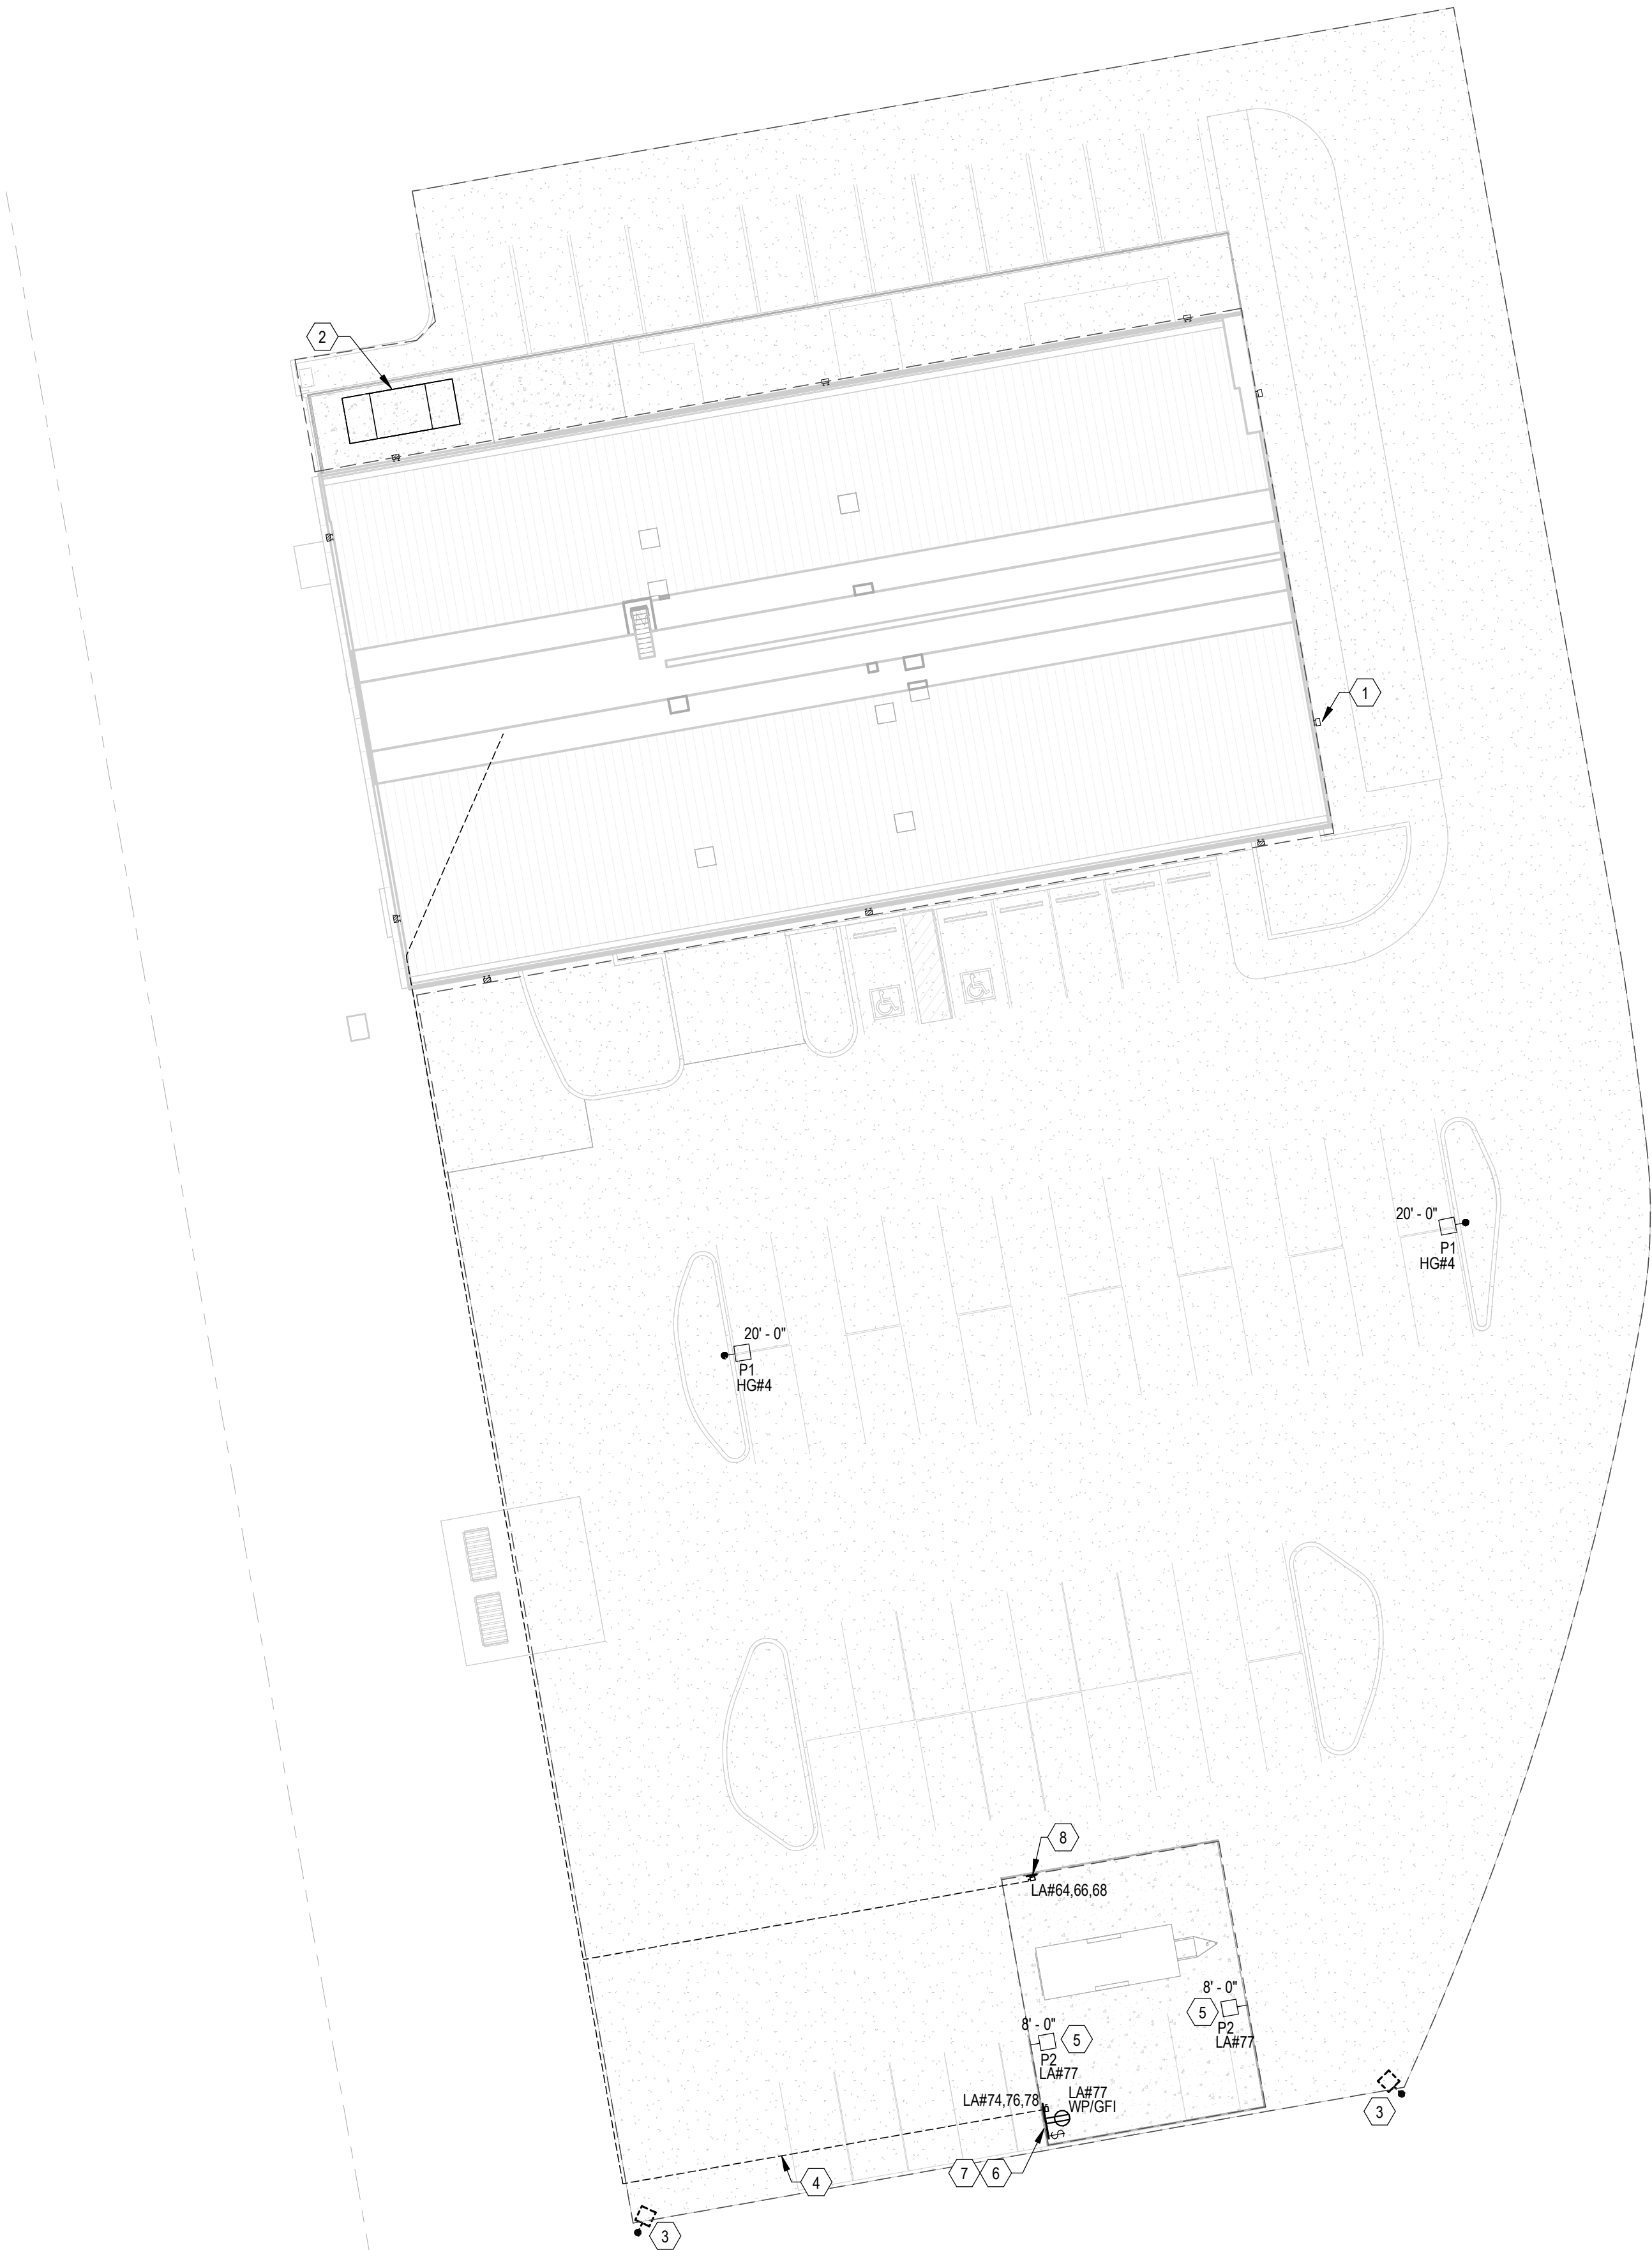

SITE VOLTAGE DROP CALCULATION											
PANEL NAME	CIRCUIT NUMBER	LENGTH (FT)	WIRE SIZE	POWER (VA)	R (OHMS/KH)	CURRENT (AMPS)	VOLTAGE DROP (V)	SOURCE (V)	PHASE	% VOLTAGE DROP	AVAILABLE VOLTAGE (V)
LA	69	350	#6	652.0	0.4910	5.4	1.896	120	1	1.555%	118.13
LA	74,76,78	350	#2	14410.0	0.1940	40.0	5.432	208	3	2.612%	202.57
LA	64,66,68	310	#2	14410.0	0.1940	40.0	4.811	208	3	2.313%	203.19
HG	4	250	#12	992.0	1.8300	3.6	3.455	277	1	1.247%	273.55

SITE PLAN SHEET NOTES

- A. REFER TO SPECIFICATIONS, SCHEDULES, DETAILS AND GENERAL NOTES SHEET FOR ADDITIONAL SITE REQUIREMENTS.
- B. BURIED CONDUIT SHALL BE INSTALLED AT 24" BELOW FINISHED GRADE, UNDO. 18" MAY BE USED AT LOCATIONS NOT SUBJECT TO VEHICLE OR EQUIPMENT LOADING, BUT ONLY WITH ENGINEER APPROVAL.
- C. SITE ELECTRICAL CONDUIT ROUTING IS DIAGRAMMATIC. EC MAY ADJUST PATHS AS REQUIRED PER SITE CONDITIONS AND WITHIN THE FOLLOWING LIMITATIONS: DO NOT ROUTE EXPOSED. DO NOT ROUTE UNDER EXISTING, NEW, OR FUTURE BUILDINGS OR STRUCTURES. ONLY ROUTE UNDER SIDEWALKS OR WITHIN THE DRIP LINE OF TREES WHERE UNAVOIDABLE.
- D. VERIFY EXISTING BURIED UTILITY LOCATIONS PRIOR TO TRENCHING FOR CONDUIT OR BORING FOR LIGHT POLE FOUNDATIONS. USE GROUND PENETRATING RADAR SCAN.
- E. VERIFY NEW BURIED UTILITY LOCATIONS AND COORDINATE INSTALLATION WITH UTILITIES THAT REQUIRE A SPECIFIC SLOPE (DRAIN LINES, ETC.). EC SHALL BE RESPONSIBLE FOR COORDINATING WITH OTHER TRADES.
- F. REFER TO ONE LINE DIAGRAM AND PANEL SCHEDULES FOR CONDUIT AND CONDUCTOR SIZES NOT SHOWN.
- G. CONTRACTOR SHALL VERIFY WITH LANDSCAPE/ARCHITECT/GC EXACT LOCATION OF TREES. THEN INSTALL UNDERGROUND CONDUITS TO AVOID ROOT SYSTEMS.
- H. FOR ALL EXTERIOR CONDUIT EXPOSED TO DIRECT SUNLIGHT, EC SHALL ADJUST CONDUCTOR AND CONDUIT SIZES AS NECESSARY TO COMPLY WITH CODE-REQUIRED AMBIENT TEMPERATURE AMPACITY DE-RATING.

KEYNOTES

- 1 REFER TO SHEET E-101 FOR INFORMATION ON BUILDING MOUNTED LIGHTING.
- 2 NEW 400KW NATURAL GAS GENERATOR.
- 3 EXISTING POLE MOUNTED FLOOD LIGHTS TO BE REMOVED. CONTRACTOR SHALL FIELD VERIFY OTHER LOADS CONNECTED TO THIS CIRCUIT. IF CIRCUIT IS DEDICATED TO EXTERIOR LIGHTING, RETAIN CIRCUIT TO SERVE NEW SITE LIGHTING LOADS. IF CIRCUIT SERVES OTHER INTERIOR LOADS, DEMO CIRCUIT BACK TO NEAREST EXISTING TO REMAIN JUNCTION BOX IN BUILDING.
- 4 NEW UNDERGROUND 2" POWER AND 2" DATA CONDUITS TO SERVE TELESCOPE TRAILER.
- 5 WORK LIGHTS MOUNT TO TELESCOPE YARD PERIMETER FENCE POST. FIXTURES SHALL BE CONTROLLED FROM TIMER SWITCH WITH DIMMING CONTROLS AT UNISTRUT RACK.
- 6 PROVIDE 60ANOR DISCONNECT WITH 50A FUSES (CONFIRM WITH OWNER) FOR CONNECTION TO OPCI CONEX BOX. WPI/GFI RECEPTACLE AND OVERRIDE LIGHT SWITCH ENCLOSED IN WEATHERPROOF BOX MOUNTED ON UNISTRUT RACK. FEEDER FOR CONEX BOX SHALL CONSIST OF 402, 188G. LIGHTING AND RECEPTACLE BRANCH WIRING SHALL CONSIST OF 206, 186G.
- 7 TERMINATE DATA CONDUIT IN LOCKABLE NEMA 4 ENCLOSURE MOUNTED ON RACK. ENCLOSURE SHALL HAVE HINGED COVER AND LOCKABLE HASP CLOSURE. 18"x18"x20" MIN. MOUNT GFCI DOUBLE DUPLEX RECEPTACLE IN BOTTOM RIGHT CORNER OF BOX. CIRCUIT WITH ADJACENT UNISTRUT MOUNTED RECEPTACLE.
- 8 PROVIDE 60ANOR DISCONNECT WITH 50A FUSES (CONFIRM WITH OWNER) FOR CONNECTION TO OWNER PROVIDED EQUIPMENT. FEEDER TO DISCONNECT SHALL CONSIST OF 402, 188G.



THE HARTMAN • MAJEWSKI
DESIGN GROUP
Architects • Engineers • Interior Design
Planners • Urban Designers • LEED®
120 Vassar Dr SE Suite 100
Albuquerque New Mexico 87106
T 505 242 6880 • F 505 242 6881

CONSULTANT



STAMP

Digitally Signed



2023.08.24 15:25:49-05'00'

PERMIT SET

PROJECT NAME
**GENERAL ATOMICS TI
ABQ**

14820 CENTRAL AVE, ALBUQUERQUE,
NM 87123

GENERAL ATOMICS

REVISIONS

NO.	DATE	DESCRIPTION

Copyright: Design Group

Drawn by SD
Checked by JW
Date 08/28/2023
Project number 2728

SHEET TITLE

ELECTRICAL SITE PLAN

SHEET NUMBER

ES101

LIGHTING CONTROL MATRIX										
ID	ROOM TYPE	LOCAL CONTROL FUNCTIONS	SENSOR MOUNTING	LIGHTING AUTO ON LEVEL	OCCUPANCY SHUTOFF	DIMMABLE	DAYLIGHT CONTROL	DAYLIGHT TARGET	REMARKS	
A	PRIVATE OFFICE	ON/OFF/DIM	CEILING	0%	20 MIN	YES	NO	-	-	
B	OPEN OFFICE	ON/OFF/DIM	CEILING	50%	20 MIN	YES	NO	-	-	
Bn	OPEN OFFICE	ON/OFF/DIM	CEILING	50%	20 MIN	YES	NO	-	-	SEE NOTE C
C	CONFERENCE/CONTROL	ON/OFF/DIM	CEILING	0%	20 MIN	YES	NO	-	-	SEE NOTE 1
Cd	CONFERENCE	ON/OFF/DIM	CEILING	0%	20 MIN	YES	YES	50 FC	-	
Cn	CONFERENCE/CONTROL	ON/OFF/DIM	CEILING	0%	20 MIN	YES	NO	-	-	SEE NOTE C & 1
D	RESTROOM	ON/OFF	CEILING	100%	20 MIN	NO	NO	-	-	SEE NOTE 5
E	SMALL RESTROOM	ON/OFF	WALL	100%	20 MIN	NO	NO	-	-	SEE NOTE D
F	BREAK ROOM	ON/OFF/DIM	CEILING	50%	20 MIN	YES	YES	30 FC	-	
G	LOBBY/RECEPTION	ON/OFF/DIM	CEILING	50%	20 MIN	YES	NO	-	-	
H	HALLWAY	ON/OFF/DIM	CEILING	100%	20 MIN	YES	NO	-	-	SEE NOTE 2
Hn	HALLWAY	ON/OFF/DIM	CEILING	100%	20 MIN	YES	YES	20 FC	-	SEE NOTE 2
Hh	HALLWAY	ON/OFF/DIM	CEILING	100%	20 MIN	YES	NO	-	-	SEE NOTE C & 2
J	OPTICS WORK AREA	ON/OFF/DIM	CEILING	0%	20 MIN	YES	NO	-	-	SEE NOTE 3
K	UTILITY	ON/OFF	WALL	0%	20 MIN	NO	NO	-	-	
Kn	UTILITY	ON/OFF	WALL	0%	20 MIN	NO	NO	-	-	SEE NOTE C
S	SITE/EXTERIOR	ON/OFF/DIM	INTEGRAL	N/A	15 MIN	YES	N/A	-	-	SEE NOTE 4
SCHEDULE GENERAL NOTES:										
A. PROVIDE ALL POWER PACKS, RELAYS, PHOTOCELLS, TIME CLOCKS, CONTROLLERS, AND BRIDGING DEVICES AS REQUIRED FOR A FUNCTION CONTROL SYSTEM.										
B. ALL ROOMS WITH AUTOMATIC DAYLIGHT CONTROL SHALL ADJUST ONCE THE LIGHT LEVELS REACHES LEVEL INDICATED AT 30' AFF FOR ALL SPACES EXCEPT FOR HALLWAYS WHICH SHALL BE AT FOOT LEVEL.										
C. WHICH SHALL BE AT FOOT LEVEL.										
D. CONTROL TYPES ENDING WITH A "Y" SHALL NOT BE CONNECTED TO NIGHT CONTROL SYSTEM AND SHALL OPERATE INDEPENDENTLY. CONTROL DEVICES IN THIS AREA SHALL NOT HAVE BLUETOOTH OR OTHER WIRELESS COMMUNICATION CAPABILITIES.										
E. ALL WALL MOUNTED OCCUPANCY OR VACANCY SENSORS SHALL HAVE INTEGRAL ON/OFF BUTTONS, AND UP/DOWN DIM BUTTONS WHERE APPLICABLE.										
F. COORDINATE OCCUPANCY AND DAYLIGHT SENSOR PLACEMENT WITH MANUFACTURER RECOMMENDATIONS AND SHOP DRAWINGS.										
SCHEDULE KEYNOTES:										
1. TWO DIMMING ZONES. ZONE 'A' CONSISTS OF FIXTURE(S) AT VIDEO/PRESENTATION WALL. ZONE 'B' CONSISTS OF REMAINING FIXTURES IN ROOM. WHERE NOTED ON PLANS, PROVIDE A THIRD ZONE 'C'.										
2. DURING NORMAL BUSINESS HOURS HALLWAYS SHALL DIM TO 50% DURING UNOCCUPIED STATE. AFTERHOURS NORMAL FIXTURES SHALL TURN OFF AND EMERGENCY FIXTURES SHALL REMAIN ON AT 10% FOR SECURITY.										
3. TWO DIMMING ZONES. ZONE 'A' CONSISTS OF FIXTURES NOT OVER CLEANROOM. ZONE 'B' CONSISTS OF FIXTURES LOCATED ABOVE PORTABLE CLEANROOM.										
4. ALL EXTERIOR FIXTURES TO BE PROVIDED WITH INTEGRATED OCCUPANCY SENSORS AND WIRELESS CONTROLS. FIXTURES SHALL BE TURNED ON BY COMMON PHOTOCELL, DIMMED TO 30% OUTPUT AT 10PM, AND TURN OFF AT DAWN. ACTIVATION OF OCCUPANCY SENSOR SHALL BRING LIGHTS BACK TO FULL OUTPUT. PROVIDE CONTROL STATION ADJACENT TO LIGHTING CONTROL SYSTEM CONTROLLER WITH MANUAL OVERRIDE FUNCTIONS. ADDITIONAL WIRELESS OVERRIDE CONTROLLER SHALL BE PROVIDED AT TELESCOPE YARD FOR MANUAL OVERRIDE DIMMING OF SITE POLE FIXTURES.										
5. PROVIDE POWER PACK TO CONTROL EXHAUST FAN SERVING RESTROOMS. FAN SHALL RUN CONTINUOUSLY DURING NORMAL BUSINESS HOURS. DURING AFTERHOURS PERIODS, ACTIVATION OF EITHER RESTROOM OCCUPANCY SENSOR SHALL TURN FAN ON WITH A 30 MINUTE OCCUPANCY SHUTOFF DELAY.										

LIGHTING FIXTURE SCHEDULE													
TYPE	PRODUCT		CONSTRUCTION		MOUNTING	LIGHT SOURCE				ELECTRICAL			
	MFR	MODEL	DESCRIPTION			LAMP	LUMENS	CCT	CRI	DIMMING TYPE	WATTS	VOLTAGE	KEYNOTE
A	LITHONIA	2VTL4 40L ADP E21 LP840 N100	2X4 TROFFER		LAY-IN	LED	4000	4000K	80	0-10V	32 W	120/277V	--
AEB	LITHONIA	2VTL4 40L ADP E21 LP840 N100 E10WLP	2X4 TROFFER W/ SELF-DIAGNOSTIC BATTERY PACK		LAY-IN	LED	4000	4000K	80	0-10V	32 W	120/277V	--
B	LITHONIA	2VTL2 33L ADP E21 LP840 N100	2X2 TROFFER		LAY-IN	LED	3300	4000K	80	0-10V	26 W	120/277V	--
C	LITHONIA	IBG 12000LM SEF AFL GND MVOLT G210 40K 9AL NCH86 WPP160	HIGH BAY		SUSPENDED	LED	12000	4000K	80	0-10V	80 W	120/277V	1
D	JUNO	IC22LEJ G4 HAL NCH90 90CRI MVOLT E210 WH	6" DOWNLIGHT		RECESSED	LED	1250	4000K	80	0-10V	16 W	120/277V	--
E	GOTHAM	EY06SH 4015 DFF 5MO MVOLT E21	6" DOWNLIGHT - SHOWER		RECESSED	LED	1250	4000K	80	0-10V	20 W	120/277V	--
F	LITHONIA	CLX L48 4000LM SEF RDL MVOLT G210 40K 80CRI N100	4" STRIP		SURFACE	LED	4000	4000K	80	0-10V	26 W	120/277V	--
FEB	LITHONIA	CLX L48 4000LM SEF RDL MVOLT G210 40K 80CRI N100 E10WLP	4" STRIP W/ SELF-DIAGNOSTIC BATTERY PACK		SURFACE	LED	4000	4000K	80	0-10V	26 W	120/277V	--
G2	LITHONIA	FMVTSL 24IN 30K	2' LED VANITY SQUARE LIGHT		SURFACE	LED	1285	3000K	80	N/A	18 W	120/277V	--
G4	LITHONIA	FMVTSL 48IN 30K	4' LED VANITY SQUARE LIGHT		SURFACE	LED	2671	3000K	80	N/A	33 W	120/277V	--
H	EUREKA	4233-XBA LED H0 40 277V DV C 6	PENDANT		SUSPENDED	LED	1250	4000K	80	0-10V	14 W	277V	2
J	JUNO	UP580 30K 90CRI XX	UNDERCABINET LIGHTING		SURFACE	LED	850	3000K	90	ELV	13 W	120V	--
P1	LITHONIA	DSK1 LED P3 40K 80CRI TFTM MVOLT RPA NLTA92 PIRHN D08X0	AREA LIGHT		POLE	LED	12905	4000K	80	0-10V	204 W	120/277V	--
P2	LITHONIA	ESXP2 ALDSW2 YS DDB	FLOOD LIGHT		YOKE	LED	3500	4000K	80	0-10V	56 W	120/277V	--
P3	LITHONIA	ESXP3 ALDSW2 YS DDB	FLOOD LIGHT		FENCE TOP	LED	8500	4000K	80	0-10V	100 W	120/277V	--
SW	LITHONIA	WDGE2 LED P4 80CRI TFTM 40K	EXTERIOR WALL PACK		WALL	LED	4000	4000K	80	0-10V	46 W	120/277V	--
X1	LITHONIA	EDG 1 R MR	EXIT SIGN - SINGLE SIDED		UNV	LED	-	-	-	-	1 W	120/277V	--
X2	LITHONIA	EDG 2 R	EXIT SIGN - DOUBLE SIDED		UNV	LED	-	-	-	-	1 W	120/277V	--

SCHEDULE GENERAL NOTES:

A. WHETHER INDICATED IN CATALOG NUMBER OR NOT, CONTRACTOR TO PROVIDE ALL NECESSARY ACCESSORIES AND MOUNTING HARDWARE REQUIRED FOR A COMPLETE INSTALLATION.

B. COORDINATE FIXTURE COLOR SELECTION WITH ARCHITECT PRIOR TO PURCHASE.

C. LEDS SHALL MEET THE FOLLOWING MIN SPECS IN ADDITION TO THE REQUIREMENTS SHOWN ELSEWHERE:

a. 30,000 HOUR RATED, MIN CRI = 80, 1 TO 10V DIMMABLE

b. LAMP CCT SHALL CONFORM TO ANSI C78.37A COLOR BINNING AND UTILIZE 4 STEP MACADAM ELLIPSE ALGORITHM BINNING PROCESS

D. EXIT SIGNS WITH BACKWARD LETTERING SHALL NOT BE PERMITTED ANYWHERE. SINGLE-SIDED EXIT SIGNS SHALL HAVE A BLANK OR OPAQUE BACK SIDE AS SPECIFIED BY THE ARCHITECT. DOUBLE-SIDED EXIT SIGNS SHALL HAVE ENGLISH LETTERS "E" X 1" THAT READ FROM LEFT-TO-RIGHT ON EACH SIDE

E. LED DRIVERS SHALL MEET THE FOLLOWING MIN SPECS IN ADDITION TO THE REQUIREMENTS SHOWN ELSEWHERE:

a. THD LESS THAN 10% POWER FACTOR GREATER THAN 90%

F. SUBSTITUTIONS ONLY ALLOWED WITH OWNER AND DESIGN TEAM APPROVAL PRIOR TO BID. SUBSTITUTION REQUEST MUST INCLUDE LINE ITEM PRICING BREAKDOWN AND FULL PHOTOMETRIC CALCULATIONS.

SCHEDULE KEYNOTES:

1. SUSPEND TO 15' AFF

2. VERIFY MOUNTING HEIGHT WITH ARCHITECT PRIOR TO ORDERING.

INVERTER SCHEDULE									
ID	MANUFACTURER	MODEL	W RATING	VOLTAGE	PH	ENCLOSURE RATING	MOUNTING	W CONNECTED	KEYNOTE
INV	MYERS	6-EM-2-SM-IOT	1600 W	277 V	1	NEMA 1	WALL	1117 VA	
SCHEDULE GENERAL NOTES:									
A. LIGHTING INVERTERS SHALL MEET THE FOLLOWING MIN SPECS IN ADDITION TO SPECIFICATION REQUIREMENTS.									
a. 90 MINUTE RUN TIME AT FULL LOAD									
b. SELF-DIAGNOSTICS									
c. UNIT OR REMOTE MOUNTED TEST SWITCH WITH STATUS INDICATION									
B. FIXTURES CONNECTED TO LIGHTING INVERTER SHALL BE CONTROLLED VIA UL-924 DEVICE.									
SCHEDULE KEYNOTES:									
1.									

LIGHTING SHEET NOTES

A. REFER TO SPECIFICATIONS, SCHEDULES, DETAILS AND GENERAL NOTES SHEET FOR ADDITIONAL LIGHTING INSTALLATION REQUIREMENTS.

B. CONTRACTOR SHALL COORDINATE LUMINAIRE LOCATIONS WITH THE ARCHITECTURAL ELEVATIONS AND RCP PRIOR TO INSTALLATION. VERIFY LOCATIONS AND MOUNTING METHODS AND MATERIALS THAT ARE UNCLEAR PRIOR TO ORDERING OR INSTALLING LUMINAIRES.

C. CIRCUIT NUMBER AND FIXTURE TAG SHOWN ADJACENT TO EACH LUMINAIRE.

D. CIRCUIT EXIT SIGNS (UNSWITCHED) WITH THE ADJACENT LIGHTING IN THE ROOM.

E. EMERGENCY LIGHTS IN CORRIDORS AND STAIRS TO BE UNSWITCHED. EMERGENCY LIGHTING IN ALL OTHER SPACES TO BE SWITCHED WITH ROOM LIGHTING.

F. DEDICATED NEUTRAL REQUIRED FOR ALL CIRCUITS.

KEYNOTES

1. LIGHTING CONTROL DEVICES IN SCIF BOUNDARY SHALL BE WIRED ONLY AND HAVE NO WIRELESS COMMUNICATION CAPABILITIES. ALL WALL MOUNTED DEVICES IN SPACE SHALL BE SURFACE MOUNTED UTILIZING WIREMOLD 2400 SERIES RACEWAY.

2. NEW EMERGENCY LIGHTING INVERTER. REFER TO LIGHTING INVERTER SCHEDULE FOR FURTHER INFORMATION. CONFIRM REMOTE COMMUNICATION OPTION WITH GENERAL ATOMICS PROJECT MANAGER.

3. LIGHTING CONTROL SYSTEM CONTROLLER LOCATION.

4. EMERGENCY LIGHTING SHALL BE CIRCUITED TO LIGHTING INVERTER "INV" PROVIDE A UL924 CONTROL DEVICE TO ALLOW EMERGENCY FIXTURES TO BE CONTROLLED WITH NORMAL FIXTURE IN SPACE, AND COME TO FULL ON UPON LOSS OF UTILITY POWER OR ACTIVATION OF THE BUILDING FIRE ALARM SYSTEM.

5. THERE IS LESS THAN 150W OF GENERAL LIGHTING WITHIN DAYLIGHT ZONE, THEREFORE IS EXEMPT FROM DAYLIGHT RESPONSIVE CONTROLS.

6. PROVIDED TOGGLE SWITCH WITH PILOT LIGHT FOR LASER SAFETY LIGHTS LOCATED ADJACENT TO LIGHTING CONTROL STATION. PROVIDE LABEL "LASER WARNING SIGNS". VERIFY LASER WARNING LIGHT SWITCH TYPE AND LOCATION WITH GENERAL ATOMICS END USER PRIOR TO ORDERING/ROUGH-IN.

7. PROVIDE 120V ILLUMINATED LASER WARNING SIGN (ROCKWELL LASER INDUSTRIES LSL-ILM-RM). ALL SIGNS SHALL BE CONTROLLED VIA A SINGLE SWITCH. MOUNT SIGN CENTERED ABOVE DOOR. VERIFY SIGN MODEL NUMBER WITH GENERAL ATOMICS END USER PRIOR TO ORDERING.

8. DIGITAL TIME SWITCH TO CONTROL TYPE "F" FIXTURES LOCATED AT UPPER LANDING OF ROOF ACCESS STAIRS.

9. SURFACE MOUNT STRIP LIGHT AT 7' ABOVE LANDING.

10. DIGITAL TIME SWITCH TO CONTROL ROOF MAINTENANCE LIGHT FIXTURES.

STAMP

Digitally Signed



2023.08.24 15:25:42-0500'

PERMIT SET

PROJECT NAME
GENERAL ATOMICS TI
ABQ

14820 CENTRAL AVE, ALBUQUERQUE,
NM 87123

GENERAL ATOMICS

REVISIONS

NO.	DATE	DESCRIPTION

Copyright: Design Group


Drawn by SD
Checked by JW
Date 08/28/2023
Project number 2728

SHEET TITLE

LEVEL 1 - LIGHTING PLAN

SHEET NUMBER

E-101

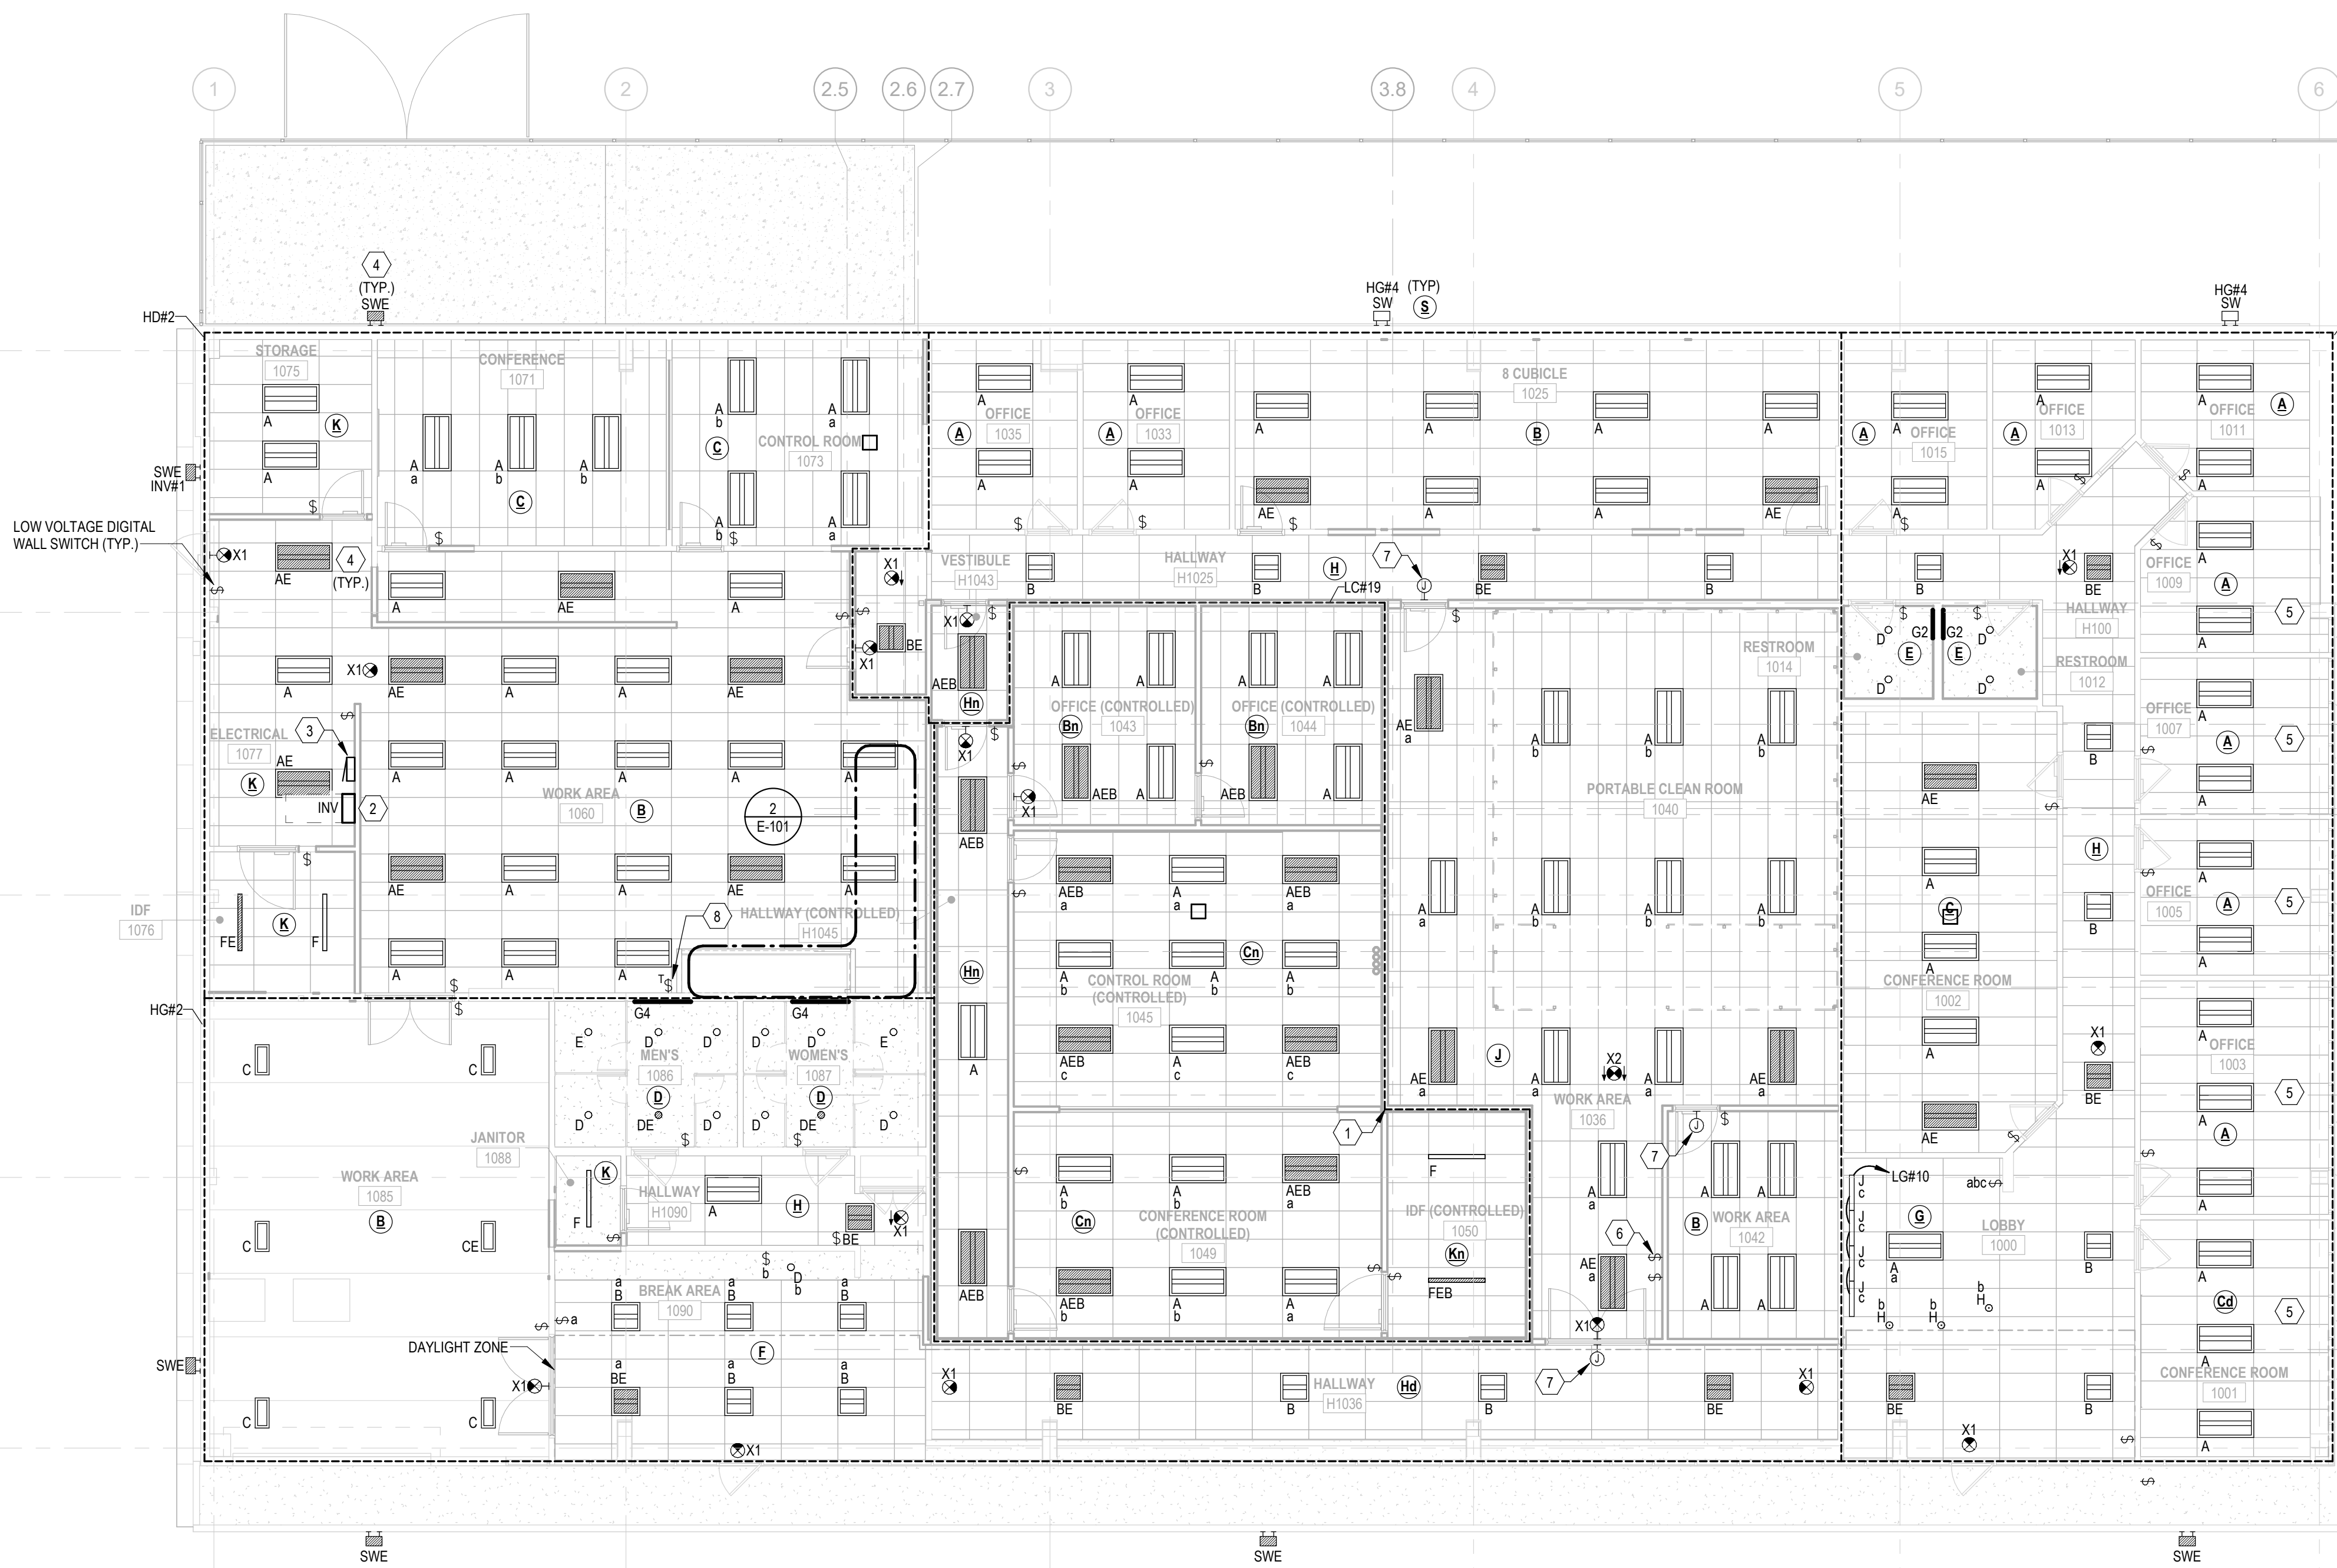

2 E-101 ENLARGED LIGHTING PLAN - SERVICE STAIRS UPPER LANDING
1/4" = 1'-0"

E

D

C

B

A

1

E-103

ROOF POWER PLAN


1/8" = 1'-0"

0

4'

8'

16'

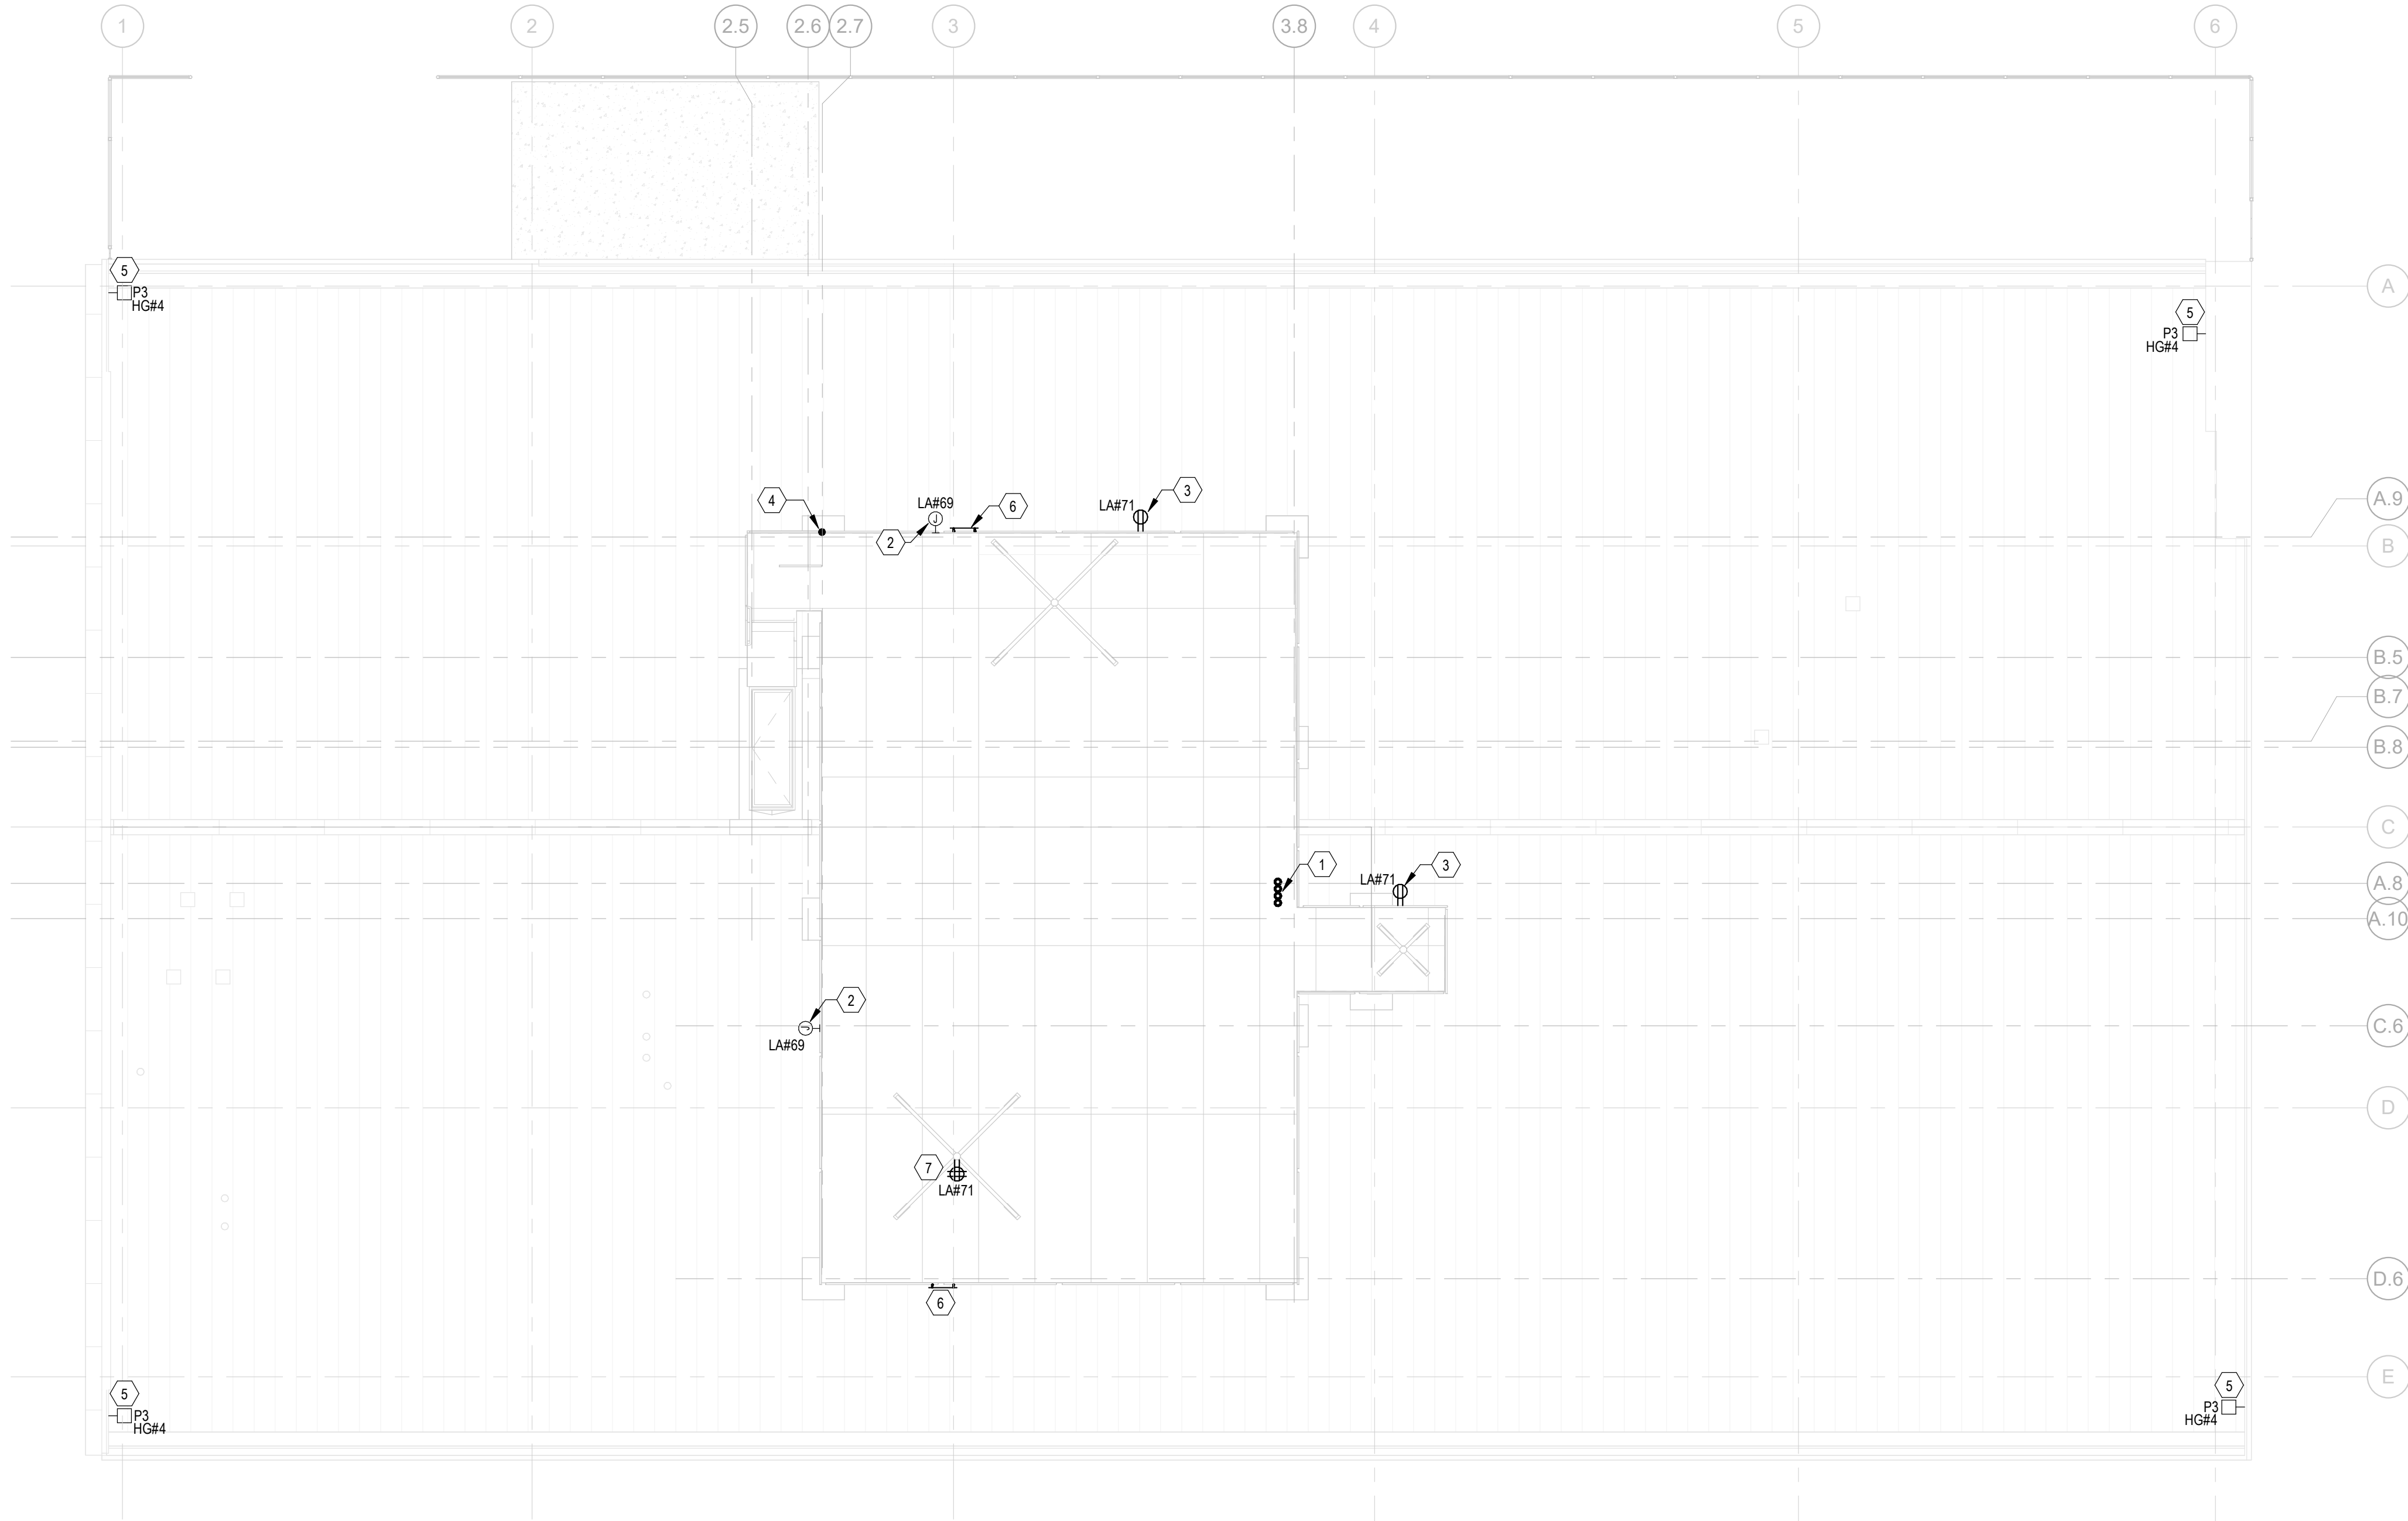

POWER SHEET NOTES

- A. REFER TO SPECIFICATIONS, SCHEDULES, DETAILS AND GENERAL NOTES SHEET FOR ADDITIONAL ELECTRICAL EQUIPMENT AND SYSTEM INSTALLATION REQUIREMENTS.
- B. SPECIAL REQUIREMENTS SUCH AS MOUNTING ABOVE COUNTER (AC), GROUND FAULT CIRCUIT INTERRUPTERS (GFI), AND WEATHERPROOF ENCLOSURES (WP) ARE NOTED ADJACENT TO RECEPTACLES.
- C. REFER TO ELECTRICAL EQUIPMENT SCHEDULE FOR DISCONNECT AND CONTROLS REQUIREMENTS.
- D. CONTRACTOR SHALL PROVIDE POWER TO ALL ITEMS SHOWN FROM THE PANEL AND CIRCUIT NUMBERS THAT ARE SHOWN ADJACENT TO THE LOAD (RECEPTACLE, DISCONNECT, JBOX, EQUIPMENT CONNECTION POINT, ETC), SIZE CIRCUIT PER PANEL SCHEDULE. PROVIDE NEUTRAL AND GROUND, U.N.O.
- E. ALL HOME RUNS SHALL BE IN CONDUIT PER REQUIREMENTS NOTED ON SHEET E-002, LABELED PER DESIGN REQUIREMENTS. FLEXIBLE CONDUIT IS LIMITED TO THE FOLLOWING USES: LIGHT FIXTURE WHIPS (8' MAX), CUT-IN RECEPTACLES, AND CONNECTIONS TO VIBRATING EQUIPMENT (3' MAX).
- F. DEDICATED NEUTRAL REQUIRED FOR ALL CIRCUITS.

KEYNOTES

1. PROVIDE (4) 1/4" CONDUIT WITH WEATHERHEADS FOR CONNECTION OF ROOF MOUNTED ANTENNAS.
2. PROVIDE WEATHERPROOF JUNCTION BOX WITH CONDUIT STUBBED INTO ACCESSIBLE CEILING SPACE FOR OWNER PROVIDED CAMERA. CONFIRM EXACT LOCATION WITH OWNER'S SECURITY REPRESENTATIVE.
3. PROVIDE WEATHER RESISTANT RECEPTACLE WITH WEATHERPROOF WHILE-IN-USE COVER TO SIDE OF ROOF PLATFORM OUTER FACIA.
4. MAST TYPE LIGHTNING PROTECTION SYSTEM BY DESIGN-BUILD SPECIALTY CONTRACTOR. ZONE OF PROTECTIONS SHALL INCLUDE ANTENNA SYSTEMS ONLY. COORDINATE ATTACHMENT OF MAST TO NEW ROOF PLATFORM STRUCTURE WITH STRUCTURAL ENGINEER. REFER TO LIGHTING PROTECTION SPECIFICATION FOR ADDITIONAL INFORMATION.
5. TYPE P3 FIXTURE SHALL BE YOKE MOUNTED TO INTERIOR SIDE OF EXISTING ROOF PARAPET WALL. AIM FIXTURES AT ANTENNA ARRAY. FIXTURES SHALL BE CONTROLLED BY DIGITAL TIMER SWITCH LOCATED AT MID-LEVEL LANDING OF ROOF ACCESS STAIR. FIXTURES ARE NORMALLY OFF AND ONLY USED FOR MAINTENANCE ACTIVITIES.
6. PROVIDE GROUND BUS BAR MOUNTED TO SIDE OF ROOF PLATFORM OUTER FACIA.
7. PROVIDE WEATHER RESISTANT QUAD RECEPTACLE WITH WEATHERPROOF WHILE-IN-USE COVER MOUNTED DIRECTLY TO ANTENNA BASE PEDESTAL. SERVE USING WEATHERTIGHT FLEXIBLE METAL CONDUIT CONNECTED TO JUNCTION BOX MOUNTED TO SIDE OF ROOF PLATFORM STRUCTURE.



THE HARTMAN • MAJEWSKI
DESIGN GROUP
Architects • Engineers • Interior Design
Planners • Urban Designers • LEED®
120 Vassar Dr SE Suite 100
Albuquerque New Mexico 87106
T 505 242 6880 • F 505 242 6881
CONSULTANT



STAMP

Digitally Signed



2023.08.24 15:25:43-05'00'

PERMIT SET

PROJECT NAME
GENERAL ATOMICS TI
ABQ

14820 CENTRAL AVE, ALBUQUERQUE,
NM 87123

GENERAL ATOMICS

REVISIONS

NO.	DATE	DESCRIPTION

Copyright: Design Group

Drawn by SD
Checked by JW
Date 08/28/2023
Project number 2728

SHEET TITLE

ROOF ELECTRICAL PLAN

SHEET NUMBER

E-103



WDGE2 LED


Architectural Wall Sconce

Precision Refractive Optic



Specifications

- Depth (D1): 7"
- Depth (D2): 1.5"
- Height: 9"
- Width: 11.5"
- Weight: 13.5 lbs (without options)

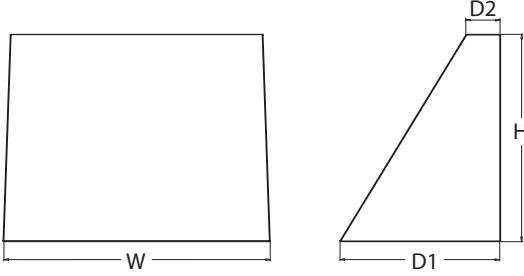

Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The WDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WDGE family provides additional energy savings and code compliance.

WDGE2 with industry leading precision refractive optics provides great uniform distribution and optical control. When combined with multiple integrated emergency battery backup options, including an 18W cold temperature option, the WDGE2 becomes the ideal wall-mounted lighting solution for pedestrian scale applications in any environment.

WDGE LED Family Overview

Luminaire	Optics	Standard EM, 0°C	Cold EM, -20°C	Sensor	Approximate Lumens (4000K, 80CRI)						
					P0	P1	P2	P3	P4	P5	P6
WDGE1 LED	Visual Comfort	4W		--	750	1,200	2,000	--	--	--	--
WDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight	--	1,200	2,000	3,000	4,500	6,000	--
WDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200	--	--
WDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight	--	7,500	8,500	10,000	12,000	--	--
WDGE4 LED	Precision Refractive			Standalone / nLight	--	12,000	16,000	18,000	20,000	22,000	25,000

Ordering Information

EXAMPLE: WDGE2 LED P3 40K 80CRI VF MVOLT SRM DDBXD

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting	
WDGE2 LED	P0 ¹	27K 2700K	70CRI ⁴	T1S Type I Short	MVOLT	SRM	Shipped included Surface mounting bracket
	P1 ²	30K 3000K	80CRI	T2M Type II Medium	347 ⁵		
	P2 ²	40K 4000K	LW ³ Limited Wavelength	T3M Type III Medium	480 ⁵	ICW	Shipped separately Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) ⁶
	P3 ²	50K 5000K		T4M Type IV Medium			
	P4 ²	AMB ³ Amber		TFTM Forward Throw Medium			

Options			Finish	
E10WH	Emergency battery backup, Certified in CA Title 20 MAEDBS (10W, 5°C min)	Standalone Sensors/Controls PIR Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching. PIRH Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching PIR1FC3V Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-programmed for dusk to dawn operation. PIRH1FC3V Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk to dawn operation. Networked Sensors/Controls NLTAIR2 PIR nLightAIR Wireless enabled bi-level motion/ambient sensor for 8-15' mounting heights. NLTAIR2 PIRH nLightAIR Wireless enabled bi-level motion/ambient sensor for 15-30' mounting heights. See page 4 for out of box functionality	DDBXD	Dark bronze
E20WC	Emergency battery backup, Certified in CA Title 20 MAEDBS (18W, -20°C min)		DBLXD	Black
PE ⁷	Photocell, Button Type		DNAXD	Natural aluminum
DMG ⁸	0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)		DWHXD	White
BCE	Bottom conduit entry for back box (PBBW). Total of 4 entry points.		DSSXD	Sandstone
BAA	Buy America(n) Act Compliant		DDBTXD	Textured dark bronze
			DBLBXD	Textured black
		DNATXD	Textured natural aluminum	
		DWHGXD	Textured white	
		DSSTXD	Textured sandstone	

Accessories

Ordered and shipped separately.

WDGEAWS DDBXD WEDGE 3/8inch Architectural Wall Spacer (specify finish)
WDGE2P8BW DDBXD U WEDGE2 surface-mounted back box (specify finish)

NOTES

- 1 PO option not available with sensors/controls.
- 2 P1-P4 not available with AMB and LW.
- 3 AMB and LW always go together.
- 4 70CRI only available with T3M and T4M.
- 5 347V and 480V not available with E10WH or E20WC.
- 6 Not qualified for DLC. Not available with emergency battery backup or sensors/controls.
- 7 PE not available in 480V or with sensors/controls.
- 8 DMG option not available with sensors/controls.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	27K (2700K, 80 CRI)					30K (3000K, 80 CRI)					40K (4000K, 80 CRI)					50K (5000K, 80 CRI)					Amber (Limited Wavelength)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P0	7W	T1S	636	92	0	0	0	666	97	0	0	0	699	101	0	0	1	691	100	0	0	1	712	47	0	0	1
		T2M	662	96	0	0	0	693	101	0	0	0	728	106	0	0	0	719	104	0	0	0	741	48	0	0	0
		T3M	662	96	0	0	0	693	101	0	0	0	728	106	0	0	0	719	104	0	0	0	741	48	0	0	0
		T4M	648	94	0	0	0	679	98	0	0	0	712	103	0	0	0	704	102	0	0	0	726	47	0	0	0
		TFTM	652	95	0	0	0	683	99	0	0	0	717	104	0	0	0	708	103	0	0	0	730	48	0	0	1
P1	11W	T1S	1,105	99	0	0	1	1,157	104	0	0	1	1,215	109	0	0	1	1,200	107	0	0	1					
		T2M	1,150	103	0	0	1	1,204	108	0	0	1	1,264	113	0	0	1	1,249	112	0	0	1					
		T3M	1,150	103	0	0	1	1,205	108	0	0	1	1,265	113	0	0	1	1,250	112	0	0	1					
		T4M	1,126	101	0	0	1	1,179	106	0	0	1	1,238	111	0	0	1	1,223	110	0	0	1					
		TFTM	1,133	101	0	0	1	1,186	106	0	0	1	1,245	112	0	0	1	1,230	110	0	0	1					
P2	19W	T1S	1,801	95	1	0	1	1,886	99	1	0	1	1,981	104	1	0	1	1,957	103	1	0	1					
		T2M	1,875	99	1	0	1	1,963	103	1	0	1	2,061	109	1	0	1	2,037	107	1	0	1					
		T3M	1,876	99	1	0	1	1,964	103	1	0	1	2,062	109	1	0	1	2,038	107	1	0	1					
		T4M	1,836	97	1	0	1	1,922	101	1	0	1	2,018	106	1	0	1	1,994	105	1	0	1					
		TFTM	1,847	97	1	0	1	1,934	102	1	0	1	2,030	107	1	0	1	2,006	106	1	0	1					
P3	32W	T1S	2,809	87	1	0	1	2,942	92	1	0	1	3,089	96	1	0	1	3,052	95	1	0	1					
		T2M	2,924	91	1	0	1	3,062	95	1	0	1	3,215	100	1	0	1	3,176	99	1	0	1					
		T3M	2,925	91	1	0	1	3,063	95	1	0	1	3,216	100	1	0	1	3,177	99	1	0	1					
		T4M	2,862	89	1	0	1	2,997	93	1	0	1	3,147	98	1	0	1	3,110	97	1	0	1					
		TFTM	2,880	90	1	0	1	3,015	94	1	0	1	3,166	99	1	0	1	3,128	97	1	0	1					
P4	47W	T1S	3,729	80	1	0	1	3,904	84	1	0	1	4,099	88	1	0	1	4,051	87	1	0	1					
		T2M	3,881	83	1	0	1	4,063	87	1	0	1	4,267	91	1	0	1	4,216	90	1	0	1					
		T3M	3,882	83	1	0	1	4,065	87	1	0	1	4,268	91	1	0	1	4,217	90	1	0	1					
		T4M	3,799	81	1	0	1	3,978	85	1	0	1	4,177	90	1	0	1	4,127	88	1	0	1					
		TFTM	3,822	82	1	0	1	4,002	86	1	0	1	4,202	90	1	0	1	4,152	89	1	0	1					

Performance Package	System Watts	Dist. Type	27K (2700K, 70 CRI)					30K (3000K, 70 CRI)					40K (4000K, 70 CRI)					50K (5000K, 70 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P0	7W	T3M	737	107	0	0	0	763	111	0	0	0	822	119	0	0	0	832	121	0	0	1
		T4M	721	105	0	0	0	746	108	0	0	0	804	117	0	0	1	814	118	0	0	1
P1	11W	T3M	1,280	115	0	0	1	1,325	119	0	0	1	1,427	128	1	0	1	1,445	129	1	0	1
		T4M	1,253	112	0	0	1	1,297	116	0	0	1	1,397	125	0	0	1	1,415	127	0	0	1
P2	19W	T3M	2,087	110	1	0	1	2,160	114	1	0	1	2,327	123	1	0	1	2,357	124	1	0	1
		T4M	2,042	108	1	0	1	2,114	111	1	0	1	2,278	120	1	0	1	2,306	121	1	0	1
P3	32W	T3M	3,254	101	1	0	1	3,369	105	1	0	1	3,629	113	1	0	1	3,675	114	1	0	1
		T4M	3,185	99	1	0	1	3,297	103	1	0	1	3,552	111	1	0	1	3,597	112	1	0	1
P4	47W	T3M	4,319	93	1	0	1	4,471	96	1	0	1	4,817	103	1	0	2	4,878	105	1	0	2
		T4M	4,227	91	1	0	1	4,376	94	1	0	2	4,714	101	1	0	2	4,774	102	1	0	2



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

WDGE2 LED
Rev. 11/21/22

Electrical Load

Performance Package	System Watts	Current (A)					
		120Vac	208Vac	240Vac	277Vac	347Vac	480Vac
P0	7.0	0.061	0.042	0.04	0.039	--	--
	9.0	--	--	--	--	0.031	0.021
P1	11.0	0.100	0.064	0.059	0.054	--	--
	14.1	--	--	--	--	0.046	0.031
P2	19.0	0.168	0.106	0.095	0.083	--	--
	22.8	--	--	--	--	0.067	0.050
P3	32.0	0.284	0.163	0.144	0.131	--	--
	37.1	--	--	--	--	0.107	0.079
P4	47.0	0.412	0.234	0.207	0.185	--	--
	53.5	--	--	--	--	0.153	0.112

Lumen Output in Emergency Mode (4000K, 80 CRI, T3M)

Option	Lumens
E10WH	1,358
E20WC	2,230

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.93	>0.87

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

LEGEND



MH = 10ft
Grid = 10ft x 10ft



Emergency Egress Options

Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

WDGE2 LED
Rev. 11/21/22

Motion/Ambient Sensor (PIR_, PIRH_)



Motion/Ambient sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.

Networked Control (NLTAIR2)

nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY™ Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.


PIR

HIGH VIEW

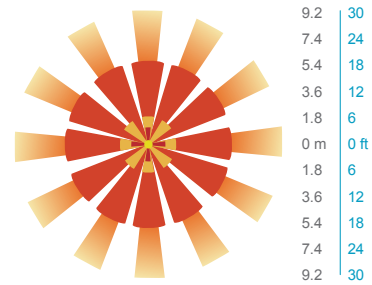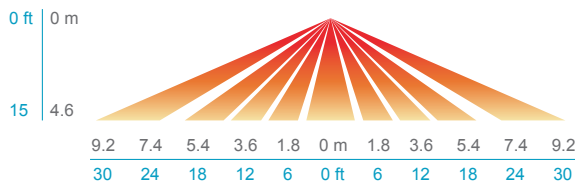


PIRH

SIDE VIEW

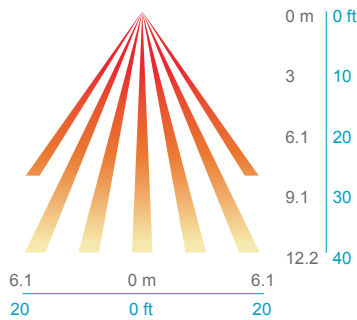

TOP VIEW

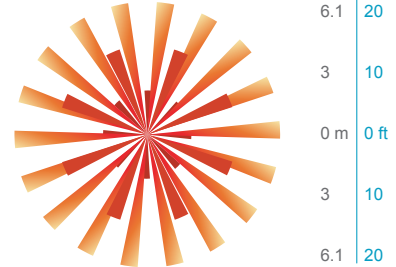

Option	Dim Level	High Level (when triggered)	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec



Motion/Ambient Sensor

D = 7"
H = 9" (Standalone controls)
11" (nLight AIR controls, 2" antenna will be pointing down behind the sensor)
W = 11.5"



PBBW – Surface-Mounted Back Box Use when there is no junction box available.

D = 1.75"
H = 9"
W = 11.5"



AWS – 3/8inch Architectural Wall Spacer

D = 0.38"
H = 4.4"
W = 7.5"

FEATURES & SPECIFICATIONS

INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

OPTICS

Individually formed acrylic lenses are engineered for superior application efficiency which maximizes the light in the areas where it is most needed. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

BUY AMERICAN ACT

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.






D-Series Size 1 LED Area Luminaire



d#series

Specifications

EPA:	0.69 ft ² (0.06 m ²)
Length:	32.71" (83.1 cm)
Width:	14.26" (36.2 cm)
Height H1:	7.88" (20.0 cm)
Height H2:	2.73" (6.9 cm)
Weight:	34 lbs (15.4 kg)

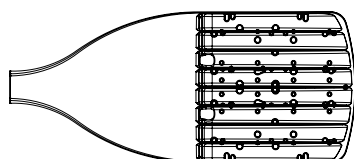

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED P7 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX1 LED						
Series	LEDs	Color temperature ²	Color Rendering Index ²	Distribution	Voltage	Mounting
DSX1 LED	Forward optics	(this section 70CRI only)		AFR Automotive front row	T5M Type V medium	Shipped included
	P1 P6	30K 3000K	70CRI	T1S Type I short	T5LG Type V low glare	SPA Square pole mounting (#8 drilling)
	P2 P7	40K 4000K	70CRI	T2M Type II medium	T5W Type V wide	RPA Round pole mounting (#8 drilling)
	P3 P8	50K 5000K	70CRI	T3M Type III medium	BLC3 Type III backlight control ³	SPA5 Square pole mounting #5 drilling ⁹
	P4 P9	(this section 80CRI only, extended lead times apply)		T3LG Type III low glare ³	BLC4 Type IV backlight control ³	RPA5 Round pole mounting #5 drilling ⁹
	P5			T4M Type IV medium	LCCO Left corner cutoff ³	SPA8N Square narrow pole mounting #8 drilling
	Rotated optics	27K 2700K	80CRI	T4LG Type IV low glare ³	RCCO Right corner cutoff ³	WBA Wall bracket ¹⁰
	P10 ¹ P12 ¹	30K 3000K	80CRI	TFTM Forward throw medium		MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)
	P11 ¹ P13 ¹	35K 3500K	80CRI			
		40K 4000K	80CRI			
		50K 5000K	80CRI			

Control options		Other options	Finish (required)
Shipped installed		Shipped installed	
NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{11, 12, 20, 21}	PER7 Seven-pin receptacle only (controls ordered separate) ^{14, 21}	SPD20KV 20KV surge protection	DDBXD Dark Bronze
PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{13, 20, 21}	FAO Field adjustable output ^{15, 21}	HS Houseside shield (black finish standard) ²²	DBLXD Black
PER NEMA twist-lock receptacle only (controls ordered separate) ¹⁴	BL30 Bi-level switched dimming, 30% ^{16, 21}	L90 Left rotated optics ¹	DNAXD Natural Aluminum
PER5 Five-pin receptacle only (controls ordered separate) ^{14, 21}	BL50 Bi-level switched dimming, 50% ^{16, 21}	R90 Right rotated optics ¹	DWHXD White
	DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷	CCE Coastal Construction ²³	DDBTXD Textured dark bronze
	DS Dual switching ^{18, 19, 21}	HA 50°C ambient operation ²⁴	DBLBXD Textured black
		Shipped separately	DNATXD Textured natural aluminum
		EGSR External Glare Shield (reversible, field install required, matches housing finish)	DWHGXD Textured white
		BSDB Bird Spikes (field install required)	



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2023 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 04/25/23
Page 1 of 10

Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²⁵
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²⁵
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²⁵
DSHORT SBK	Shorting cap ²⁵
DSX1HS P#	House-side shield (enter package number 1-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSXRPAS (FINISH)	Round pole adapter #5 drilling (specify finish)
DSX1EGSR (FINISH)	External glare shield (specify finish)
DSX1BSDB (FINISH)	Bird spike deterrent bracket (specify finish)


NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOOLT not available in packages P1 or P10.
- 9 SPA5 and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight AIR2 visit this [link](#).
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50, DMG and DS. NLTAIR2 PIRHN not available with P1 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1 and P10 using XVOOLT.
- 13 PIR not available with NLTAIR2 PIRHN, PER, PER5, PER7, FAO BL30, BL50, DMG and DS. PIR not available with P1 and P10 using HVOLT. PIR not available with P1 and P10 using XVOOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2 PIRHN, PIR, BL30, BL50, FAO, DMG and DS. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, DMG and DS.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO, DMG and DS.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50, FAO and DS.
- 18 DS not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50, FAO and DMG.
- 19 DS requires (2) separately switched circuits. DS provides 50/50 fixture operation via (2) different sets of leads using (2) drivers. DS only available with packages P8, P9, P10, P11, P12 and P13.
- 20 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 21 Reference Controls Options table on page 4.
- 22 HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 23 CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- 24 Option HA not available with performance packages P4, P5, P7, P8, P9 and P13.
- 25 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.

Shield Accessories




External Glare Shield (EGSR)

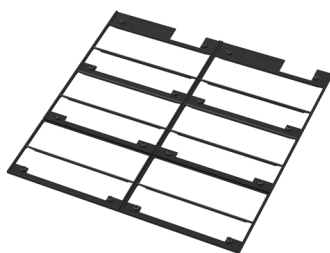

House Side Shield (HS)

Drilling


HANDHOLE ORIENTATION

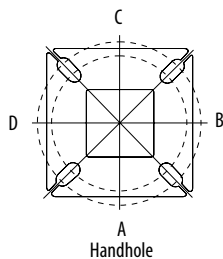

Template #8

Top of Pole

1.75" for aluminum poles
2.75" for other pole types

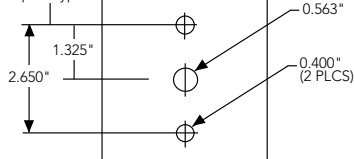

Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

DSX1 Area Luminaire - EPA

*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX1 with SPA	0.69	1.38	1.23	1.54	---	1.58
DSX1 with SPA5, SPA8N	0.70	1.40	1.30	1.66	---	1.68
DSX1 with RPA, RPA5	0.70	1.40	1.30	1.66	1.60	1.68
DSX1 with MA	0.83	1.66	1.50	2.09	2.09	2.09
















Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](https://www.lithonia.com).

Isofootcandle plots for the DSX1 LED P9 40K 70CRI. Distances are in units of mounting height (25').

LEGEND

- 0.1 fc
- 0.5 fc
- 1.0 fc



Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.95
50,000	0.90
100,000	0.81

FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use maximum published values by package listed on specification sheet (input watts and lumens by optic type).

Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P2	30	700	68	0.56	0.33	0.28	0.24	0.20	0.14
	P3	30	1050	104	0.85	0.49	0.43	0.37	0.29	0.21
	P4	30	1250	125	1.03	0.60	0.52	0.45	0.36	0.26
	P5	30	1400	142	1.15	0.66	0.58	0.50	0.40	0.29
	P6	40	1250	167	1.38	0.79	0.69	0.60	0.48	0.34
	P7	40	1400	188	1.54	0.89	0.77	0.67	0.53	0.38
	P8	60	1100	216	1.80	1.04	0.90	0.78	0.62	0.45
	P9	60	1400	279	2.31	1.33	1.15	1.00	0.80	0.58
Rotated Optics (Requires L90 or R90)	P10	60	530	101	0.84	0.49	0.42	0.37	0.29	0.21
	P11	60	700	135	1.12	0.65	0.56	0.49	0.39	0.28
	P12	60	1050	206	1.72	0.99	0.86	0.74	0.59	0.43
	P13	60	1400	279	2.30	1.33	1.15	1.00	0.79	0.57

LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2023 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 04/25/23
Page 4 of 10

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	51W	30	530	T1S	7,776	1	0	2	153	8,104	1	0	2	159	8,262	1	0	2	162
				T2M	7,203	1	0	3	142	7,507	2	0	3	147	7,653	2	0	3	150
				T3M	7,287	1	0	3	143	7,594	1	0	3	149	7,742	1	0	3	152
				T3LG	6,509	1	0	1	128	6,783	1	0	1	133	6,916	1	0	1	136
				T4M	7,395	1	0	3	145	7,707	1	0	3	151	7,857	1	0	3	154
				T4LG	6,726	1	0	1	132	7,010	1	0	1	138	7,146	1	0	1	140
				TFTM	7,446	1	0	3	146	7,760	1	0	3	152	7,912	1	0	3	155
				T5M	7,609	3	0	2	149	7,930	3	0	2	156	8,084	3	0	2	159
				T5W	7,732	3	0	2	152	8,058	4	0	2	158	8,215	4	0	2	161
				T5LG	7,631	3	0	1	150	7,953	3	0	1	156	8,108	3	0	1	159
				BLC3	5,300	0	0	2	104	5,524	0	0	2	109	5,631	0	0	2	111
				BLC4	5,474	0	0	3	108	5,705	0	0	3	112	5,816	0	0	3	114
				RCCO	5,348	0	0	2	105	5,573	0	0	2	109	5,682	0	0	2	112
				LCCO	5,348	0	0	2	105	5,573	0	0	2	109	5,682	0	0	2	112
				AFR	7,776	1	0	2	153	8,104	1	0	2	159	8,262	1	0	2	162
P2	68W	30	700	T1S	9,997	1	0	2	147	10,418	1	0	2	154	10,621	1	0	2	157
				T2M	9,260	2	0	3	137	9,651	2	0	3	142	9,839	2	0	3	145
				T3M	9,368	2	0	3	138	9,763	2	0	3	144	9,953	2	0	3	147
				T3LG	8,368	1	0	2	123	8,721	1	0	2	129	8,891	1	0	2	131
				T4M	9,507	2	0	3	140	9,909	2	0	3	146	10,102	2	0	3	149
				T4LG	8,647	1	0	2	128	9,012	1	0	2	133	9,187	1	0	2	136
				TFTM	9,573	2	0	3	141	9,977	2	0	3	147	10,172	2	0	3	150
				T5M	9,782	4	0	2	144	10,195	4	0	2	150	10,393	4	0	2	153
				T5W	9,940	4	0	2	147	10,360	4	0	2	153	10,562	4	0	2	156
				T5LG	9,810	3	0	1	145	10,224	3	0	1	151	10,423	3	0	1	154
				BLC3	6,814	0	0	2	101	7,101	0	0	2	105	7,240	0	0	2	107
				BLC4	7,038	0	0	3	104	7,334	0	0	3	108	7,477	0	0	3	110
				RCCO	6,875	1	0	2	101	7,165	1	0	2	106	7,305	1	0	2	108
				LCCO	6,875	1	0	2	101	7,165	1	0	2	106	7,305	1	0	2	108
				AFR	9,997	1	0	2	147	10,418	1	0	2	154	10,621	1	0	2	157
P3	102W	30	1050	T1S	14,093	2	0	2	138	14,687	2	0	2	144	14,973	2	0	2	147
				T2M	13,055	2	0	3	128	13,605	2	0	3	133	13,871	2	0	3	136
				T3M	13,206	2	0	4	129	13,763	2	0	4	135	14,031	2	0	4	137
				T3LG	11,797	2	0	2	115	12,294	2	0	2	120	12,534	2	0	2	123
				T4M	13,403	2	0	4	131	13,968	2	0	4	137	14,241	2	0	4	139
				T4LG	12,190	2	0	2	119	12,704	2	0	2	124	12,952	2	0	2	127
				TFTM	13,496	2	0	4	132	14,065	2	0	4	138	14,339	2	0	4	140
				T5M	13,790	4	0	2	135	14,371	4	0	2	141	14,652	4	0	2	143
				T5W	14,013	4	0	3	137	14,605	4	0	3	143	14,889	4	0	3	146
				T5LG	13,830	3	0	2	135	14,413	3	0	2	141	14,694	3	0	2	144
				BLC3	9,606	0	0	2	94	10,011	0	0	2	98	10,206	0	0	2	100
				BLC4	9,921	0	0	3	97	10,340	0	0	3	101	10,541	0	0	3	103
				RCCO	9,692	1	0	2	95	10,101	1	0	2	99	10,298	1	0	2	101
				LCCO	9,692	1	0	2	95	10,101	1	0	2	99	10,298	1	0	2	101
				AFR	14,093	2	0	2	138	14,687	2	0	2	144	14,973	2	0	2	147

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P4	124W	30	1250	T1S	16,416	2	0	3	132	17,109	2	0	3	138	17,442	2	0	3	141
				T2M	15,207	3	0	4	123	15,849	3	0	4	128	16,158	3	0	4	130
				T3M	15,383	2	0	4	124	16,032	2	0	4	129	16,345	2	0	4	132
				T3LG	13,742	2	0	2	111	14,321	2	0	2	116	14,600	2	0	2	118
				T4M	15,613	2	0	4	126	16,272	2	0	4	131	16,589	2	0	4	134
				T4LG	14,200	2	0	2	115	14,799	2	0	2	119	15,087	2	0	2	122
				TFTM	15,721	2	0	4	127	16,384	2	0	4	132	16,703	2	0	4	135
				T5M	16,063	4	0	2	130	16,741	4	0	2	135	17,067	4	0	2	138
				T5W	16,324	5	0	3	132	17,013	5	0	3	137	17,344	5	0	3	140
				T5LG	16,110	3	0	2	130	16,790	4	0	2	135	17,117	4	0	2	138
				BLC3	11,190	0	0	3	90	11,662	0	0	3	94	11,889	0	0	3	96
				BLC4	11,557	0	0	3	93	12,044	0	0	3	97	12,279	0	0	3	99
				RCCO	11,291	1	0	3	91	11,767	1	0	3	95	11,996	1	0	3	97
				LCCO	11,291	1	0	3	91	11,767	1	0	3	95	11,996	1	0	3	97
				AFR	16,416	2	0	3	132	17,109	2	0	3	138	17,442	2	0	3	141
P5	138W	30	1400	T1S	18,052	2	0	3	131	18,814	2	0	3	136	19,180	2	0	3	139
				T2M	16,723	3	0	4	121	17,428	3	0	4	126	17,768	3	0	4	129
				T3M	16,917	3	0	4	122	17,630	3	0	4	128	17,974	3	0	4	130
				T3LG	15,111	2	0	2	109	15,749	2	0	2	114	16,055	2	0	2	116
				T4M	17,169	3	0	5	124	17,893	3	0	5	130	18,242	3	0	5	132
				T4LG	15,615	2	0	2	113	16,274	2	0	2	118	16,591	2	0	2	120
				TFTM	17,288	2	0	4	125	18,017	2	0	5	130	18,368	3	0	5	133
				T5M	17,664	5	0	3	128	18,410	5	0	3	133	18,768	5	0	3	136
				T5W	17,951	5	0	3	130	18,708	5	0	3	135	19,073	5	0	3	138
				T5LG	17,716	4	0	2	128	18,463	4	0	2	134	18,823	4	0	2	136
				BLC3	12,305	0	0	3	89	12,824	0	0	3	93	13,074	0	0	3	95
				BLC4	12,709	0	0	4	92	13,245	0	0	4	96	13,503	0	0	4	98
				RCCO	12,416	1	0	3	90	12,940	1	0	3	94	13,192	1	0	3	95
				LCCO	12,416	1	0	3	90	12,940	1	0	3	94	13,192	1	0	3	95
				AFR	18,052	2	0	3	131	18,814	2	0	3	136	19,180	2	0	3	139
P6	165W	40	1250	T1S	21,031	2	0	3	127	21,918	2	0	3	133	22,345	2	0	3	135
				T2M	19,482	3	0	4	118	20,303	3	0	4	123	20,699	3	0	4	125
				T3M	19,708	3	0	5	119	20,539	3	0	5	124	20,939	3	0	5	127
				T3LG	17,604	2	0	2	107	18,347	2	0	2	111	18,704	2	0	2	113
				T4M	20,001	3	0	5	121	20,845	3	0	5	126	21,251	3	0	5	129
				T4LG	18,191	2	0	2	110	18,959	2	0	2	115	19,328	2	0	2	117
				TFTM	20,140	3	0	5	122	20,989	3	0	5	127	21,398	3	0	5	129
				T5M	20,579	5	0	3	125	21,447	5	0	3	130	21,865	5	0	3	132
				T5W	20,912	5	0	3	127	21,795	5	0	3	132	22,219	5	0	3	134
				T5LG	20,638	4	0	2	125	21,509	4	0	2	130	21,928	4	0	2	133
				BLC3	14,335	0	0	3	87	14,940	0	0	3	90	15,231	0	0	3	92
				BLC4	14,805	0	0	4	90	15,430	0	0	4	93	15,731	0	0	4	95
				RCCO	14,464	1	0	3	88	15,074	1	0	3	91	15,368	1	0	3	93
				LCCO	14,464	1	0	3	88	15,074	1	0	3	91	15,368	1	0	3	93
				AFR	21,031	2	0	3	127	21,918	2	0	3	133	22,345	2	0	3	135

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P7	184W	40	1400	T1S	22,741	2	0	3	123	23,700	2	0	3	129	24,162	3	0	3	131
				T2M	21,066	3	0	4	114	21,955	3	0	4	119	22,383	3	0	4	121
				T3M	21,311	3	0	5	116	22,210	3	0	5	120	22,642	3	0	5	123
				T3LG	19,036	2	0	2	103	19,839	2	0	3	108	20,226	2	0	3	110
				T4M	21,628	3	0	5	117	22,541	3	0	5	122	22,980	3	0	5	125
				T4LG	19,671	2	0	2	107	20,501	2	0	3	111	20,900	2	0	3	113
				TFTM	21,778	3	0	5	118	22,697	3	0	5	123	23,139	3	0	5	125
				T5M	22,252	5	0	3	121	23,191	5	0	3	126	23,643	5	0	3	128
				T5W	22,613	5	0	3	123	23,567	5	0	4	128	24,027	5	0	4	130
				T5LG	22,317	4	0	2	121	23,258	4	0	2	126	23,712	4	0	2	129
				BLC3	15,501	0	0	3	84	16,155	0	0	4	88	16,470	0	0	4	89
				BLC4	16,010	0	0	4	87	16,685	0	0	4	90	17,010	0	0	4	92
				RCCO	15,641	1	0	3	85	16,301	1	0	3	89	16,619	1	0	3	90
				LCCO	15,641	1	0	3	85	16,301	1	0	3	89	16,619	1	0	3	90
				AFR	22,741	2	0	3	123	23,700	2	0	3	129	24,162	3	0	3	131
P8	216W	60	1100	T1S	28,701	3	0	3	133	29,912	3	0	4	139	30,495	3	0	4	141
				T2M	26,587	3	0	5	123	27,709	3	0	5	128	28,249	3	0	5	131
				T3M	26,895	3	0	5	125	28,030	3	0	5	130	28,576	3	0	5	132
				T3LG	24,025	3	0	3	111	25,038	3	0	3	116	25,526	3	0	3	118
				T4M	27,296	3	0	5	127	28,448	3	0	5	132	29,002	3	0	5	134
				T4LG	24,826	3	0	3	115	25,873	3	0	3	120	26,378	3	0	3	122
				TFTM	27,485	3	0	5	127	28,645	3	0	5	133	29,203	3	0	5	135
				T5M	28,084	5	0	4	130	29,269	5	0	4	136	29,839	5	0	4	138
				T5W	28,539	5	0	4	132	29,743	5	0	4	138	30,323	5	0	4	141
				T5LG	28,165	4	0	2	131	29,354	4	0	2	136	29,926	4	0	2	139
				BLC3	19,563	0	0	4	91	20,388	0	0	4	94	20,786	0	0	4	96
				BLC4	20,205	0	0	5	94	21,057	0	0	5	98	21,468	0	0	5	99
				RCCO	19,740	1	0	4	91	20,572	1	0	4	95	20,973	1	0	4	97
				LCCO	19,740	1	0	4	91	20,572	1	0	4	95	20,973	1	0	4	97
				AFR	28,701	3	0	3	133	29,912	3	0	4	139	30,495	3	0	4	141
P9	277W	60	1400	T1S	34,819	3	0	4	126	36,288	3	0	4	131	36,996	3	0	4	134
				T2M	32,255	3	0	5	116	33,616	3	0	5	121	34,271	3	0	5	124
				T3M	32,629	3	0	5	118	34,006	3	0	5	123	34,668	3	0	5	125
				T3LG	29,146	3	0	3	105	30,376	3	0	4	110	30,968	3	0	4	112
				T4M	33,116	3	0	5	120	34,513	3	0	5	125	35,185	3	0	5	127
				T4LG	30,119	3	0	3	109	31,389	3	0	4	113	32,001	3	0	4	116
				TFTM	33,345	3	0	5	120	34,751	3	0	5	125	35,429	3	0	5	128
				T5M	34,071	5	0	4	123	35,509	5	0	4	128	36,201	5	0	4	131
				T5W	34,624	5	0	4	125	36,084	5	0	4	130	36,788	5	0	4	133
				T5LG	34,170	5	0	3	123	35,612	5	0	3	129	36,306	5	0	3	131
				BLC3	23,734	0	0	4	86	24,735	0	0	4	89	25,217	0	0	4	91
				BLC4	24,513	0	0	5	88	25,547	0	0	5	92	26,045	0	0	5	94
				RCCO	23,948	1	0	4	86	24,958	1	0	4	90	25,445	1	0	4	92
				LCCO	23,948	1	0	4	86	24,958	1	0	4	90	25,445	1	0	4	92
				AFR	34,819	3	0	4	126	36,288	3	0	4	131	36,996	3	0	4	134

Performance Data


Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	101W	60	530	T1S	15,164	3	0	3	150	15,803	3	0	3	156	16,112	3	0	3	159
				T2M	14,047	4	0	4	139	14,640	4	0	4	145	14,925	4	0	4	147
				T3M	14,208	4	0	4	140	14,807	4	0	4	146	15,096	4	0	4	149
				T3LG	12,693	3	0	3	125	13,229	3	0	3	131	13,487	3	0	3	133
				T4M	14,420	4	0	4	142	15,028	4	0	4	148	15,321	4	0	4	151
				T4LG	13,115	3	0	3	129	13,668	3	0	3	135	13,934	3	0	3	138
				TFTM	14,522	4	0	4	143	15,134	4	0	4	149	15,429	4	0	4	152
				T5M	14,836	4	0	2	146	15,462	4	0	2	153	15,763	4	0	2	156
				T5W	15,076	4	0	3	149	15,712	5	0	3	155	16,019	5	0	3	158
				T5LG	14,879	3	0	2	147	15,507	3	0	2	153	15,809	3	0	2	156
				BLC3	10,335	3	0	3	102	10,771	4	0	4	106	10,981	4	0	4	108
				BLC4	10,674	4	0	4	105	11,124	4	0	4	110	11,341	4	0	4	112
				RCCO	10,429	1	0	2	103	10,869	1	0	2	107	11,080	1	0	2	109
				LCCO	10,429	1	0	2	103	10,869	1	0	2	107	11,080	1	0	2	109
				AFR	15,164	3	0	3	150	15,803	3	0	3	156	16,112	3	0	3	159
P11	135W	60	700	T1S	19,437	4	0	4	144	20,257	4	0	4	150	20,651	4	0	4	153
				T2M	18,005	4	0	4	133	18,765	4	0	4	139	19,131	4	0	4	142
				T3M	18,211	4	0	4	135	18,980	4	0	4	141	19,350	4	0	4	143
				T3LG	16,270	3	0	3	121	16,957	3	0	3	126	17,287	4	0	4	128
				T4M	18,483	4	0	4	137	19,263	5	0	5	143	19,638	5	0	5	146
				T4LG	16,810	3	0	3	125	17,519	3	0	3	130	17,861	3	0	3	132
				TFTM	18,614	4	0	4	138	19,399	4	0	4	144	19,777	5	0	5	147
				T5M	19,017	5	0	3	141	19,819	5	0	3	147	20,205	5	0	3	150
				T5W	19,325	5	0	3	143	20,140	5	0	3	149	20,533	5	0	3	152
				T5LG	19,072	4	0	2	141	19,876	4	0	2	147	20,264	4	0	2	150
				BLC3	13,247	4	0	4	98	13,806	4	0	4	102	14,075	4	0	4	104
				BLC4	13,682	4	0	4	101	14,259	4	0	4	106	14,537	4	0	4	108
				RCCO	13,367	1	0	3	99	13,931	1	0	3	103	14,203	1	0	3	105
				LCCO	13,367	1	0	3	99	13,931	1	0	3	103	14,203	1	0	3	105
				AFR	19,437	4	0	4	144	20,257	4	0	4	150	20,651	4	0	4	153
P12	206W	60	1050	T1S	27,457	4	0	4	133	28,616	4	0	4	139	29,174	4	0	4	142
				T2M	25,436	5	0	5	124	26,509	5	0	5	129	27,025	5	0	5	131
				T3M	25,727	5	0	5	125	26,812	5	0	5	130	27,335	5	0	5	133
				T3LG	22,984	4	0	4	112	23,954	4	0	4	116	24,421	4	0	4	119
				T4M	26,110	5	0	5	127	27,212	5	0	5	132	27,742	5	0	5	135
				T4LG	23,747	4	0	4	115	24,749	4	0	4	120	25,231	4	0	4	123
				TFTM	26,295	5	0	5	128	27,404	5	0	5	133	27,938	5	0	5	136
				T5M	26,864	5	0	4	130	27,997	5	0	4	136	28,543	5	0	4	139
				T5W	27,299	5	0	4	133	28,451	5	0	4	138	29,006	5	0	4	141
				T5LG	26,942	4	0	2	131	28,078	4	0	2	136	28,626	4	0	2	139
				BLC3	18,714	4	0	4	91	19,504	4	0	4	95	19,884	4	0	4	97
				BLC4	19,327	5	0	5	94	20,143	5	0	5	98	20,535	5	0	5	100
				RCCO	18,883	1	0	4	92	19,680	1	0	4	96	20,064	1	0	4	97
				LCCO	18,883	1	0	4	92	19,680	1	0	4	96	20,064	1	0	4	97
				AFR	27,457	4	0	4	133	28,616	4	0	4	139	29,174	4	0	4	142
P13	276W	60	1400	T1S	34,436	5	0	5	125	35,889	5	0	5	130	36,588	5	0	5	133
				T2M	31,900	5	0	5	116	33,246	5	0	5	121	33,894	5	0	5	123
				T3M	32,265	5	0	5	117	33,626	5	0	5	122	34,282	5	0	5	124
				T3LG	28,826	4	0	4	105	30,042	4	0	4	109	30,628	4	0	4	111
				T4M	32,746	5	0	5	119	34,128	5	0	5	124	34,793	5	0	5	126
				T4LG	29,782	4	0	4	108	31,039	4	0	4	113	31,644	5	0	4	115
				TFTM	32,978	5	0	5	120	34,369	5	0	5	125	35,039	5	0	5	127
				T5M	33,692	5	0	4	122	35,113	5	0	4	127	35,797	5	0	4	130
				T5W	34,238	5	0	4	124	35,682	5	0	4	129	36,378	5	0	4	132
				T5LG	33,789	5	0	3	122	35,215	5	0	3	128	35,901	5	0	3	130
				BLC3	23,471	5	0	5	85	24,461	5	0	5	89	24,937	5	0	5	90
				BLC4	24,240	5	0	5	88	25,262	5	0	5	92	25,755	5	0	5	93
				RCCO	23,683	1	0	4	86	24,682	1	0	4	89	25,163	1	0	4	91
				LCCO	23,683	1	0	4	86	24,682	1	0	4	89	25,163	1	0	4	91
				AFR	34,436	5	0	5	125	35,889	5	0	5	130	36,588	5	0	5	133



Dimensions

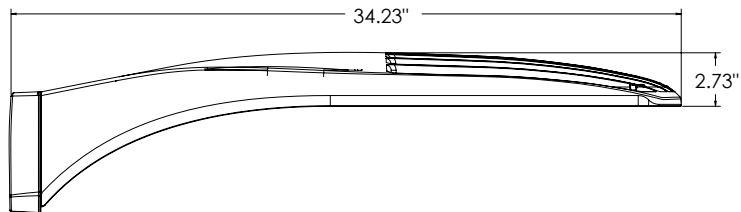


DSX1 with RPA, RPA5, SPA5, SPA8N mount
Weight: 36 lbs

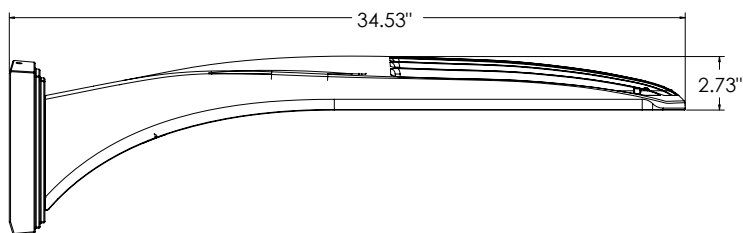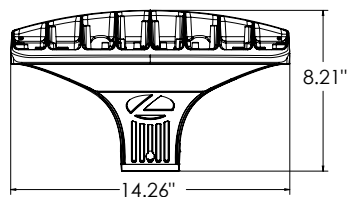


DSX1 with WBA mount
Weight: 38 lbs

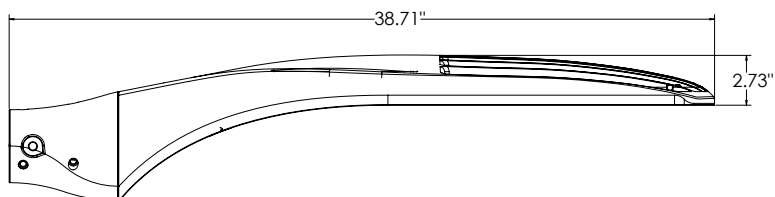


DSX1 with MA mount
Weight: 39 lbs




SPA (STANDARD ARM)




RPA




SPA5



RPA5






SPA8N



nLight Sensor Coverage Pattern

NLTAIR2 PIRHN

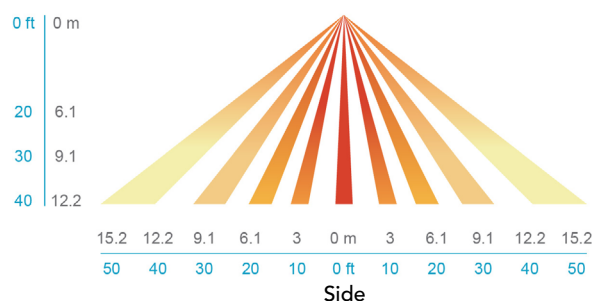

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G for SPA and MA. 1.5G for mountings RPA, RPA5, SPA5 and SPA8N. Low EPA (0.69 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

Coastal Construction (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L81/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. DSX Size 1, comes standard with 0-10V dimming drivers. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensor with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocell functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.


d^{series}

D-Series DSXF1 LED Floodlight



Specifications

EPA:	0.6 ft ² (0.05 m ²)
Depth:	3.52" (8.9 cm)
Width:	8.86" (22.5 cm)
Height:	7.84" (19.9 cm)
Overall Height:	13.37" (34.0 cm)
Weight:	7.2 lbs (3.3 kg)

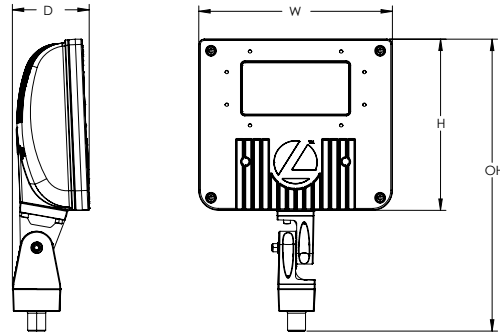Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series floodlights feature a site-wide offering to meet specifier's every floodlighting need in application. The D-Series flood offers three sizes delivering 3,000 to 27,000 lumens. Available with seven precision optics, three mountings and three color temperatures, D-Series floodlights offer vast design capabilities while delivering significant energy savings and long life.

The DSXF1 delivers 3,000 to 5,500 lumens, meeting a large breadth of illumination requirements for design and renovation when replacing 70W to 150W HID floodlights. All configurations are assembled in the USA allowing for quick delivery.

Ordering Information

EXAMPLE: DSXF1 LED P1 40K MSP MVOLT THK DDBXD

DSXF1 LED					
Series	Performance Package	Color Temperature	Distribution	Voltage	Mounting
DSXF1 LED	P1 P2	30K 3000K 40K 4000K 50K 5000K	WFL Wide flood (6X6) FL Flood (5X5) MFL Medium flood (4X4) WFR Wide flood rectangular (6X5) HMF Horizontal medium flood (6X4) MSP Medium spot (4X4) NSP Narrow spot (3X3)	MVOLT ¹ 347	Shipped included THK Knuckle with 1/2" NPT threaded pipe IS Integral slipfitter (fits 2-3/8" O.D. tenon) YKC62 Yoke with 2ft 16-3 SO cord

Options	Finish (required)
Shipped installed PE Photocontrol, button style ² DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) SPD10KV Separate surge protection	Shipped separately³ UBV Upper/bottom visor (universal) FV Full visor VG Vandal guard
	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White

Accessories³

Ordered and shipped separately.

DSXF1/2TS DDBXD U	Slipfitter for 1-1/4" to 2-3/8" OD tenons; 1/2" THK required (specify finish)
FTS CG6 DDBXD U	Slipfitter for 2-3/8" to 2-7/8" OD tenons; YKC62 required (specify finish)
FRWB DDBXD U	Radius wall bracket, 2-3/8" OD tenon (specify finish)
FSPB DDBXD U	Steel square pole bracket, 2-3/8" OD tenon (specify finish)
DSXF1UBV DDBXD U	Upper/bottom visor accessory (specify finish)
DSXF1FV DDBXD U	Full visor accessory (specify finish)
DSXF1VG U	Vandal guard accessory

For more mounting options, visit our
[Floodlighting Accessories](#) pages.

NOTES

- MVOLT driver operates on line voltage from 120-277V.
- Requires MVOLT or 347V (not available in 480V).
- Also available as accessories; see Accessories information at left.



Mountings



IS – Adjustable Slipfitter
(Fits 2-3/8" O.D. tenon)



**YKC62 - Yoke with 16-3
SO cord, 2ft**



**THK - Threaded Knuckle with
1/2" NPT threaded pipe**

External Shields



**UBV Visor
Top Mounted**



**UBV Visor
Bottom Mounted**



FV - Full Visor

Accessories



VG - Vandal Guard



**DSXF1/2TS - THK
Slipfitter Accessory**

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown within applicable tolerances. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	Field Angle		Beam Angle		30K (3000K, 70 CRI)			40K (4000K, 70 CRI)			50K (5000K, 70 CRI)		
			°H	°V	°H	°V	Lumens	LPW	Max Cd	Lumens	LPW	Max Cd	Lumens	LPW	Max Cd
P1	21W	NSP	37	38	18	19	2,601	124	16,316	2,876	137	18,039	2,876	137	18,039
		MSP	51	51	27	28	2,578	123	9,908	2,850	136	10,954	2,850	136	10,954
		MFL	60	60	46	45	2,435	116	4,027	2,692	128	4,452	2,692	128	4,452
		FL	84	91	59	72	2,682	128	2,255	2,965	141	2,494	2,965	141	2,494
		WFL	109	101	86	85	2,766	132	1,494	3,058	146	1,652	3,058	146	1,652
		WFR	103	92	80	71	2,794	133	1,809	3,089	147	2,000	3,089	147	2,000
		HMF	124	63	100	48	2,329	111	2,001	2,575	123	2,212	2,575	123	2,212
P2	42W	NSP	37	38	18	19	4,741	113	29,740	5,242	125	32,881	5,242	125	32,881
		MSP	51	51	27	28	4,699	112	18,060	5,195	124	19,967	5,195	124	19,967
		MFL	60	50	46	45	4,439	106	7,340	4,908	117	8,115	4,908	117	8,115
		FL	84	91	59	72	4,889	116	4,111	5,406	129	4,545	5,405	129	4,545
		WFL	109	101	86	85	4,753	113	2,568	5,573	133	3,011	5,573	133	3,011
		WFR	103	92	80	71	5,094	121	3,297	5,631	134	3,645	5,632	134	3,645
		HMF	124	63	100	48	4,245	101	3,647	4,693	112	4,032	4,693	112	4,032

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	
0°C	32°F
10°C	50°F
20°C	68°F
25°C	77°F
30°C	86°F
40°C	104°F

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXF1 LED P2** platform noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.



TM-21 Percent Lumen Maintenance	60,000 hrs
Lumen Maintenance Factor	>88%

Electrical Load


Light Engines	System Watts	Current (A)					
		120	208	240	277	347	480
P1	21W	0.18	0.1	0.09	0.08	0.07	-
P2	42W	0.35	0.20	0.18	0.15	0.12	-

Isofootcandle plots for DSXF1. Distances are in units of mounting height (15ft).


LEGEND

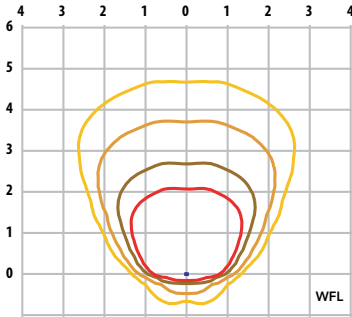


DSXF1 LED P2 40K - Tilted at 45°

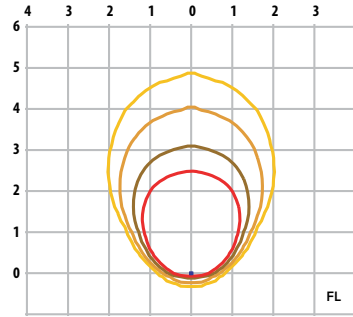


DSXF1 LED P2 40K - Tilted at 45°

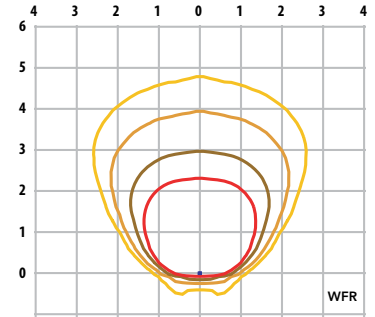


DSXF1 LED P2 40K - Tilted at 45°

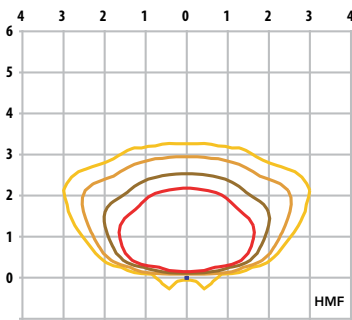


DSXF1 LED P2 40K - Tilted at 45°

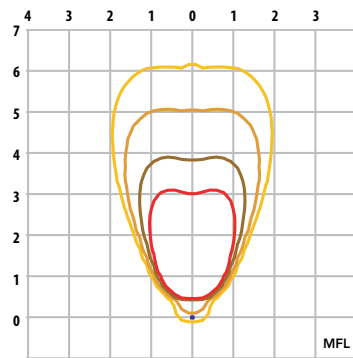

DSXF1 LED P2 40K - Tilted at 60°

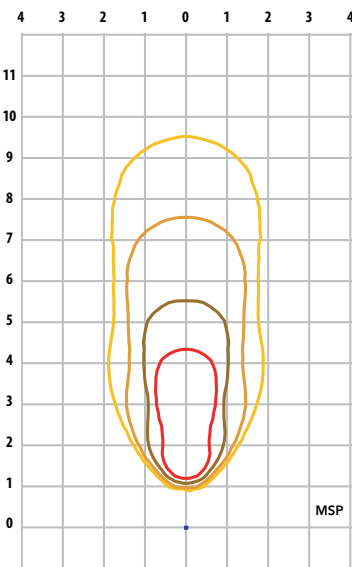

DSXF1 LED P2 40K - Tilted at 80°

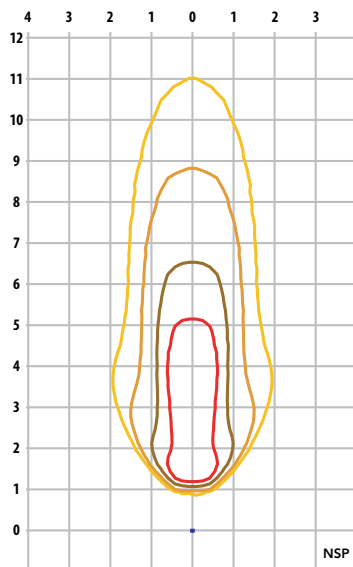


DSXF1 LED P2 40K - Tilted at 80°

MH = 15ft
Grid = 15ft x 15ft

Dimensions


Adjustable Slipfitter (IS)

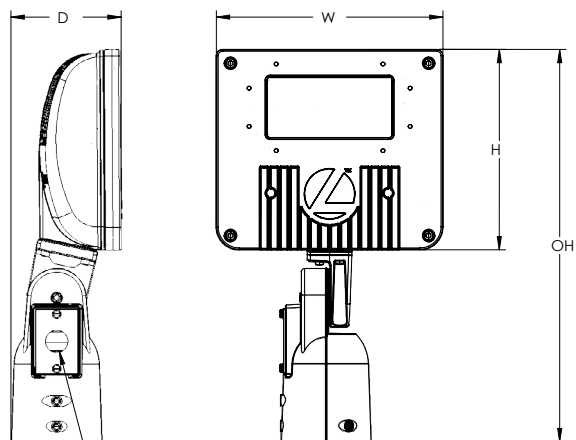

Width: 8.86" (22.5 cm)
 Depth: 4.32" (11.0 cm)
 Height: 7.84" (19.9 cm) main body
 Overall: 15.35" (39.0 cm) with arm
 Weight: 7.7 lbs


Qty (2) - splice covers included (includes one with 7/8" thru-hole allowing conduit from exterior)

Threaded Knuckle (THK)

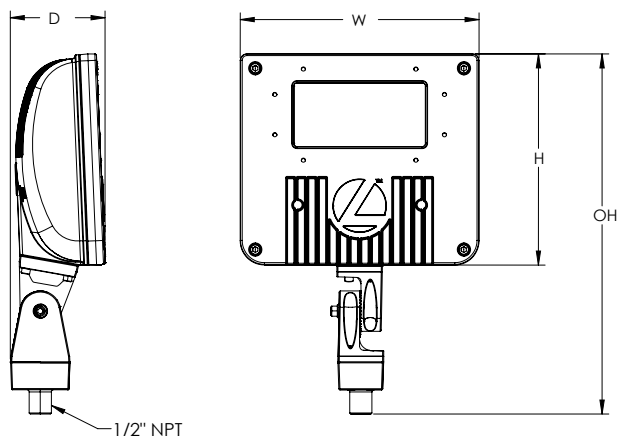


Width: 8.86" (22.5 cm)
 Depth: 3.52" (8.9 cm)
 Height: 7.84" (19.9 cm) main body
 Overall: 13.37" (34.0 cm) with arm
 Weight: 7.2 lbs

Yoke (YKC62)

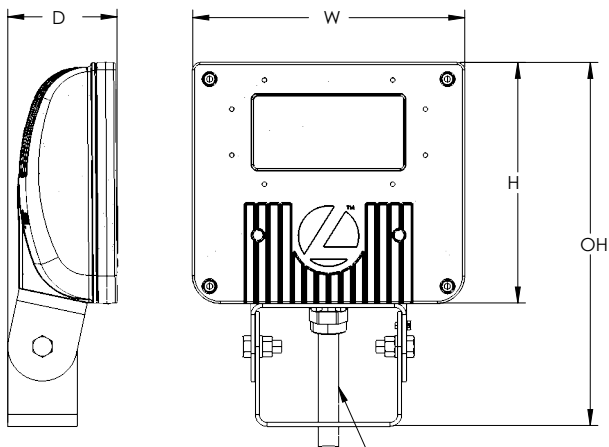

Note: Standard cord is 16-3 wire, 2 ft cord. Other lengths can be specified.
 Ex: YKC62
 YK = Yoke Mount
 C6 = 16 gage, 3 wire cord
 2 = 2 feet (5 = 5ft, 6 = 6ft, etc.)

Yoke (YK) Mounting Detail



Width: 8.86" (22.5 cm)
 Depth: 3.56" (9.0 cm)
 Height: 7.84" (19.9 cm) main body
 Overall: 11.84" (30.0 cm) with arm
 Weight: 7.5 lbs

Accessories including bullhorns, cross arms and other adapters are available. For the complete line of accessories available, visit the accessories tab at Lithonia's Outdoor Poles and Arms product page. [Click here to visit Accessories.](#)

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek and compact design of the D-Series floodlights reflects the embedded high performance LED technology while offering a clean aesthetic suitable for specification and general purpose floodlighting applications. Three sizes are available with seven precision optics allowing for maximum design versatility. DSXF1 delivers 3,000 to 5,500 lumens and is ideal for commercial lighting applications including new construction and replacing 70W to 150W HID floodlights. DSXF1 is ideal for security, facade, flagpole, column grazing and signage lighting applications.

CONSTRUCTION

The DSXF1 LED floodlight features rugged die-cast aluminum construction with integral heat sink fins that optimize thermal management through conductive and convective cooling. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. The housing and lens frame are completely sealed against moisture and environmental contaminants providing an IP66 rating. Low EPA (0.8 ft²) for optimized wind loading. DSXF1 is 1.5G vibration rated per ANSI C136.31.

FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, and white. Available in textured and non-textured finishes.

OPTICS

Seven unique precision-molded vacuum-metalized specular reflectors are engineered for superior field-to-beam ratios, uniformity and spacing. Light engines are available in 3000K, 4000K or 5000K (minimum 70 CRI) configurations. Optional visors offer additional versatility when shielding is required.

ELECTRICAL

Light engines consist of chip-on-board (COB) LEDs directly coupled to the housing to maximize heat dissipation and promote long life. LED lumen maintenance is L88/60,000 hours. Class 1 electronic 0-10V continuous dimming drivers ensure system power factor: 90% and THD <20%. Optional 10kV surge protection device meets a minimum Category C low operation (per ANSI/IEEE C62.41.2).

CONTROLS

DSXF2 features MVOLT (120-277V) and 347V button photocontrol.

INSTALLATION

The die-cast integral "IS" mount features an adjustable slipfitter that mounts on a 2 3/8" OD tenon. Includes integral splice compartment offering easy installation and wiring. An extra cover plate with 7/8" through hole is provided to accommodate 1/2" water-tight fitting for power run from outside of the tenon. The "THK" adjustable knuckle mount includes a 1/2-14 NPT pipe thread. A steel yoke "YK" mount is available and includes a water tight cord grip and cord. DSXF1 features a glass lens enclosure that is protected to IP66 and is rated for lighting aimed up above 90°. Suitable for mounting within 4 feet of ground.

LISTINGS

CSA Certified to meet U.S. and Canadian standards. Suitable for wet locations. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

BUY AMERICAN ACT

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations.

Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.