

CONSTRUCTION PLANS  
FOR  
**PUBLIC ALLEY**  
**UPGRADE**

PAVING  
IMPROVEMENTS


INDEX

SHEET NO.

TITLE

1  
2  
3  
4

COVER SHEET  
PUBLIC ALLEY PLAN & PROFILE  
TRAFFIC CONTROL NOTES/STANDARDS  
TRAFFIC CONTROL EXAMPLES

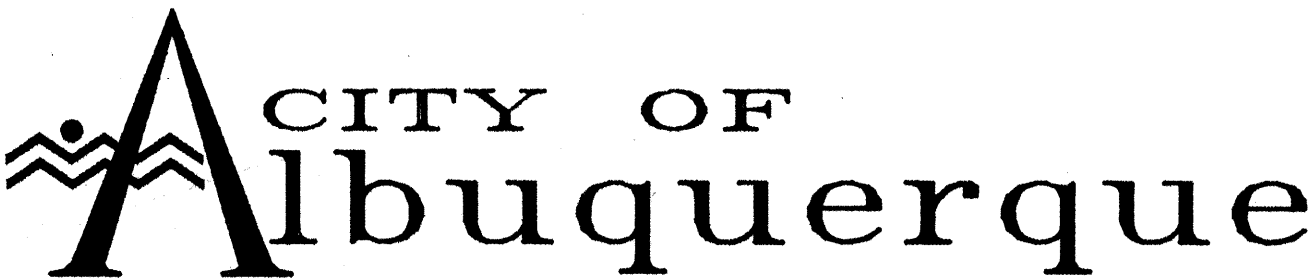


GENERAL NOTES

1. ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED UNDER CONTRACT SHALL, EXCEPT AS OTHERWISE STATED OR PROVIDED FOR HEREON, BE CONSTRUCTED IN ACCORDANCE WITH THE CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS, FOR PUBLIC WORKS CONSTRUCTION (1986 EDITION AS AMENDED TO DATE).
2. ALL WORK PERFORMED ON THIS PROJECT SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE AND LOCAL LAWS, RULES AND REGULATIONS CONCERNING CONSTRUCTION SAFETY AND HEALTH.
3. CONTRACTOR SHALL NOTIFY AND COORDINATE ALL CONSTRUCTION TWO WEEKS PRIOR TO START WITH THE FOLLOWING UTILITIES: US WEST COMMUNICATIONS, PUBLIC SERVICE CO. OF NEW MEXICO, AND THE GAS CO. OF NEW MEXICO.
4. CONTRACTOR SHALL MAINTAIN ACCESS TO ADJACENT PROPERTIES DURING CONSTRUCTION.
5. TWO WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE, 260-1990, FOR LOCATION OF EXISTING UTILITIES.
6. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF ALL OBSTRUCTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER OR SURVEYOR SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM AMOUNT OF DELAY.
7. ALL UTILITIES AND UTILITY SERVICE LINES SHALL BE INSTALLED PRIOR TO THE CONSTRUCTION OF PAVING.
8. BACKFILL COMPACTION SHALL BE ACCORDING TO SPECIFIED STREET USE.
9. TACK COAT REQUIREMENTS SHALL BE DETERMINED BY THE CITY ENGINEER.
10. FIVE (5) WORKING DAYS PRIOR TO BEGINNING CONSTRUCTION, THE CONTRACTOR SHALL SUBMIT TO THE COORDINATION DIVISION, A DETAILED CONSTRUCTION SCHEDULE REGARDING TRAFFIC CONTROL. TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL OBTAIN A BARRICADING PERMIT FROM SAME DIVISION. CONTRACTOR SHALL NOTIFY THE BARRICADE ENGINEER (768-2551) PRIOR TO OCCUPYING AN INTERSECTION, AS PER SECT. 19 OF THE SPECIFICATIONS.
11. ALL STREET STRIPING ALTERED OR DESTROYED SHALL BE REPLACED BY CONTRACTOR TO EXISTING LOCATION WITH PLASTIC REFLECTORIZED PAVEMENT MARKINGS, OR AS SHOWN IN THIS PLAN SET.

FOR INFORMATION ONLY  
Clark Consulting Engineers  
19 Ryan Road Edgewood, New Mexico 87015  
(505) 281-2444 FAX (505) 281-2444

REV.	SHEETS	CITY ENGINEER	DATE	USER DEPARTMENT	DATE	USER DEPARTMENT	DATE
ENGINEER'S STAMP & SIGNATURE		APPROVALS		ENGINEER	DATE	*****	
		DRC Chairman		<i>Philip W. Clark</i>	6-12-98	APPROVED FOR CONSTRUCTION	
		Transportation		<i>R.W. Kane</i>	7-01-98		
		Water/Wastewater		<i>R.W. Kane</i>	7-8-98		
		Hydrology		<i>R.W. Kane</i>	7-7-98		
		Parks		<i>R.W. Kane</i>	7-7-98		
Constr. Mngmnt.		<i>J.D. Lutz</i>	7-9-98	City Engineer		Date	
Constr. Coord'r.		<i>J.D. Lutz</i>	7-9-98	City Project No.		5926.81	Sheet 1 of 4

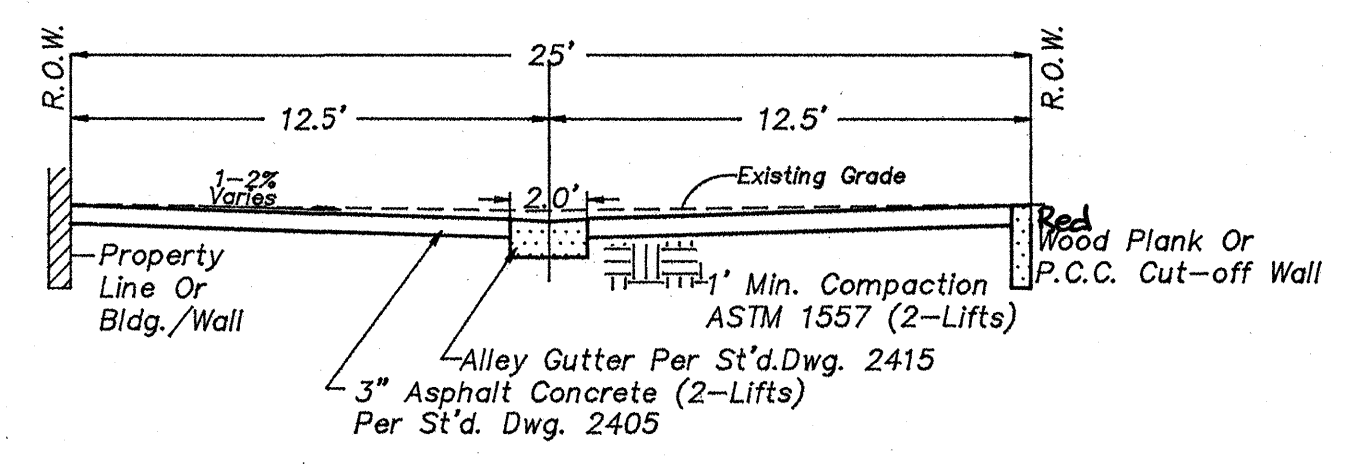

City Project No.	5926.81	Zone Map No.	L-17	SHEET	2	OF	4
------------------	---------	--------------	------	-------	---	----	---