



**D1** 6" CONCRETE-SIDEWALK EDGE DETAIL  
1 1/2" = 1'-0"

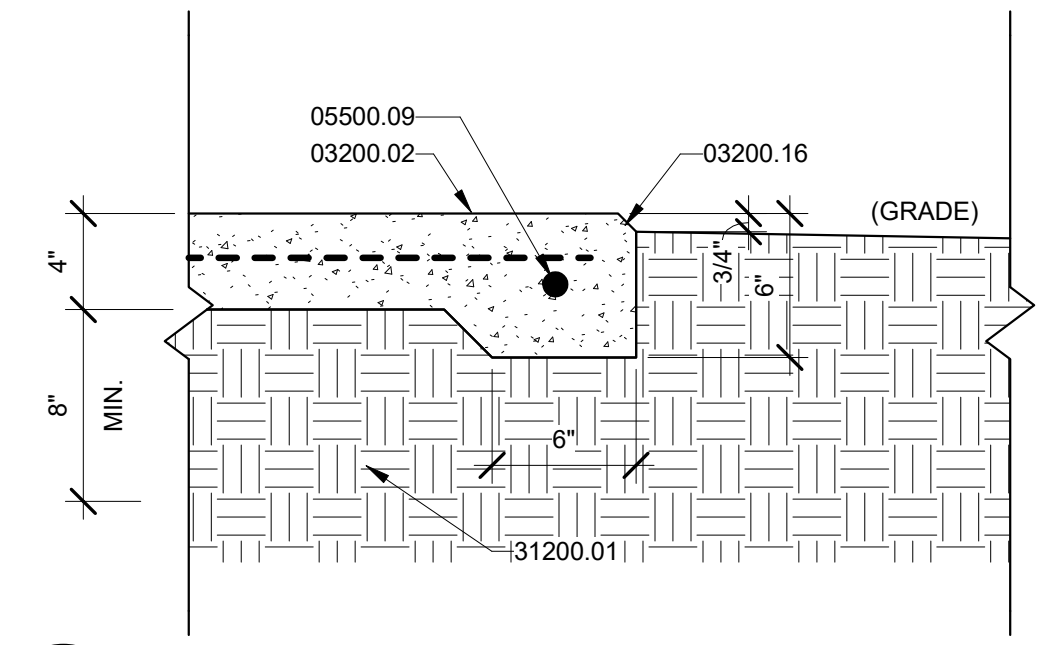

**D2** CONCRETE SLAB-SIDEWALK EDGE DETAIL  
1 1/2" = 1'-0"

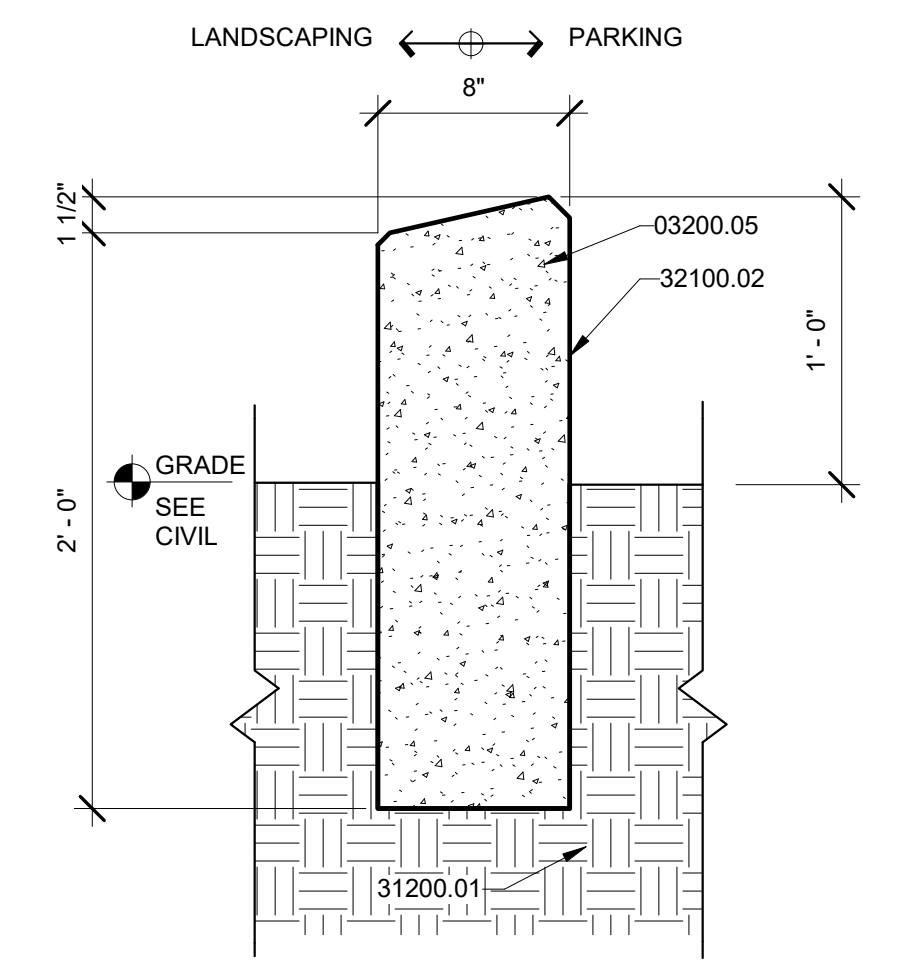

**D3** HEADER-CURB @ GRADE  
1 1/2" = 1'-0"

**LEGEND**


- EXISTING 6'-0" HIGH CHAIN LINK FENCE W/ ROUND POSTS, CENTERED ON 1'-0" WIDE CONCRETE CURB. TO REMAIN.
- EXISTING WIRE FENCE W/ STEEL POSTS. TO REMAIN.

**GENERAL NOTES**


- A. EXTERIOR LIGHTS AND LIGHT POLES SHALL BE INSTALLED NO TALLER THAN 18' ABOVE GRADE. LIGHT FIXTURES SHALL COMPLY WITH THE NIGHT SKY ORDINANCE, AND SHALL COMPLY WITH THE REQUESTS OF KIRTLAND AFB AND/ OR THE DEPARTMENT ON ENERGY.

**KEYED NOTES**

- 01100.06 FUTURE BLEACHER LOCATION. NOT PART OF THIS CONTRACT.
- 02200.01 SAWCUT/ REMOVE EXISTING CURB AND GUTTER FOR NEW CURB CUT.
- 03200.02 4" THICK, 4000 PSI, AIR-ENTRAINED CONCRETE SLAB/SIDEWALK REINFORCE WITH #4x2.9W2.9 WELDED WIRE MESH, FLAT SHEETS ONLY. INSTALL ON CHAIRS CENTERED IN SLAB.
- 03200.05 4000 PSI, AIR-ENTRAINED CAST IN PLACE CONCRETE HEADER CURB MODIFIED CITY OF ALBUQUERQUE STANDARD SPECIFICATION. REFER TO CITY STANDARD DETAIL 2415 B. SEE SITE DETAILS. SEE CIVIL.
- 03200.06 1/2" THICK EXPANSION MATERIAL, WITH POUR IN PLACE SEALANT. ASPHALT IMPREGNATED OR EQUAL. SEE DETAIL D3 / AS-102.
- 03200.07 EXISTING CONCRETE PAD/ SIDEWALK, TO REMAIN.
- 03200.08 EXISTING CONCRETE CURB AND GUTTER, TO REMAIN.
- 03200.09 CONCRETE SIDEWALK PER CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS. REFER TO CITY STANDARD DETAIL DWG. 2430. SEE CIVIL.
- 03200.10 CONCRETE PAVING PER CITY OF ALBUQUERQUE STANDARD SPECIFICATION. REFER TO CITY STANDARD DETAIL 2426 FOR PRIVATE ENTRANCE. SEE CIVIL.
- 03200.11 NEW CONCRETE CURB AND GUTTER PER CITY OF ALBUQUERQUE STANDARD SPECIFICATION. REFER TO CITY STANDARD DETAIL 2415. SEE CIVIL.
- 03200.12 CONCRETE ACCESSIBLE SIDEWALK RAMP WITH TRUNCATED DOMES. PER CITY OF ALBUQUERQUE STANDARD SPECIFICATION. REFER TO COA STANDARD DWGS. 2440 AND 2441. SEE CIVIL.
- 03200.13 6" THICK, 4000 PSI, AIR-ENTRAINED CONCRETE SLAB. REINFORCE W/ NO.4 REBAR @ 16" O.C. EACH WAY.
- 03200.14 1" DEEP X 3/8" WIDE CONCRETE CONTROL JOINT. SPACED 5'-0" APART, OR AS INDICATED ON PLAN. SEE DETAIL D3/ AS-102.
- 03200.16 CHAMFER OUTSIDE EDGE 3/4", TYPICAL.
- 03200.19 6" THICK, 4000 PSI, AIR-ENTRAINED CONCRETE SLAB W/ 3/4" AGGREGATE. REINFORCE W/ 6X6 10/10 WELDED WIRE MESH.
- 03400.02 12" X 36" PRE CAST CONCRETE SPLASH BLOCK. PROVIDE AT INDICATED DOWNLEADER LOCATIONS.
- 04800.13 8" X 8" X 16" CMU BLOCK, SPLIT FACE GRAY COLOR BLOCK (SINGLE SIDED EXTERIOR SPLIT FACE), REINFORCED CMU WALL W/ NO.5 REBAR @ 16" O.C. VERTICAL. GROUT ALL CELL SOLID. PROVIDE (2) NO.5 IN KNOCK OUT BOND BEAMS @ 48" O.C. HORIZONTAL.
- 05100.01 STEEL COLUMN. PRIME AND PAINT AT EXPOSED LOCATIONS. SEE STRUCTURAL.
- 05500.09 NO. 4 REBAR CONTINUOUS.
- 05500.11 8"Ø X 6'-0" TALL STEEL PIPE, CONCRETE FILLED. PRIME AND PAINT.
- 05500.13 2"Ø STEEL PIPE BIKE RACK. SET IN CONCRETE FOOTING. GRIND EDGES SMOOTH. PRIME AND PAINT.
- 10100.06 STOP SIGN (R1-1) AND NO LEFT TURN SIGN (R3-1) PER MUTCD STANDARDS. ALUMINUM OR FIBERGLASS PLATE. SIGN FIELD IS RED, BORDER AND LETTERING ARE WHITE. SEE DETAIL C4 / AS-103.
- 10100.07 PROVIDE "VAN ACCESSIBLE" SIGN AT DESIGNATED LOCATIONS. SEE ENLARGED SITE PLANS.
- 10100.08 ADA ACCESSIBLE PARKING SIGN. ALUMINUM OR FIBERGLASS PLATE. SIGN FIELD IS WHITE, SIGN LETTERING AND BORDERS ARE GREEN. SEE DETAIL A3 / AA-AS-1. LOCATE SIGN CENTERED ON PARKING SPACE AND 1'-8" BACK FROM EDGE OF SIDEWALK. CAST IN CONCRETE SIDEWALK.
- 10100.09 MOTORCYCLE PARKING SIGN. ALUMINUM OR FIBERGLASS PLATE. SIGN FIELD IS WHITE, SIGN LETTERING AND BORDERS ARE GREEN. SEE DETAIL A4 / AA-AS-1. LOCATE SIGN CENTERED PARKING SPACE.
- 10700.01 20" HIGH X 5'Ø BUTT CONE TAPERED ALUMINUM FLAG POLE W/ EXTERNAL HALYARD (23'-0" OVERALL HEIGHT), (MANUFACTURER CONCORD INDUSTRIES, 800.634.4926, OR EQUAL), CONTINENTAL STYLE. INSTALL PER MANUFACTURER'S SPECIFICATIONS. SEE DETAIL D1 / AS-103.
- 21100.01 KNOX BOX INSTALLED RECESSED IN CMU WALL @ 48" A.F.F. GROUT SOLID IN WALL.
- 22100.08 NEW GAS METER. SEE PLUMBING.
- 22400.04 NEW FIRE HYDRANT. SEE CIVIL.
- 22400.05 BACKFLOW PREVENTER INSTALLED IN HOT BOX. SEE CIVIL. SEE PLUMBING. SEE ELECTRICAL.
- 26200.01 EXISTING ELECTRICAL TRANSFORMER. TO REMAIN. SEE ELECTRICAL.
- 26200.02 NEW TRANSFORMER. SEE ELECTRICAL.
- 26200.03 NEW ELECTRICAL PANEL. SEE ELECTRICAL.
- 26800.01 RECESSED LIGHT FIXTURE INSTALLED IN CONCRETE CUBE BOLLARD. LIGHT FIXTURE ILLUMINATES METAL TRELLIS/ FINS STRUCTURE. SEE ELECTRICAL. SEE DETAIL A4 / AS-104.
- 26800.02 LIGHT POLE. SEE ELECTRICAL.
- 27100.01 EXISTING COMMUNICATIONS IN-GROUND QUARTZITE BOX. TO REMAIN.
- 31200.01 COMPACTED SUBGRADE AT 95% MIN. SEE GEOTECHNICAL REPORT.
- 32100.01 EXISTING COMPACTED GRADE TO REMAIN.
- 32100.02 6" WIDE, WHITE PAINT STRIPS ON VERTICAL AND HORIZONTAL SURFACE OF MODIFIED HEADER CURB TO INDICATE PARKING STALL. TYPICAL AT PARKING SPACES ON GRADE.
- 32100.03 EXISTING ASPHALT PAVING, TO REMAIN. SEE CIVIL.
- 32100.04 PROVIDE AND INSTALL PARKING STRIPING, HANDICAP SYMBOL (36" X 36"), AND HANDICAP STRIPING. PROVIDE 6" WIDE X 2'-0" O.C. DIAGONAL PAINT STRIPING. SEE INDICATED LAYOUT. PROVIDE THE WORDS "NO PARKING" IN CAPITAL LETTERS, 1'-0" HIGH LETTERS X 2" WIDE STRIPES LOCATED SO AS TO BE CLOSE TO WHERE ADJACENT VEHICLE'S REAR TIRES WOULD BE PARKED. WHITE PARKING LINES AT REGULAR SPACE, AND BLUE COLOR AT HANDICAPPED SPACES AND ACCESS AISLE.
- 32100.05 PROVIDE 6" WIDE PAINT STRIPING. SEE INDICATED LAYOUT.
- 32100.06 EXISTING COMPACTED GRADE TO REMAIN, CAPABLE OF SUPPORTING 75,000 POUND FIRE APPARATUS VEHICLES. AS REQUIRED PROVIDE ADDITIONAL COMPACTED GRAVEL TO MAINTAIN ALL WEATHER TRAVEL SURFACE.
- 32300.01 EXISTING GATE, TO REMAIN.
- 32300.02 PIPE GATE PER COA STANDARD #2251. SEE CIVIL. PROVIDE KNOX LOCK.
- 32600.01 38 GALLON POWDER COATED STEEL, REFUSE CONTAINER W/ DOMED LID.
- 32800.01 IN-GROUND IRRIGATION VALVE BOX. SEE CIVIL. SEE PLUMBING. SEE ELECTRICAL.
- 32900.01 EXISTING ATHLETIC FIELD W/ TURF. TO REMAIN.

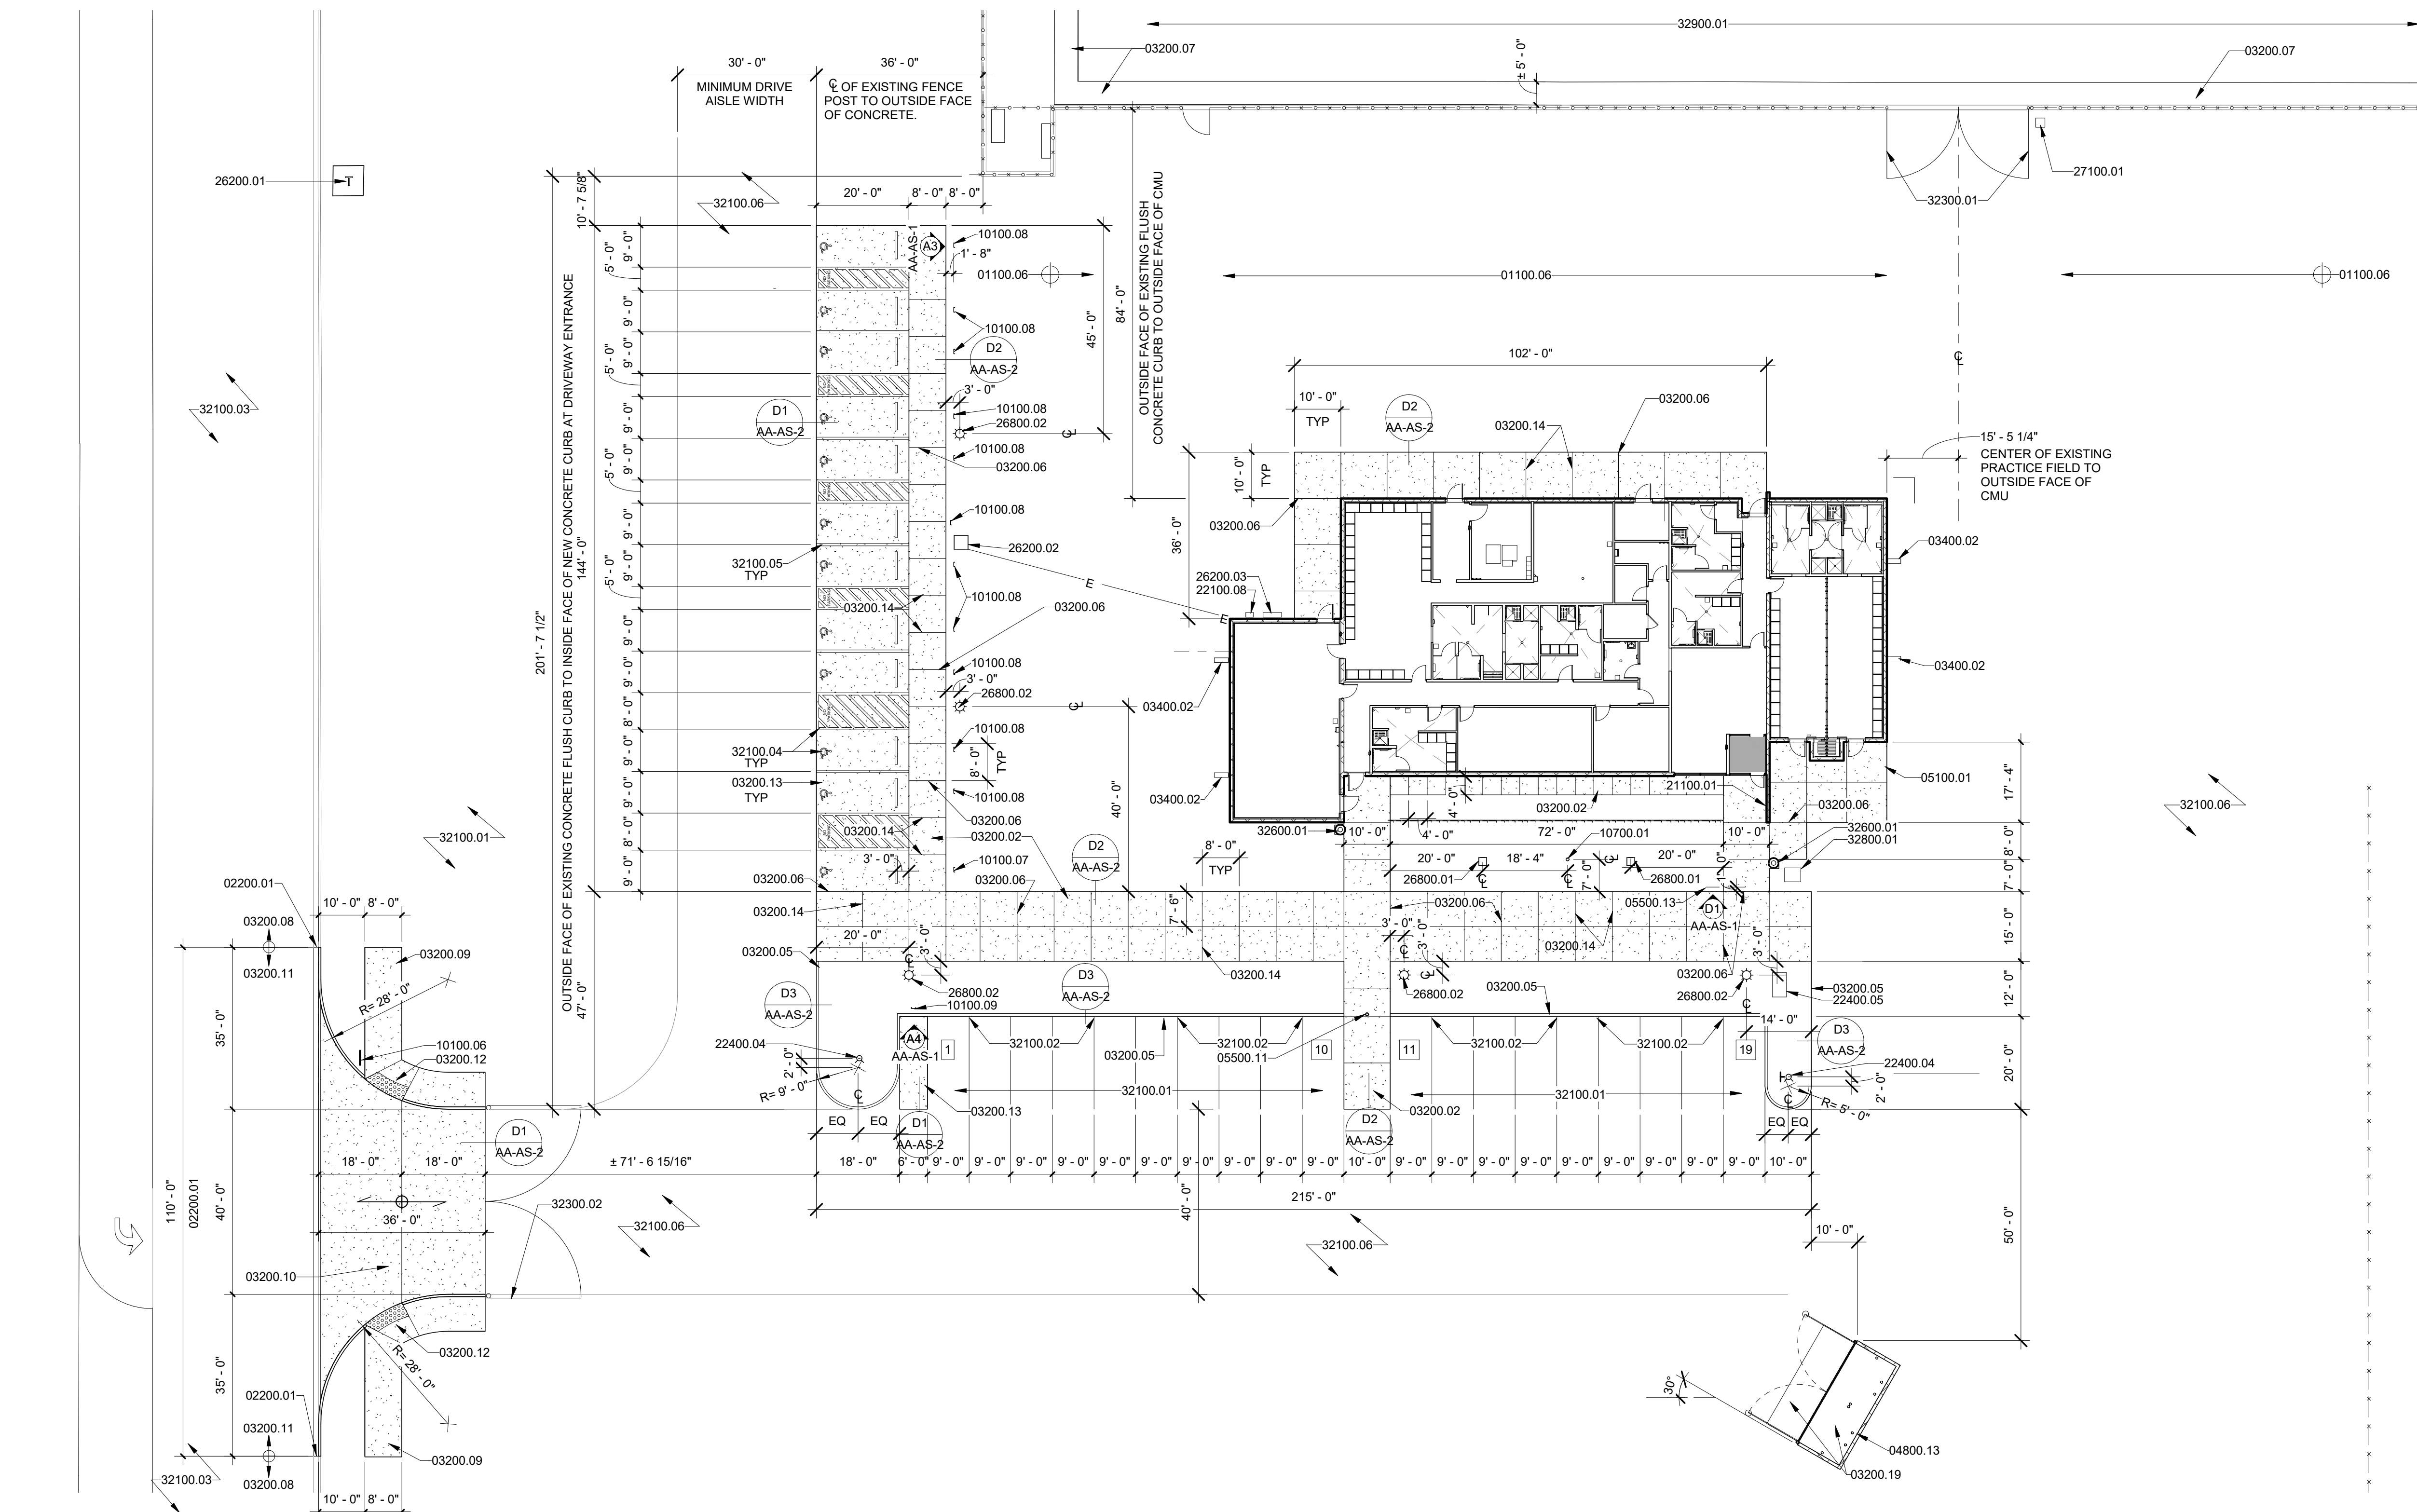

**A1** SITE PLAN-AA  
1" = 20'-0"

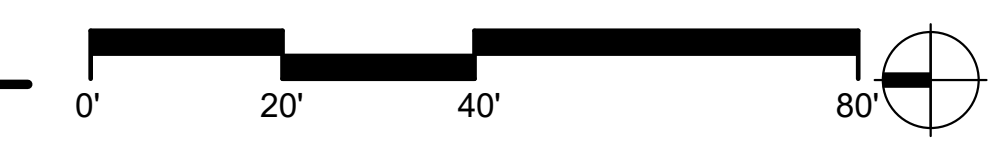

NO.	DATE	REVISIONS	CHECKED BY:
1	4.21.22	REVISIONS	

LEE GAMELSKY ARCHITECTS P.C.

2412 MILES ROAD SE  
ALBUQUERQUE, NM 87106  
505.842.8865 FAX 842.1693  
lee@lganm.com

STATE OF NEW MEXICO  
LEE D. GAMELSKY  
No. 19332  
REGISTERED ARCHITECT

**LOCKER ROOM FACILITY AT MDS**  
Albuquerque, New Mexico

PROJECT ARCHITECT:  
LEE GAMELSKY, AIA

LGA Project #: 20-01-ABQ.7  
Date: 4.21.2022

ADMINISTRATIVE AMMENDMENT •  
SITE PLAN  
LOCKER ROOM FACILITY AT MDS

By: \_\_\_\_\_ Sheet: Of: 81  
File: \_\_\_\_\_ AA-AS-2