

KEYED NOTES

- ACCESSIBLE PARKING PER ADA STANDARDS WITH SIGN (SEE DETAIL SHT. C5)
- MOTORCYCLE PARKING WITH SIGN (SEE DETAIL SHT. C5)
- CURB & GUTTER (TYP) (SEE DETAIL SHT. C4)
- DUMPSTER (SEE DETAIL SHT. C4)
- R1-1 36" STOP SIGN
- BICYCLE RACKS (SEE DETAIL SHT. C5)
- UNIDIRECTIONAL HC RAMP (SEE DETAIL SHT. C4)
- ASPHALT PAVING (SEE GEOTECH REPORT & DETAIL SHT. C4)
- EXISTING 6' PUBLIC SIDEWALK / ADA RAMP
- CARPORT (SEE DETAIL SHT. C7)
- CURB HC RAMP (SEE DETAIL SHT. C4)
- 5' CONCRETE SIDEWALK (SEE DETAIL SHT. C4)
- 5' CRUSHED GRAVEL TRAIL
- 6'-FT CMU SCREEN WALL (SEE DETAIL SHT. C6)
- GATED VEHICULAR ACCESS (SEE DETAIL SHT. C7)
- 2X ELECTRIC CHARGING STATION (SEE DETAIL SHT. 7)
- MONUMENT SIGN (SEE ARCH. DETAIL SHT.)
- PARK BENCH (SEE ARCH. DETAIL SHT.)

LEGEND

- CURB & GUTTER
- BOUNDARY LINE
- EASEMENT
- CENTERLINE
- RIGHT-OF-WAY
- BUILDING
- SIDEWALK
- SCREEN WALL
- RETAINING WALL
- STREET LIGHTS
- LANE
- STRIPING
- EXISTING CURB & GUTTER
- EXISTING BOUNDARY LINE
- EXISTING SIDEWALK
- EXISTING LANE
- EXISTING STRIPING
- CLEAR SIGHT TRIANGLE

LEGAL DESCRIPTION
TRACT E-1, AMAFCA BLACK ARROYO CHANNEL ROW, PARADISE HEIGHTS, UNIT 1

FOUR STORY BUILDING APARTMENT UNIT MIX AREAS

BUILDING "A"	APARTMENT TYPE	HEATED AREA	MECHANICAL AREA	COVERED PATIO AREA	STORAGE AREA	TOTAL APARTMENTS	TOTAL S.F. AREA	CORRIDOR AREA	ELEVATOR AREA	ELEVATOR EQUIP. RM. AREA	FIRE RISER RM. AREA	TOTAL 1ST FLOOR AREA
1ST FLOOR AREA	STUDIO	578 S.F.	22 S.F.	54 S.F.	N/A	(2) STUDIOS	654 S.F. x 2 = 1,308 S.F.	1,747 S.F.	59 S.F.	61 S.F.	71 S.F.	15,029 S.F.
	ONE BEDROOM	781 S.F.	22 S.F.	77 S.F.	N/A	(6) ONE BEDROOMS	880 S.F. x 6 = 5,280 S.F.					
	TWO BEDROOM	1,105 S.F.	22 S.F.	72 S.F.	74 S.F.	(3) TWO BEDROOMS	1,273 S.F. x 3 = 3,819 S.F.					
	TWO BDRM. W/ DEN	1,175 S.F.	22 S.F.	69 S.F.	74 S.F.	(2) TWO BDRM. W/ DEN	1,340 S.F. x 2 = 2,680 S.F.					
TOTAL					13 APARTMENTS		13,087 S.F.					

BUILDING AREAS

APARTMENT BUILDINGS (4 STORIES EA.)

- BUILDING "A" AREA: 59,716 S.F. (52 APARTMENT UNITS)
- BUILDING "B" AREA: 59,716 S.F. (52 APARTMENT UNITS)
- BUILDING "C" AREA: 59,716 S.F. (52 APARTMENT UNITS)
- BUILDING "D" AREA: 59,716 S.F. (52 APARTMENT UNITS)
- TOTAL AREA: 238,864 S.F. (208 TOTAL APARTMENTS)

CLUB HOUSE BUILDING "F" (1 STORY)

- CLUB HOUSE AREA: 5,000 S.F.
- PORTE COCHERE AREA: +1,400 S.F.
- TOTAL AREA: 6,400 S.F.

BUILDING "F" (1 STORY)

- AREA: 1,680 S.F.

TOTAL BUILDING AREA: 247,044 S.F.

TOTAL CARPORT AREA: 37,417 S.F.

PARKING REQUIRED PER THE IDO

DWELLING, MULT-FAMILY = 1.5 PARKING SPACES PER UNIT
208 UNITS x 1.5 = 312
SPACES REQUIRED = 312
ACCESSIBLE SPACES REQUIRED: 301 - 400 = 12 SPACES (1 VAN)
MOTORCYCLE SPACES REQUIRED: 301 TO 500 = 6 SPACES
BICYCLE PARKING REQUIRED: 10% OF OFF STREET PARKING:
312 x 10% = 32 BICYCLE PARKING SPACES
ELECTRIC CHARGING SPACES REQUIRED 2% OF TOTAL = 8 SPACES

OPEN SPACE CALCULATIONS

(1BR: 200 SQ. FT. / UNIT)
(2BR: 250 SQ. FT. / UNIT)
TOTAL = 128*200 + 80*250 = 45,600 SQ. FT.
PROVIDED = 144,030 SQ. FT.

PARKING PROVIDED:

- CARPORT PARKING SPACES: 52 SPACES
- BUILDING "A": 52 SPACES
- BUILDING "B": 52 SPACES
- BUILDING "C": 52 SPACES
- BUILDING "D": 52 SPACES
- TOTAL CARPORT PARKING SPACES = 208

REGULAR PARKING SPACES = 154
ACCESSIBLE PARKING SPACES = 12 (2 VAN)
TOTAL PARKING SPACES PROVIDED = 374
PROVIDED MOTORCYCLE SPACES = 6 SPACES
PROVIDED BICYCLE SPACES = 32 (4X7 STANDS & 1X4)
ELECTRIC CHARGING STATIONS PROVIDED = 8

PROJECT NUMBER: _____
APPLICATION NUMBER: _____

This plan is consistent with the specific Site Development Plan approved by the Environmental Planning Commission (EPC) dated _____ and the Findings and Conditions in the Official Notification of Decision are satisfied.

Is an Infrastructure List required? () Yes () No. If Yes, then a set of approved DRC plans with a work order is required for any construction within Public Right-of-Way or for construction of public improvements.

DRB SITE DEVELOPMENT PLAN APPROVAL:

Traffic Engineer, Transportation Division	Date
ABCWUA	Date
Parks & Recreation Department	Date
City Engineer/Hydrology	Date
Code Enforcement	Date
*Environmental Health Department (conditional)	Date
Solid Waste Management	Date
DRB Chairperson, Planning Department	Date

* Environmental Health, if necessary

MINI CLEAR SIGHT TRIANGLE NOTE

LANDSCAPING AND SIGNAGE WILL NOT INTERFERE WITH CLEAR SIGHT REQUIREMENTS. THEREFORE, SIGNS, WALLS, TREES, AND SHRUBBERY BETWEEN 3' AND 8 FEET TALL (AS MEASURED FROM THE GUTTER PAN) WILL NOT BE ACCEPTABLE IN THE CLEAR SIGHT TRIANGLE (11'X11' PER DPM 7-11(D)).

INDEX TO DRAWINGS

- C1. SITE PLAN
- C2. GRADING AND DRAINAGE PLAN
- C3. MASTER UTILITY PLAN
- C4. CONSTRUCTION DETAILS
- C5. CONSTRUCTION DETAILS
- C6. CONSTRUCTION DETAILS
- C7. CONSTRUCTION DETAILS
- B1. BUILDING ELEVATIONS
- L1. LANDSCAPING PLAN

GRAPHIC SCALE

SCALE: 1"=40'


PRELIMINARY - NOT FOR CONSTRUCTION

ENGINEER'S SEAL
RONALD R. BOHANNAN
NEW MEXICO
7868
PROFESSIONAL ENGINEER
7/31/2020

WINTERGREEN LUXURY APARTMENTS
GOLF COURSE RD NE
SITE PLAN_VER B

5571 MIDWAY PARK PLACE NE
ALBUQUERQUE, NM 87109
(505) 858-3100
www.tierrawestllc.com

DRAWN BY: BF
DATE: 7/31/2020
2020013_SPB_VER B
SHEET #: C1
JOB #: 2020013

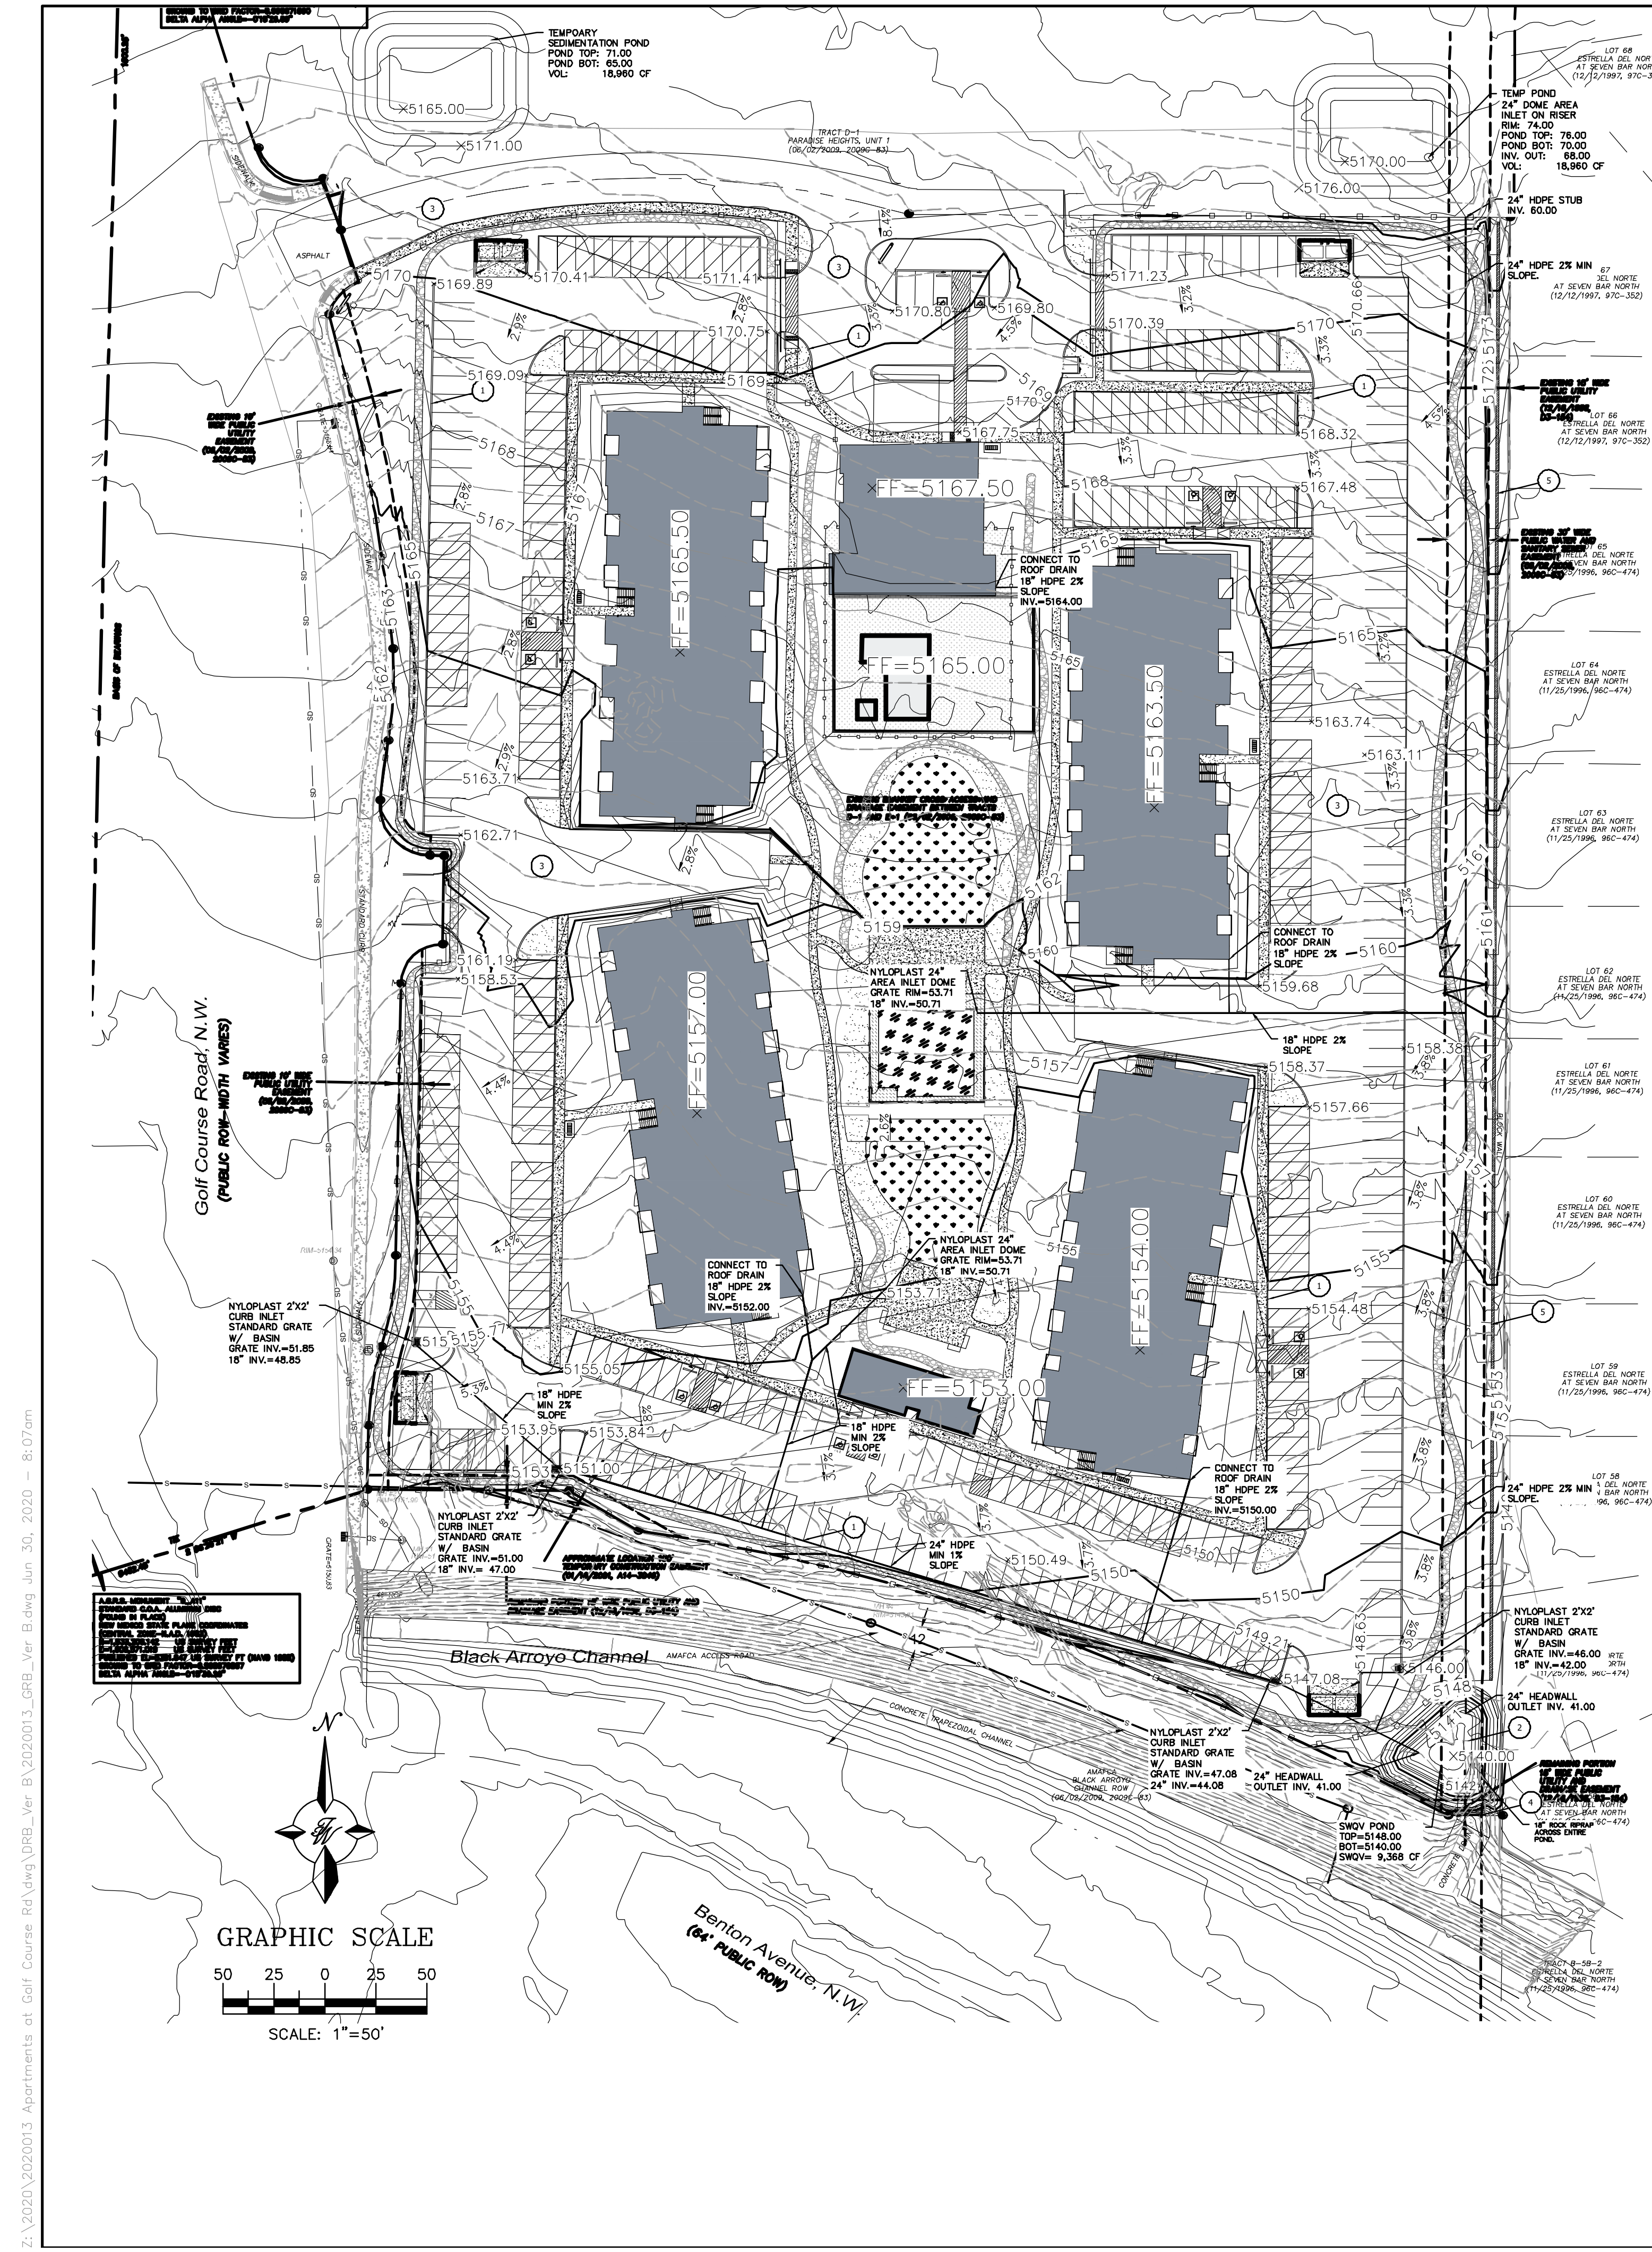

NOTICE TO CONTRACTORS



1. AN EXCAVATION/CONSTRUCTION PERMIT WILL BE REQUIRED BEFORE BEGINNING ANY WORK WITHIN CITY RIGHT-OF-WAY.
2. ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED, EXCEPT AS OTHERWISE STATED OR PROVIDED HERON, SHALL BE CONSTRUCTED IN ACCORDANCE WITH CITY OF ALBUQUERQUE INTERIM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 1985.
3. TWO WORKING DAYS PRIOR TO ANY EXCAVATION, THE CONTRACTOR MUST CONTACT NEW MEXICO ONE CALL, DIAL "811" (OR (505) 260-1990) FOR THE LOCATION OF EXISTING UTILITIES.
4. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATIONS OF ALL CONNECTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM AMOUNT OF DELAY.
5. BACKFILL COMPACTION SHALL BE ACCORDING TO TRAFFIC/STREET USE.
6. MAINTENANCE OF THESE FACILITIES SHALL BE THE RESPONSIBILITY OF THE OWNER OF THE PROPERTY SERVED.
7. WORK ON ARTERIAL STREETS SHALL BE PERFORMED ON A 24-HOUR BASIS. CONTRACTOR MUST CONTACT JASON RODRIGUEZ AT 235-8016 AND CONSTRUCTION COORDINATION AT 924-3416 TO SCHEDULE AN INSPECTION.


LEGEND

- CURB & GUTTER
- BOUNDARY LINE
- EASEMENT
- CENTERLINE
- RIGHT-OF-WAY
- BUILDING
- SIDEWALK
- SCREEN WALL
- RETAINING WALL
- 5010 — CONTOUR MAJOR
- 5011 — CONTOUR MINOR
- x 5048.25 — SPOT ELEVATION
- FLOW ARROW
- EXISTING CURB & GUTTER
- 5010 — EXISTING BOUNDARY LINE
- 5010 — EXISTING CONTOUR MAJOR
- 5011 — EXISTING CONTOUR MINOR
- x 5048.25 — EXISTING SPOT ELEVATION





KEYED NOTES

- 1 6" ONSITE CURB AND GUTTER
- 2 SWQV POND - SEE PLAN FOR NUMBER AND VOLUME THIS SHEET
- 3 ASPHALT PAVING (SEE GEOTECH REPORT)
- 4 BUILD NEW CONCRETE RUNDOWN CONNECTION TO EXISTING FLUME 10-FT WIDE, 2.5-FT HEIGHT. SEE DETAIL SHEET.
- 5 NEW BOUNDARY/SCREEN WALL 6-FT HIGH, CMU BLOCK WALL, BY OWNER.

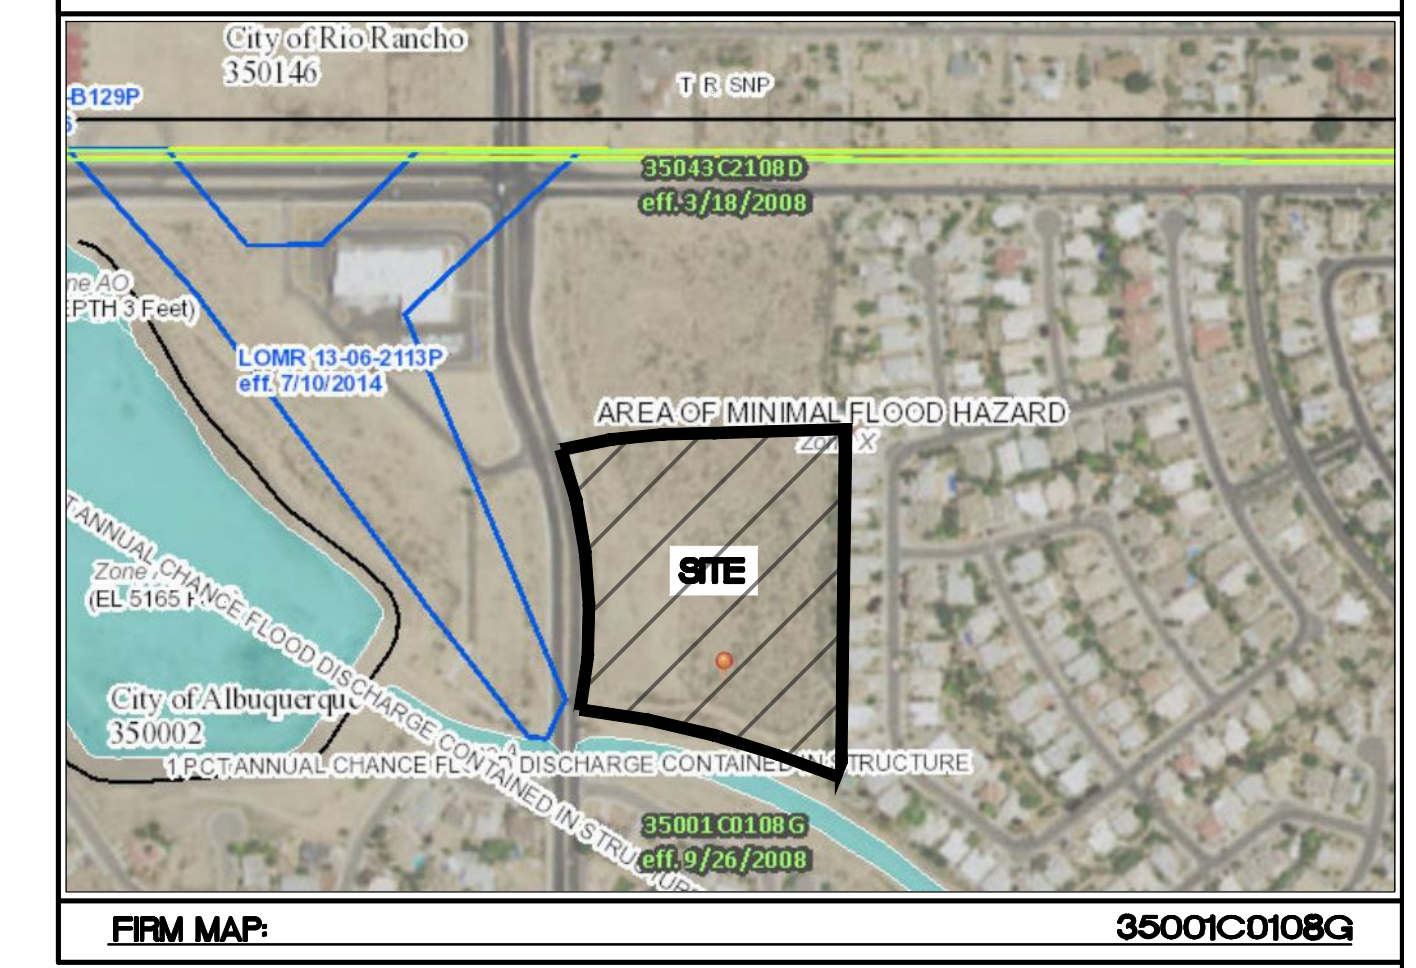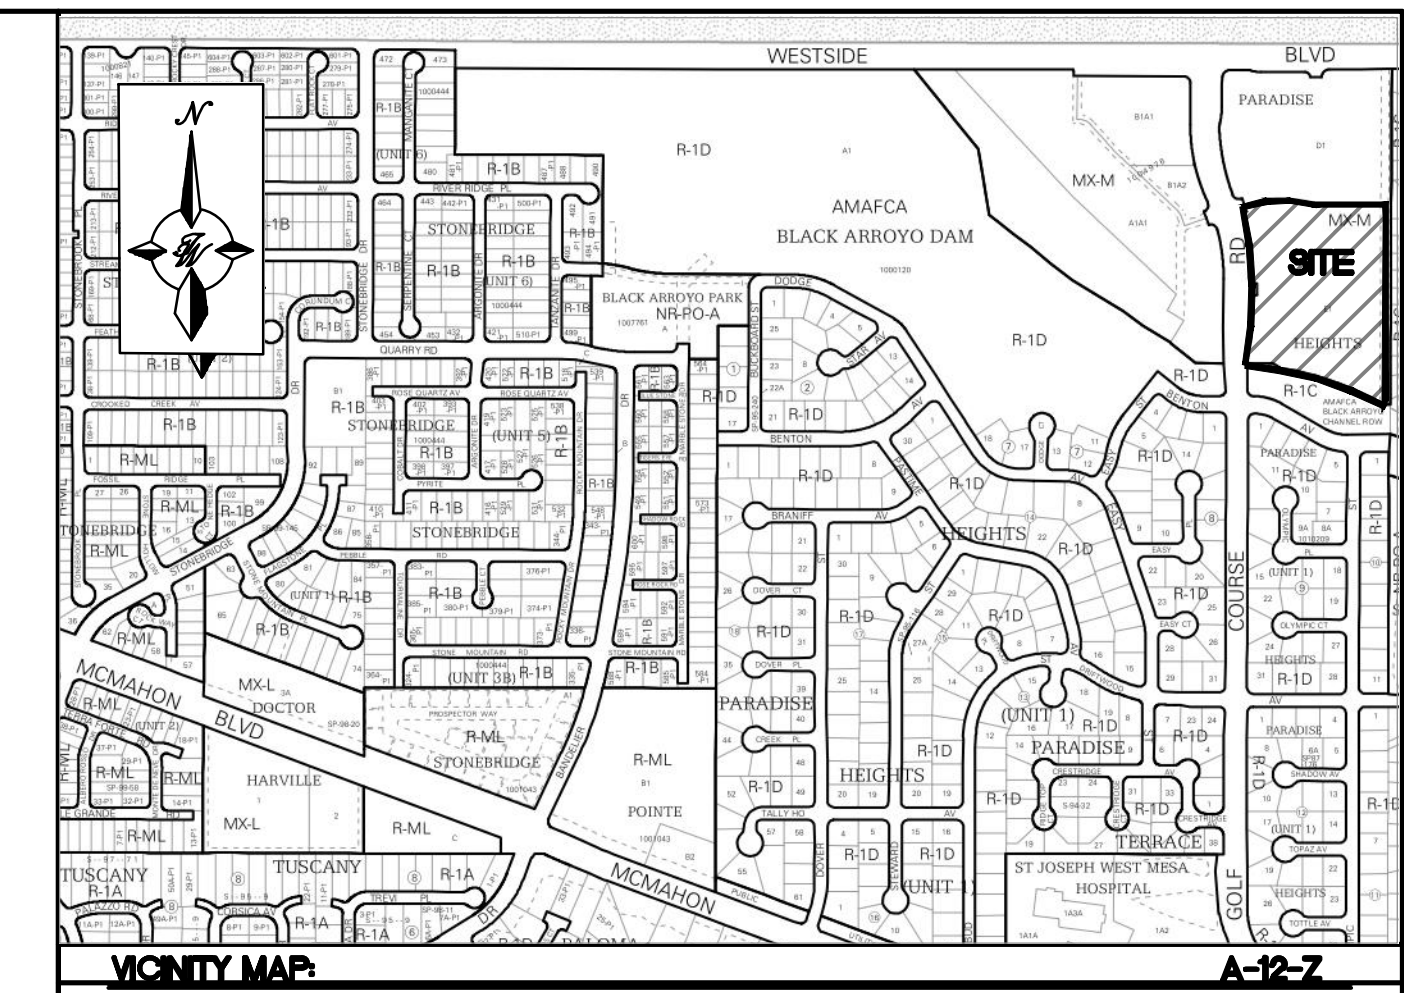


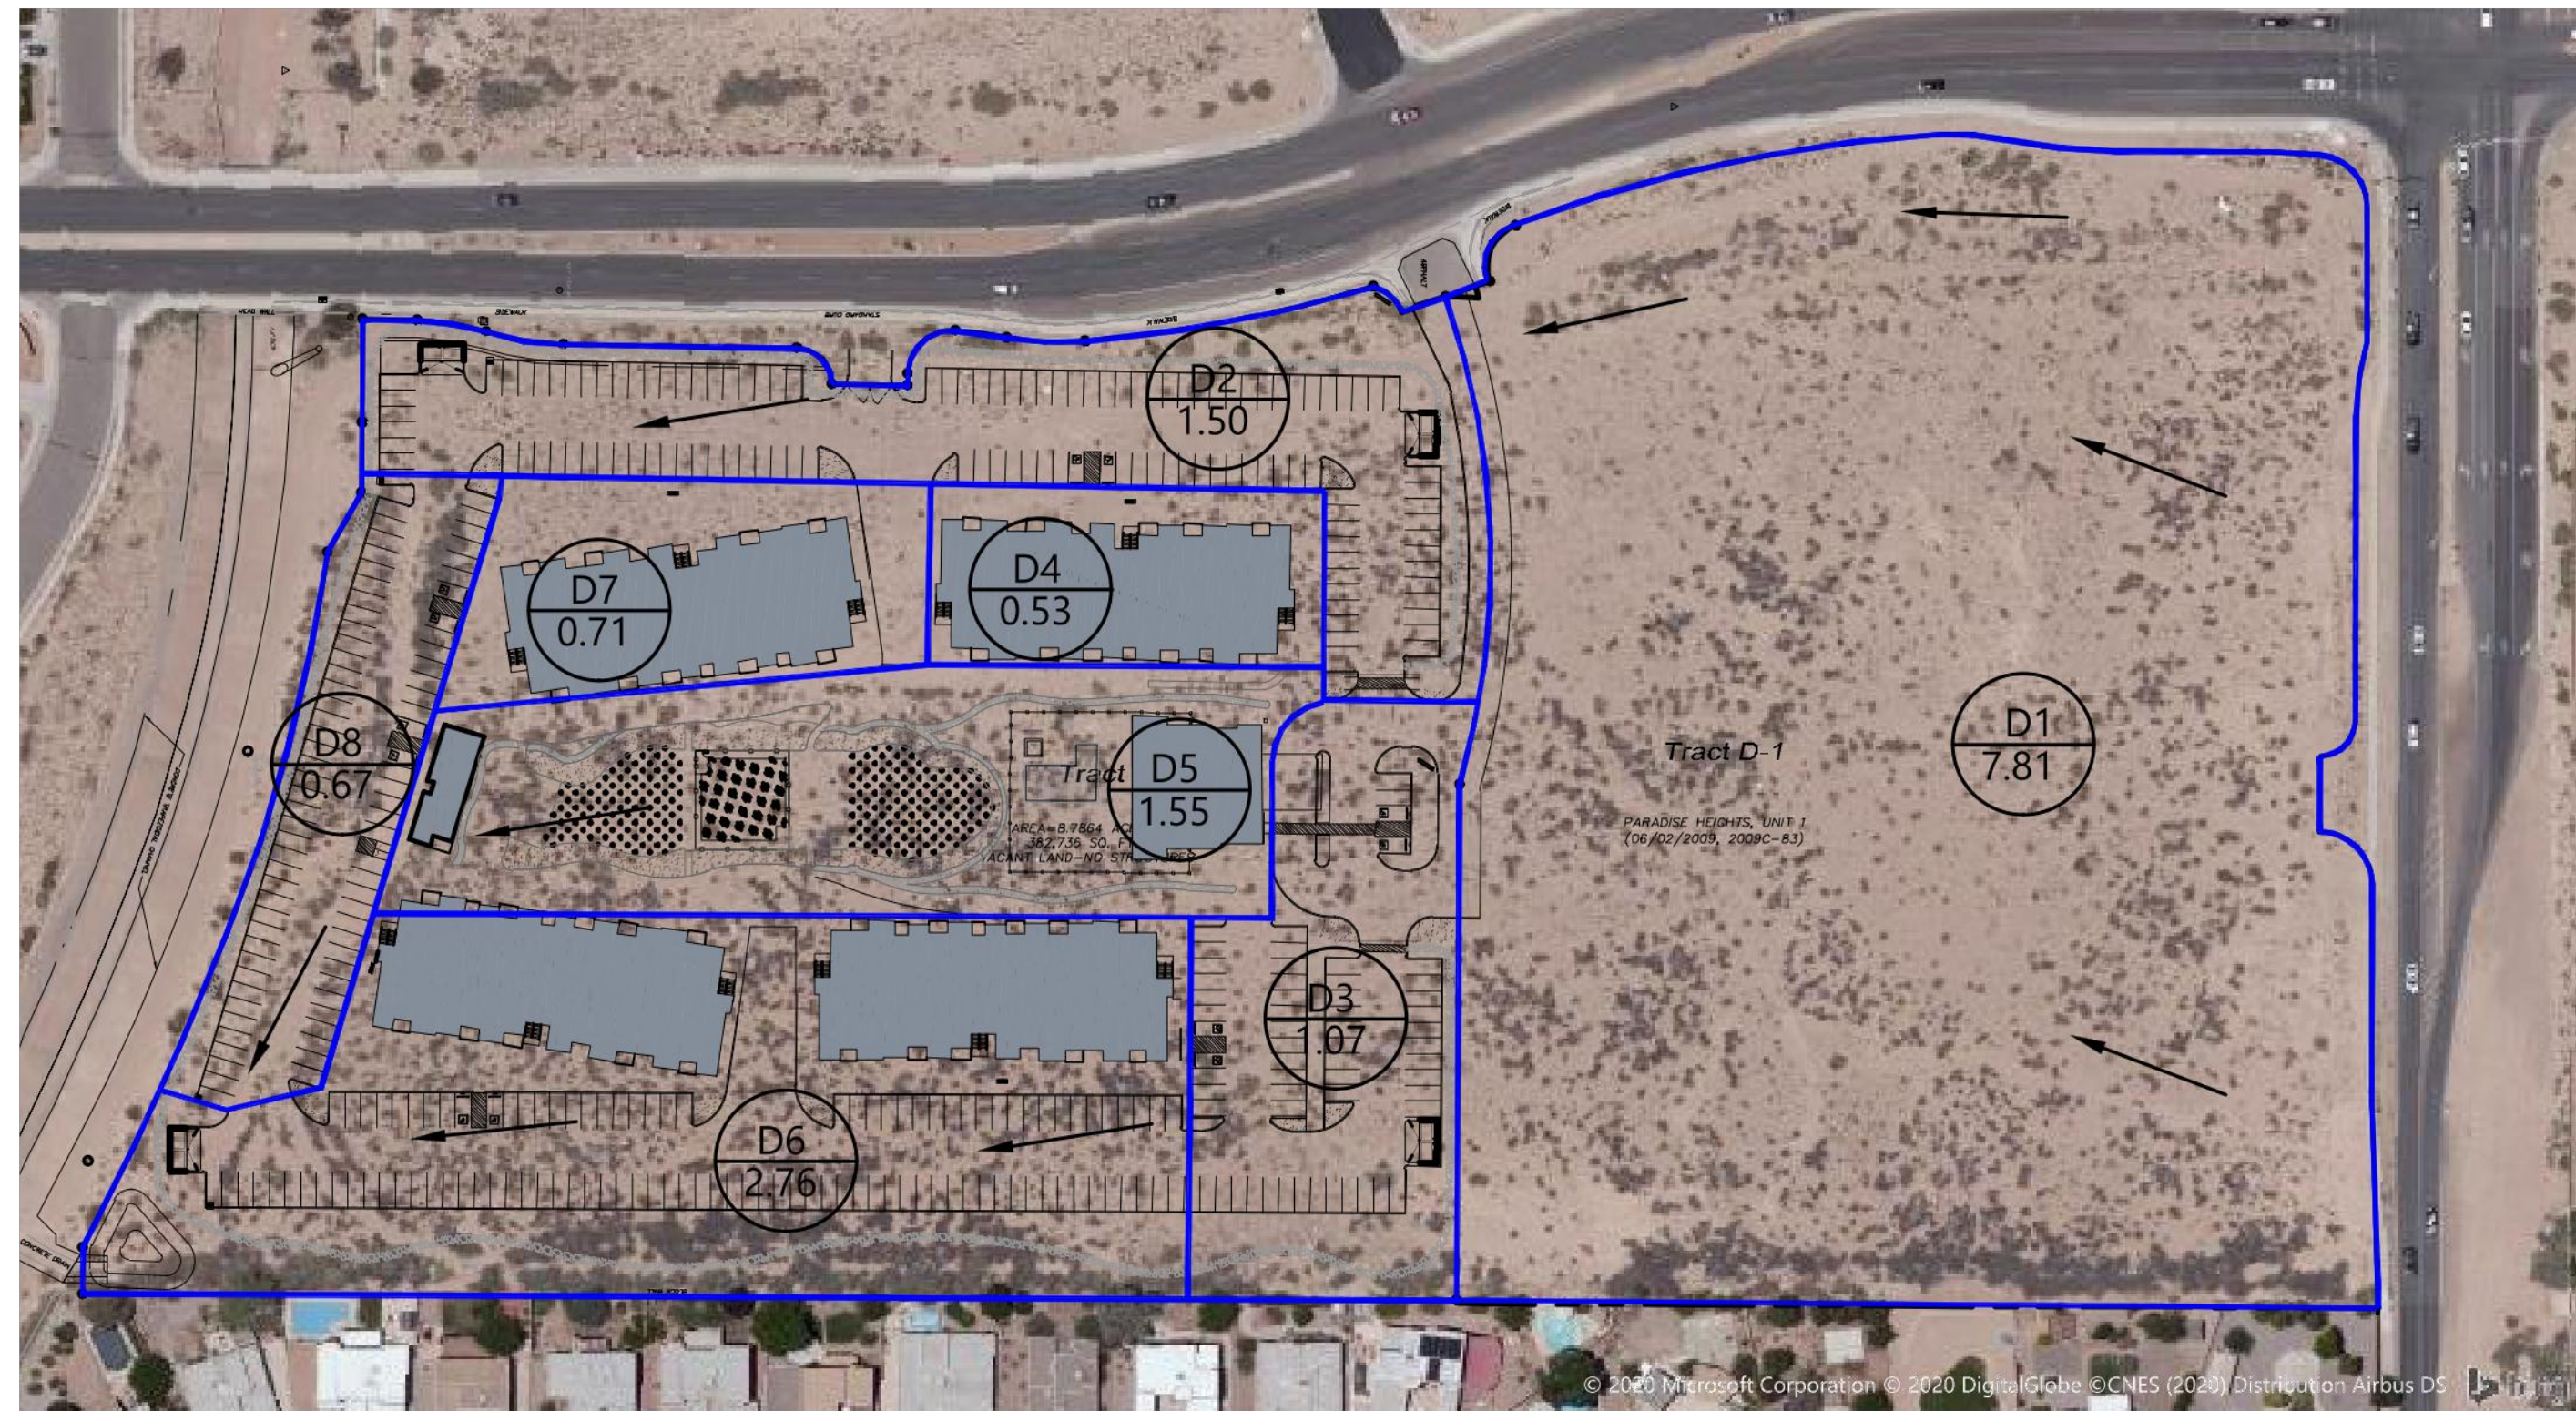

PROPOSED BASIN MAP
DEVELOPED CONDITION - 10800 GOLF COURSE RD. NW

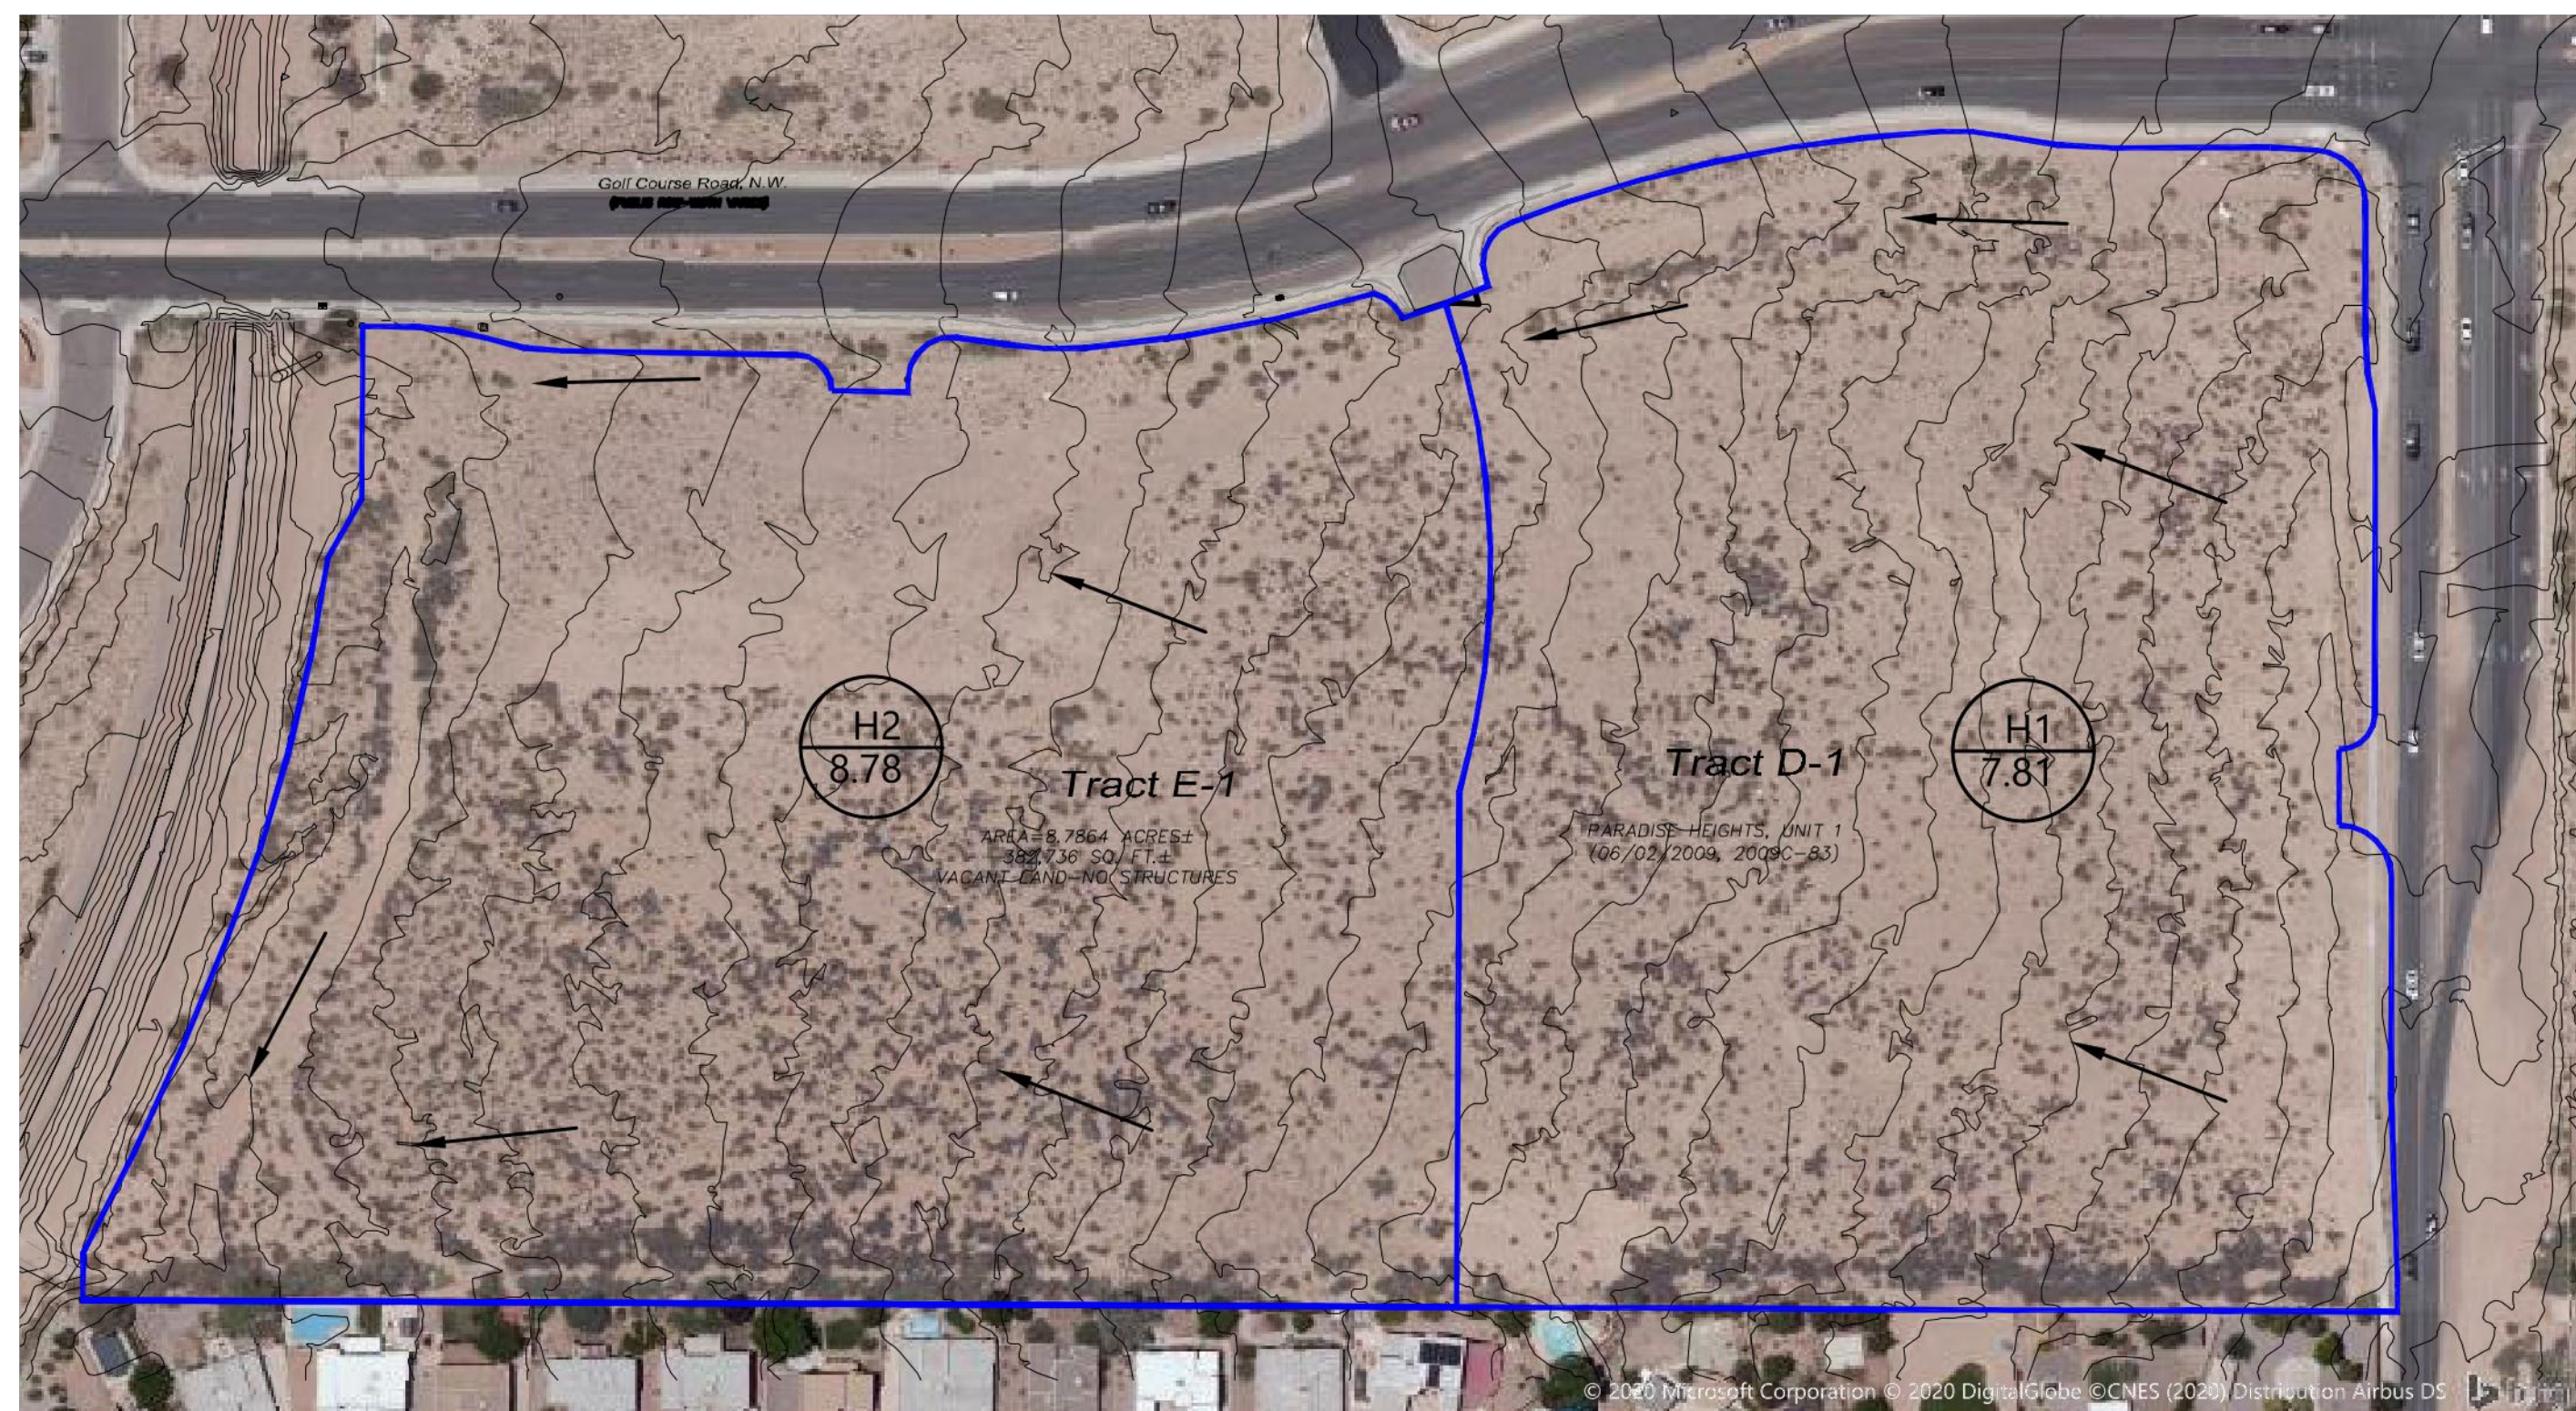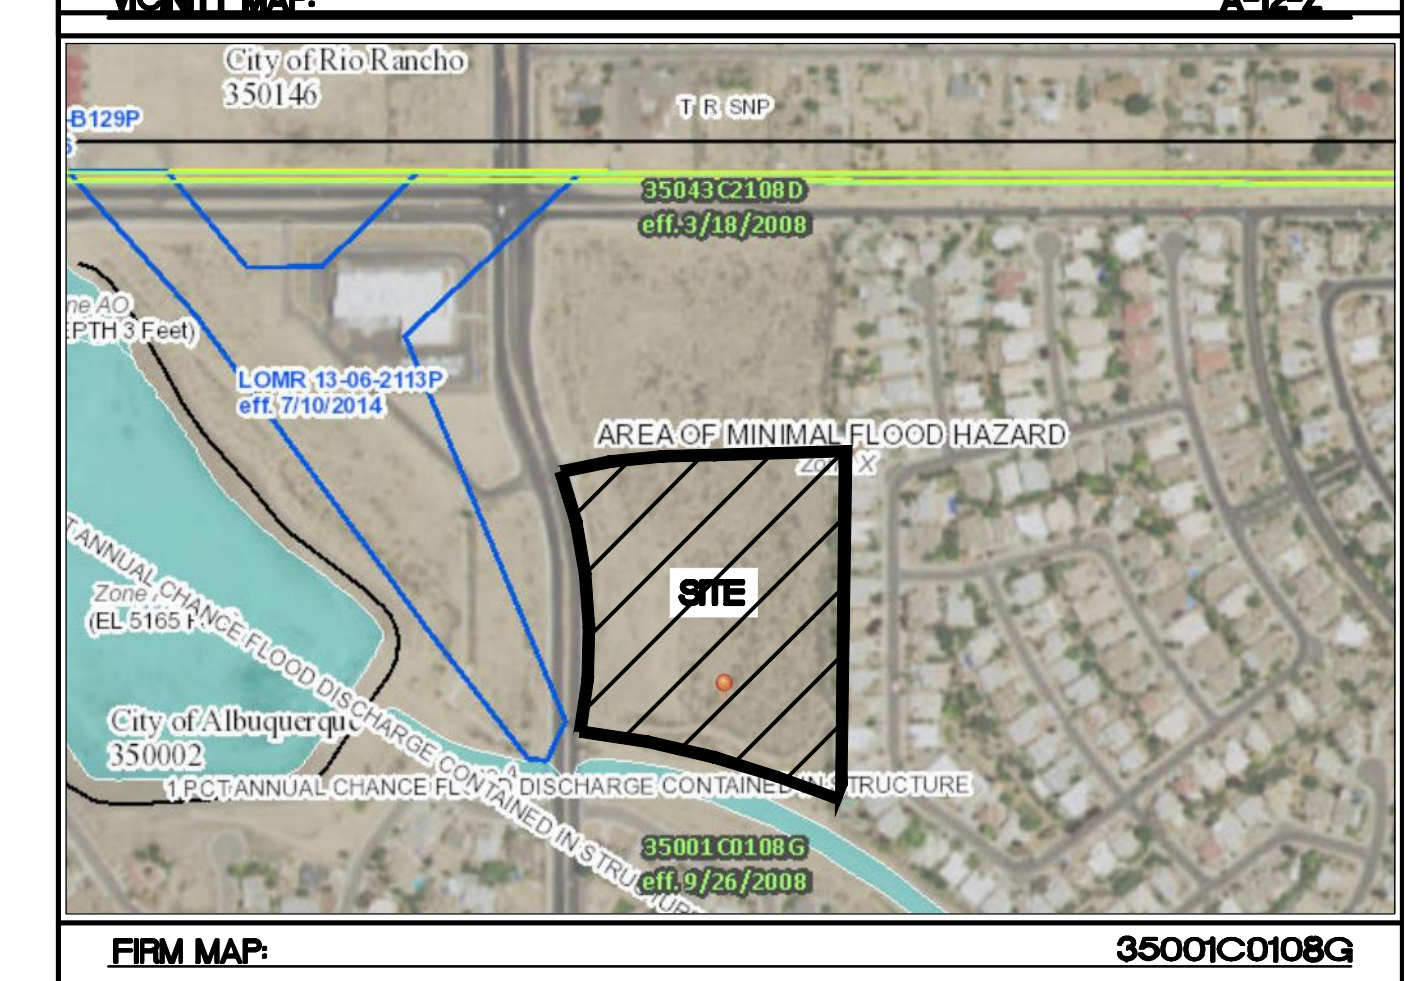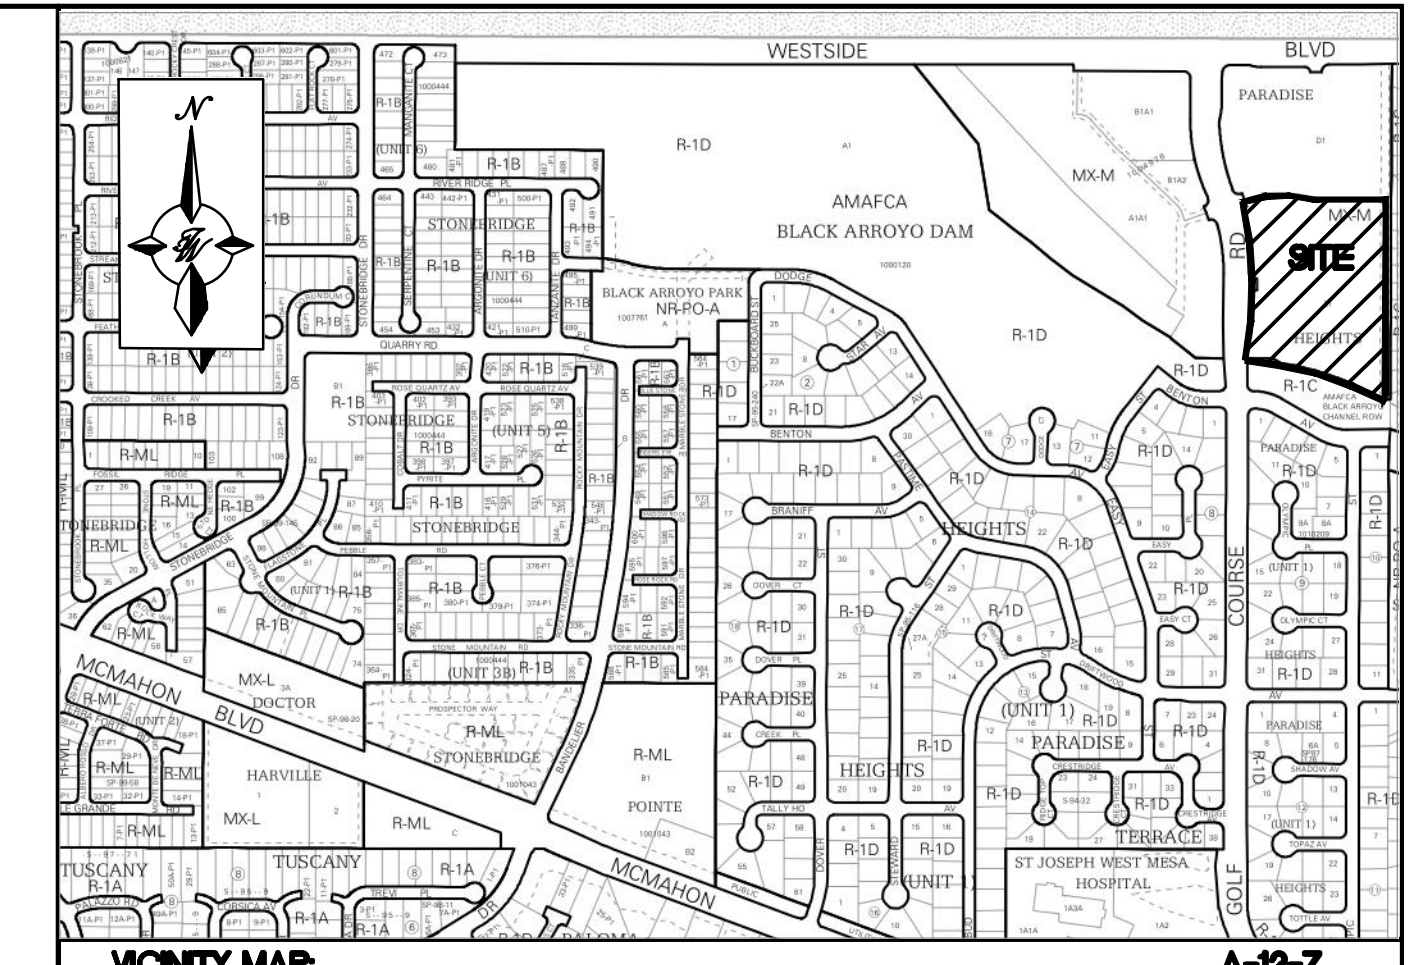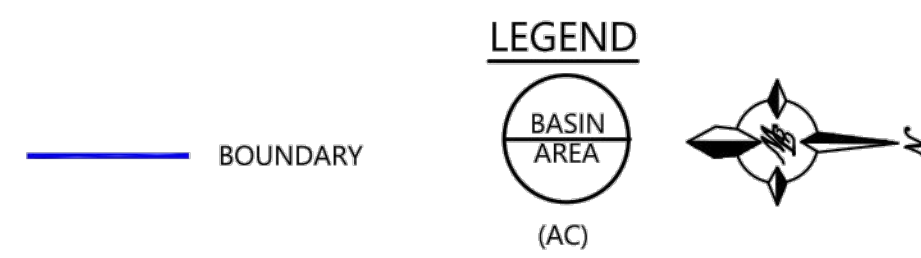

HISTORIC BASIN MAP
EXISTING CONDITION - 10800 GOLF COURSE RD. NW

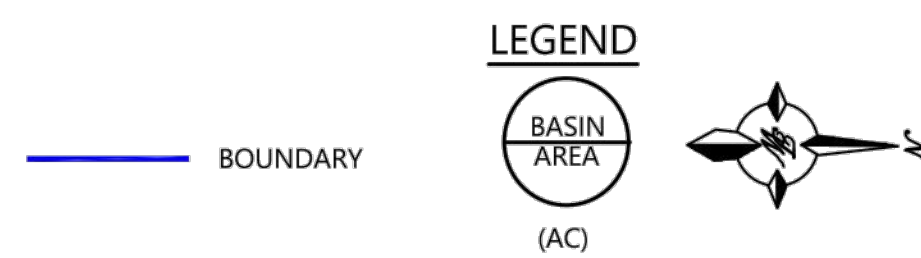


Pipe Number	D (in)	Slope (%)	Area (ft ²)	R	Q Provided (cfs)
1	30	2.00	4.91	0.625	58.16
2	30	1.00	4.91	0.625	41.13
3	24	2.00	3.14	0.500	32.08
4	24	1.00	3.14	0.500	22.68
5	18	2.00	1.77	0.375	14.90
6	18	1.00	1.77	0.375	10.53

Manning's Equation:
 $Q = 1.49/n * A * R^{2/3} * S^{1/2}$
 A = Area
 R = D/4
 S = Slope
 n = 0.013

Z:\2020\2020013_Apartments at Golf Course_R\Drawings\DRB_Ver.B\2020013_GRB_Ver.B.dwg Jun 30, 2020 - 8:02am

PRELIMINARY - NOT FOR CONSTRUCTION

	ENGINEER'S SEAL WINTERGREEN LUXURY APARTMENTS GOLF COURSE RD NE	DRAWN BY BF
	CONCEPTUAL GRADING & DRAINAGE PLAN	DATE 6/26/2020
6/26/2020 RONALD R. BOHANNAN P.E. #7868	 5571 MIDWAY PARK PLACE NE ALBUQUERQUE, NM 87109 (505) 858-3100 www.tierrawestllc.com	SHEET # C2-B
		JOB # 2020013

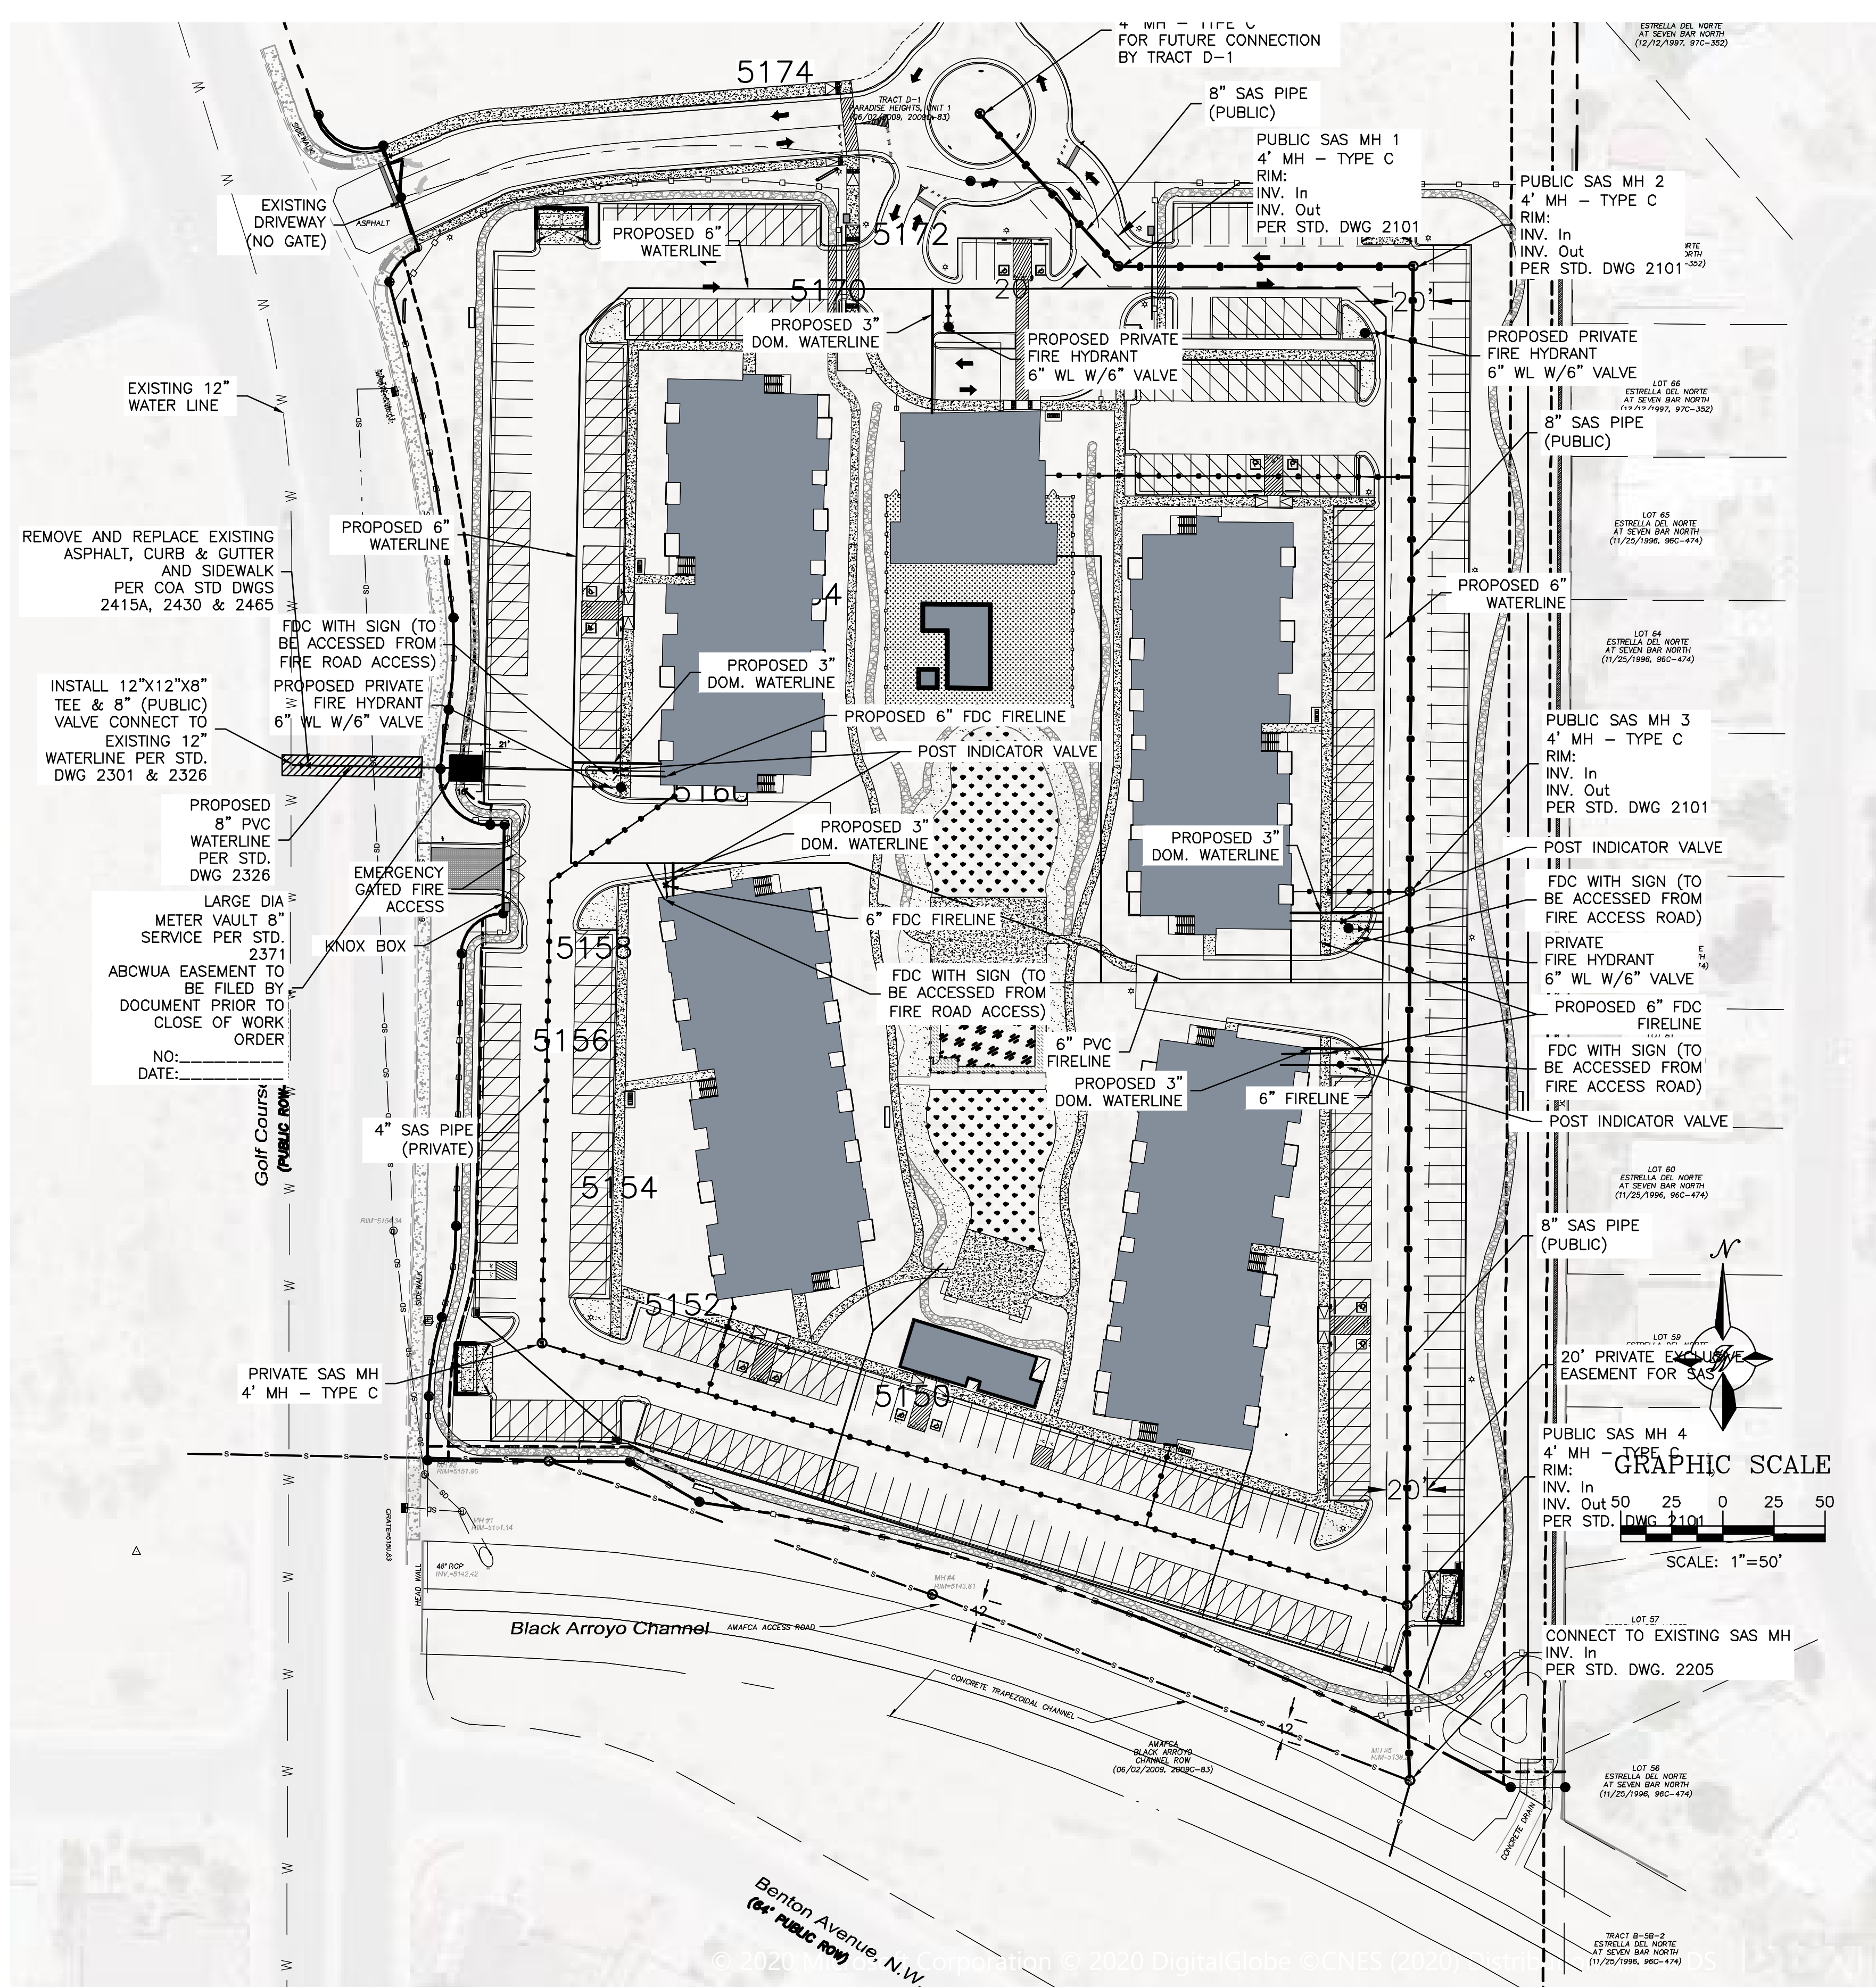

LEGEND


	CURB & GUTTER
	BOUNDARY LINE
	EASEMENT
	CENTERLINE
	RIGHT-OF-WAY
	BUILDING
	SIDEWALK
	SCREEN WALL
	RETAINING WALL
	EXISTING CURB & GUTTER
	EXISTING BOUNDARY LINE
	STORM SEWER LINE
	SANITARY SEWER LINE
	WATERLINE
	SINGLE CLEAN OUT
	DOUBLE CLEAN OUT
	EXISTING SD MANHOLE
	EXISTING INLET
	EXISTING SAS MANHOLE
	EXISTING FIRE HYDRANT
	EXISTING WATER VALVE
	EXISTING WATER METER
	EXISTING POWER POLE
	EXISTING GAS VALVE
	EXISTING OVERHEAD UTILITIES
	EXISTING UNDERGROUND UTILITIES
	EXISTING GAS
	EXISTING SANITARY SEWER LINE
	EXISTING WATER LINE
	EXISTING STORM SEWER LINE

- WATER NOTES:**
- CONTACT UTILITY COMPANIES FOR EXACT LOCATION FOR UNDERGROUND UTILITIES IN THE AREA.
 - PROVIDE ADEQUATE CONCRETE THRUST BLOCKING AT THE FOLLOWING: TAPPING, SLEEVES, TEES, BENDS, PLUGS - ALL FITTINGS. REFER TO ABCWUA STANDARD DETAIL DRAWING 2320
 - INSTALL A TRENCH SAFETY SYSTEM TO PROVIDE FOR THE SAFE EXCAVATION OF ALL TRENCHES EXCEEDING A DEPTH OF (5') FIVE FEET AS PER O.S.H.A. STANDARDS.
 - ALL P.V.C. PIPE ON THIS PLAN SHALL BE ENCASED WITH SELECT BEDDING WHEN PLACED IN CITY ROW. IN SITU (ACCEPTABLE) MATERIAL CAN BE USED IN PRIVATE LINES.
 - ALL VALVES ON P.V.C. WATER MAINS SHALL BE ANCHORED IN CONCRETE.
 - CITY PAVING CUT PERMIT REQUIRED BEFORE EXCAVATION.
 - RECONNECTION OF EXISTING WATER LINE SYSTEM SHOWN ON THESE PLANS MUST BE MADE, SUCH THAT MINIMAL INTERRUPTION OF SERVICE TO CUSTOMER IS MADE.
 - ALL EXISTING LINES CURRENTLY IN SERVICE MUST REMAIN IN SERVICE THROUGHOUT CONSTRUCTION. CONTRACTOR IS RESPONSIBLE FOR PROTECTING 8" SEWER LINES (INCLUDING SERVICES) FROM DAMAGE AS A RESULT OF CONSTRUCTION.
 - CONTRACTOR SHALL VERIFY LOCATION OF SERVICES BEFORE CONSTRUCTION.
 - CONTRACTOR SHALL COORDINATE WITH CITY & COUNTY CONSTRUCTION SEQUENCE AND TRAFFIC CONTROL PLANS.
 - CONTRACTOR SHALL PROVIDE TEMPORARY SERVICE TO CUSTOMERS IF SERVICE WILL BE INTERRUPTED FOR MORE THAN (4) HOURS IN A 24-HOUR PERIOD.
 - CONTRACTOR TO ADJUST WATER VALVES TO FINAL GRADE WHERE NECESSARY.

- GENERAL UTILITY NOTES:**
- CONTRACTOR MUST COORDINATE WATER SYSTEM WITH SEWER SYSTEM TO PREVENT ANY CONFLICTS WHERE THESE LINES INTERSECT ONE ANOTHER.
 - PROVIDE 4 FEET OF COVER MINIMUM FOR ALL PROPOSED WATER LINES.
 - AREAS WHERE WATER PIPES CROSS OVER SEWER PIPES SHALL NOT HAVE ANY JOINTS.
 - PROPOSED WATER LINE SHALL BE 8' FROM CENTERLINE (North and East), UNLESS OTHERWISE NOTED.
 - NO FENCES, SIGNS, TREES OR ROCKWALLS TO BE PLACED WITHIN UTILITY EASEMENTS.
 - CONTACT UTILITY COMPANIES FOR EXACT LOCATION OF UNDERGROUND UTILITIES IN THIS AREA BEFORE EXCAVATION.
 - INSTALL A TRENCH SAFETY SYSTEM TO PROVIDE FOR THE SAFE EXCAVATION OF ALL TRENCHES EXCEEDING A DEPTH OF (5') FEET AS PER O.S.H.A. STANDARDS.
 - PROVIDE ADEQUATE CONCRETE THRUST BLOCKING AT THE FOLLOWING: TAPPING SLEEVES, TEES, BENDS, PLUGS AND ALL FITTINGS.
 - P.V.C. PIPE SHALL BE PLACED WITH SELECT BEDDING MATERIAL ALL AROUND.
 - CAUTION: VERIFY LOCATION & DEPTH OF EXISTING GAS MAIN IN THE AREA OF CONSTRUCTION, BEFORE INSTALLING WATER LINE.

ABCWUA NOTES:

THE CONTRACTOR SHALL COORDINATE WITH THE WATER AUTHORITY SEVEN (7) DAYS IN ADVANCE OF PERFORMING WORK THAT WILL AFFECT THE PUBLIC WATER OR SANITARY SEWER INFRASTRUCTURE. WORK REQUIRING SHUTOFF OF FACILITIES DESIGNATED AS MASTER PLAN FACILITIES MUST BE COORDINATED WITH THE WATER AUTHORITY 14 DAYS IN ADVANCE OF PERFORMING SUCH WORK. ONLY WATER AUTHORITY CREWS ARE AUTHORIZED TO OPERATE PUBLIC VALVES. SHUTOFF REQUESTS MUST BE MADE ONLINE AT [HTTP://ABCWUA.ORG/CONTENT/VIEW/483/729/](http://abcwua.org/content/view/full/483/729/)

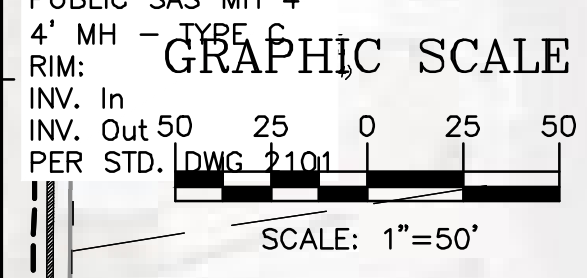


CAUTION:


ALL EXISTING UTILITIES SHOWN WERE OBTAINED FROM RESEARCH, AS-BUILTS, SURVEYS OR INFORMATION PROVIDED BY OTHERS. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO CONDUCT ALL NECESSARY FIELD INVESTIGATIONS PRIOR TO AND INCLUDING ANY EXCAVATION, TO DETERMINE THE ACTUAL LOCATION OF UTILITIES AND OTHER IMPROVEMENTS, PRIOR TO STARTING THE WORK. ANY CHANGES FROM THIS PLAN SHALL BE COORDINATED WITH AND APPROVED BY THE ENGINEER.

PRELIMINARY - NOT FOR CONSTRUCTION		
ENGINEER'S SEAL 	WINTERGREEN LUXURY APARTMENTS GOLF COURSE RD NE	DRAWN BY BF
	CONCEPT MASTER UTILITY PLAN	DATE 7/31/2020
	 TIERRA WEST, LLC 5571 MIDWAY PARK PLACE NE ALBUQUERQUE, NM 87109 (505) 858-3100 www.tierrawestllc.com	2020013_MUB_VER B
		SHEET # C3
		JOB # 2020013

Z:\2020\2020013 Apartments at Golf Course RA\dwg\DRB_Ver_B\2020013_MUB_Ver_B.dwg, July 31, 2020 - 10:44am

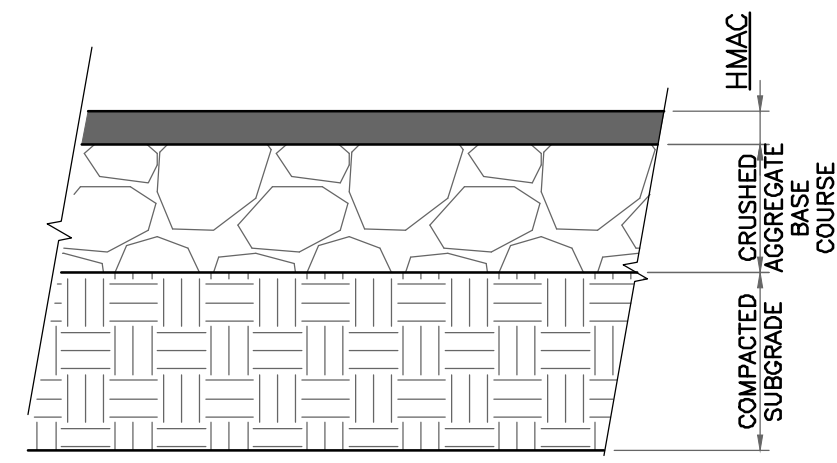

PAVEMENT SECTION DETAIL
SCALE: 1"=1'

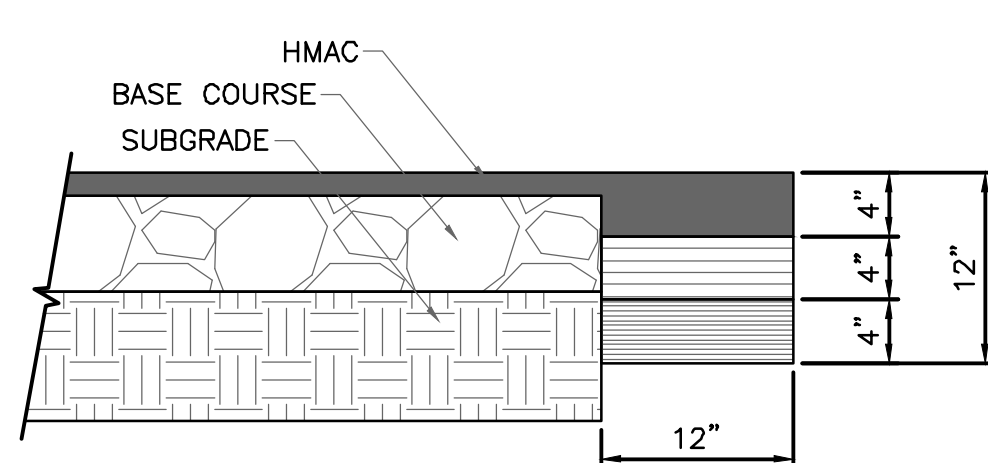

PAVEMENT TERMINUS
SCALE: 1"=1'

PAVEMENT NOTES




- SUBGRADE TO BE COMPACTED TO 95% OF MAXIMUM DENSITY AS PER ASTM D1557.
- BASE TO BE COMPACTED TO NOT LESS THAN 100% DENSITY IN ACCORDANCE WITH ASTM D1557, TYPE A, GRADE 1 OR 2.
- BITUMINOUS MATERIAL SHALL CONFORM TO AC-10 OR AC-20, TYPE "C" IN ACCORDANCE WITH ASTM D3318.
- PRIME COAT TO BE 0.25 GAL. PER SQUARE YARD (MINIMUM COVERAGE) MC-70.
- COMPACTION TESTS WHERE REQUIRED BY THE CITY ENGINEER MUST BE PAID FOR BY THE DEVELOPER.
- C.B.R. TESTS WILL BE REQUIRED AT 500 FOOT INTERVALS AFTER SUBGRADE IS PLACED AND/OR A MINIMUM OF TWO TESTS IF STREET IS LESS THAN 500 FEET.
- STRICT VERTICAL CONTROL OF ALL CURB AND GUTTER ELEVATIONS WILL BE MAINTAINED. BLUE TOPPING WILL BE REQUIRED THROUGHOUT.

TRENCHING


ALL TRENCHING SHALL BE DONE IN STRICT ACCORDANCE WITH OSHA-2226.

NOTE:


THICKENED EDGE SHALL BE CONSTRUCTED IN COURSED NOT OVER 4" IN THICKNESS, EACH COURSE THOROUGHLY COMPACTED BEFORE PLACING NEXT COURSE, FINAL COURSE. FINAL COURSE TO BE PLACED MONOLITHIC WITH PAVEMENT.

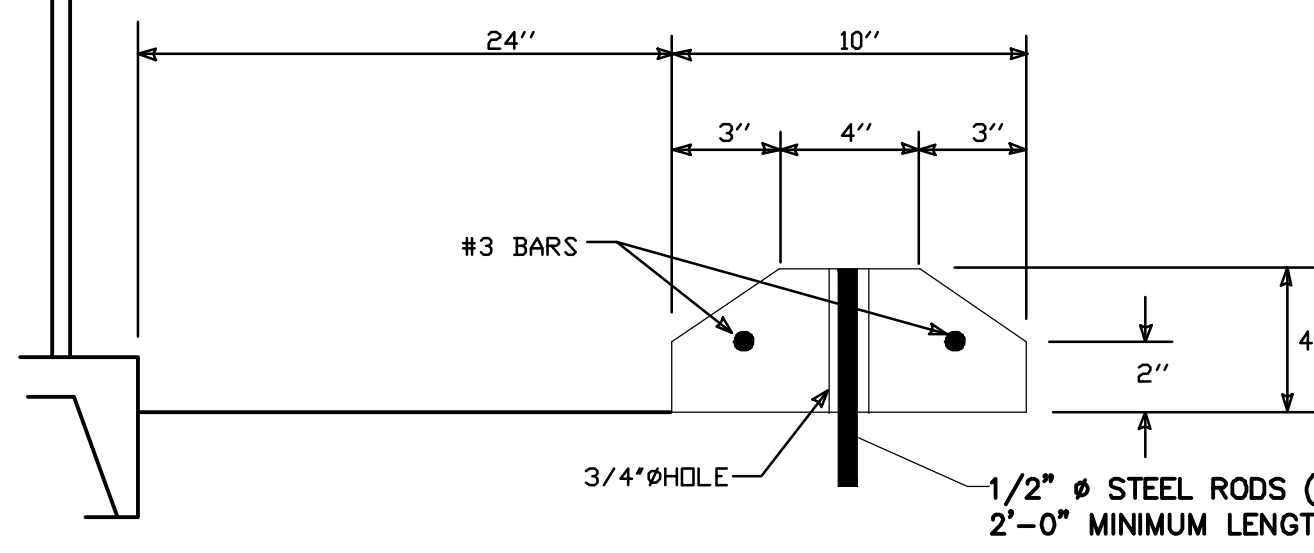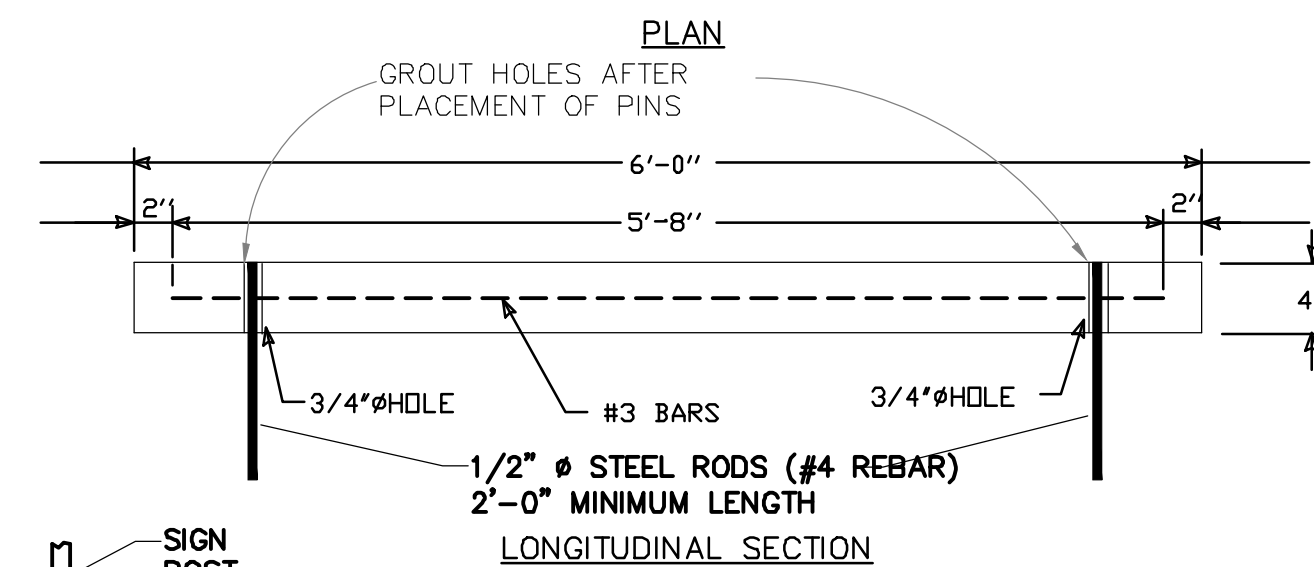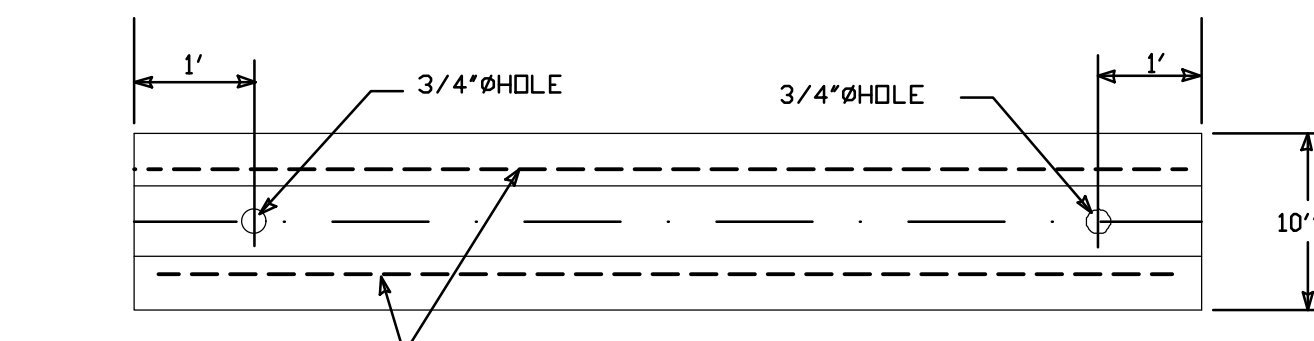


WHEEL STOP

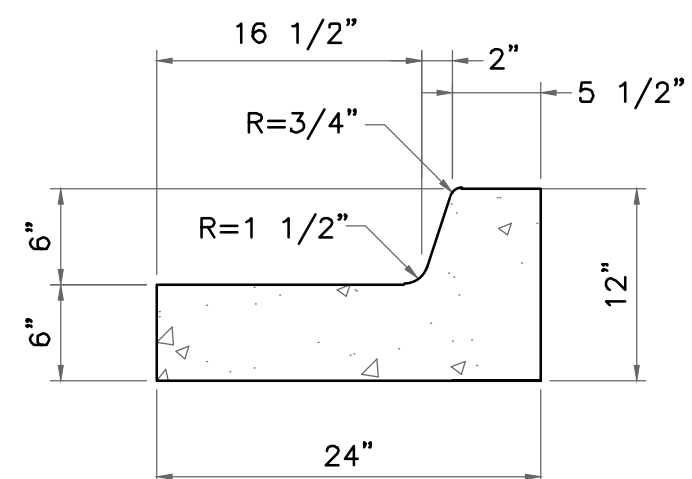

END SECTION

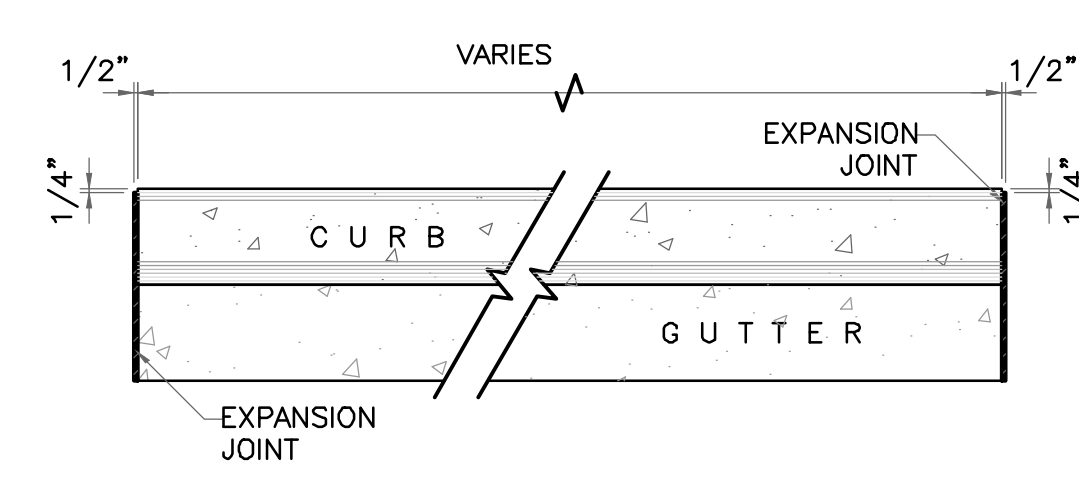


PLAN VIEW

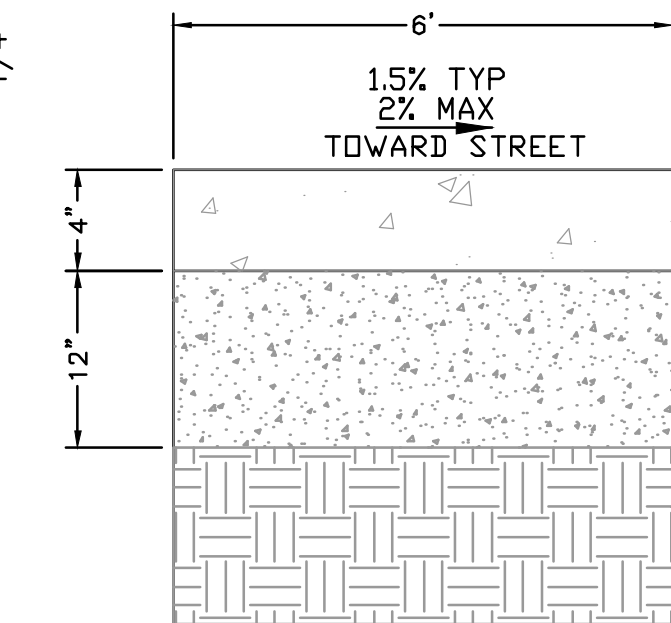


CONCRETE SIDEWALK SECTION

4" PCC CONCRETE
8" SUBGRADE TO BE COMPACTED TO A MINIMUM OF 95% OF MAXIMUM DENSITY AS DETERMINED BY ASTM D-1557
ALL OTHER FILL BELOW PAVEMENT TO BE COMPACTED TO A MINIMUM OF 90% OF MAXIMUM DENSITY AS DETERMINED BY ASTM D-1557

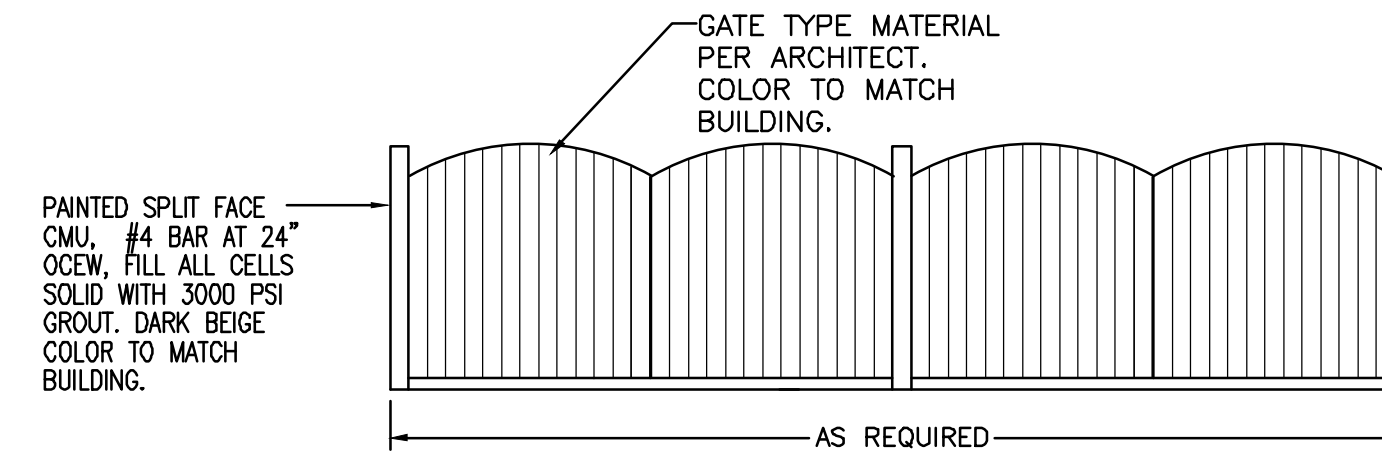

DOUBLE DUMPSTER ENCLOSURE DETAIL

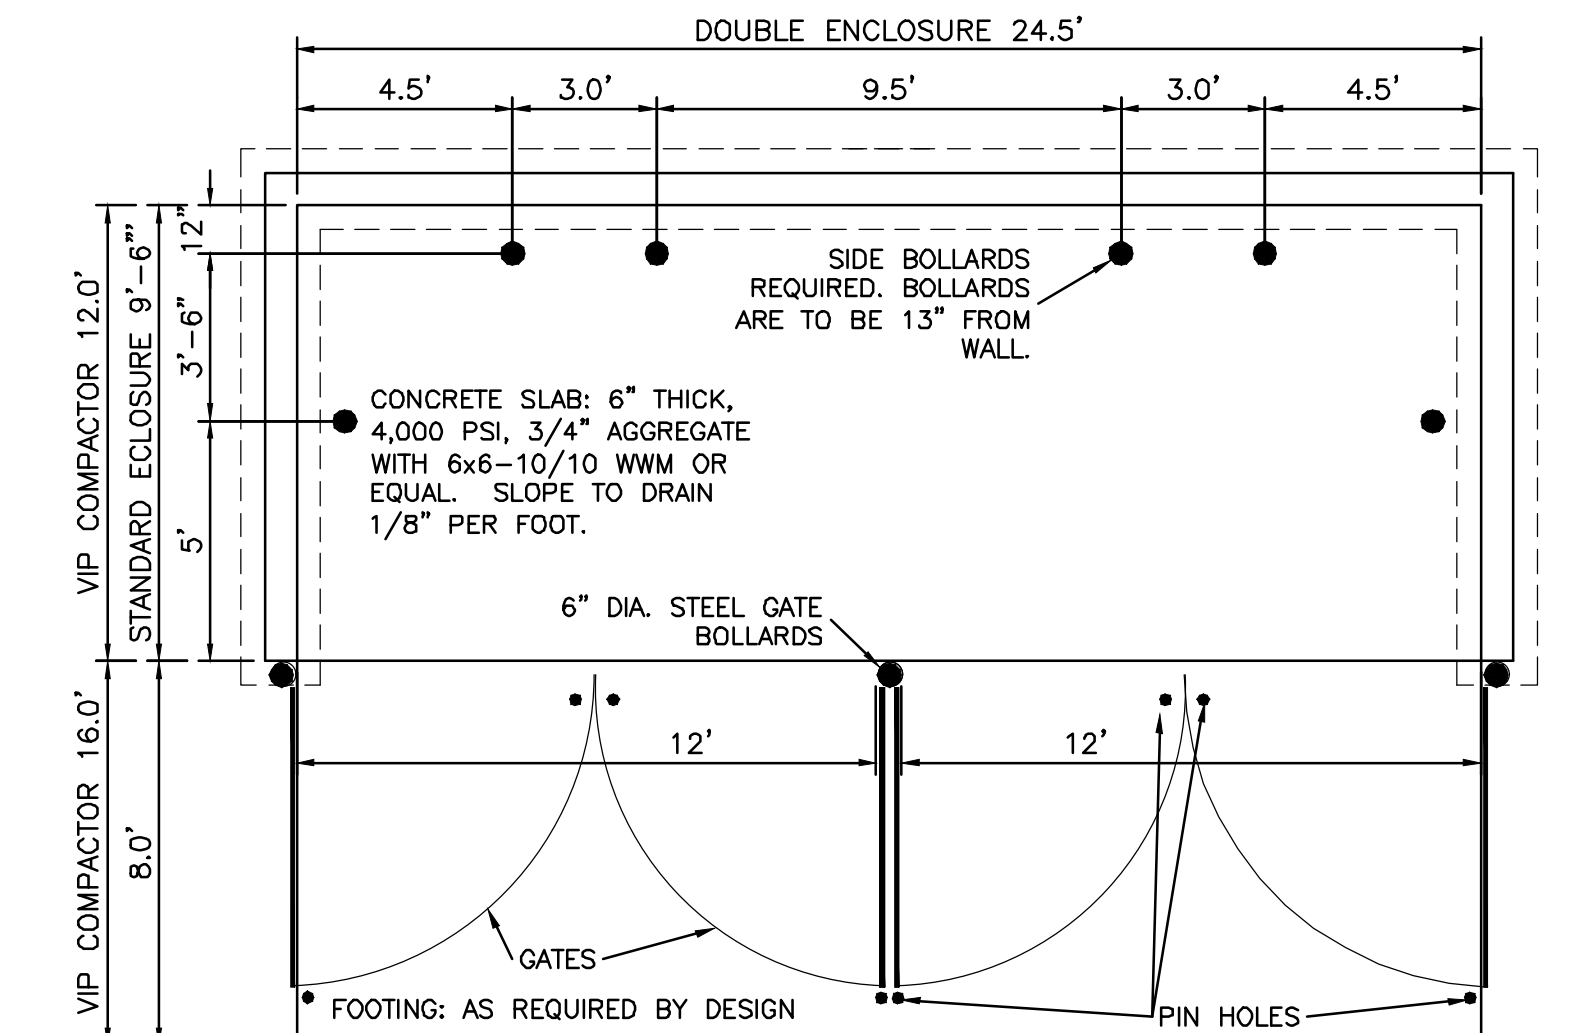

DOUBLE DUMPSTER ENCLOSURE DETAIL


NOTE: THESE ARE THE MINIMUM REQUIREMENTS FOR TRASH ENCLOSURES. DESIGNS MAY VARY TO FIT THE SELECTED ENCLOSURE.

NOTES:

- NO EXPANSION JOINT WILL BE REQUIRED EXCEPT AT THE END OF CURB RETURNS. (POINT OF TANGENCY WITH STRAIGHT LINE).
- CONTRACTION JOINTS (1/2" INCH MIN.) MUST BE SCORD EVERY 10 FEET IN CURB AND GUTTER.
- ALL EXPANSION JOINTS WILL BE OF PREFORMED BITUMINOUS FIBER 1/2" INCH THICK.
- CONCRETE: CLASS "A" 3000 PSI.
- EXPANSION JOINTS REQUIRED AT 5' O.C. WHEN FORMING FOR CURBS.
- THIS DETAIL APPLIES TO PRIVATE CURB WORK ONLY.

STANDARD 6" CURB & GUTTER DETAIL

SCALE: 1"=1'

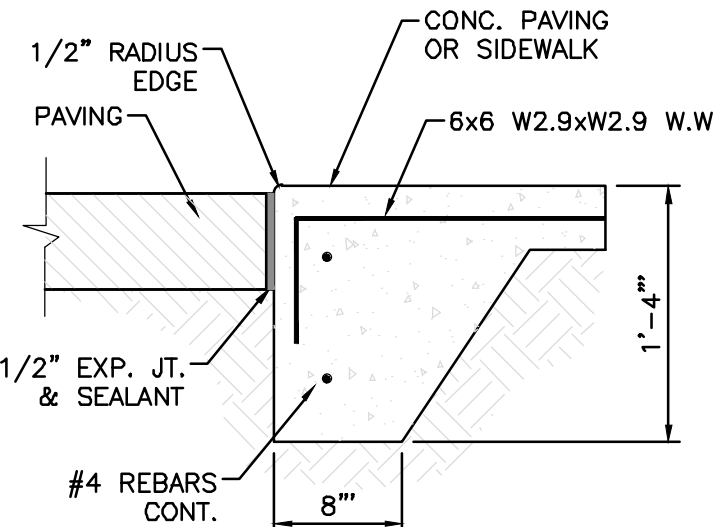


ZERO CURB

NTS


NOTES:

- THE SURFACE OF RAMP AND SIDES SHALL HAVE A TRANSVERSE BROOMED SURFACE TEXTURE ROUGHER THAN THE SURROUNDING SIDEWALK.
- CONSTRUCT PER A.D.A. STANDARDS.

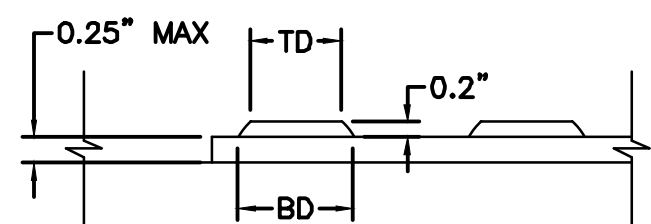


DOME SECTION

BD - BASE DIAMETER 0.9" MIN
TD - TOP DIAMETER 50% OF BD MIN TO 65% OF BD MAX

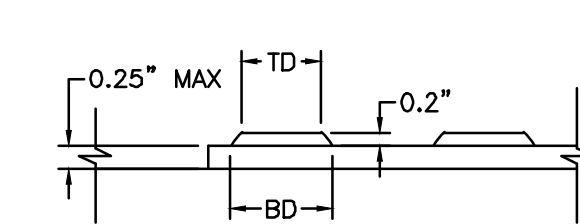


DOME SECTION

BD - BASE DIAMETER 0.9" MIN
TD - TOP DIAMETER 50% OF BD MIN TO 65% OF BD MAX

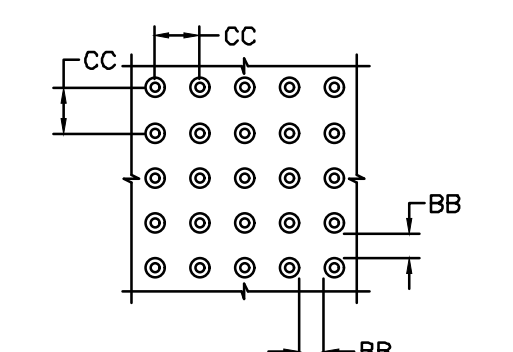


DOME SPACING
CC - CENTER TO CENTER SPACING 2.35"
BB - BASE TO BASE SPACING 1.48" MIN

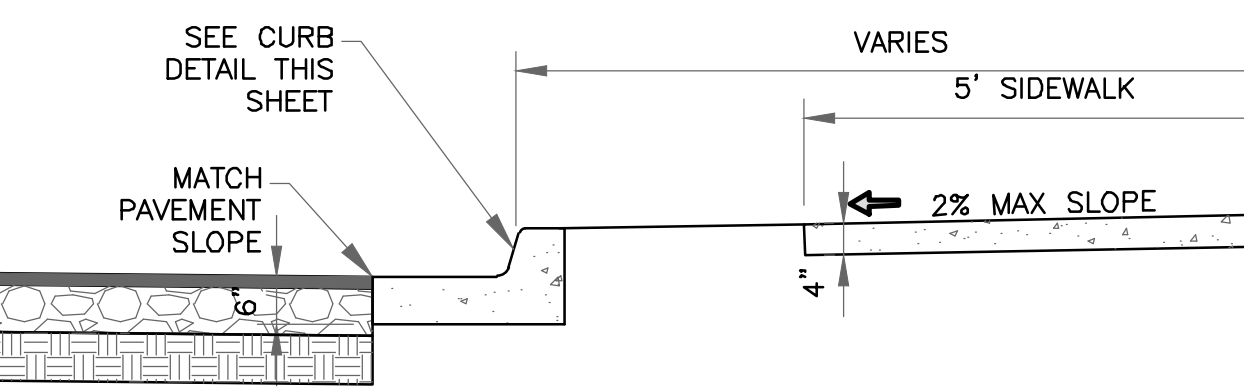


NOTES:

- CONCRETE SHALL BE 3000 P.S.I. MINIMUM.
- DUMMY JOINTS REQUIRED AT 10' O.C. FOR CURB/GUTTER AND 5' O.C. FOR SIDEWALK.
- EXPANSION MATERIAL REQUIRED AT CURB RETURNS WITH 1/2" PREMOLDED ASPHALT IMPREGNATED EXPANSION MATERIAL OR EQUAL.
- EXPANSION JOINTS REQUIRED AT 50' O.C. WHEN FORMING FOR CURBS.
- WHENEVER SIDEWALK ABUTS ROCK OR MASONRY STRUCTURES SUCH AS CURBS OR BUILDINGS, EXPANSION JOINT FILLER SHALL BE USED IN ACCORDANCE WITH STANDARD SPECIFICATIONS.

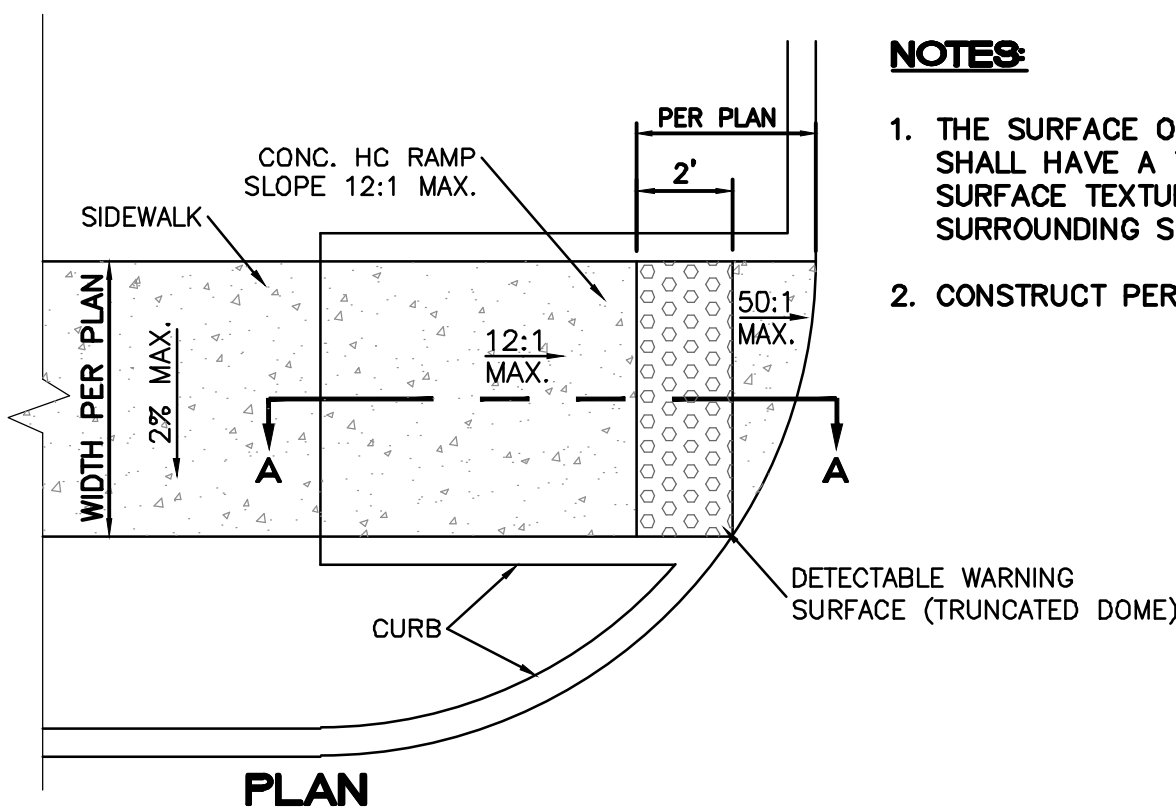

PLAN

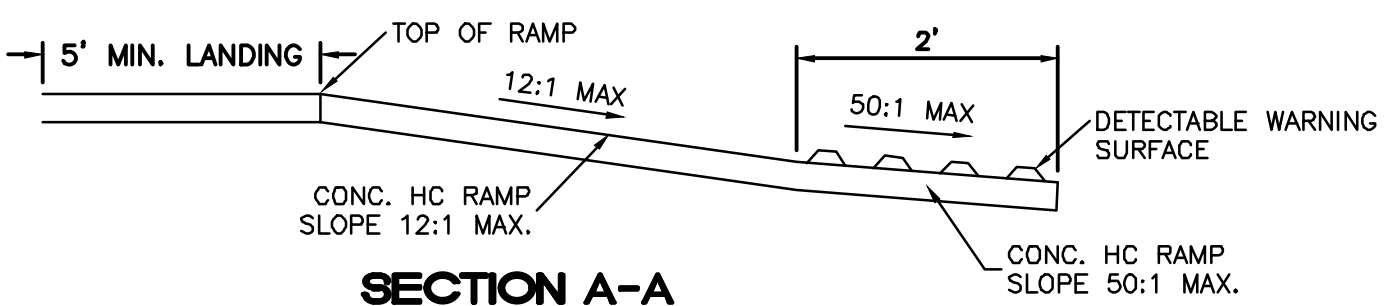


SECTION A-A

UNIDIRECTIONAL HC RAMP

NOT TO SCALE


NOTES:

- THE SURFACE OF RAMP AND SIDES SHALL HAVE A TRANSVERSE BROOMED SURFACE TEXTURE ROUGHER THAN THE SURROUNDING SIDEWALK.
- CONSTRUCT PER A.D.A. STANDARDS.

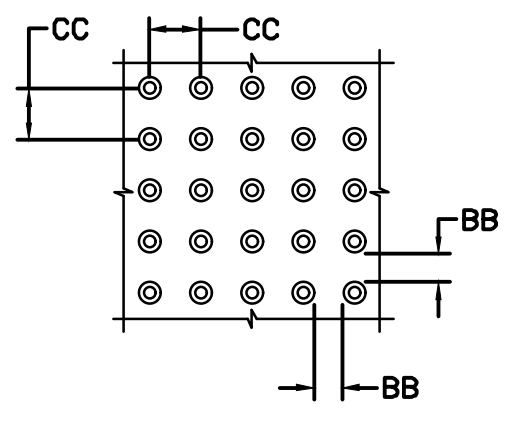

DOME SPACING

CC - CENTER TO CENTER SPACING 2.35"
BB - BASE TO BASE SPACING 1.48" MIN

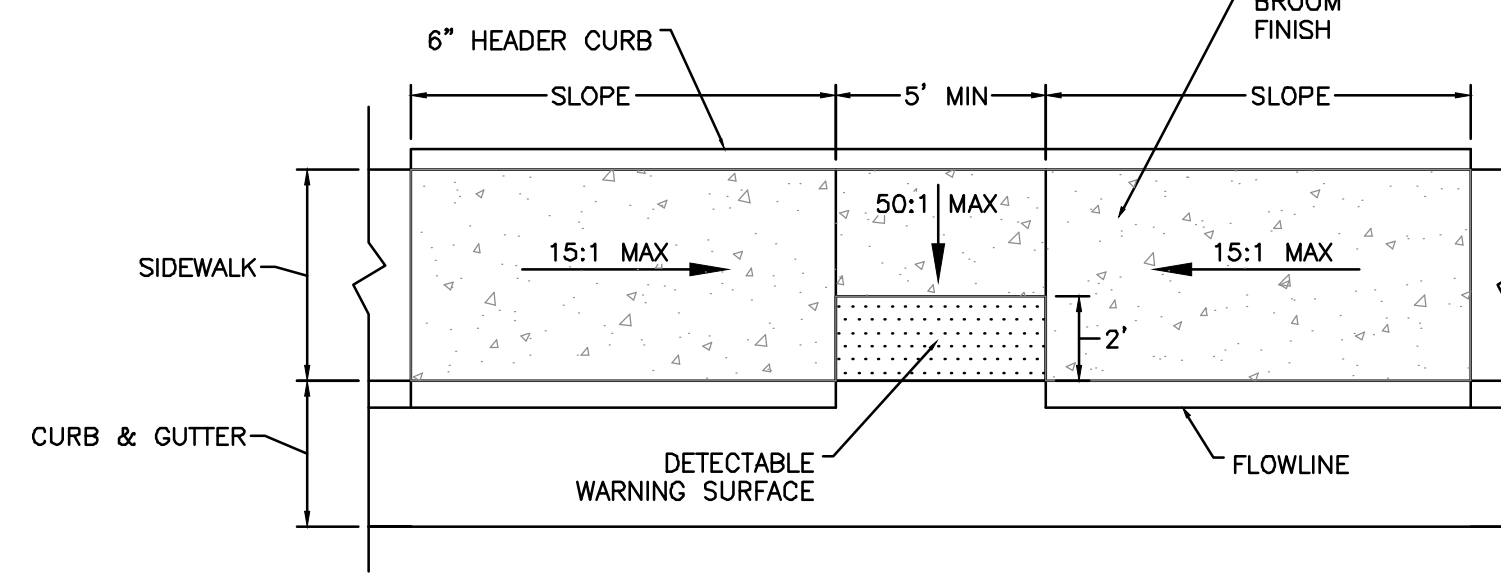


PARALLEL CURB HC RAMP

NOT TO SCALE

PRELIMINARY - NOT FOR CONSTRUCTION


	ENGINEER'S SEAL WINTERGREEN LUXURY APARTMENTS GOLF COURSE RD NE ALBUQUERQUE, NM 87109 (505) 858-3100 www.tierrawestllc.com	DRAWN BY BF DATE 7/31/2020 2020013_DTB_VER B
	CONSTRUCTION DETAILS	SHEET # C4 JOB # 2020013

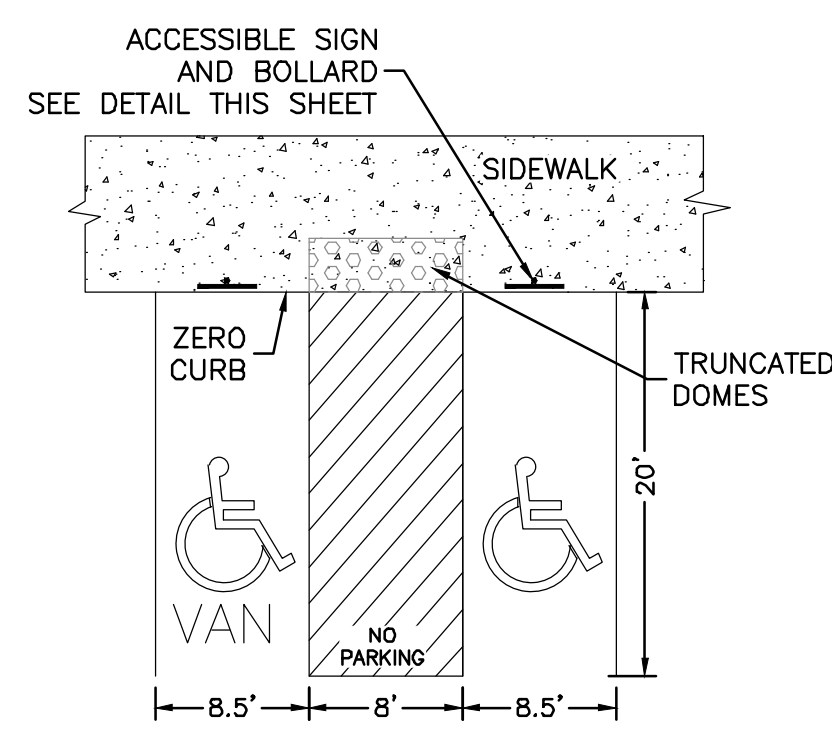


NOTES:

- 1) International Symbol of Accessibility shall be painted on the pavement at rear of space, white symbol on blue background.
- 2) Parking space lines and diagonal striping to be painted blue.
- 3) Access aisle shall have the words "NO PARKING" in capital letters, each of which shall be at least one foot high and at least two inches wide, placed at the rear of the parking space so as to be close to where an adjacent vehicle's rear tires would be placed.
- 4) ADA parking areas - not to exceed a slope greater than 2% in any direction


HC PARKING DETAIL
NTS

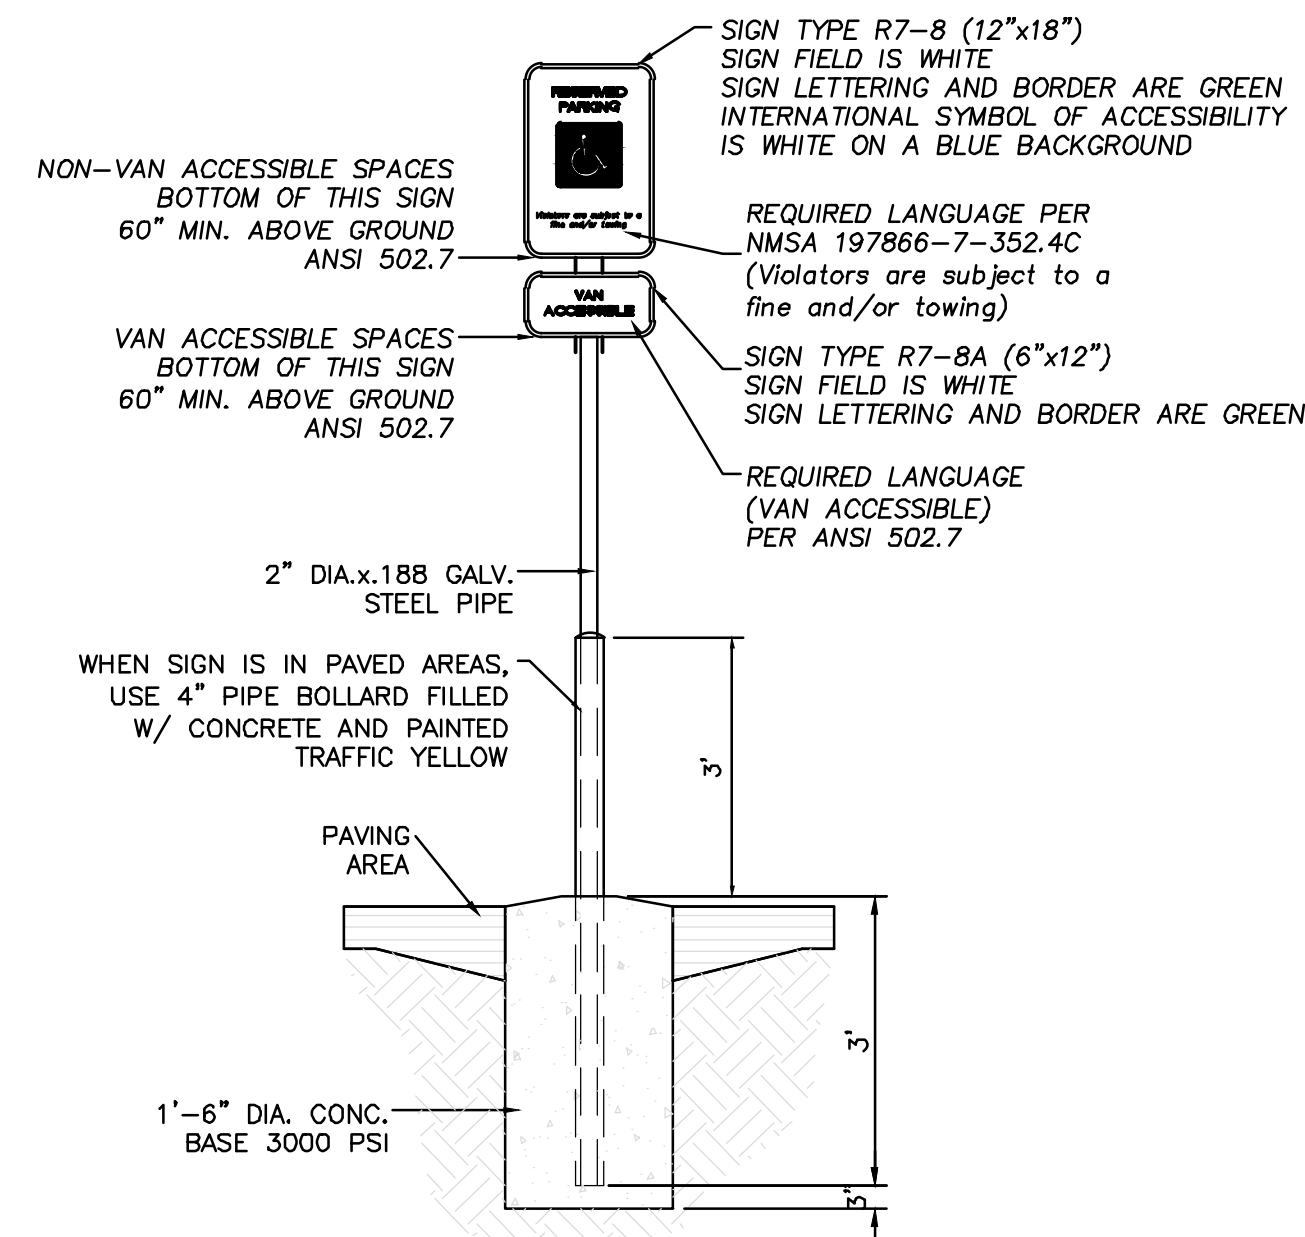


ACCESSIBLE PARKING SIGN
NTS

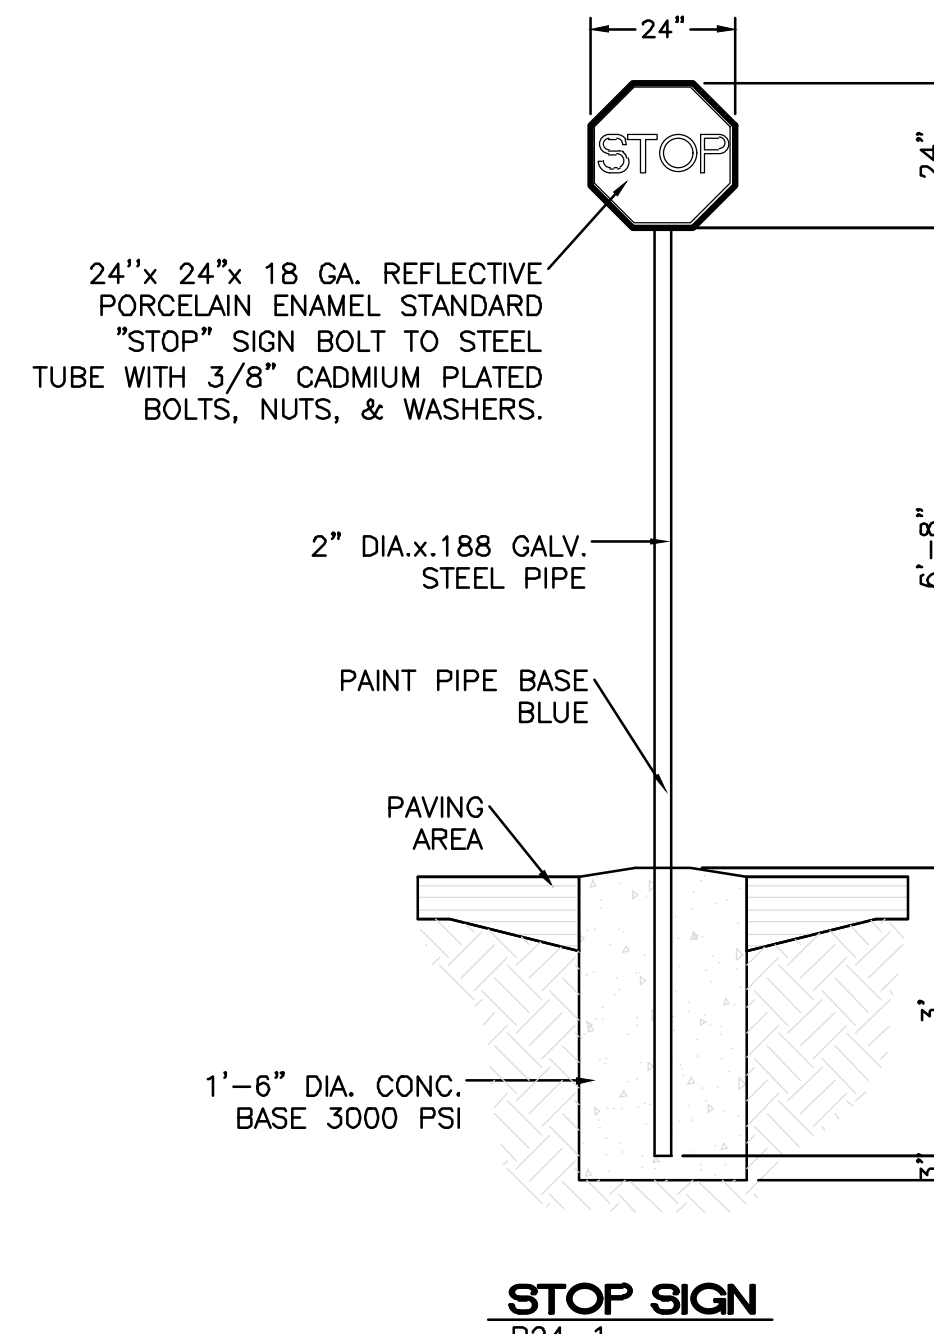

STOP SIGN
R24-1

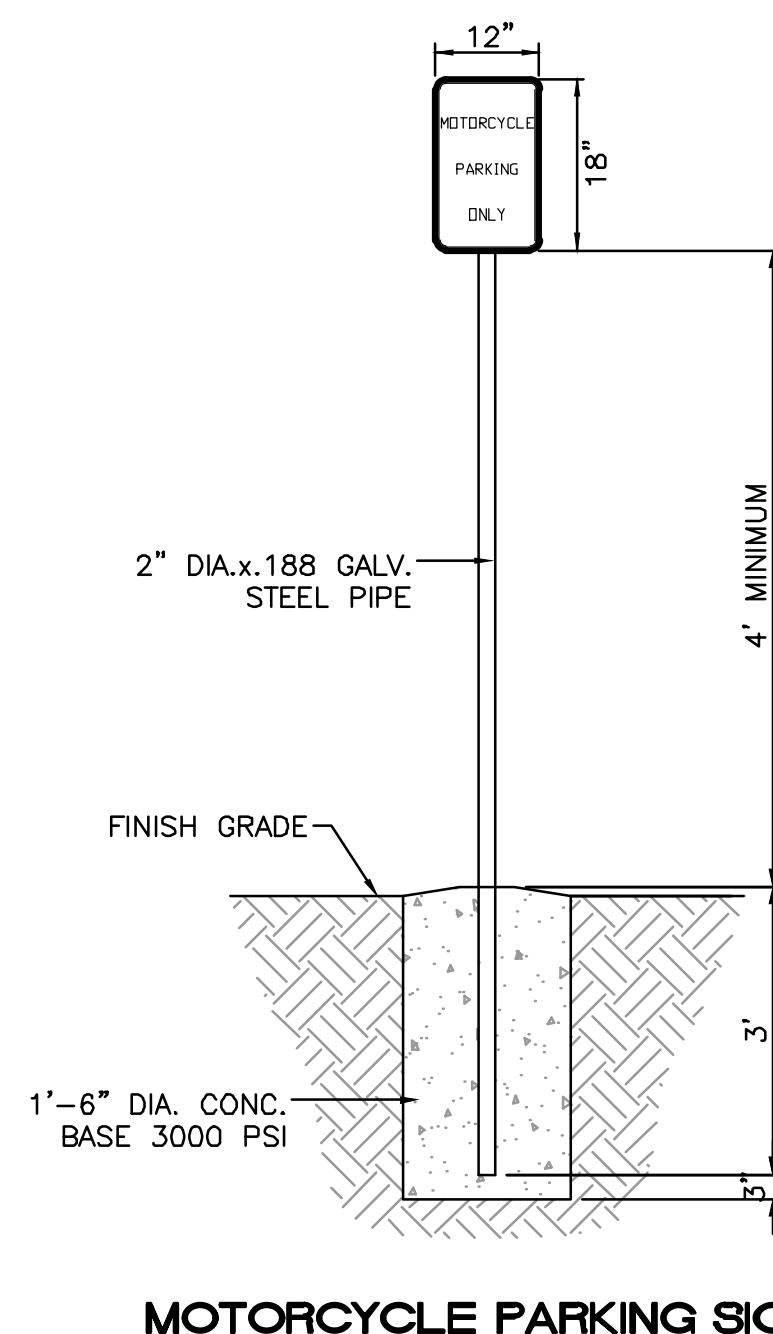

MOTORCYCLE PARKING SIGN
NTS

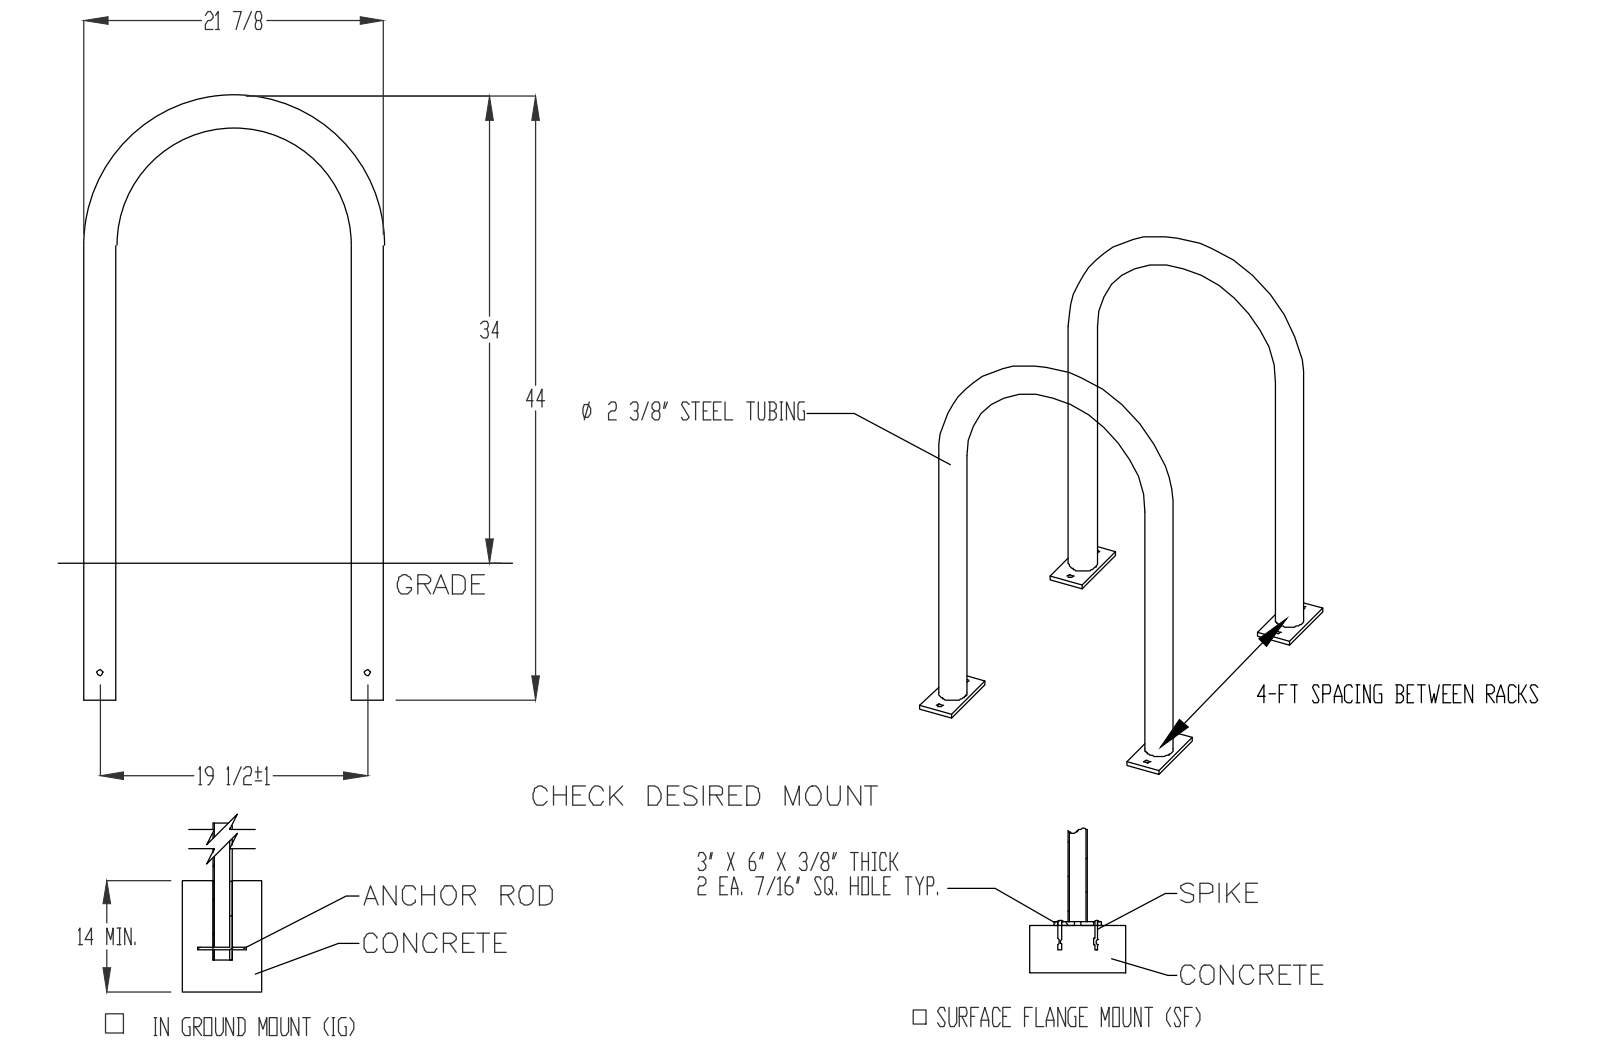

PRODUCT: 1238-1037

DESCRIPTION: 1) BIKE RACK
2) BIKE, SURFACE OR IN GROUND MOUNT
DATE: 10-4-18
ENG: SMC

CONFIDENTIAL DRAWING AND INFORMATION IS NOT TO BE COPIED OR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF GRABER MANUFACTURING, INC. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©2018 GRABER MANUFACTURING, INC. ALL PROPRIETARY RIGHTS RESERVED.


NOTES:

1. INSTALL BIKE RACKS ACCORDING TO MANUFACTURER'S SPECIFICATIONS.
2. CONSULTANT TO SELECT COLOR FINISH. SEE MANUFACTURER'S SPECIFICATIONS.
3. SEE SITE PLAN FOR LOCATION OR CONSULT OWNER.


BIKE RACK DETAIL
SCALE: NONE

GENERAL NOTES:


1. 1'-FT CLEAR ZONE AROUND BICYCLE RACK SHALL BE PROVIDED
2. SPACE RACKS 4'-FT APART
3. NUMBER OF RACKS LISTED ON PLAN
4. RACKS SHALL BE A MINIMUM OF 30 INCHES TALL AND 18 INCHES WIDE
5. BICYCLE RACKS SHALL BE ANCHORED TO THE CONCRETE PAD
6. BICYCLE PARKING SPACE SHALL BE AT LEAST 6 FEET LONG AND 2 FEET WIDE

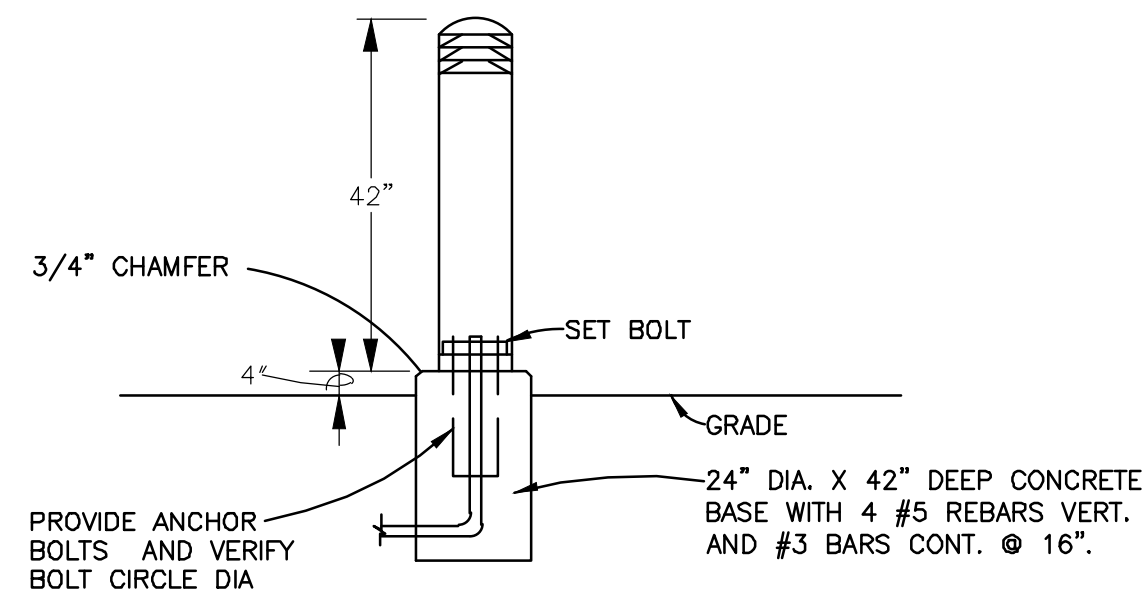


BOLLARD LIGHT FIXTURE DIAGRAM
NTS

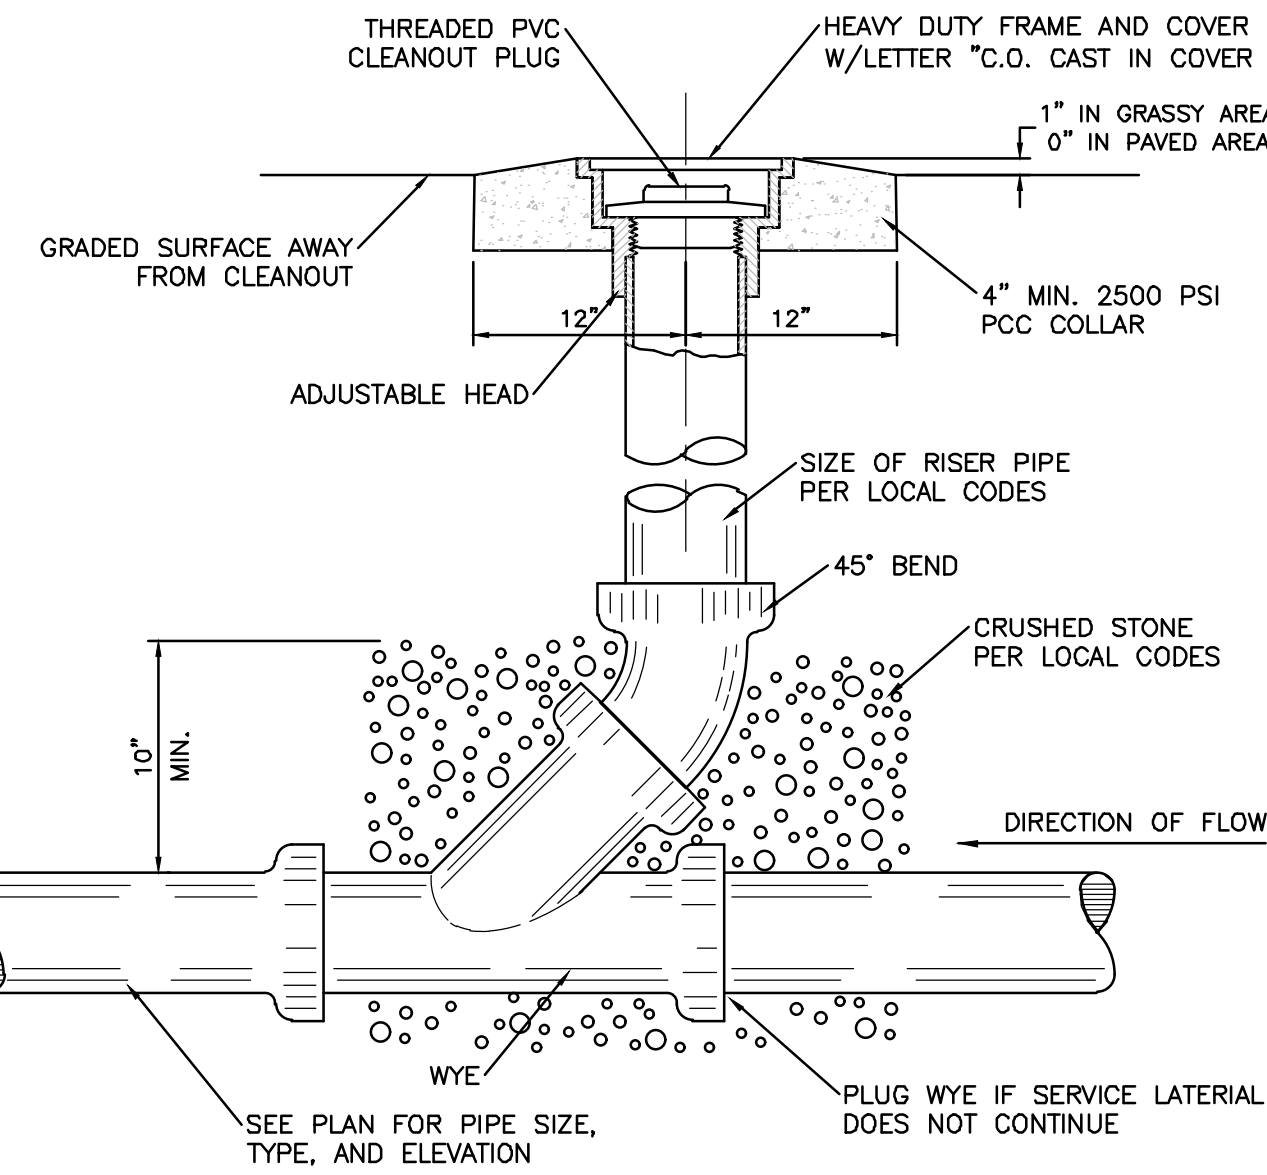

SANITARY SEWER CLEAN-OUT
NTS

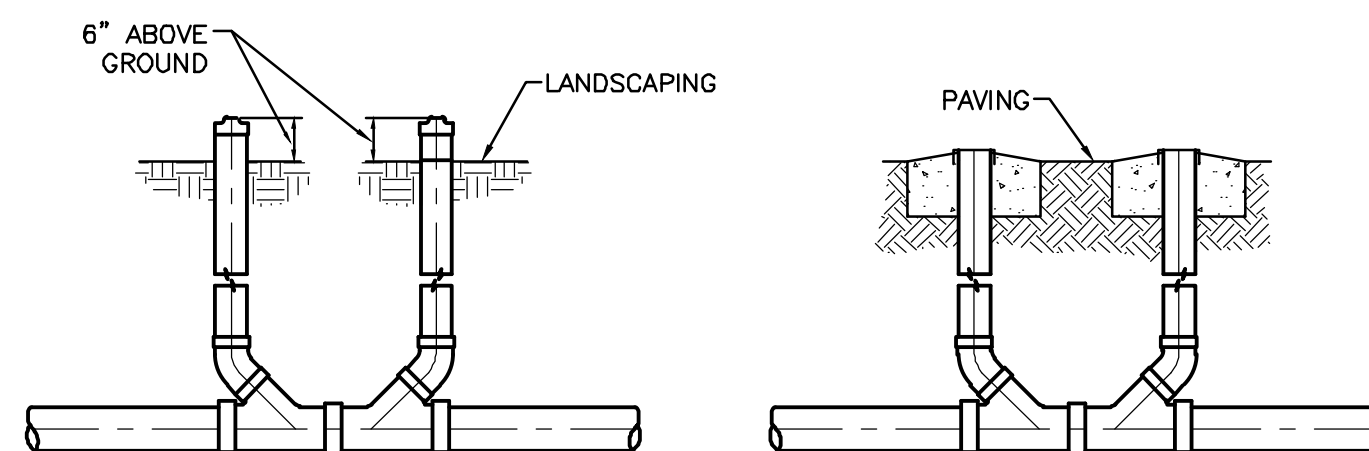

SANITARY SEWER DOUBLE CLEAN-OUTS
NTS

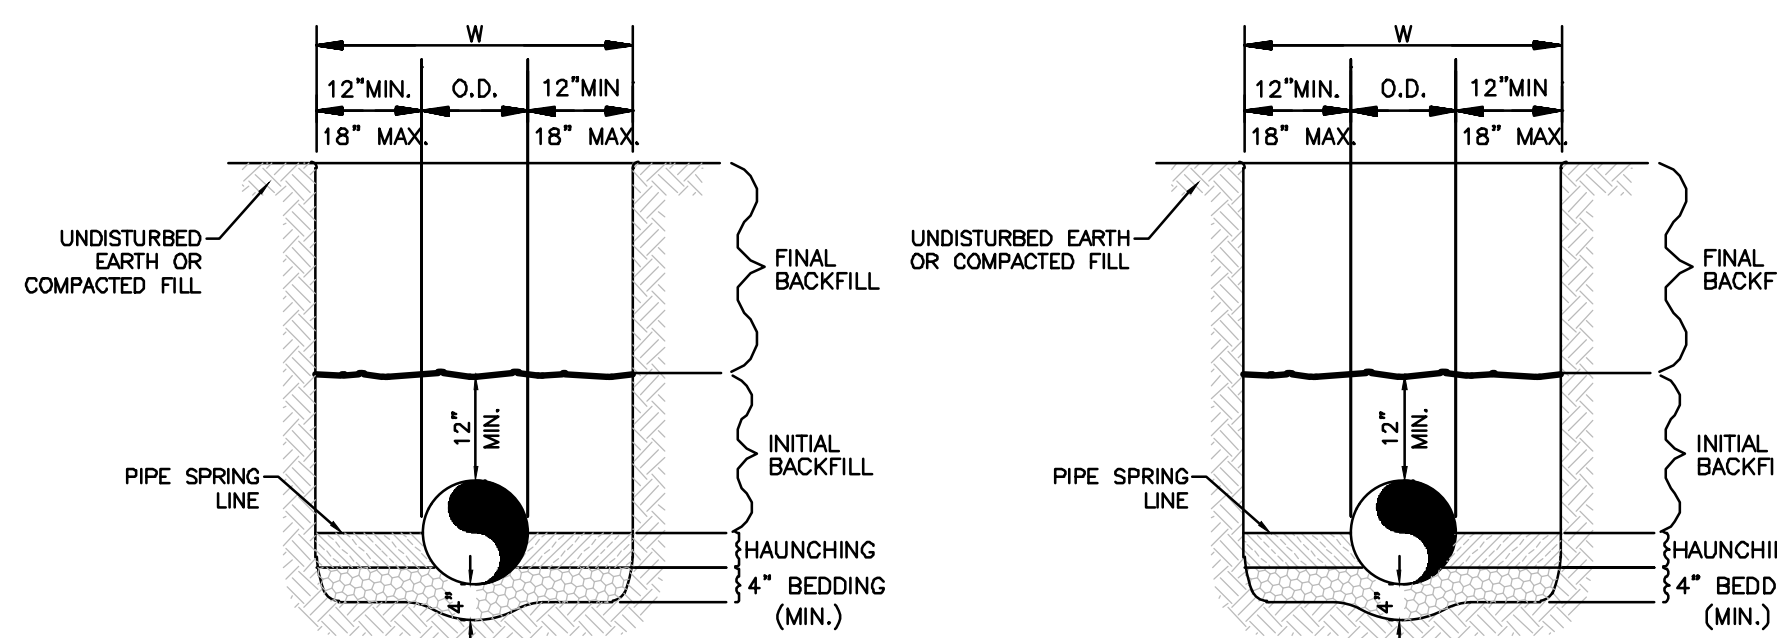


WATER LINE

SANITARY SEWER

GENERAL NOTES:

1. BEDDING SHALL BE CLASS I-A WORKED BY HAND. IF GROUNDWATER IS ANTICIPATED, THEN BEDDING SHALL BE CLASS I-B OR CLASS II COMPACTED TO 95% STANDARD PROCTOR. (SEE SPECIFICATIONS FOR GRADATION)
2. HAUNCHING SHALL BE WORKED AROUND THE PIPE BY HAND TO ELIMINATE VOIDS AND SHALL BE CLASS I-A OR CLASS I-B OR CLASS II COMPACTED TO 95% PROCTOR.
3. INITIAL BACKFILL SHALL BE CLASS I-A WORKED BY HAND, OR CLASS I-B OR CLASS II COMPACTED TO 95% STANDARD PROCTOR.
4. INITIAL BACKFILL NOT UNDER PAVED AREAS CAN BE COMPACTED TO 95% STANDARD PROCTOR.
5. FINAL BACKFILL SHALL BE CLASS I, OR II COMPACTED AS NOTED IN NOTES 3. AND 4.
6. FINAL BACKFILL NOT UNDER PAVED AREAS CAN BE TYPE II COMPACTED TO 95% STANDARD PROCTOR.
7. ALL MATERIALS ARE CLASSIFIED IN ACCORDANCE WITH ASTM D 2321-89.
8. ALL MATERIALS SHALL BE INSTALLED IN MAXIMUM 8" LOOSE LIFTS IN ACCORDANCE WITH ASTM D 698.
9. FILL SALVAGED FROM EXCAVATION SHALL BE FREE OF DEBRIS, ORGANICS AND ROCKS LARGER THAN 3".
10. ALL TRENCH EXCAVATIONS SHALL BE SLOPED, SHORED, SHEETED, BRACED, OR OTHERWISE SUPPORTED IN COMPLIANCE WITH OSHA REGULATIONS AND LOCAL ORDINANCES. (SEE SPECIFICATIONS)

UTILITY TRENCH AND BEDDING DETAIL
NTS

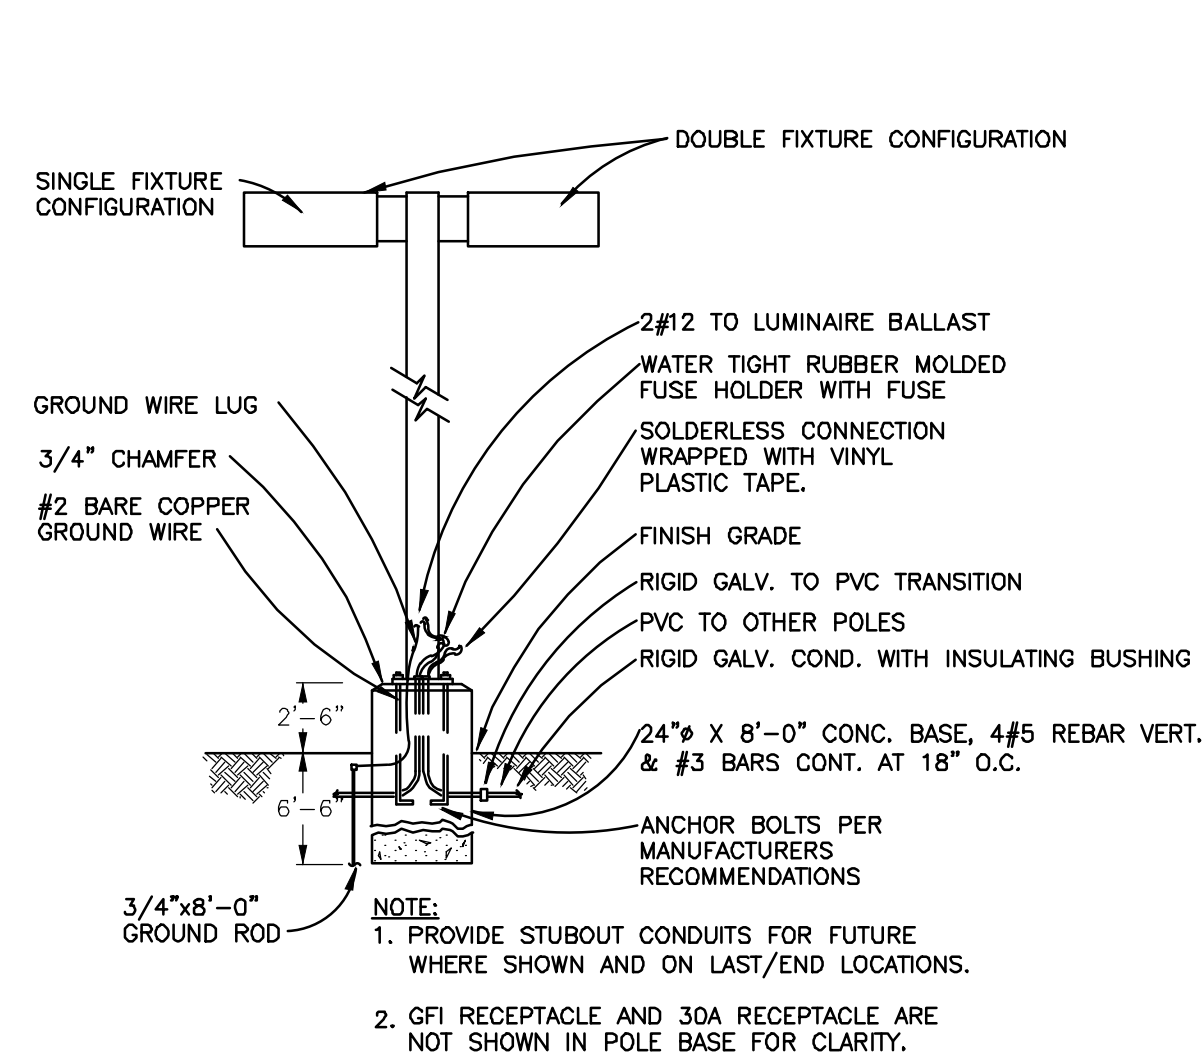

PARKING LOT LIGHTING FIXTURE
NO SCALE

LIGHT POLE DETAIL
NTS

- NOTE:
1. LIGHTING SHALL COMPLY WITH ZONING CODE §14-16-3-9.
 2. HEIGHT LIMITED TO 16'.

PRELIMINARY - NOT FOR CONSTRUCTION

	ENGINEER'S SEAL WINTERGREEN LUXURY APARTMENTS GOLF COURSE RD NE	DRAWN BY BF
	CONSTRUCTION DETAILS	DATE 7/31/2020
	5571 MIDWAY PARK PLACE NE ALBUQUERQUE, NM 87109 (505) 858-3100 www.tierrawestllc.com	SHEET # C5
RONALD R. BOHANNAN P.E. #7868	7/31/2020	JOB # 2020013

LANDSCAPE LEGEND

SYMB.	QTY	SIZE (INSTALL)	COMMON/BOTANICAL	SIZE (MATURE HxW)	WATER USE	COVER (EA)	TOTAL
Trees							
42	2" Trunk w/ 2" Combined Cal.	Desert Willow <i>Chilopsis linearis</i>	20' x 25'	L	625	26750	
20	2" Trunk w/ 2" Combined Cal.	New Mexico Olive <i>Forestiera neomexicana</i>	15' x 15'	M	225	4500	
	2" Cal.	Honey Locust <i>Gleditsia triacanthos inermis</i>	50' x 45'	M	2025	26325	
	6" Height	Austrian Pine <i>Pinus nigra</i>	35' x 25'	M	625	75000	
11	2" Cal.	Chinese Pistache <i>Pistacia chinensis</i>	40' x 30'	M	900	15300	
12	2" Cal.	Texas Red Oak <i>Quercus buckleyi</i>	40' x 40'	M	1600	19200	
9	2" Cal.	Autum Blaze Pear <i>Pyrus calleryana 'Autum Blaze'</i>	30' x 30'	M	900	8100	
16	2" Cal.	Aliso Elm <i>Ulmus parvifolia 'Eter II'</i>	40' x 40'	L	1600	25600	
20	2" Trunk w/ 2" Combined Cal.	Chaste Tree <i>Vitex agnus-castus</i>	20' x 20'	M	400	8000	
Total Tree Coverage:							15875
Shrubs & Groundcover							
26	9 Gal	Blue Mist Spirea <i>Caryopteris x clandonensis</i>	3' x 3'	L	9	234	
53	9 Gal	Curl-leaf Fountain Hydrangea <i>Hydrangea latifolia</i>	15' x 15'	L	225	18225	
12	9 Gal	Parley Colonnaster <i>Colonnaster palmaj (C. lacteus)</i>	8' x 10'	M	100	1200	
41	9 Gal	Solot <i>Dasyliroon wheeleri</i>	5' x 5'	RW	25	1125	
165	9 Gal	Turpentine Bush <i>Biscaria laetifolia</i>	3' x 3'	L	9	1485	
22	9 Gal	Manzanita Eucymus <i>Eucymus klatschovius</i>	6' x 6'	M	36	792	
99	9 Gal	Apache Pine <i>Pinus paradoxo</i>	6' x 7'	L	49	781	
39	9 Gal	Red Yucca <i>Hesperaloe parviflora</i>	3' x 3'	L	9	931	
12	9 Gal	Althea / Rose of Sharon <i>Hibiscus syriacus</i>	10' x 10'	M	100	1200	
70	9 Gal	Blue Holly <i>Ilex x neriifolia</i>	7' x 5'	M	25	715	
51	9 Gal	Spartan Juniper <i>Juniperus chinensis 'Spartan'</i>	15' x 6'	L	36	2052	
54	9 Gal	Buffalo Juniper <i>Juniperus sibirica 'Buffalo'</i>	7' x 8'	L	64	3456	
14	9 Gal	Morning Light Maidengrass <i>Panicum ananensis var.</i>	5' x 5'	M	25	1850	
81	9 Gal	Deer Grass <i>Panicum rigens</i>	4' x 4'	L	16	1296	
78	9 Gal	Bear Grass <i>Nolina macrocarpa</i>	5' x 6'	RW	36	2808	
75	9 Gal	Suitgrass <i>Panicum virgatum</i>	4' x 4'	M	16	1200	
80	9 Gal	Potentilla <i>Potentilla fruticosa (Dasyphora ?)</i>	3' x 3'	M	9	720	
39	9 Gal	Three-Leaf Sassafras <i>Rhus trilobata</i>	6' x 6'	L	36	1404	
41	9 Gal	Pink Double Knock Out Rose <i>Rosa 'Pink Double Knock Out'</i>	4' x 4'	M	16	656	
39	9 Gal	Autum Cherry Sage <i>Salvia greggii</i>	2' x 3'	L	9	351	
Total Shrub Coverage:							4101
Vines							
48	9 Gal	Hill's Honeyuckie <i>Lonicera japonica Hilliana</i>	2' x 12'	M	144	692	
22	9 Gal	Lady Banks Rose <i>Rosa banksiae</i>	2' x 12'	L	144	3168	
Total Vines Coverage:							3860

Other Materials

SYMB.	QTY	TYPE
112	EA	Boulders (2-3cft) To be placed at contractor's discretion
5650	SF	Cruker Fines Over Aggregate Basecourse
95260	SF	Landscape Gravel A with Filter Fabric 1/2" Brown Gravel
41325	SF	Landscape Gravel B with Filter Fabric 1" Amarillo Gravel
6460	SF	Oversize Landscape Gravel / No Filter Fabric 2-4" Blue Salt Fractured Cobble/RipRap
11260	SF	Parkland Sod Pop-Up Irrigation
24075	SF	Native Seed Area Wetland Mix with Rotor Irrigation
2160	SF	Dog Park Surfacing Synthetic Turf over Aggregate Base
Concrete See site plan		
Asphalt Parking Areas and Driveways See site plan		
Landscape Curb See site plan		
Stormwater Management Depression See site plan		
Site Furnishings Benches, Tables, Trash Receptacles		

TREE PLANTING KEYED NOTES

- TREE LOCATION, SPECIES, AND CONDITION AS PER PLAN.
- REMOVING EXISTING SOIL FROM NURSERY AS NEEDED TO EXPOSE ROOT FLARE. INSTALL WITH ROOT FLARE FLUSH WITH SUBGRADE (BOTTOM OF MULCH).
- INSTALL TREE PLUMB. REMOVE WIRE BASKET, WOOD BOX, PLASTIC TUNE, AND/OR ROPE PRIOR TO BACKFILL. REMOVE BURLAP EXCEPT FROM BOTTOM OF ROOT BALL.
- SCAFFRY AND LOOSEN EDGES OF PLANTING PIT.
- BACKFILL PER SPECIFICATIONS, LIGHTLY TAMP IN LIFTS AND WATER-IN TO ELIMINATE VOIDS AND AIR POCKETS.
- UNDISTURBED NATIVE SOIL UNDER ROOTBALL TO PREVENT SETTLING.
- INSTALL WOOD CHIP ORGANIC MULCH OVER ROOTBALL AND BELOW DRIP LINE. GENERALLY, MULCH SHOULD BE HELD 4" BACK FROM TREE TRUNK.
- 4" HIGH X 1/2" WIDE COBBLE BERRY AT DRIP LINE.
- MULCH - SEE PLANTING PLAN.

01 TREE PLANTING
NTS TREE PLANTING DETAIL

SHRUB PLANTING KEYED NOTES

- SHRUB LOCATION, SPECIES, AND CONDITION AS PER PLAN.
- INSTALL WITH TOP OF ROOT BALL FLUSH WITH SUBGRADE (BOTTOM OF MULCH).
- USE WOOD CHIP MULCH OVER ROOTBALL FEATHERED TO A 2" DEPTH AND HELD BACK 2" FROM TRUNK AND STEMS.
- 2" HIGH X 1/2" WIDE BERRY.
- BACKFILL PER SPECIFICATIONS, LIGHTLY TAMP IN LIFTS AND WATER-IN TO ELIMINATE VOIDS AND AIR POCKETS.
- UNDISTURBED NATIVE SOIL.
- SCAFFRY AND LOOSEN EDGES OF PLANTING PIT.
- MULCH - SEE PLANTING PLAN 3" DEPTH UNLESS OTHERWISE NOTED.

02 SHRUB PLANTING
NTS SHRUB PLANTING DETAIL

GOLF COURSE ROAD NW


STREET TREES
Linear Frontage: 600'
Trees Provided: 24

BLACK ARROYO CHANNEL

PARKING LOT LANDSCAPE SET BACK - 14-5-6 (C15.7g)
ALL LANDSCAPED AREAS SHALL BE PROTECTED FROM VEHICULAR ENCROACHMENT BY CURBS OR WHEEL STOPS LOCATED 2 FEET OUTSIDE THE LANDSCAPED AREA (TYP.)

ARROYO/PARKING LOT LANDSCAPE BUFFER - 14-5-6 (F)3
LANDSCAPING WITH EVERGREEN SHRUBS OR VINES TO FORM A SCREEN AT LEAST 75 PERCENT OPAQUE

8' x 100'
RESIDENTIAL LANDSCAPE BUFFER
(C15.3-C17.2)
1 TREE AND 3 SHRUBS PER SF OF LOT LINE
= 32 TREES AND 96 SHRUBS REQUIRED
40 TREES AND 176 SHRUBS PROVIDED

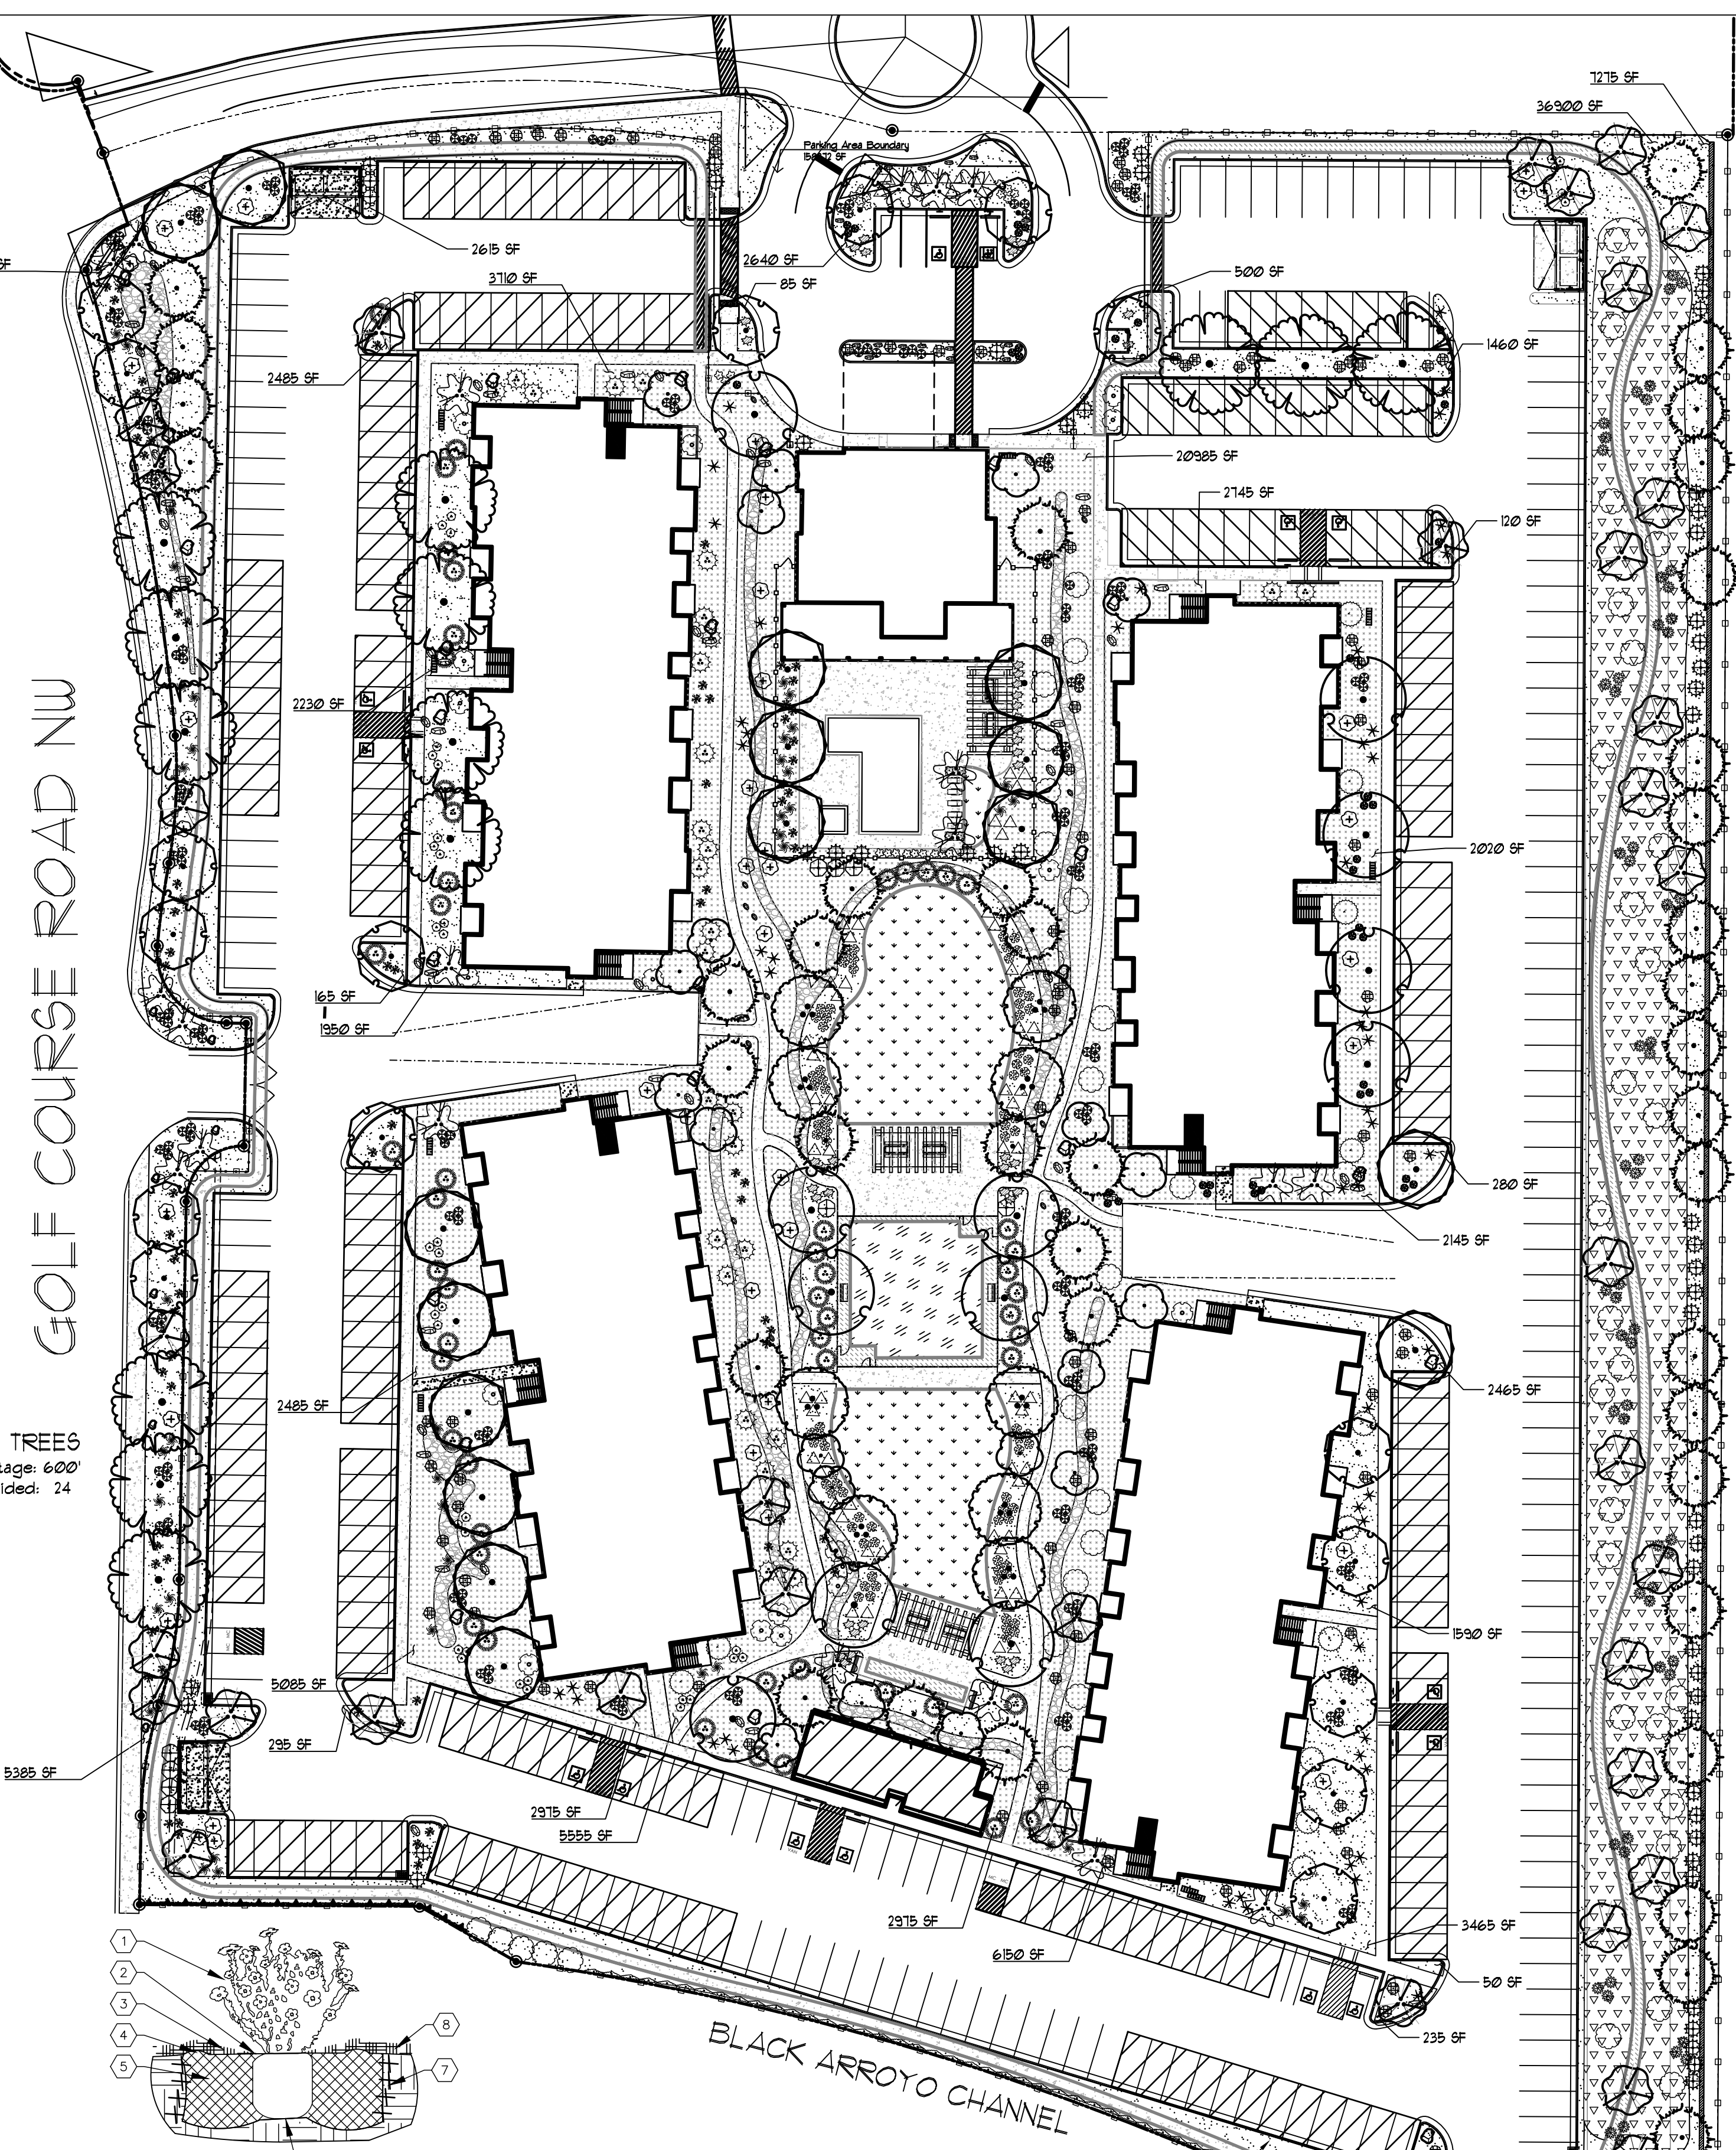

GENERAL NOTES
ALL LANDSCAPING WILL BE IN CONFORMANCE WITH THE CITY OF ALBUQUERQUE ZONING CODES, LAND-USE ORDINANCES, AND WATER CONSERVATION LANDSCAPING AND WATER WASTE ORDINANCE. IN GENERAL, WATER CONSERVATIVE, ENVIRONMENTALLY SOUND LANDSCAPE PRINCIPLES WILL BE FOLLOWED IN DESIGN AND INSTALLATION.

LANDSCAPE MAINTENANCE SHALL BE THE RESPONSIBILITY OF THE PROPERTY OWNER. THE PROPERTY OWNER SHALL MAINTAIN STREET TREES IN A LIVING, HEALTHY, AND ATTRACTIVE CONDITION.

WATER MANAGEMENT IS THE SOLE RESPONSIBILITY OF THE PROPERTY OWNER. IT IS THE INTENT OF THIS PLAN TO COMPLY WITH APPLICABLE CITY WATER CONSERVATION LANDSCAPING AND WATER WASTE ORDINANCE USING A PLANTING RESTRICTION APPROACH. APPROVAL OF THIS PLAN DOES NOT CONSTITUTE OR IMPLY EXEMPTION FROM WATER WASTE PROVISIONS OF THE WATER CONSERVATION LANDSCAPING AND WATER WASTE ORDINANCE.

GRAVEL OVER FILTER FABRIC TO A MINIMUM DEPTH OF 3" SHALL BE PLACED IN ALL LANDSCAPED AREAS WHICH ARE NOT DESIGNATED AS ANOTHER HATCHED GROUND COVER AREA SUCH AS THOSE INDICATED TO RECEIVE NATIVE SEED. ALL GRAVEL SHALL BE PLACED 5"-1" LOWER THAN ADJACENT HARD SURFACES.

PRIOR TO CONSTRUCTION, LANDSCAPE CONTRACTOR SHALL VERIFY LOCATION OF ALL UTILITY LINES. IN CASE OF A DISCREPANCY BETWEEN UTILITIES INDICATED ON PLAN AND ACTUAL FIELD VERIFICATION, CONTRACTOR SHALL CEASE WORK AND NOTIFY LANDSCAPE ARCHITECT IMMEDIATELY FOR DIRECTIONS ON HOW TO PROCEED.

POSITIVE DRAINAGE AWAY FROM ALL STRUCTURES IS TO REMAIN AFTER ALL LANDSCAPE WORK IS COMPLETED.

IRRIGATION NOTES:
IRRIGATION SYSTEM MAINTENANCE AND OPERATION SHALL BE THE SOLE RESPONSIBILITY OF THE OWNER. IT SHALL BE THE OWNER'S RESPONSIBILITY TO ENSURE THAT FUGITIVE WATER DOES NOT LEAVE THE SITE DUE TO OVERWATERING OR MALFUNCTIONING EQUIPMENT.

ALL ON-SITE PLANT MATERIAL, NEW AND EXISTING, SHALL BE IRRIGATED BY COMPLETE, AUTOMATIC DRIP IRRIGATION WITH SUBTERRANEAN LATERALS, INSTALLED IN A SINGLE PHASE. THE IRRIGATION SYSTEM SHALL PROTECT POTABLE WATER SYSTEMS THROUGH THE USE OF AN APPROVED PRESSURE VACUUM BREAKER (PVB) BACKFLOW PREVENTION DEVICE. TREES SHALL RECEIVE ONE (1) NETAFIM SPIRAL (50' LENGTH) WITH 3 LOOPS AT A FINAL RADIUS OF 4.5' FROM TREE TRUNK, FINNED IN PLACE. NETAFIM SHALL HAVE EMITTERS 12" O.C. WITH A FLOW OF 6 GPH. SHRUBS TO RECEIVE (2) 1/2" DRIP EMITTERS. DRIP AND BUBBLER SYSTEMS TO BE TIED TO 1/2" POLYPIPE WITH FLUSH CAPS AT EACH END.

RUN TIME PER EACH SHRUB DRIP VALVE WILL BE APPROXIMATELY 15 MINUTES PER DAY. TREE DRIP VALVE SHALL RUN 15 HOURS, 3 TIMES PER WEEK. RUN TIME WILL BE ADJUSTED ACCORDING TO THE SEASON.

POINT OF CONNECTION FOR IRRIGATION SYSTEM IS UNKNOWN AT CURRENT TIME AND WILL BE COORDINATED IN THE FIELD. IRRIGATION WILL BE OPERATED BY AUTOMATIC CONTROLLER.

LOCATION OF CONTROLLER TO BE FIELD DETERMINED AND POWER SOURCE FOR CONTROLLER TO BE PROVIDED BY OTHERS.

WATER AND POWER SOURCE SHALL BE THE RESPONSIBILITY OF THE DEVELOPER/BUILDER.

ZONING	MX-M: MIXED-USE WITH MODERATE INTENSITY
APPLICABLE REGULATION(S)	IDO 14-16-5-6 AND PART 6-6-2 OF ROA 1994

LANDSCAPE CALCULATIONS	
TOTAL LOT AREA (ACRES)	8.79
TOTAL LOT AREA (SF)	382892
BUILDING AREA (SF)	61950
NET LOT AREA (SF)	320942

REQUIRED LANDSCAPE (%)	15
REQUIRED LANDSCAPE (SF)	48141
LANDSCAPE PROVIDED (SF)	144030

VEGETATIVE COVER (% - REQ)	15.0
VEGETATIVE COVER (SF - REQ)	102023
VEGETATIVE COVER (SF - PROV.)	240661


GROUND COVER (% - REQ)	18.75
GROUND COVER (SF - REQ)	60711
GROUND COVER (SF - PROV.)	82386

IRRIGATED TURF (SF)	11260
IRRIGATED TURF (% OF LANDSCAPE)	7.8%


REQ. TREES - 1ST AND 2ND STORY UNITS	104
PROVIDED UNIT TREES	118

PARKING LOT INTERIOR LANDSCAPE CALCULATIONS - 14-5-6 (F)2

PARKING LOT AREA (SF)	138572
REQ. PARKING LANDSCAPE 10% (SF)	13857
PROV. PARKING LANDSCAPE (SF)	35644
REQ. PARKING TREES (1/10 SPOTS)	36
PROV. PARKING TREES	113

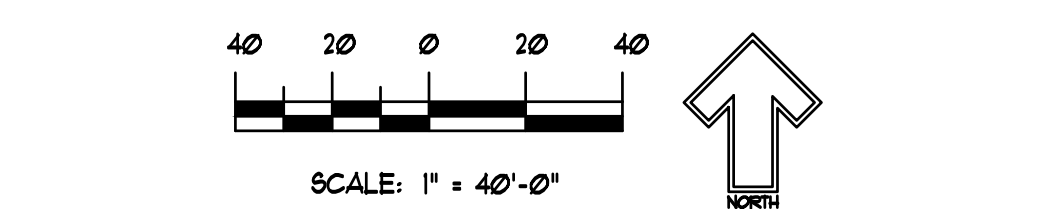


THE HILLTOP
1909 EARTH NE
ALBUQUERQUE, NM 87113
CON. LIC. #16468
PH. (505) 899-3600
FAX (505) 899-1131
tes@hilltoplandscape.com

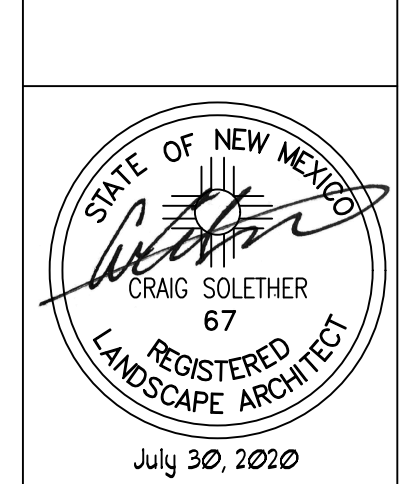

July 30, 2020

Wintergreen Luxury Apartments
Golf Course Road
Albuquerque, NM
Conceptual Landscape Plan


The design contained herein remains the property of The Hilltop Landscape Architects and Contractors and are protected by copyright. This is an original design and must not be reproduced or used for any other project without the written consent of The Hilltop Landscape Architects and Contractors. All fees have been paid for a job order placed.

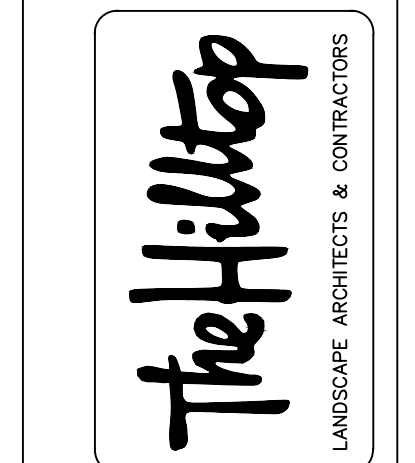

DRAWN BY: [Signature]
REVISION: A - Civil Layout
DATE: 07/30/2020




4 TYPICAL FRONT ELEVATION
1/8" = 1'-0"



WHITE STUCCO AND ELEVATOR SHAFT WALLS
PAREX USA SNOW BALL 10499L (75)
PAREX USA LARIAT 821L (57)
PAREX USA CLAY 1571L (24)
WHITE VINYL CLAD WINDOW AND DOORS

PAREX USA SNOW BALL 10499L (75)
WHITE VINYL CLAD WINDOW AND DOORS
BRONZE COLOR STEEL WROUGHT IRON GUARDRAILS

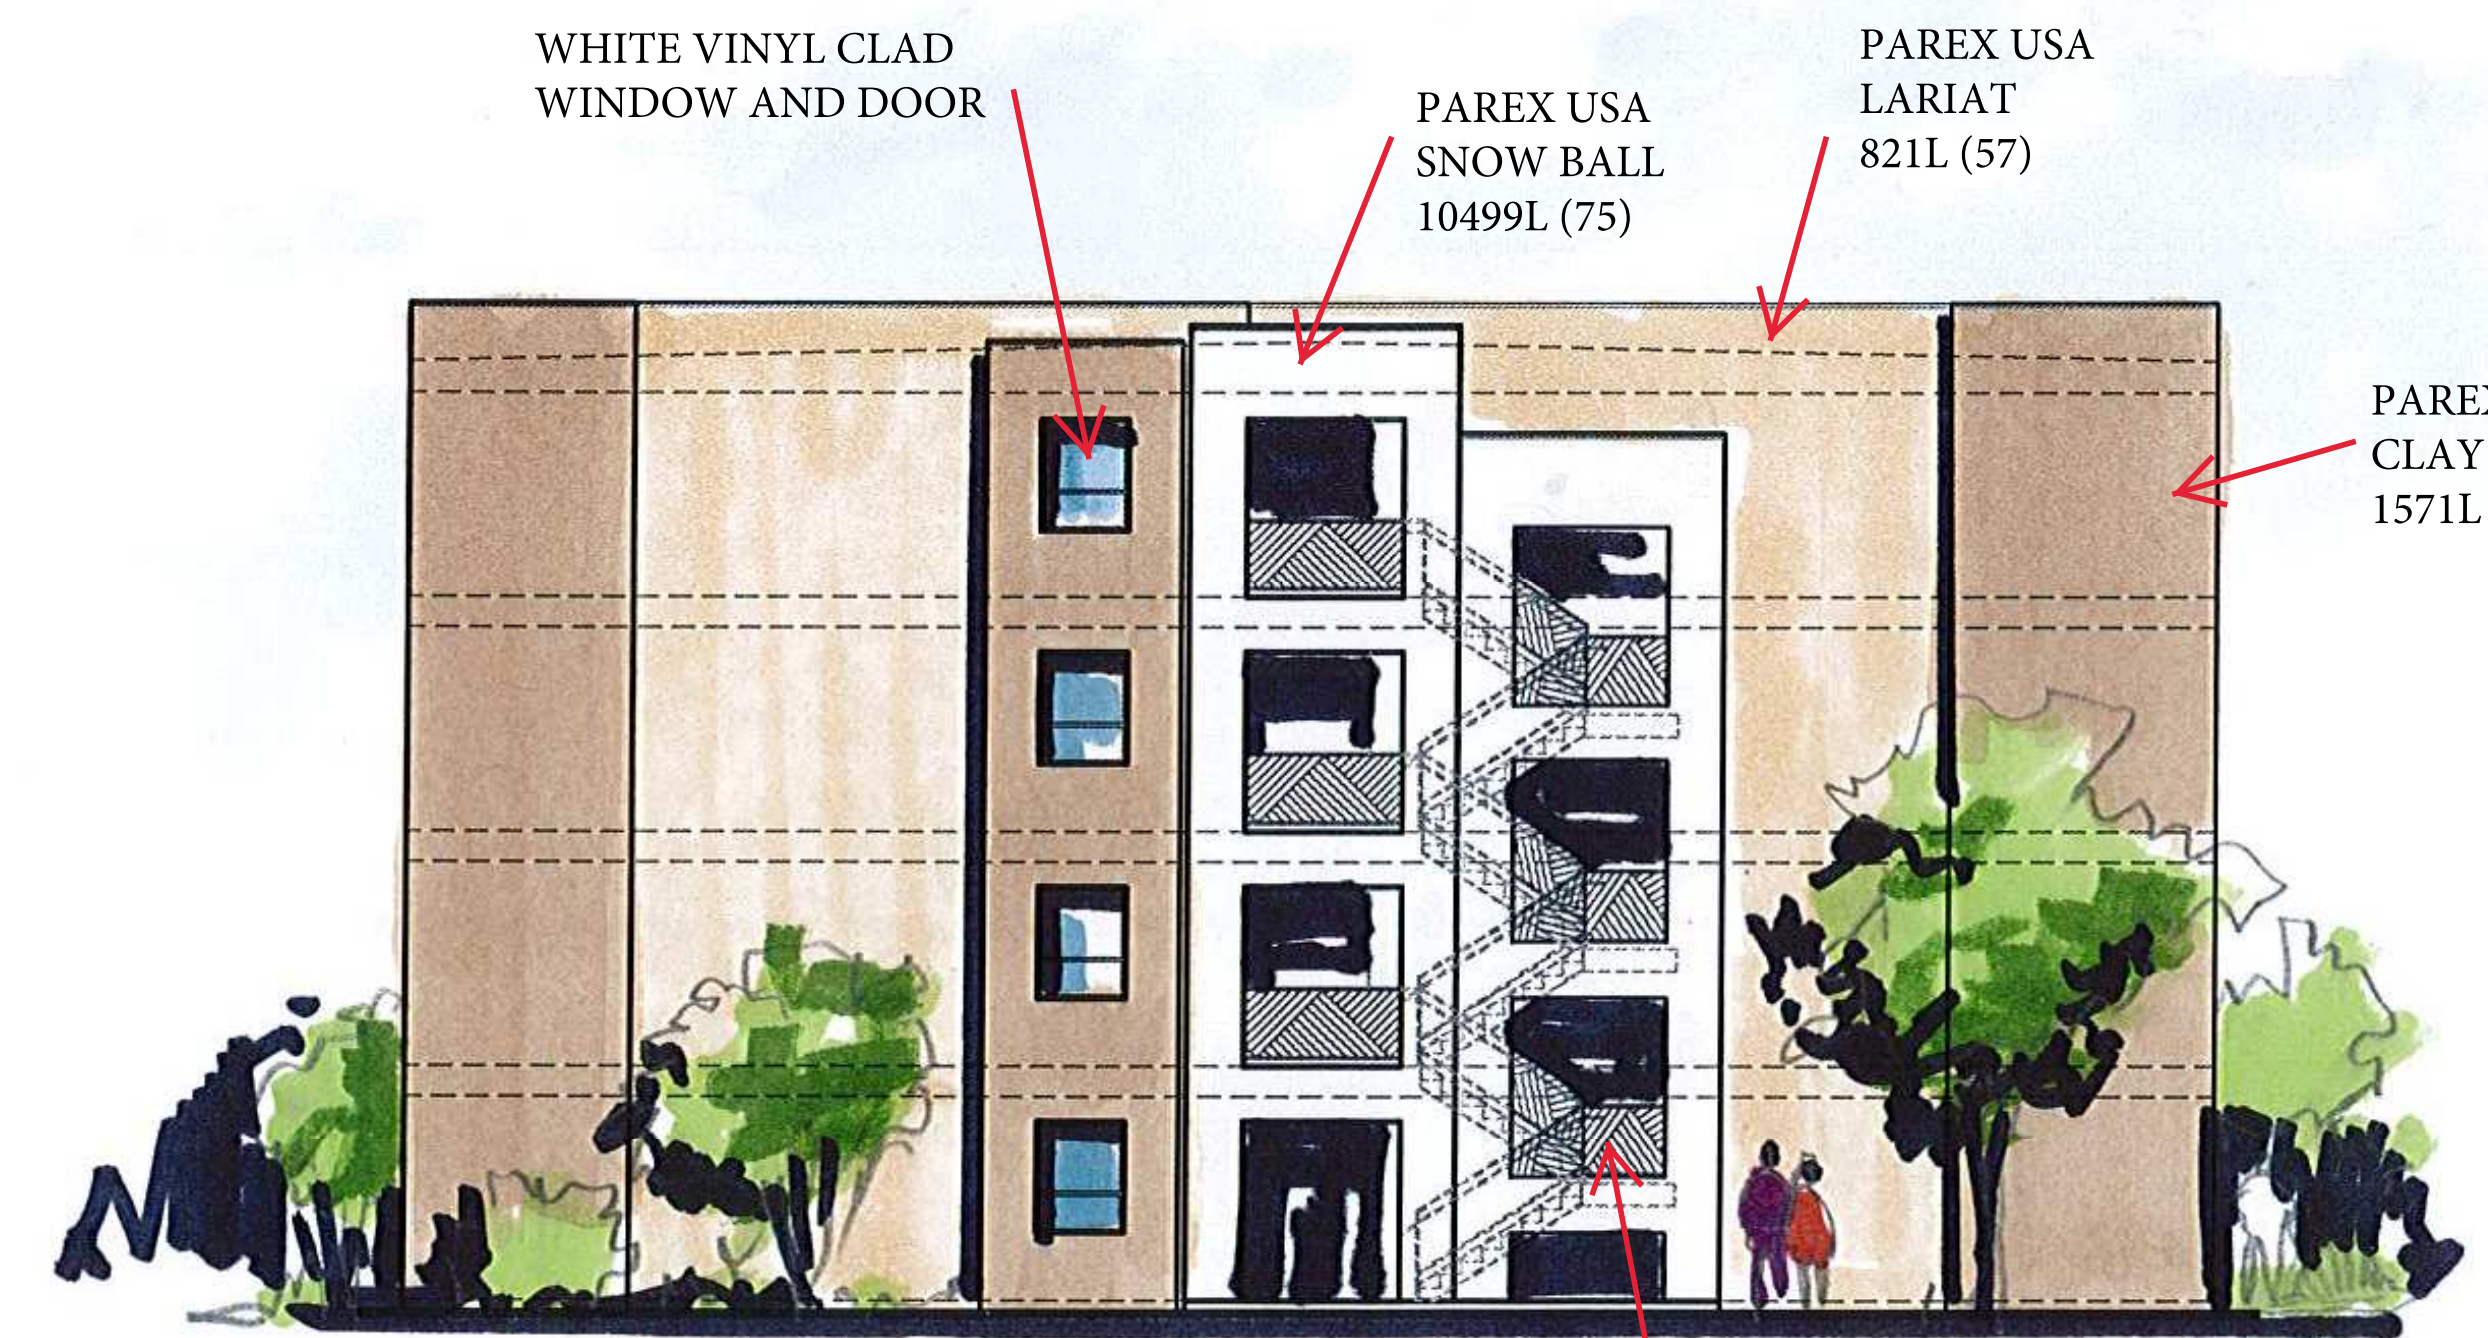

3 TYPICAL RIGHT ELEVATION
1/8" = 1'-0"



WHITE VINYL CLAD WINDOW AND DOOR
PAREX USA SNOW BALL 10499L (75)
PAREX USA LARIAT 821L (57)
PAREX USA CLAY 1571L (24)


BRONZE COLOR STEEL WROUGHT IRON GUARDRAILS

WINTERGREEN LUXURY APARTMENTS
BUILDING ELEVATIONS
ALBUQUERQUE, NM
PROJECT #2020-05

REVISION DATE
DATE 05-19-2020
SHEET NUMBER A-5.0



4 TYPICAL REAR ELEVATION
 1/8" = 1'-0"
 5' 0 10' 20'
 BAR SCALE (IN FEET)

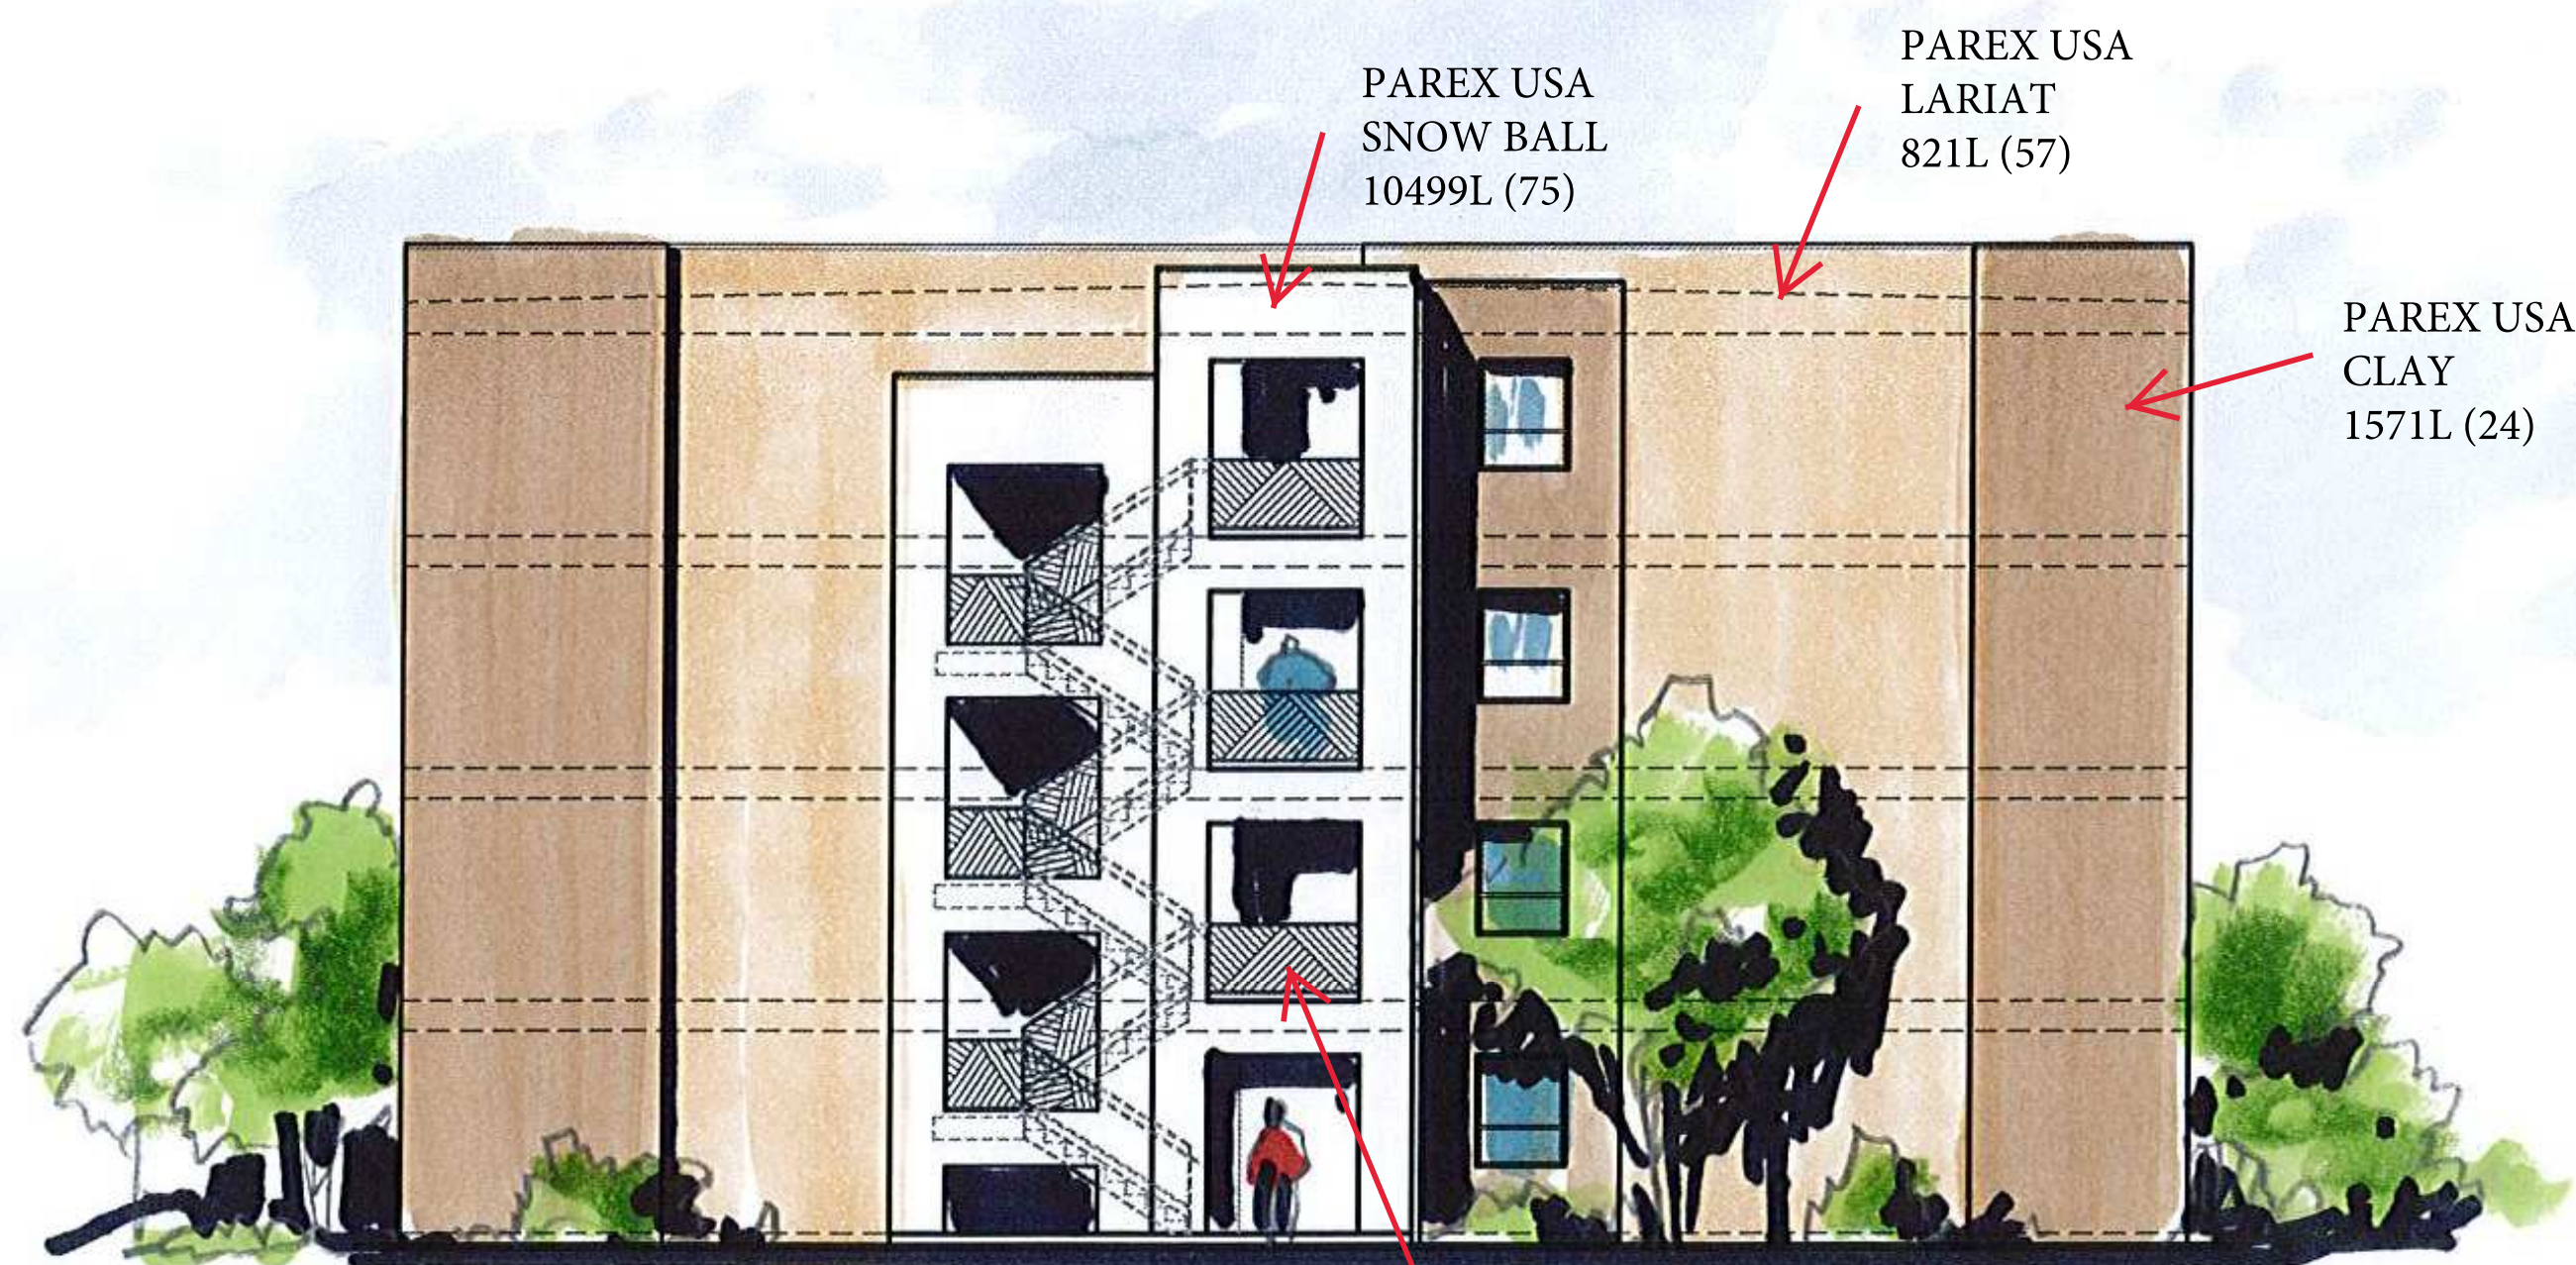

3 TYPICAL LEFT ELEVATION
 1/8" = 1'-0"
 5' 0 10' 20'
 BAR SCALE (IN FEET)

WINTERGREEN LUXURY APARTMENTS
 BUILDING ELEVATIONS
 ALBUQUERQUE, NM
 PROJECT #2020-05

REVISION DATE

DATE 05-19-2020
SHEET NUMBER A-5.1



PAREX USA
LARIAT
821L (57)

BRONZE COLOR
STEEL WROUGHT
IRON GUARDRAILS

PAREX USA
CLAY
1571L (24)

PAREX USA
LARIAT
821L (57)

WHITE VINYL CLAD
WINDOW AND DOORS


PAREX USA
SNOW BALL
10499L (75)





PAREX USA
SNOW BALL
10499L (75)

PAREX USA
LARIAT
821L (57)


PAREX USA
CLAY
1571L (24)

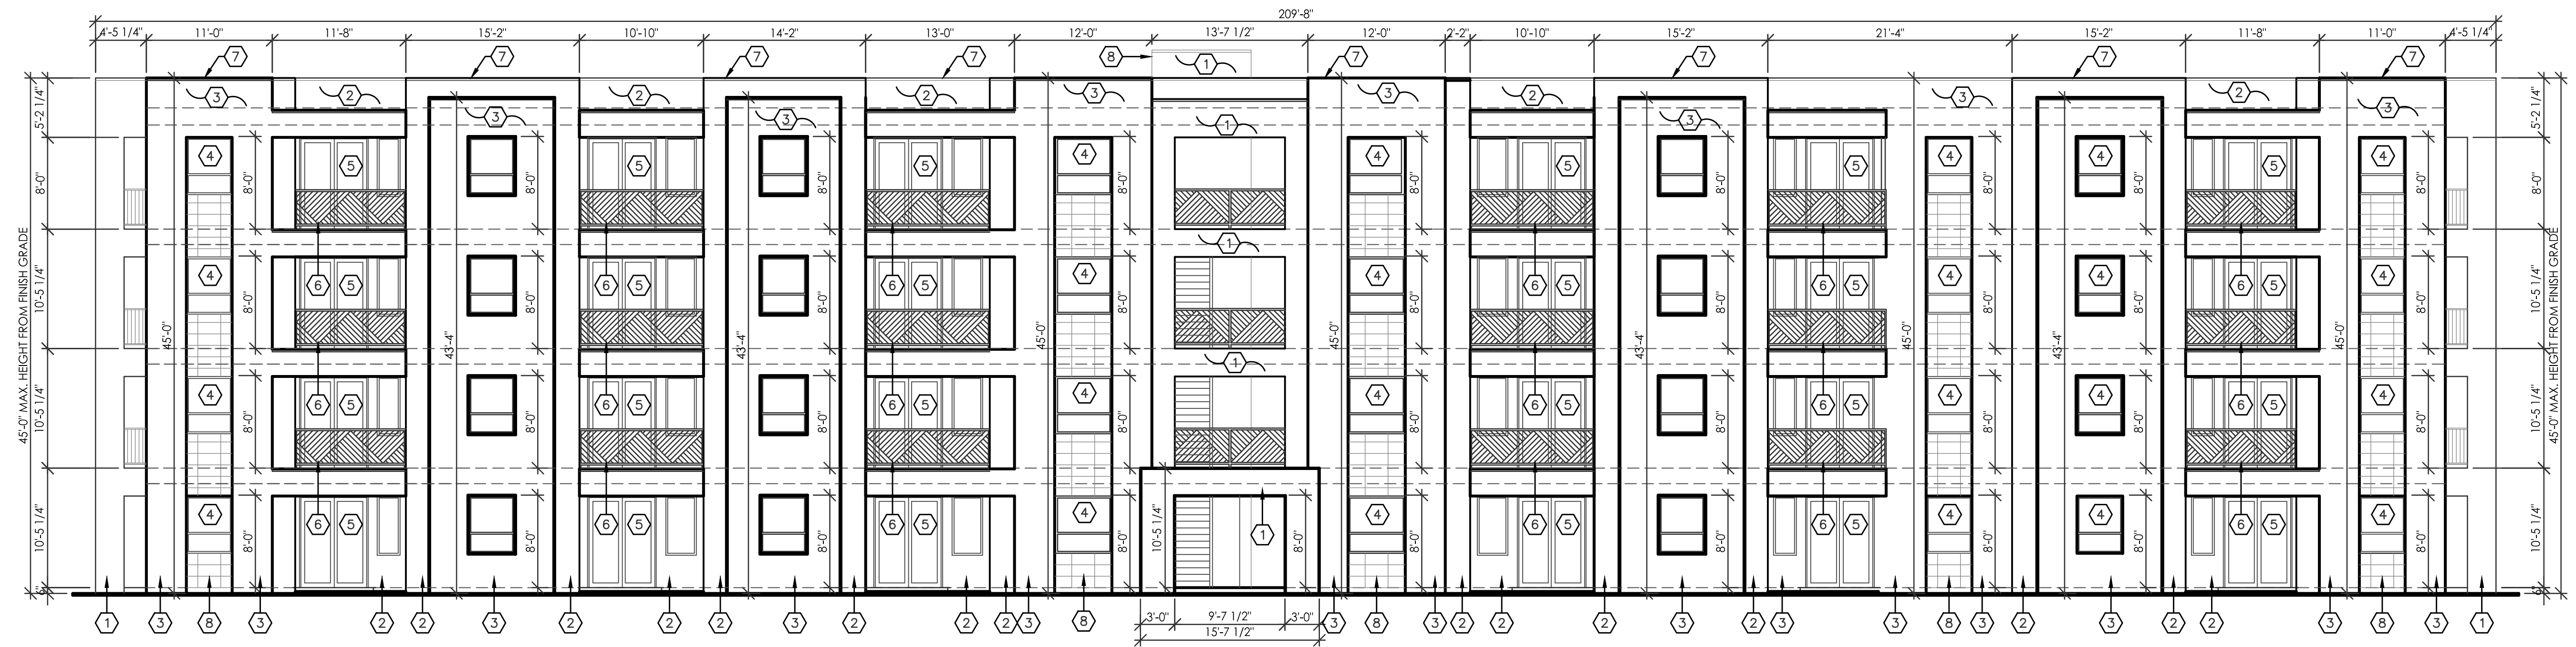


4 TYPICAL FRONT ELEVATION
1/8" = 1'-0"

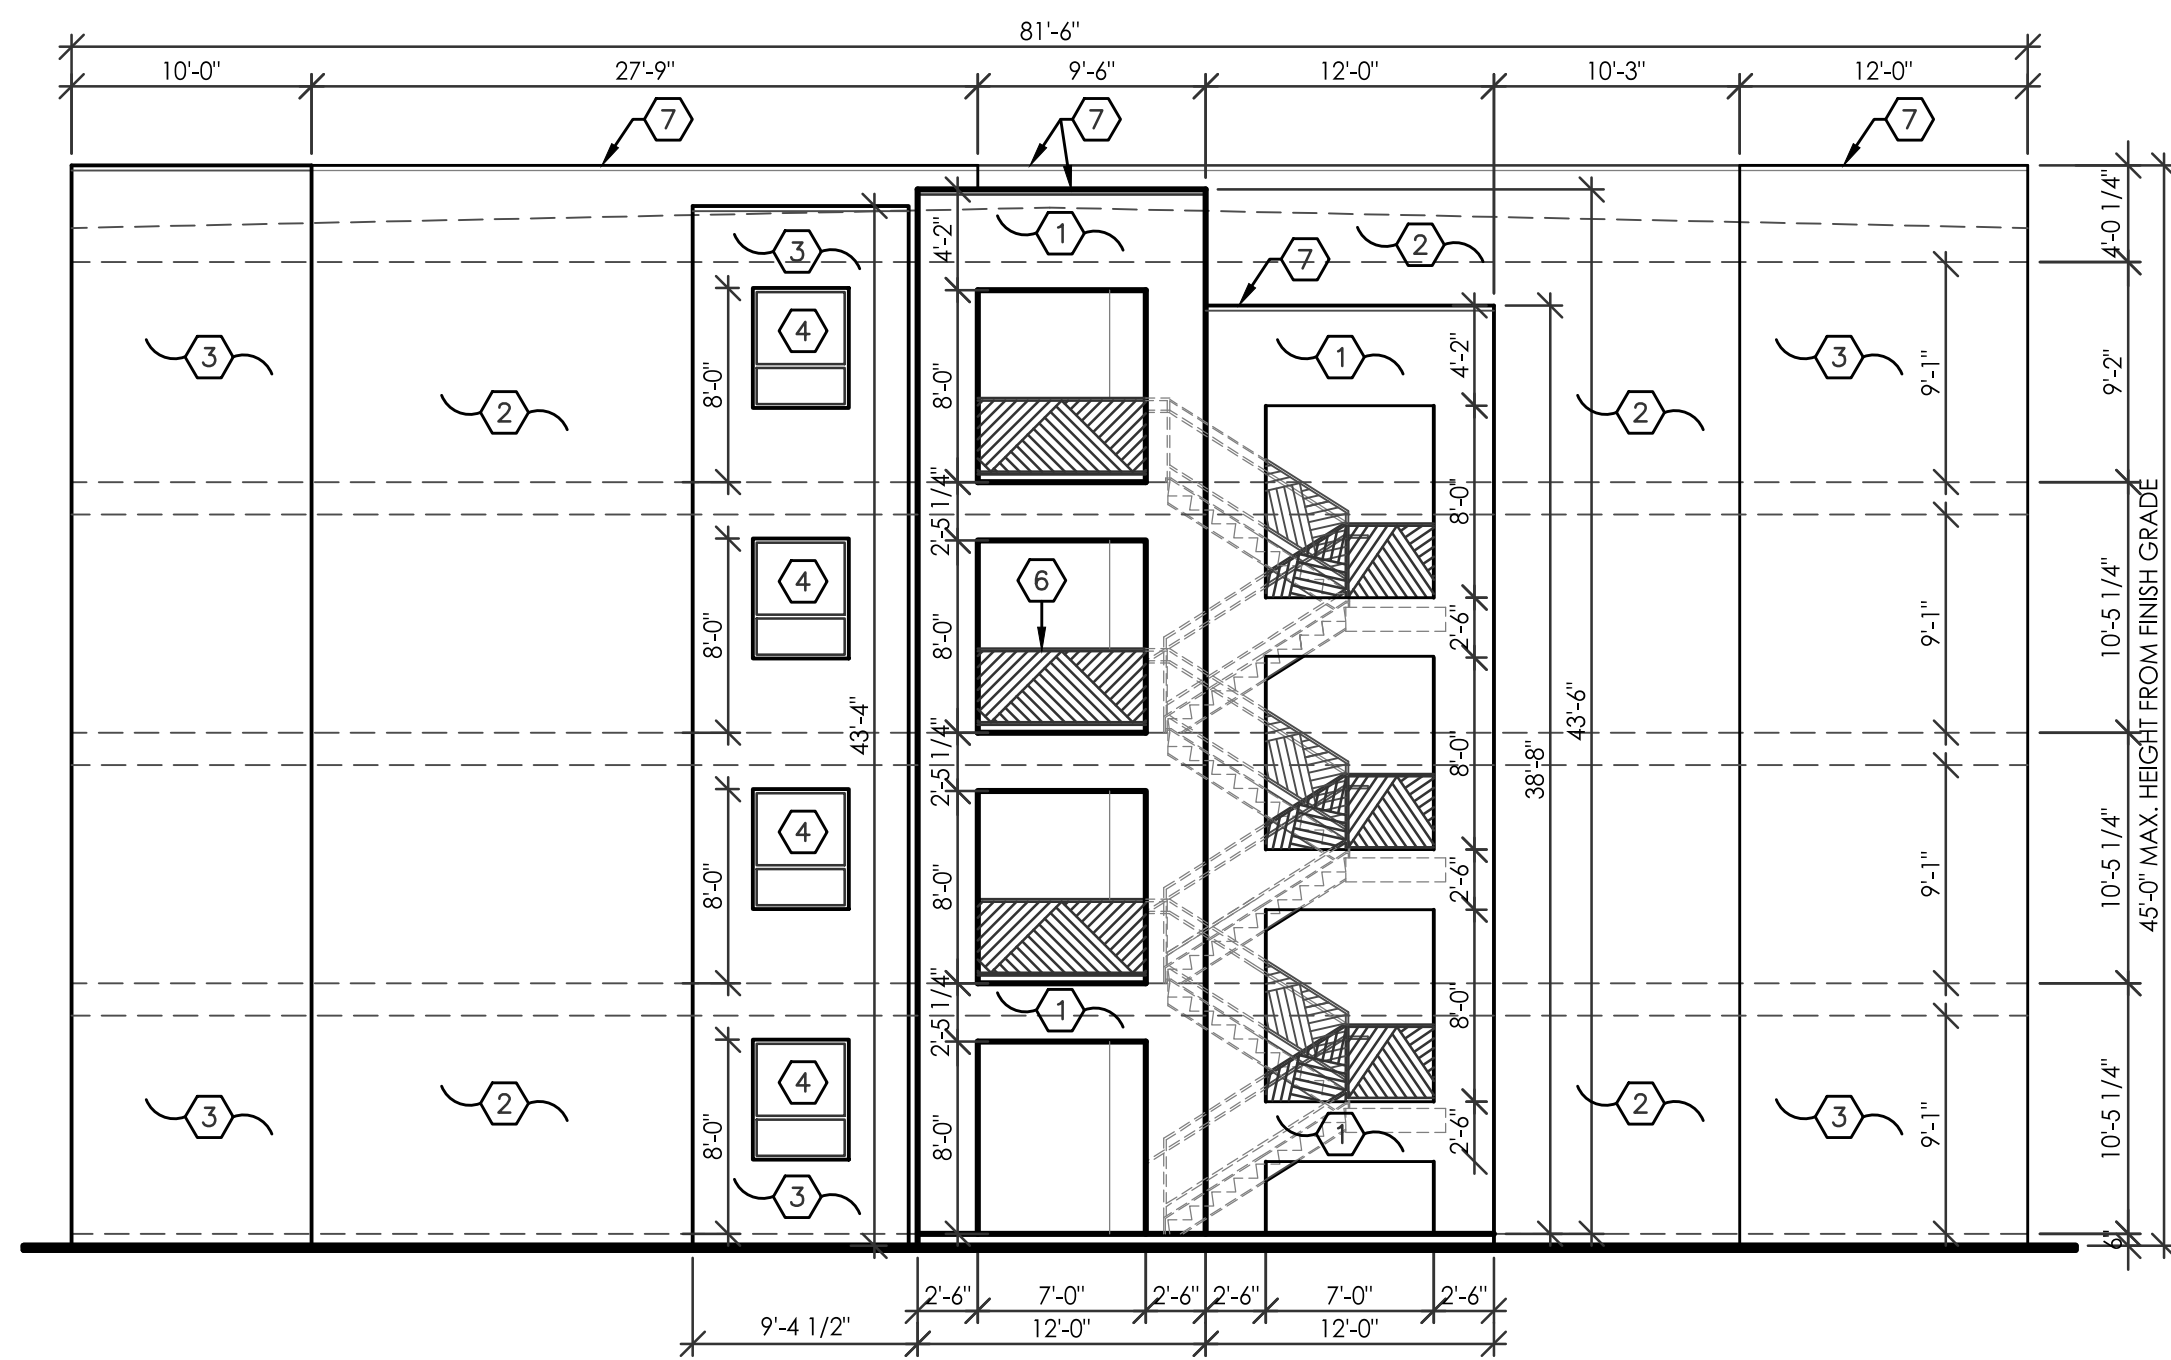

3 TYPICAL RIGHT ELEVATION
1/8" = 1'-0"



- KEYED NOTES**
1. STUCCO COLOR: PAREX USA SNOW BALL, 199499L (75)
 2. STUCCO COLOR: PAREX USA LARIAT, 821L (57)
 3. STUCCO COLOR: PAREX USA CLAY, 131L (24)
 4. WINDOW TYPE: DOUBLE INSULATED GLAZING WITH LOW E IN WHITE VINYL CLAD FRAME, TYP.
 5. PATIO SLIDING DOOR TYPE: DOUBLE INSULATED GLAZING WITH LOW E IN WHITE VINYL CLAD FRAME, TYP.
 6. GUARDRAILS: BRONZE WROUGHT IRON, TYP.
 7. METAL COPING CAP, PAINT TO MATCH STUCCO COLOR, TYP.
 8. 12" x 24" TAN COLOR CERAMIC TILE, TYP.
 9. ELEVATOR SHAFT WALL BEYOND, REF: ARCH FLOOR PLANS.

REVISION DATE

DATE 06-26-2020
SHEET NUMBER A-5.0