


City of Albuquerque

Public Works Department

Transportation Division

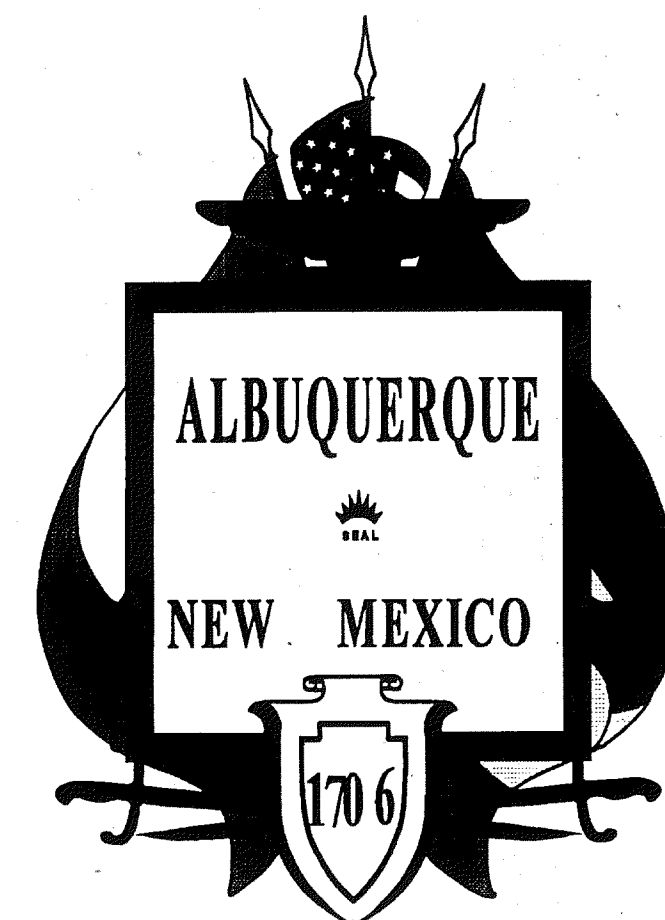



MOUNTAIN RD. & 18TH STREET

STORM DRAINAGE IMPROVEMENTS

AND ACCESS RAMPS SOUTH SIDE OF MOUNTAIN RD

INDEX

SHEET No.			DESCRIPTION
1	of	4	Title Sheet
2	of	4	Plan & Profile/Details
3	of	4	Signing & Const. Traffic Stds.
4	of	4	Typ. Traffic Control & Signing

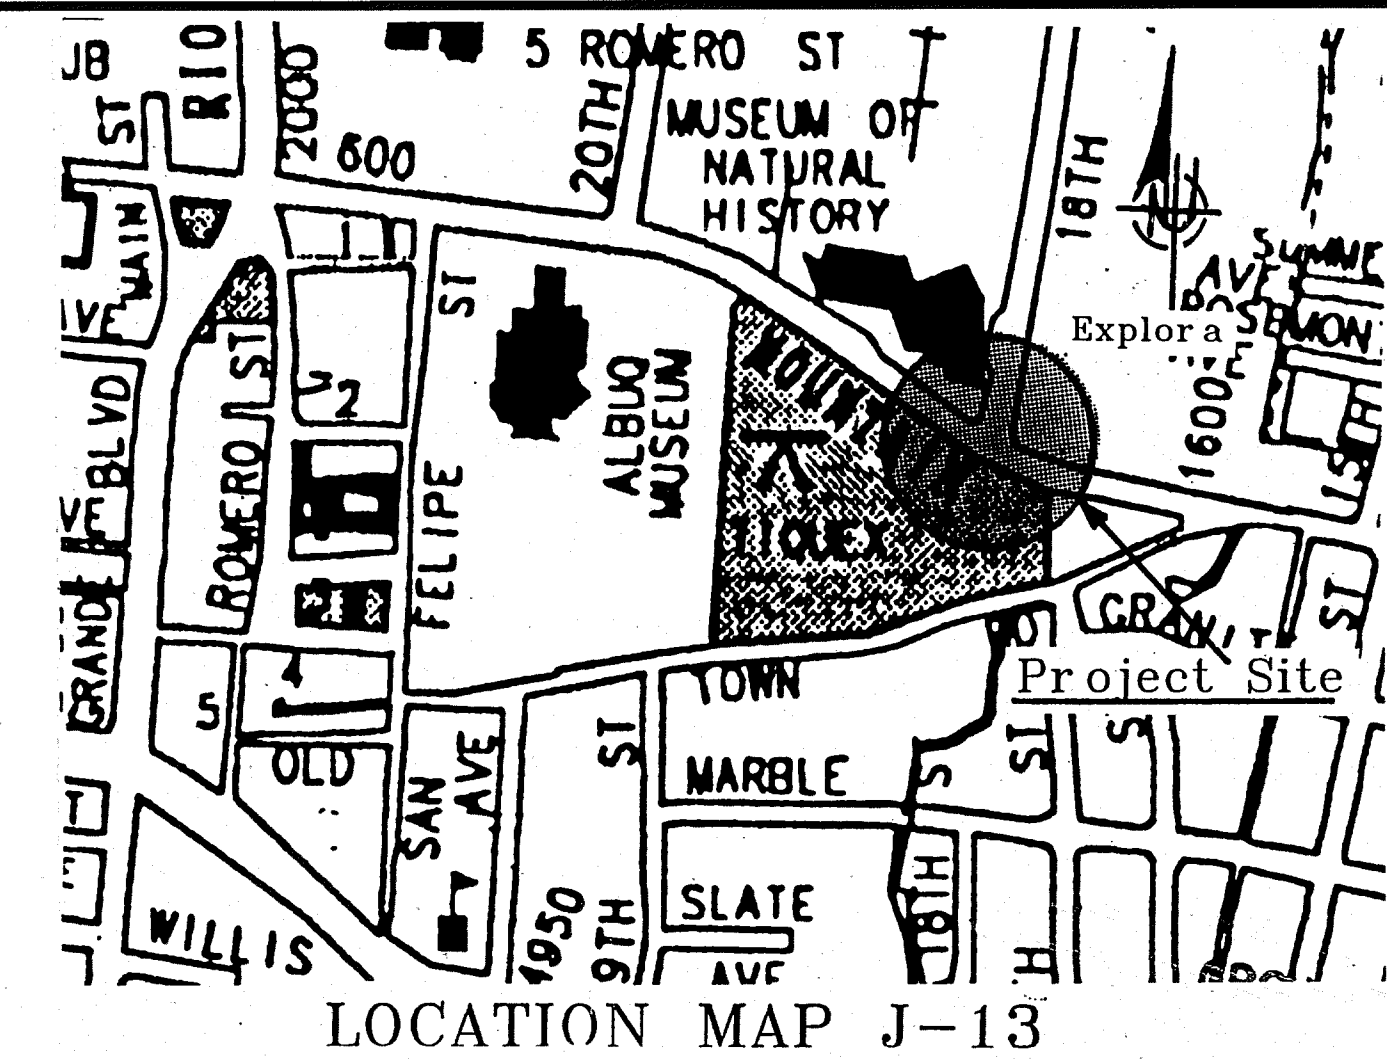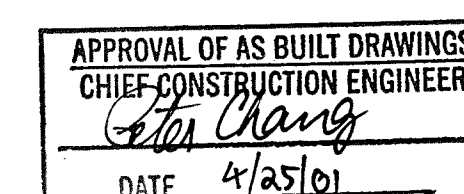


LOCATION MAP J-13

GENERAL NOTES

NOTICE TO CONTRACTORS



- CITY OF ALBUQUERQUE SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 1986 EDITION AS AMENDED THROUGH UPDATE 6, WILL BE REFERRED TO HEREIN AS THE "STANDARD SPECIFICATION".
- TWO WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT NEW MEXICO ONE CALL SYSTEM (260-1990) AND DETERMINE LOCATION OF EXISTING UTILITIES.
- PRIOR TO ANY CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATIONS OF ALL OBSTRUCTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER OR THE SURVEYOR SO THAT THE CONFLICT CAN BE RESOLVED WITHOUT DELAY.
- ALL EXISTING SIGNS, MARKERS, DELINEATORS, ETC., WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED, STORED AND RE-SET BY THE CONTRACTOR.
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER NOT LESS THAN SEVEN (7) DAYS PRIOR TO STARTING WORK IN ORDER THAT THE ENGINEER MAY TAKE NECESSARY MEASURES TO INSURE THE PRESERVATION OF SURVEY MONUMENTS. CONTRACTOR SHALL NOT DISTURB PERMANENT SURVEY MONUMENTS WITHOUT THE CONSENT OF THE ENGINEER AND SHALL NOTIFY THE ENGINEER AND BEAR THE EXPENSE OF REPLACING ANY THAT MAY BE DISTURBED WITHOUT PERMISSION. REPLACEMENT MADE IN THE FINISHED ELEVATIONS OF THE PAVEMENT OF ANY ROADWAY IN WHICH A PERMANENT SURVEY MONUMENT IS LOCATED, CONTRACTOR SHALL, AT HIS OWN EXPENSE, ADJUST THE MONUMENT COVER TO THE NEW GRADE UNLESS OTHERWISE SPECIFIED. REFER TO SECTION 4.4 OF THE GENERAL CONDITION OF THE STANDARD SPECIFICATIONS.
- FIVE (5) WORKING DAYS PRIOR TO BEGINNING CONSTRUCTION THE CONTRACTOR SHALL SUBMIT TO THE CONSTRUCTION CO-ORDINATION DIVISION A DETAILED CONSTRUCTION SCHEDULE. TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION THE CONTRACTOR SHALL OBTAIN A BARRICADING PERMIT FROM THE CONSTRUCTION CO-ORDINATION DIVISION. CONTRACTOR SHALL NOTIFY BARRICADE ENGINEER (764-2551) PRIOR TO OCCUPYING AN INTERSECTION.
- ANY WORK OCCURRING WITHIN AN ARTERIAL ROADWAY REQUIRES 24 HOURS CONSTRUCTION.
- CONTRACTOR SHALL MAINTAIN A GRAFFITI-FREE WORK SITE. CONTRACTOR SHALL PROMPTLY REMOVE ANY AND ALL GRAFFITI FROM EQUIPMENT, WHETHER PERMANENT OR TEMPORARY.
- ALL STREET STRIPING ALTERED OR DESTROYED SHALL BE REPLACED WITH PLASTIC REFLECTORIZED PAVEMENT MARKING BY THE CONTRACTOR TO LOCATION AS EXISTING OR AS INDICATED BY THE PLAN SET.

REV	SHEETS	CITY ENGINEER	DATE	USER	DEPARTMENT
ENGINEERS STAMP & SIGNATURE	APPROVALS	ENGINEER	DATE	*****	
	DRC Chairman	<i>[Signature]</i>	9-27-00	APPROVED FOR CONSTRUCTION <i>[Signature]</i> 9/27/00 City Engineer Date:	
	TRANSPORTATION	<i>[Signature]</i>	9-21-00		
	Utilities	<i>[Signature]</i>	9-26-00		
	Hydrology	<i>[Signature]</i>	9-21-00		
Const. Coord.	<i>[Signature]</i>	9-27-00			
City Project No. 634004				Sheet	Of
				1	4

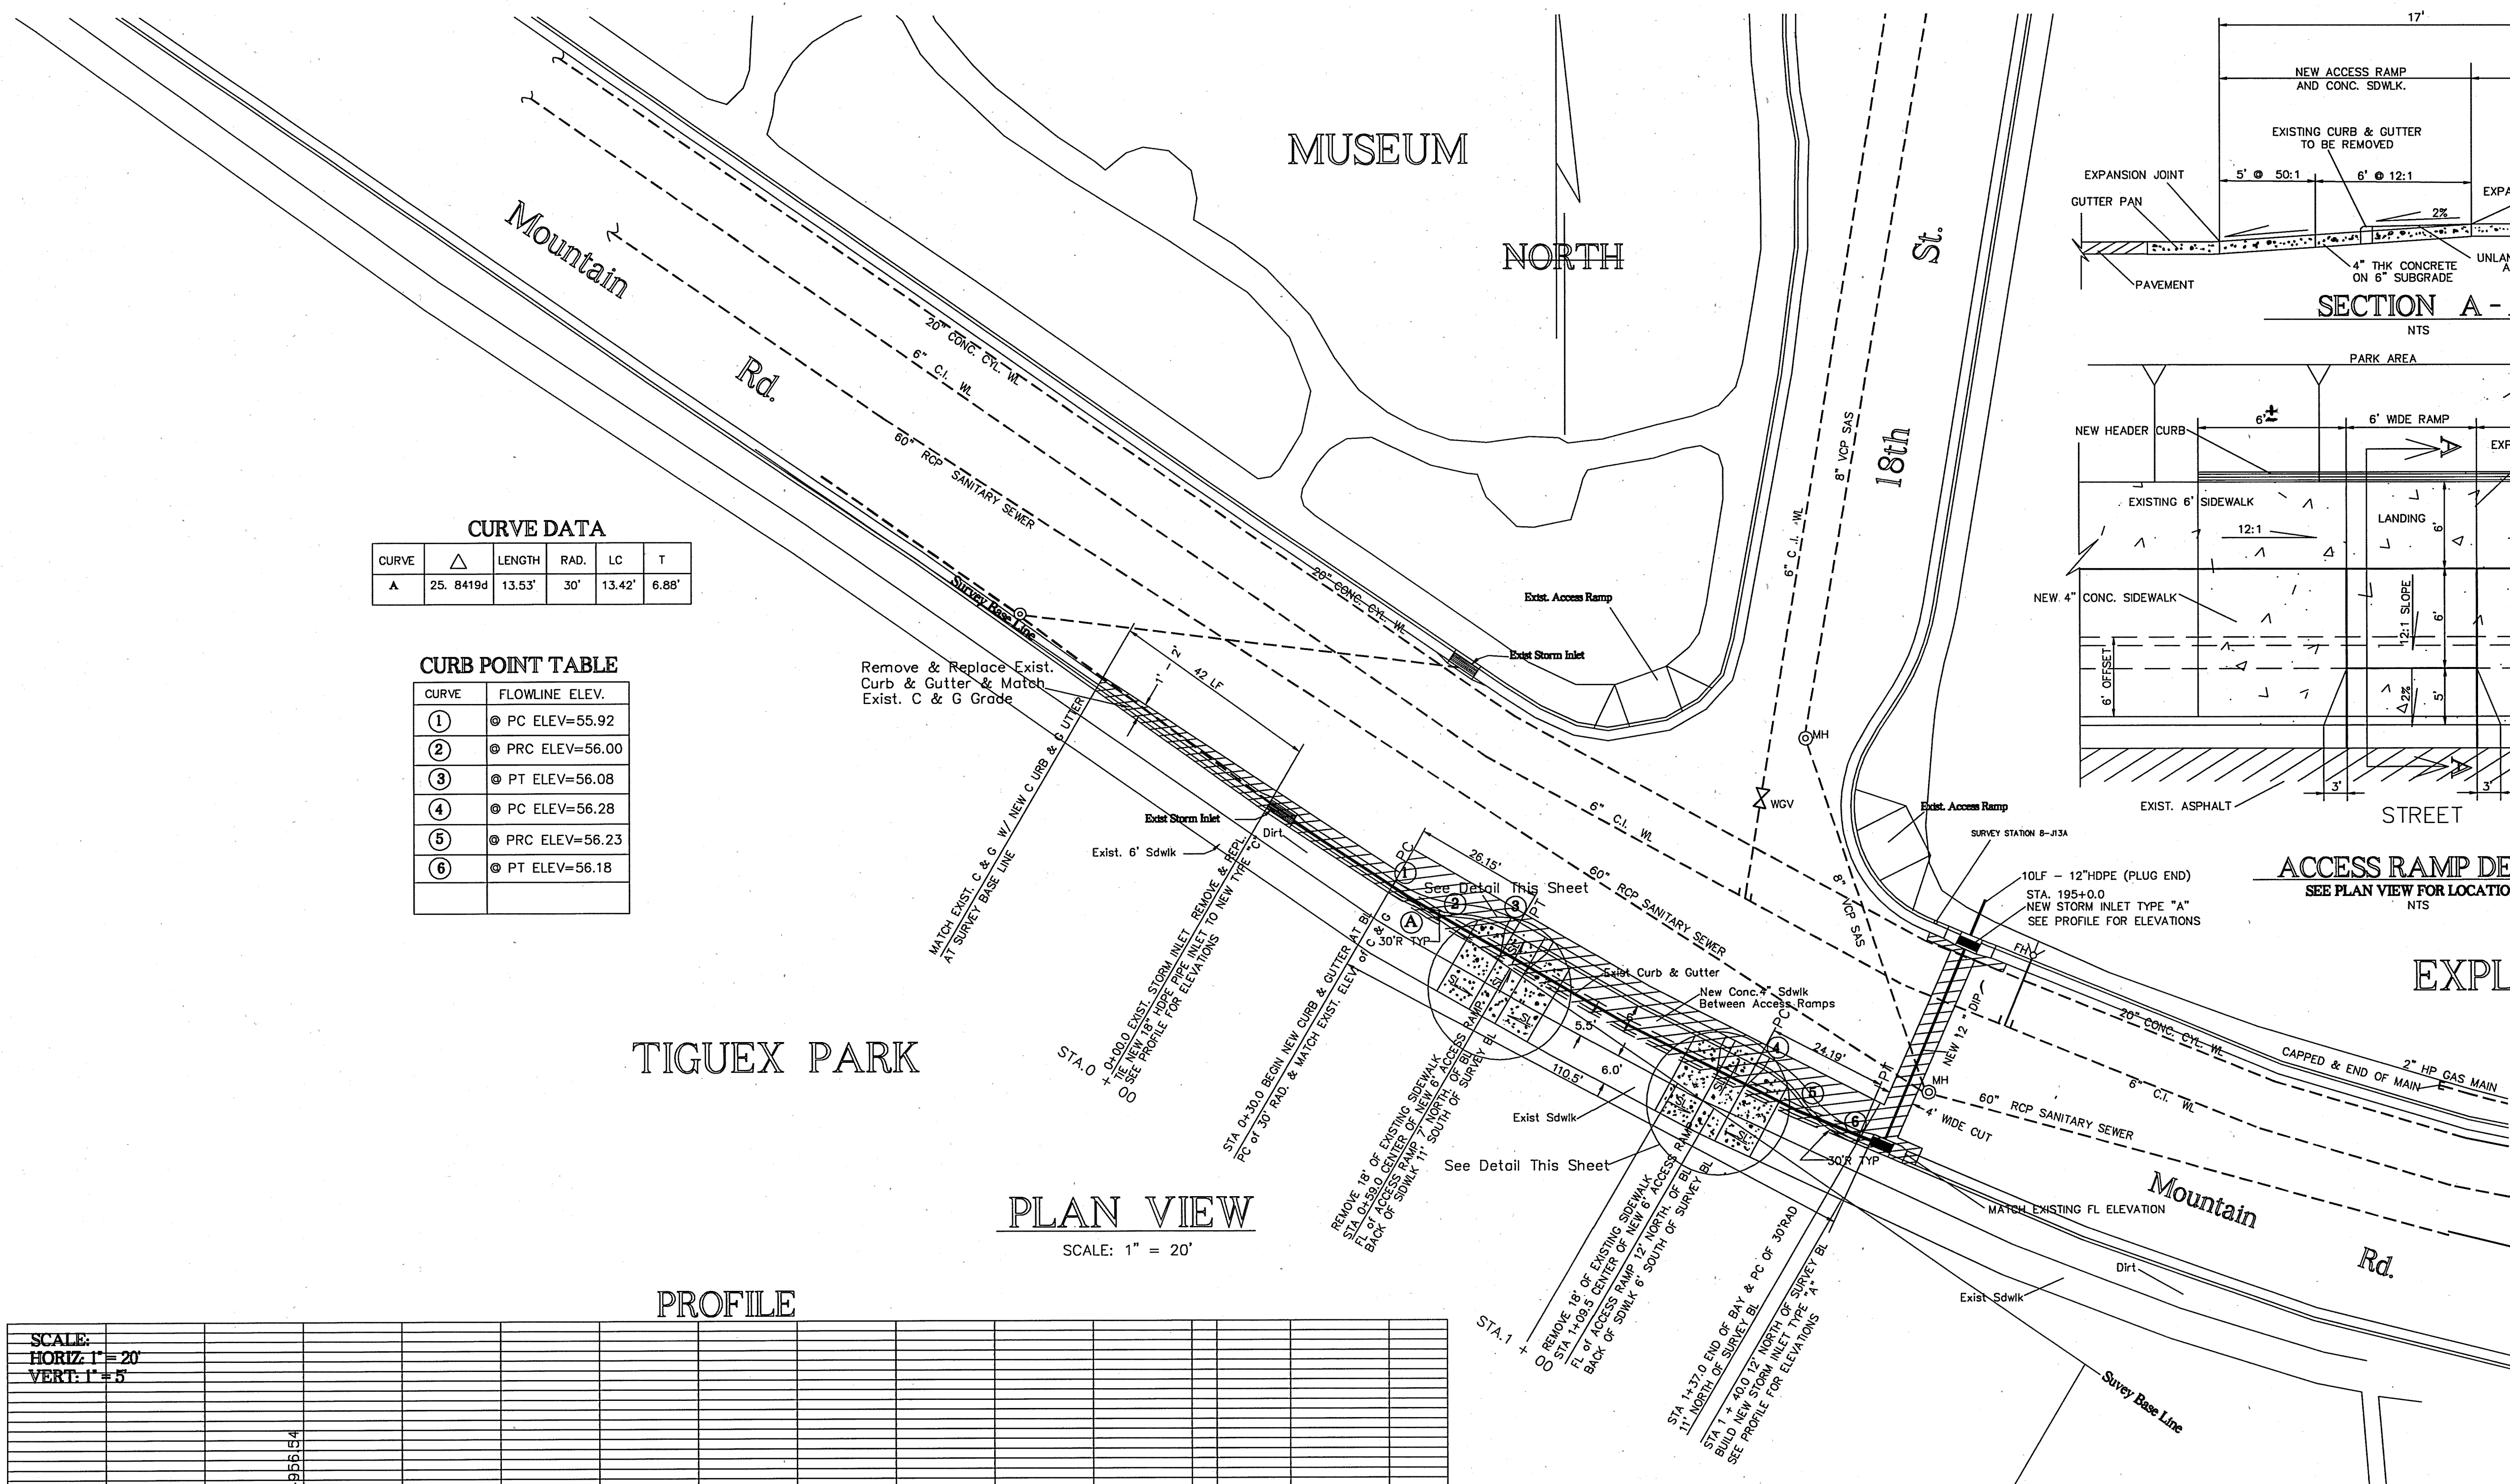


CURVE DATA				
CURVE	△	LENGTH	RAD.	LC
A	25.8419d	13.53'	30'	13.42'

CURB POINT TABLE	
CURVE	FLOWLINE ELEV.
①	PC ELEV=55.92
②	PRC ELEV=56.00
③	PT ELEV=56.08
④	PC ELEV=56.28
⑤	PRC ELEV=56.23
⑥	PT ELEV=56.18

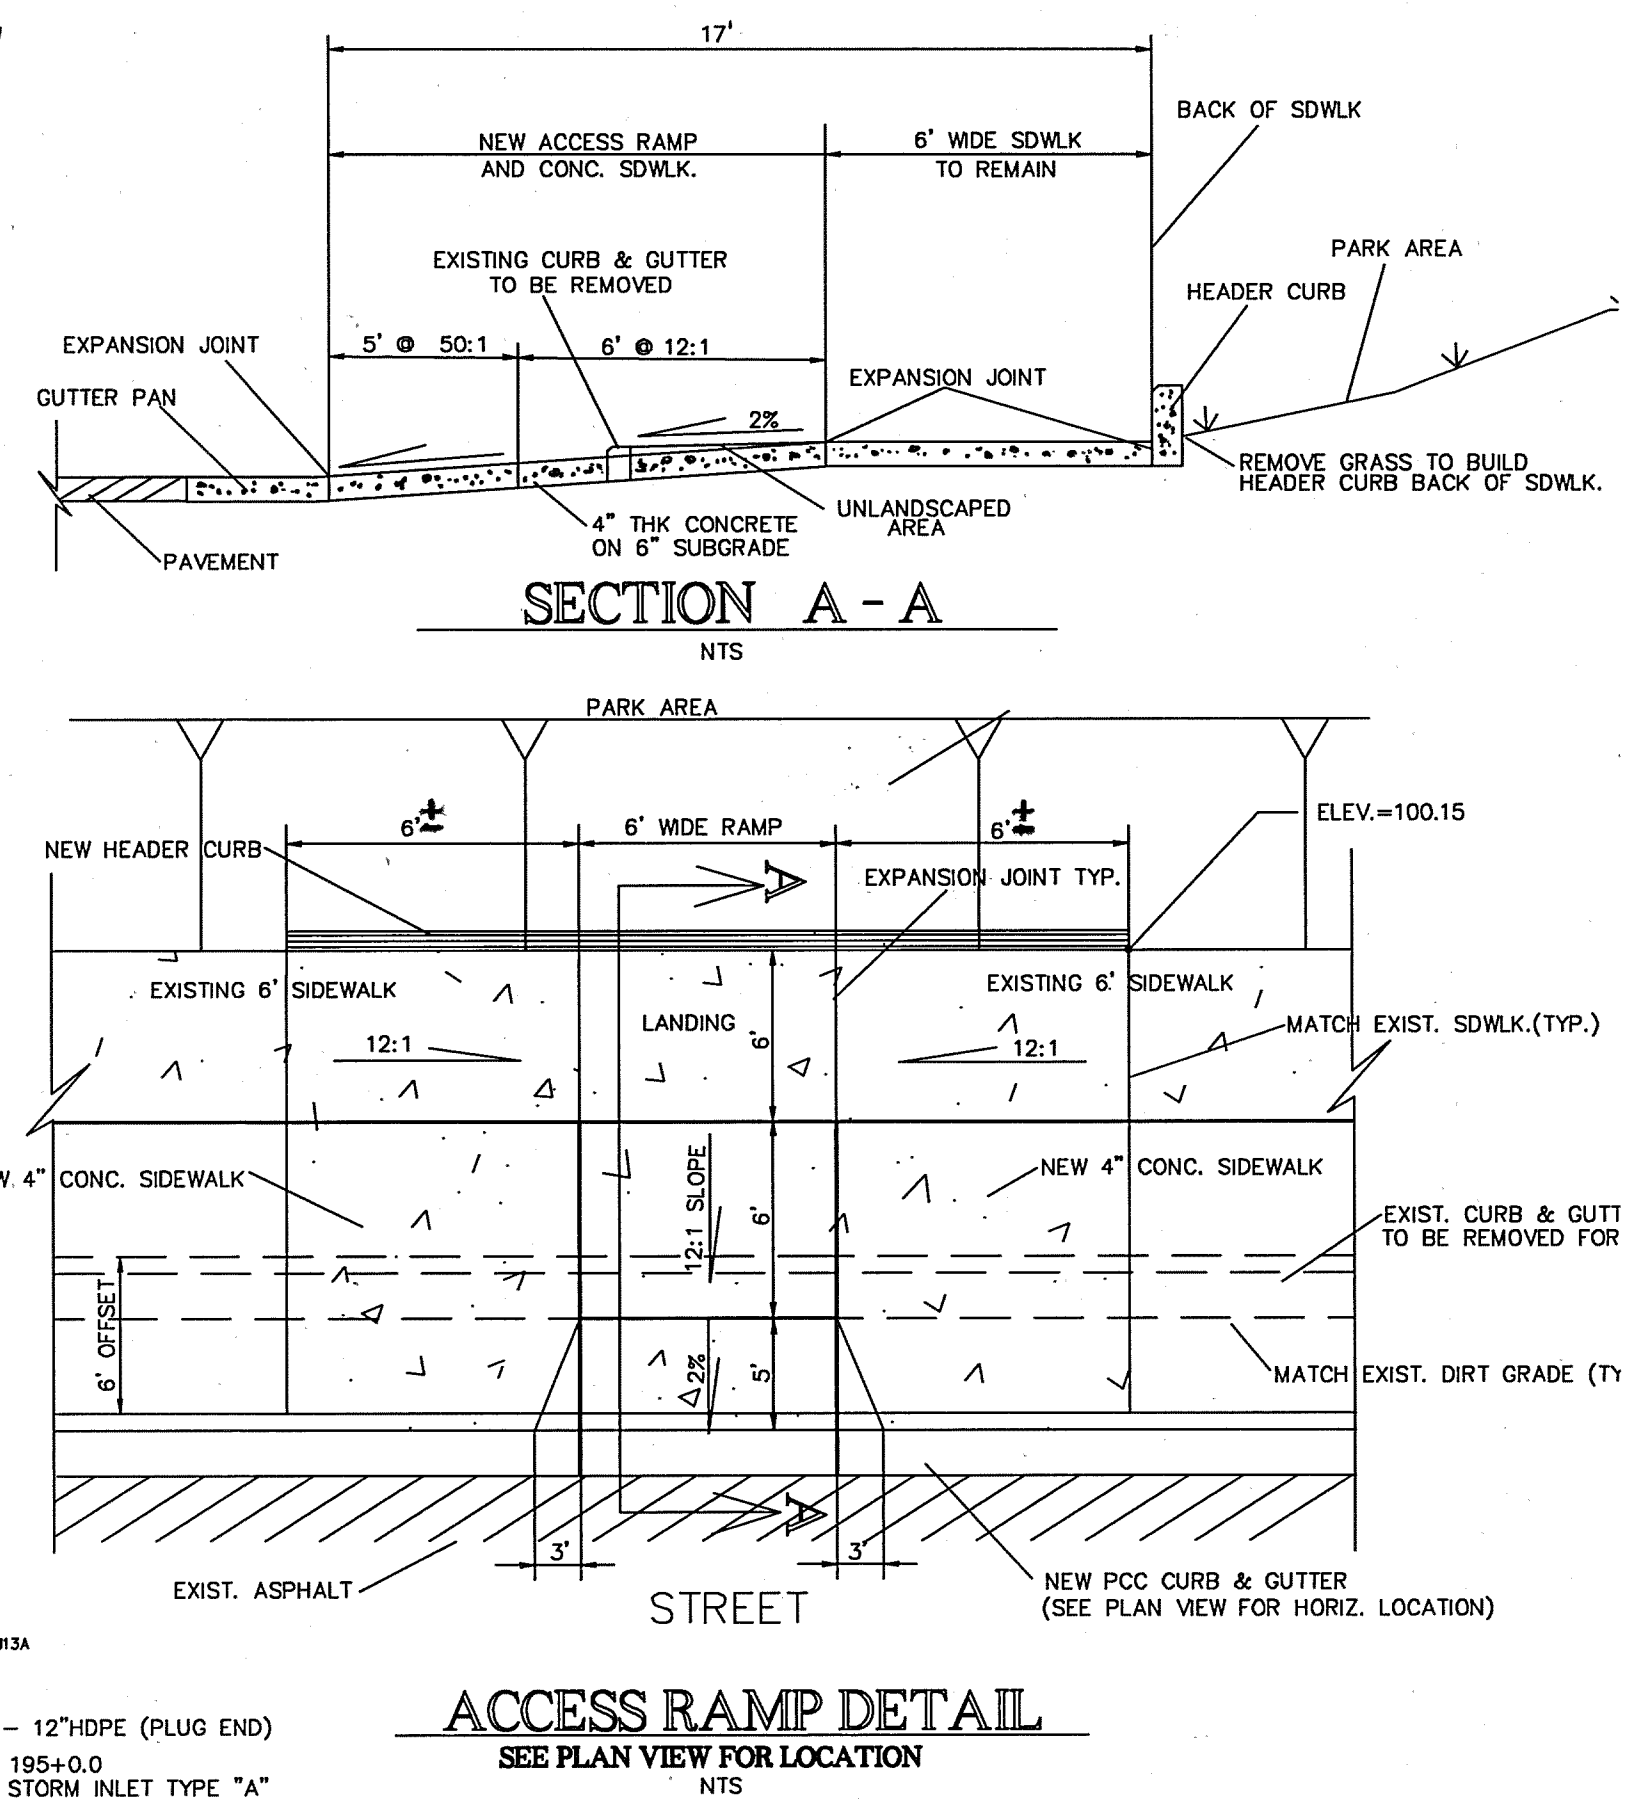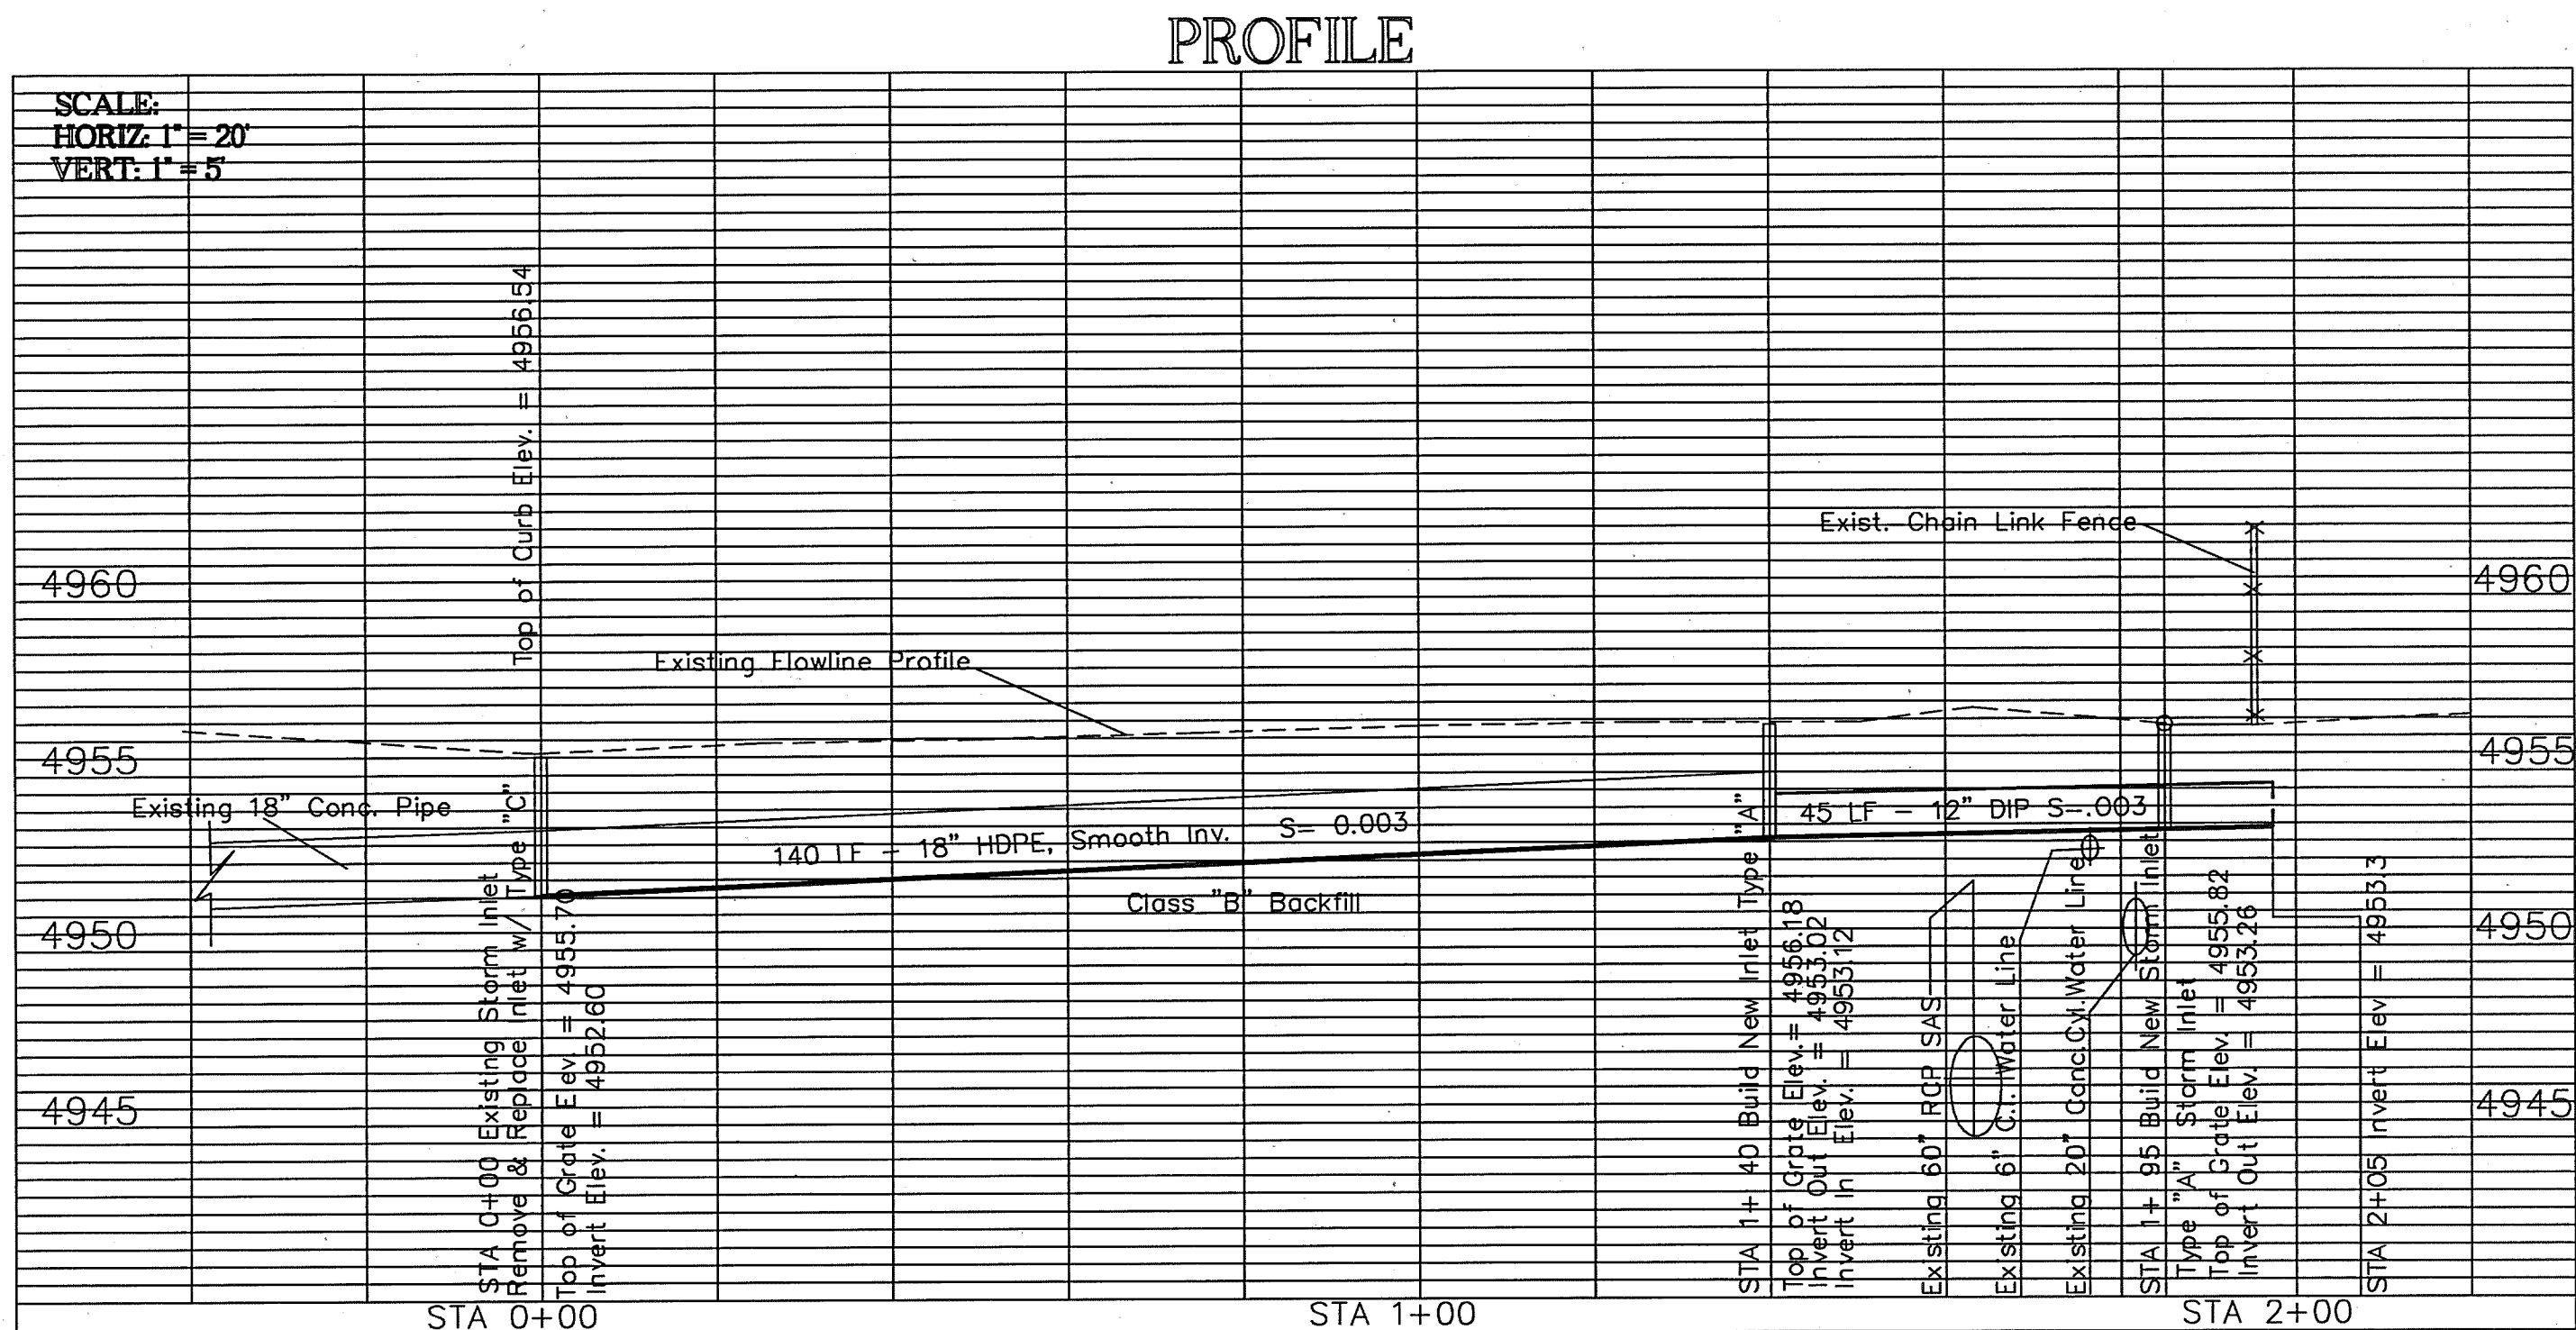

ACCESS RAMP DETAIL
SEE PLAN VIEW FOR LOCATION
NTS

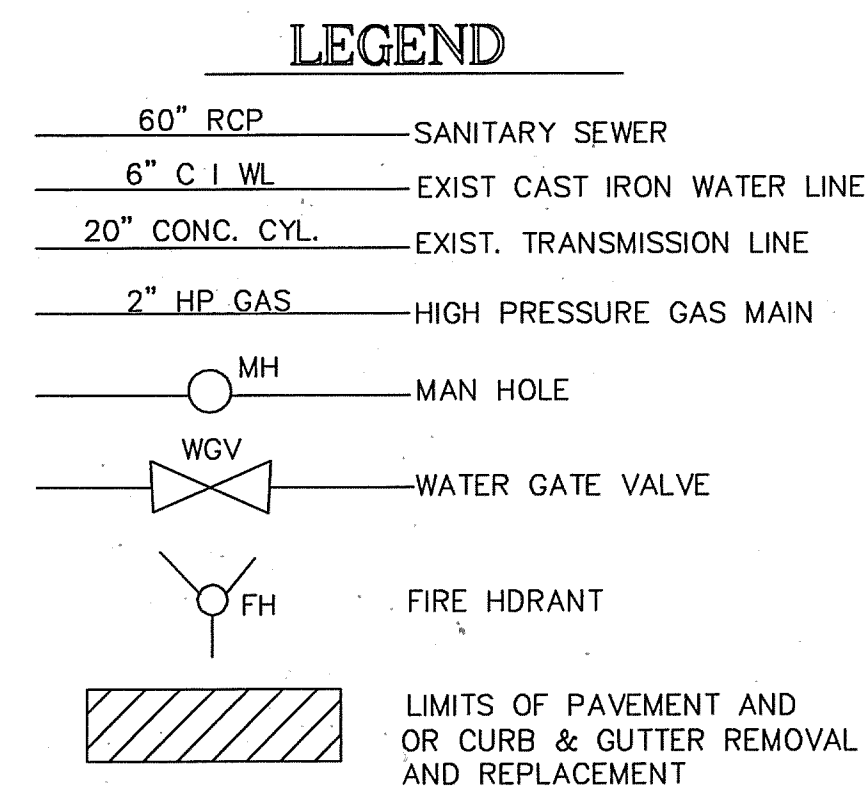

NOTE:
1. CONTRACTOR TO CALL FOR STAKING OF EXISTING UTILITIES WITHIN CONSTRUCTION LIMITS SEE NOTE 2 ON COVER SHEET.
2. SAWCUT AND DISPOSE OF EXISTING PAVEMENT 12\"/>

NEW PAVEMENT SECTION:
2\"/>



CITY OF ALBUQUERQUE
PUBLIC WORKS DEPARTMENT
TRANSPORTATION DEVELOPMENT

TITLE: DRAINAGE IMPROVEMENTS & ACCESS RAMPS
AT MOUNTAIN RD AND 18TH STREET N.W.

DESIGN REVIEW COMMITTEE
APPROVED
SEP 27 2000

CITY ENGINEER APPROVAL
APPROVED
SEP 27 2000
CITY ENGINEER

MO./DAY/YR.







MO./DAY/YR.

City Project No.
634004

Zone Map No.
J-13

Sheet
2

Of
4

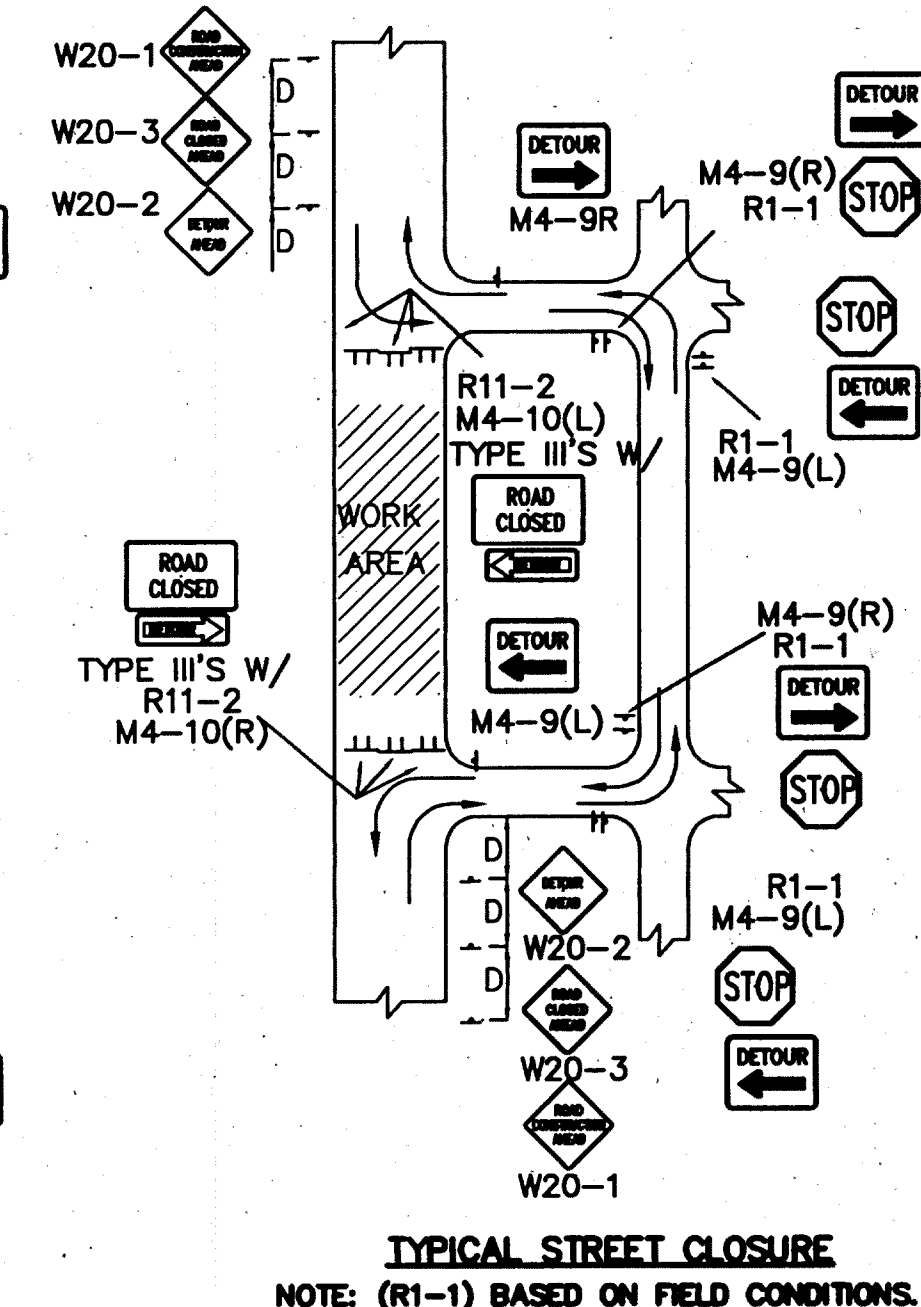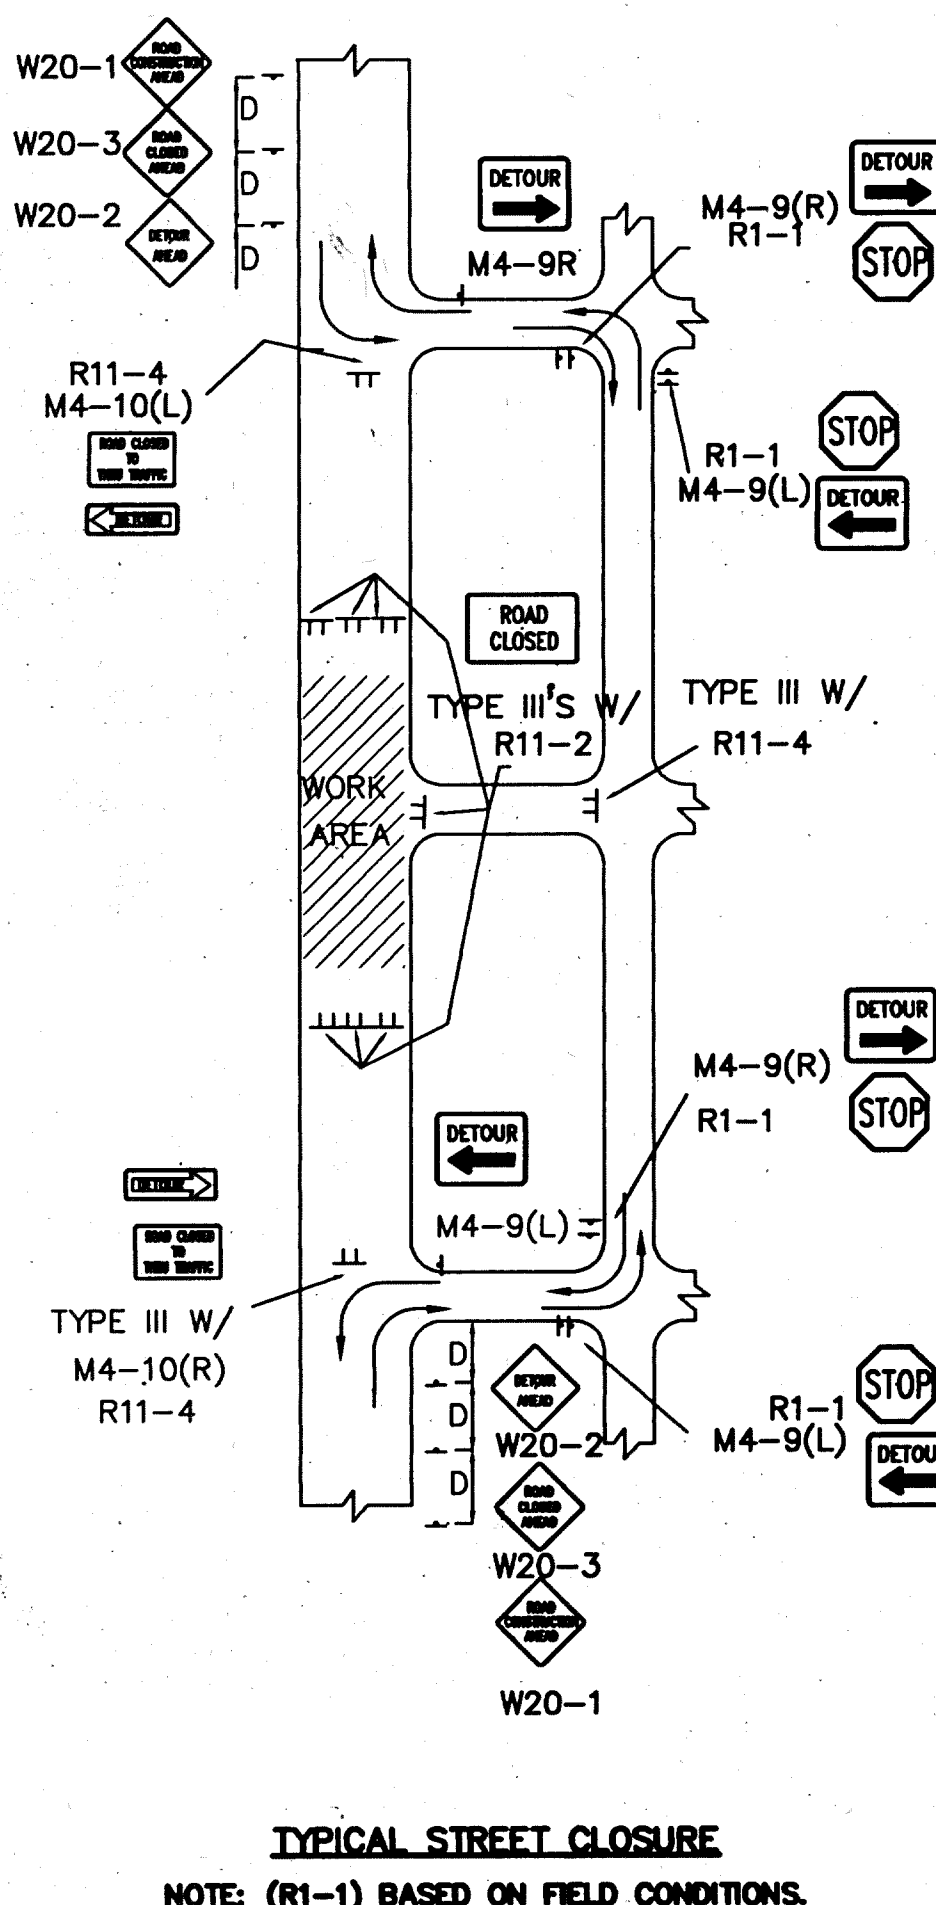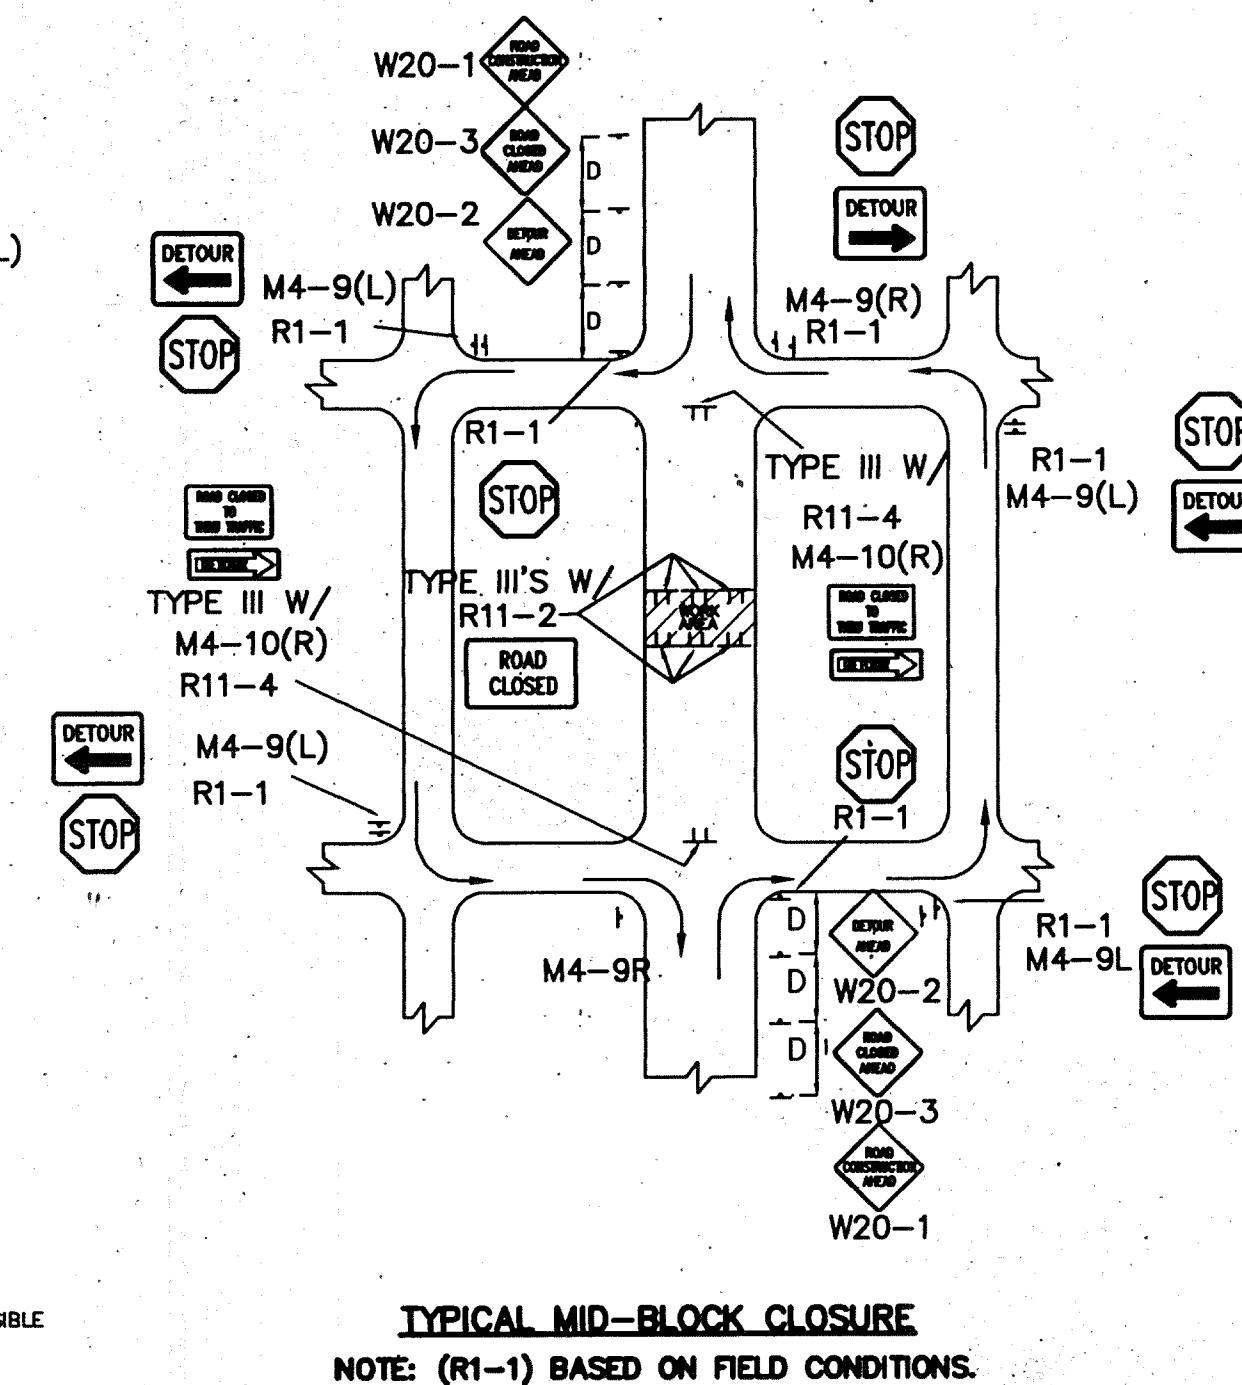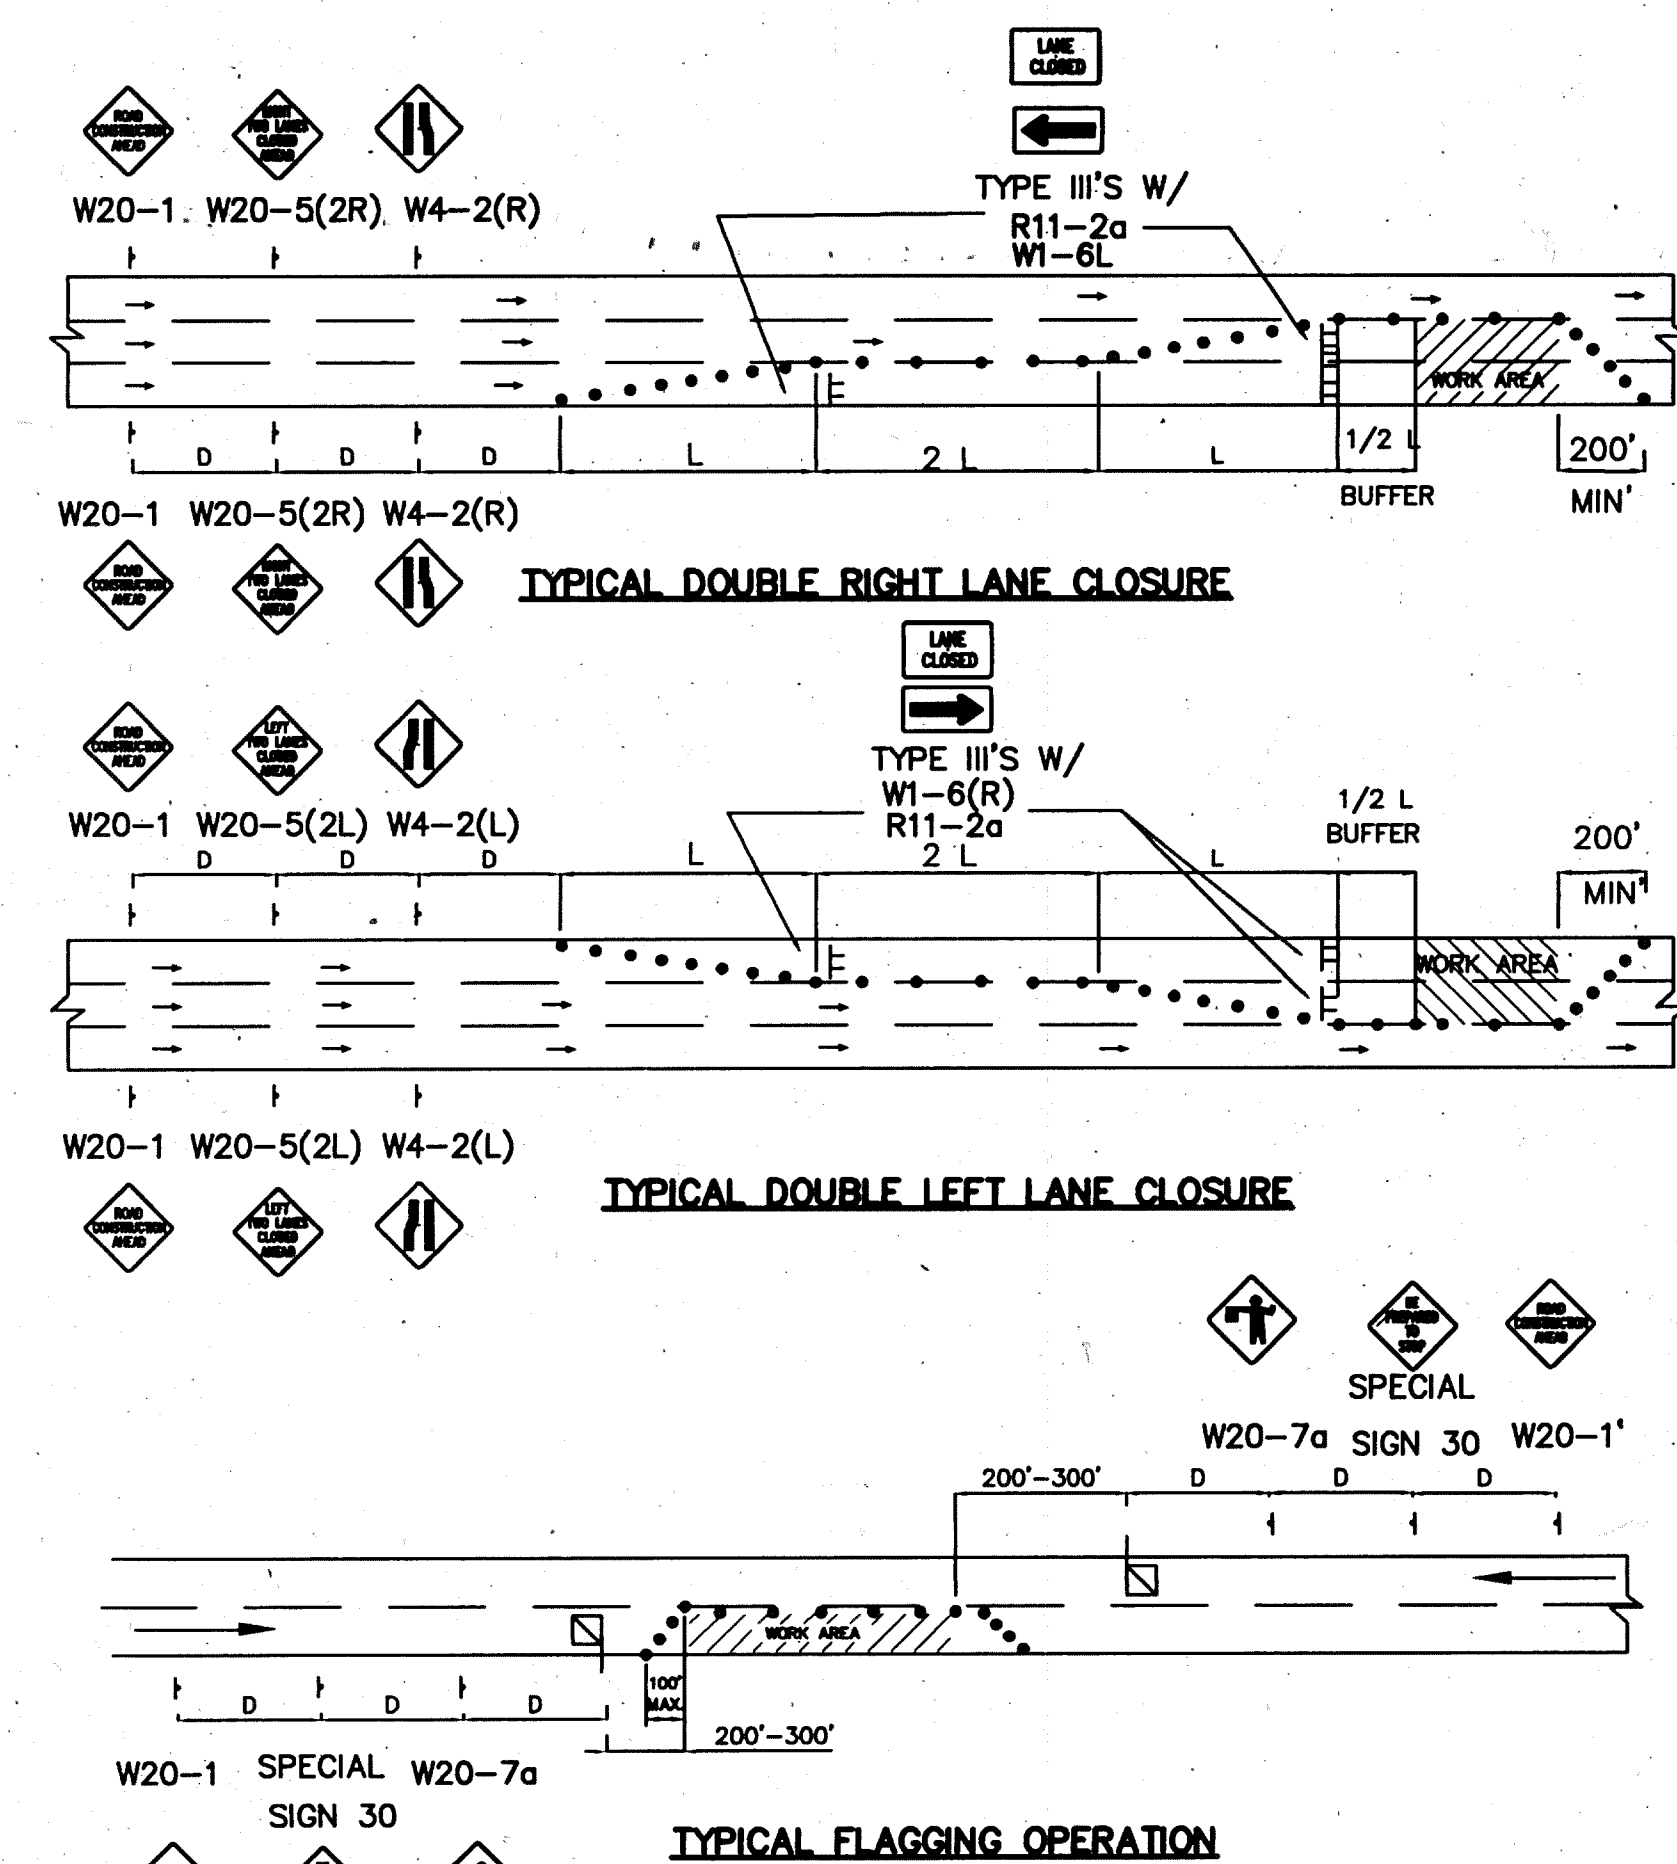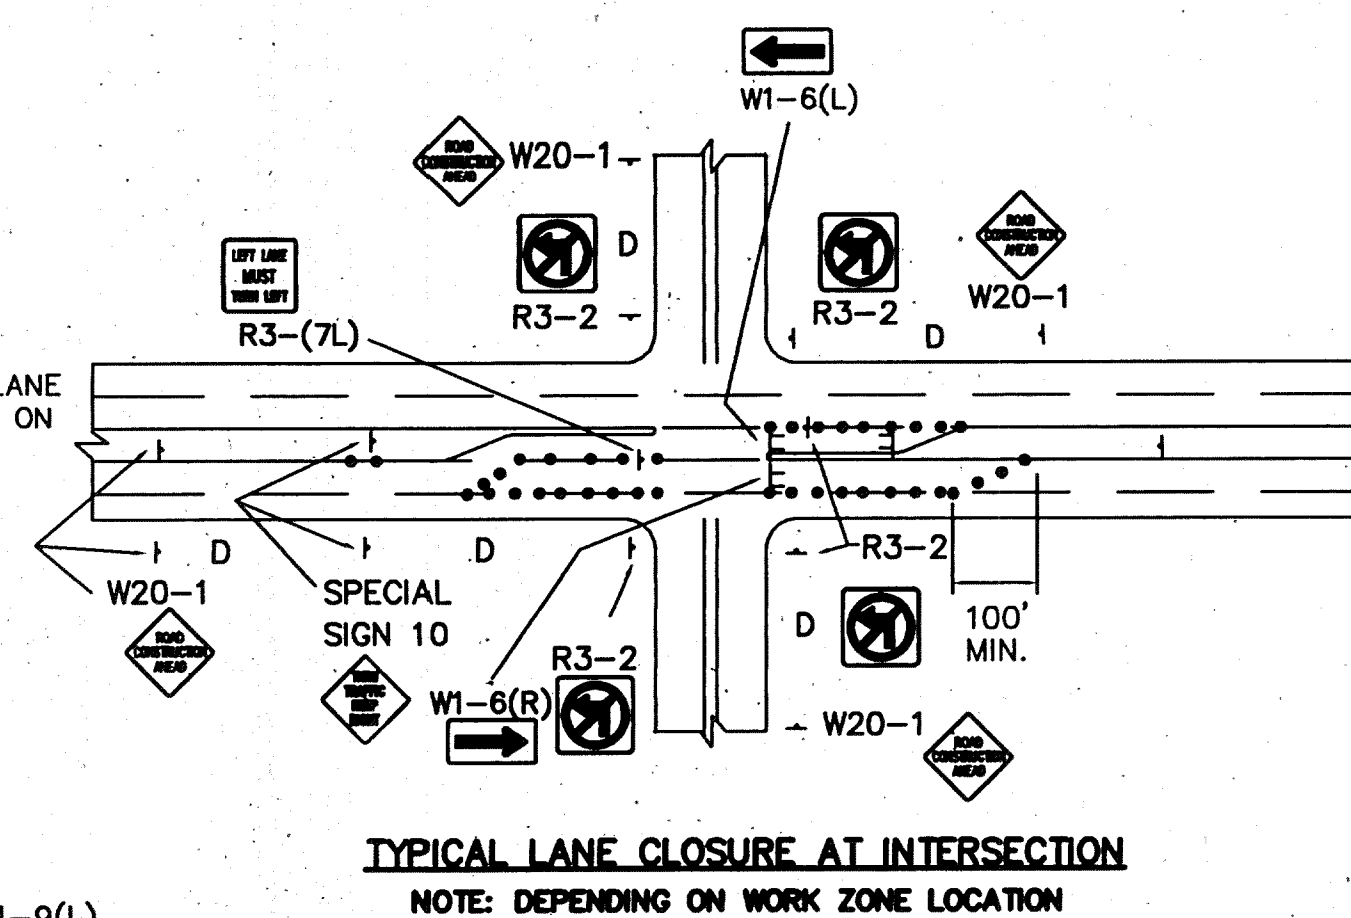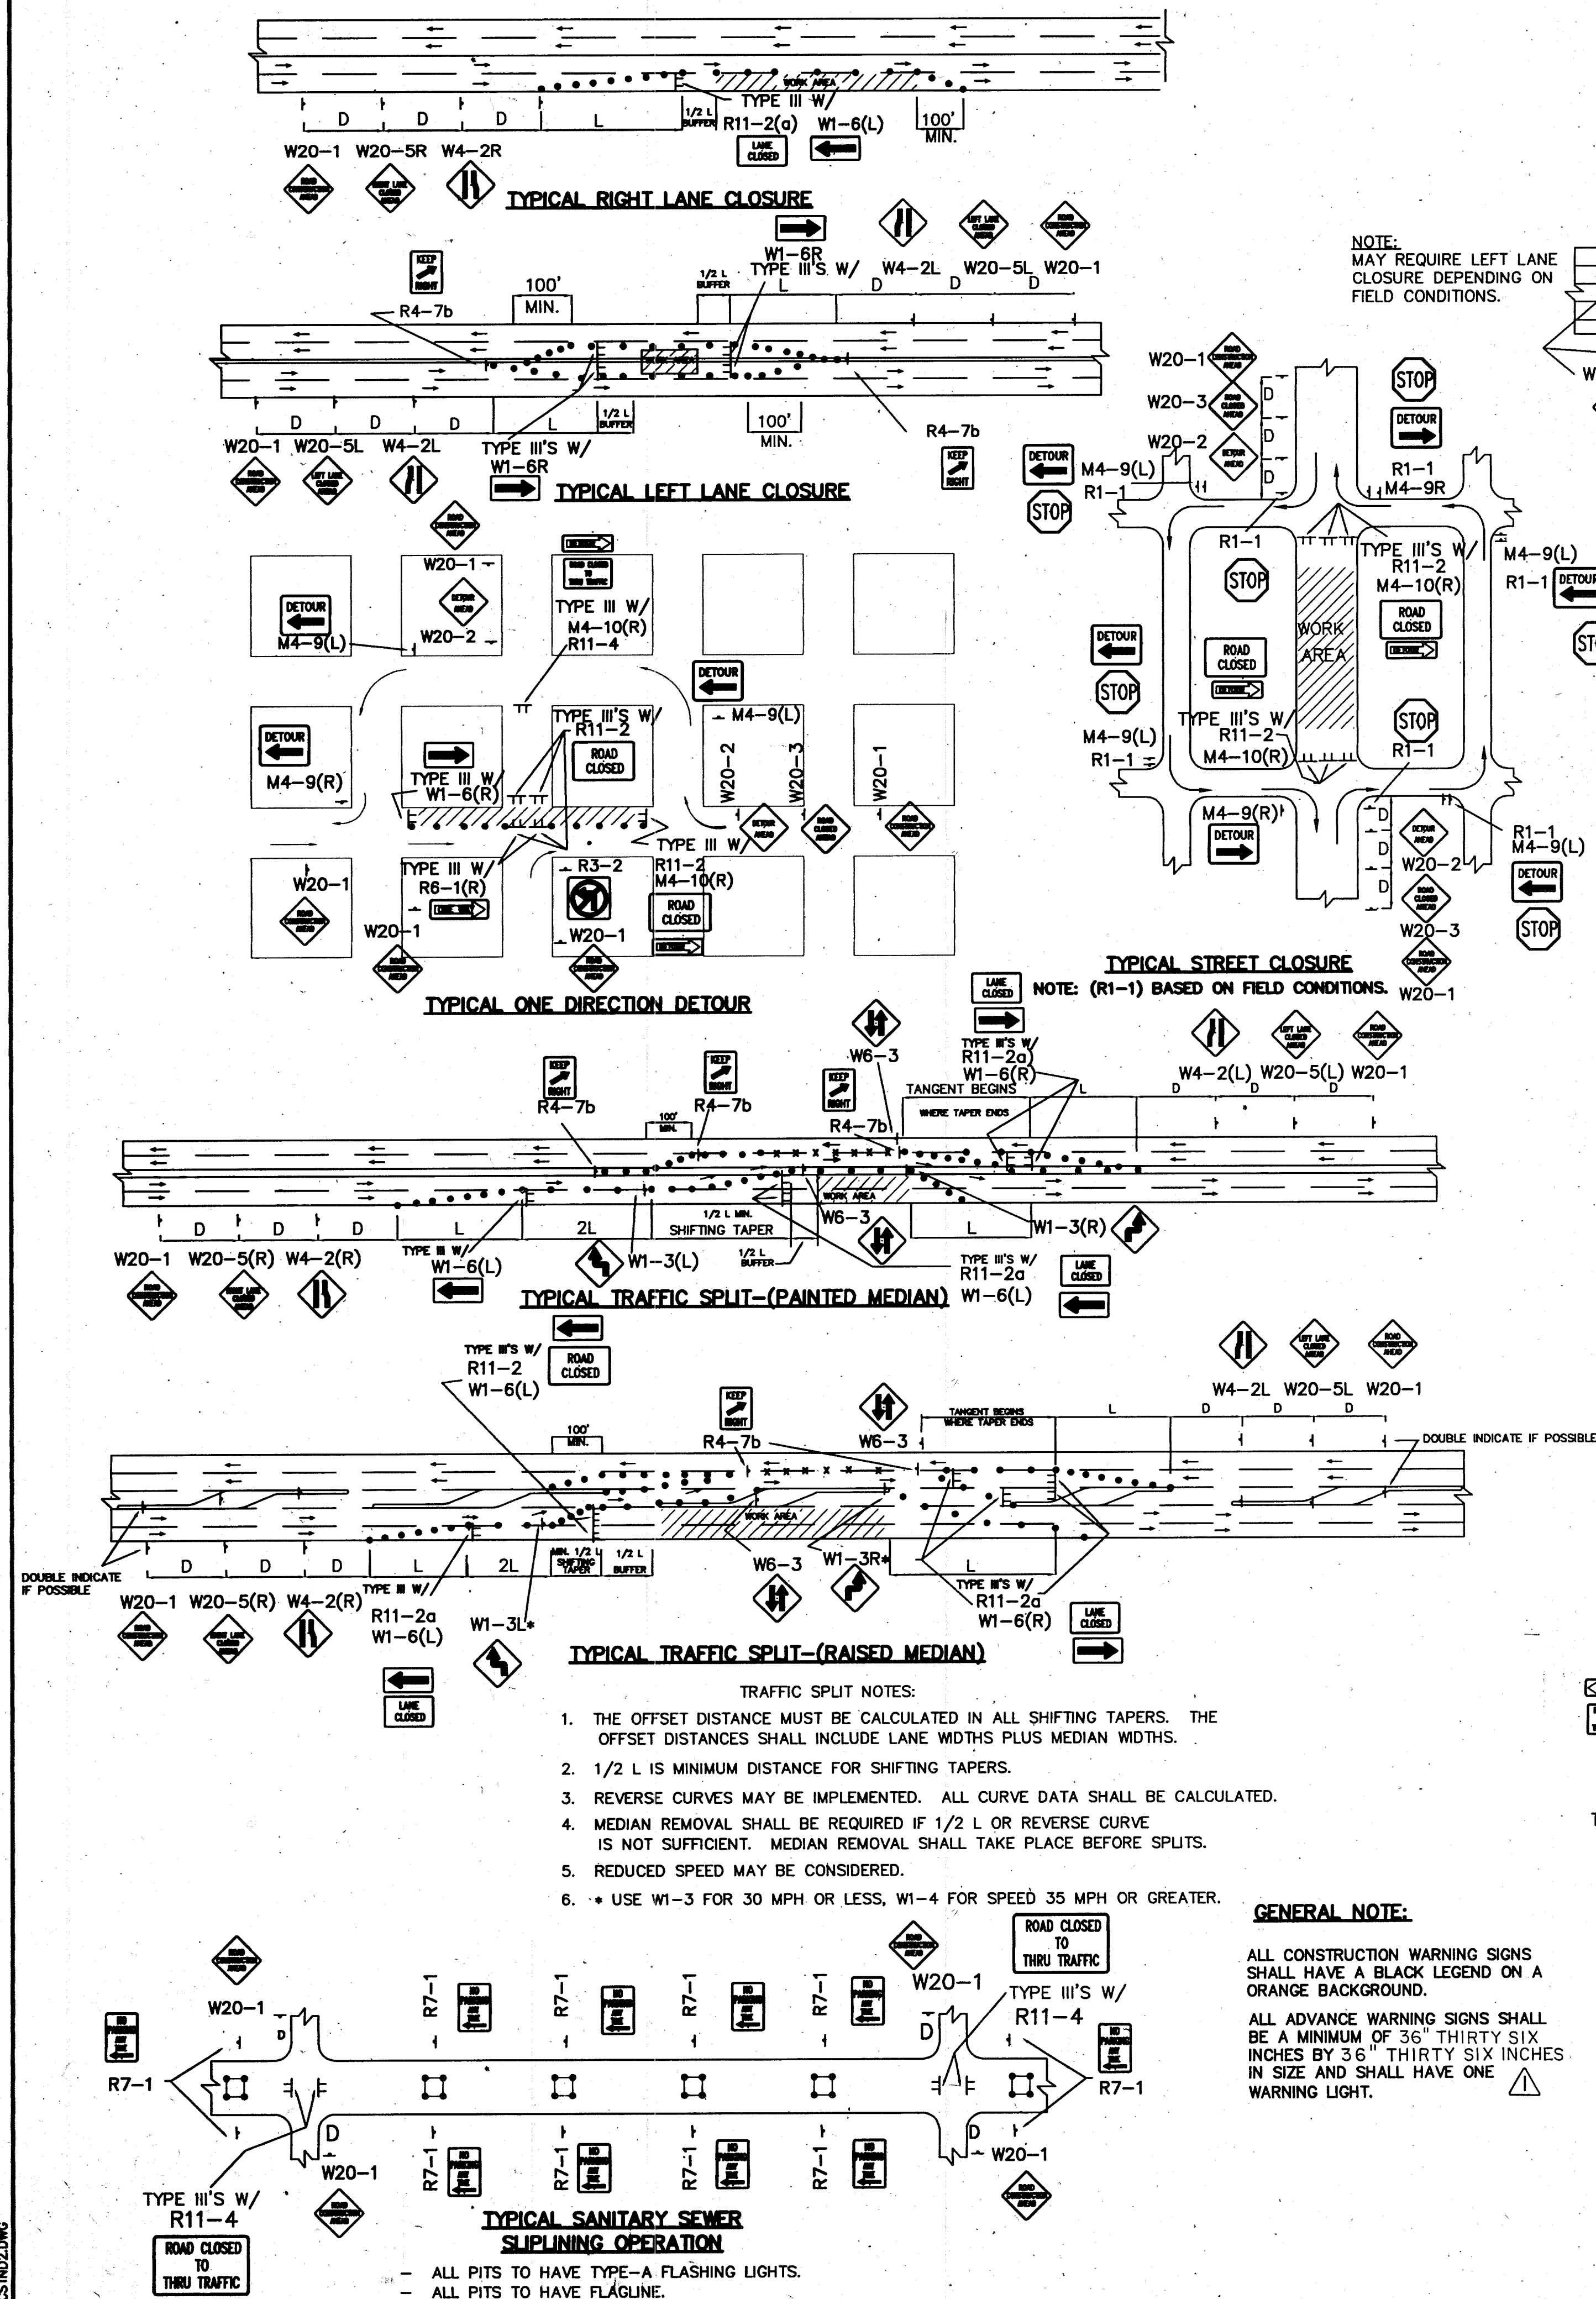[illegible]