


PROPOSED IMPROVEMENTS FOR GIBSON BLVD FSU CHICK-FIL-A STORE NUMBER # 03486

1600 GIBSON BOULEVARD SE
ALBUQUERQUE, NM 87106

LATITUDE 35° 03' 29" N, LONGITUDE 106° 37' 49" W
PARCEL ID# ABQ181822 (CITY), 101505528948711715 (COUNTY)

VICINITY MAP

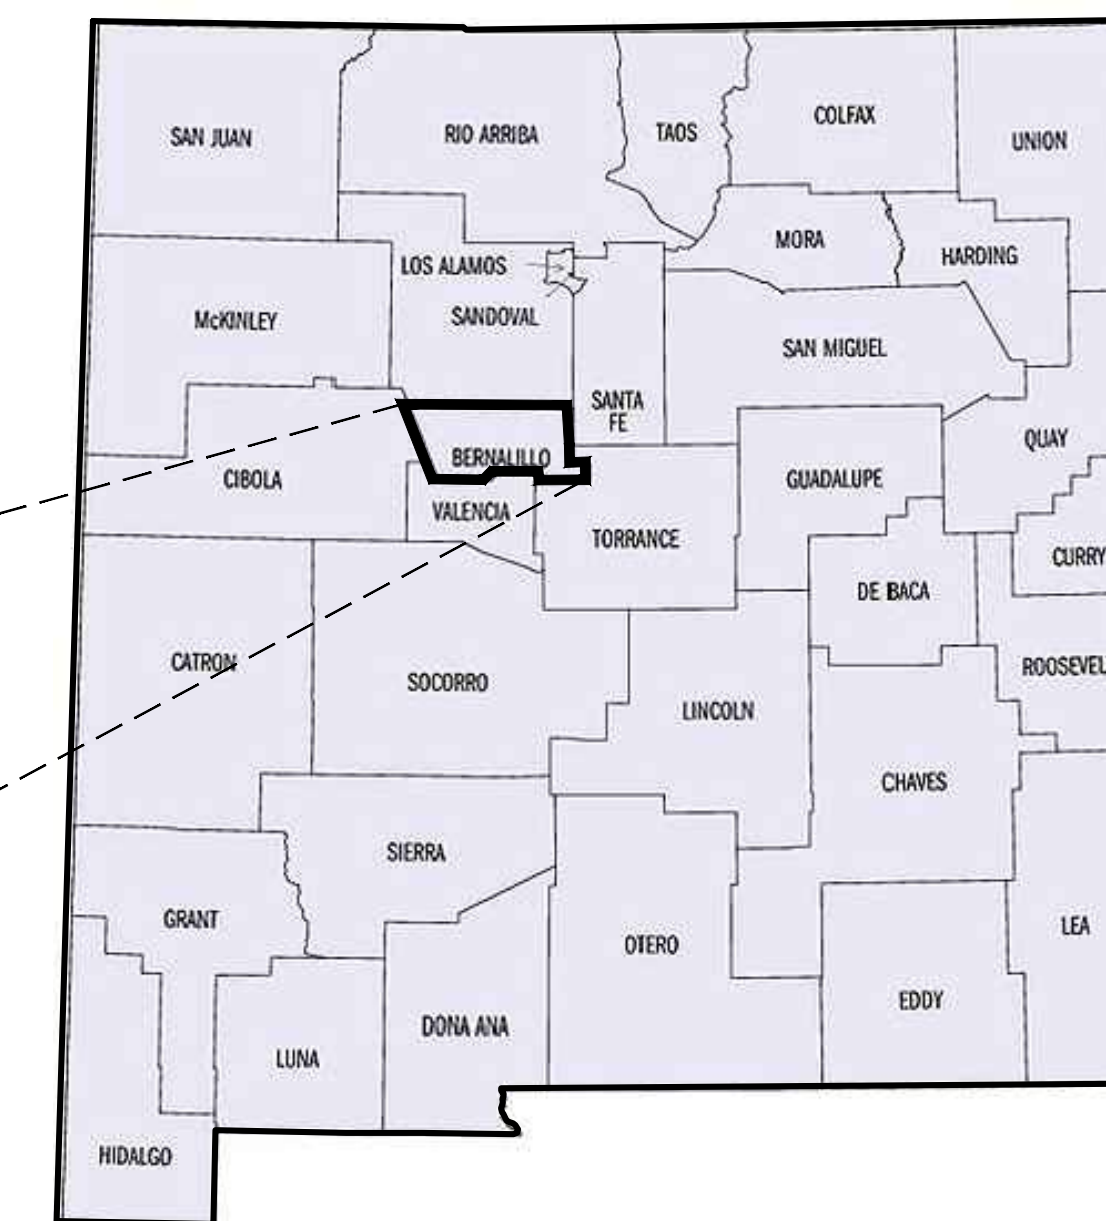


HORIZONTAL DATUM: NAD 1983
VERTICAL DATUM: NAVD 1988

GENERAL NOTES

1. CONTRACTOR SHALL HAVE ONE SIGNED COPY OF THE APPROVED PLANS AND THE APPROPRIATE STANDARDS AND SPECIFICATIONS ALONG WITH A COPY OF ANY PERMITS AND AGREEMENTS NEEDED FOR THE JOB ON-SITE AT ALL TIMES.
2. CONTRACTOR SHALL MEET OR EXCEED ALL SITE WORK SPECIFICATIONS AND APPLICABLE STATE AND FEDERAL REGULATIONS FOR ALL MATERIALS AND CONSTRUCTION.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ASPECTS OF SAFETY DURING CONSTRUCTION.
4. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IF ANY SITUATION THAT IS NOT IDENTIFIED IN THE PLANS OR SPECIFICATIONS IS ENCOUNTERED.
5. NO REVISION SHALL BE MADE TO THESE PLANS WITH OUT THE APPROVAL OF THE ENGINEER OF RECORD.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING ROADWAYS FREE AND CLEAR OF ALL CONSTRUCTION DEBRIS AND DIRT TRACKED FROM THE SITE.
7. ANY REFERENCE TO PUBLISHED STANDARDS SHALL REFER TO THE LATEST REVISION OF SAID STANDARD, UNLESS SPECIFICALLY STATED OTHERWISE.
8. ALL NECESSARY INSPECTIONS AND/OR CERTIFICATIONS REQUIRED BY CODES AND/OR UTILITY SERVICE COMPANIES SHALL BE PERFORMED PRIOR TO ANNOUNCED BUILDING POSSESSION AND THE FINAL CONNECTION OF SERVICES.
9. ZONING AND SETBACKS SHOULD BE CONFIRMED AND VERIFIED BY PLANNING AND ZONING PRIOR TO DESIGN OR CONSTRUCTION ACTIVITIES

FEMA FLOOD MAP

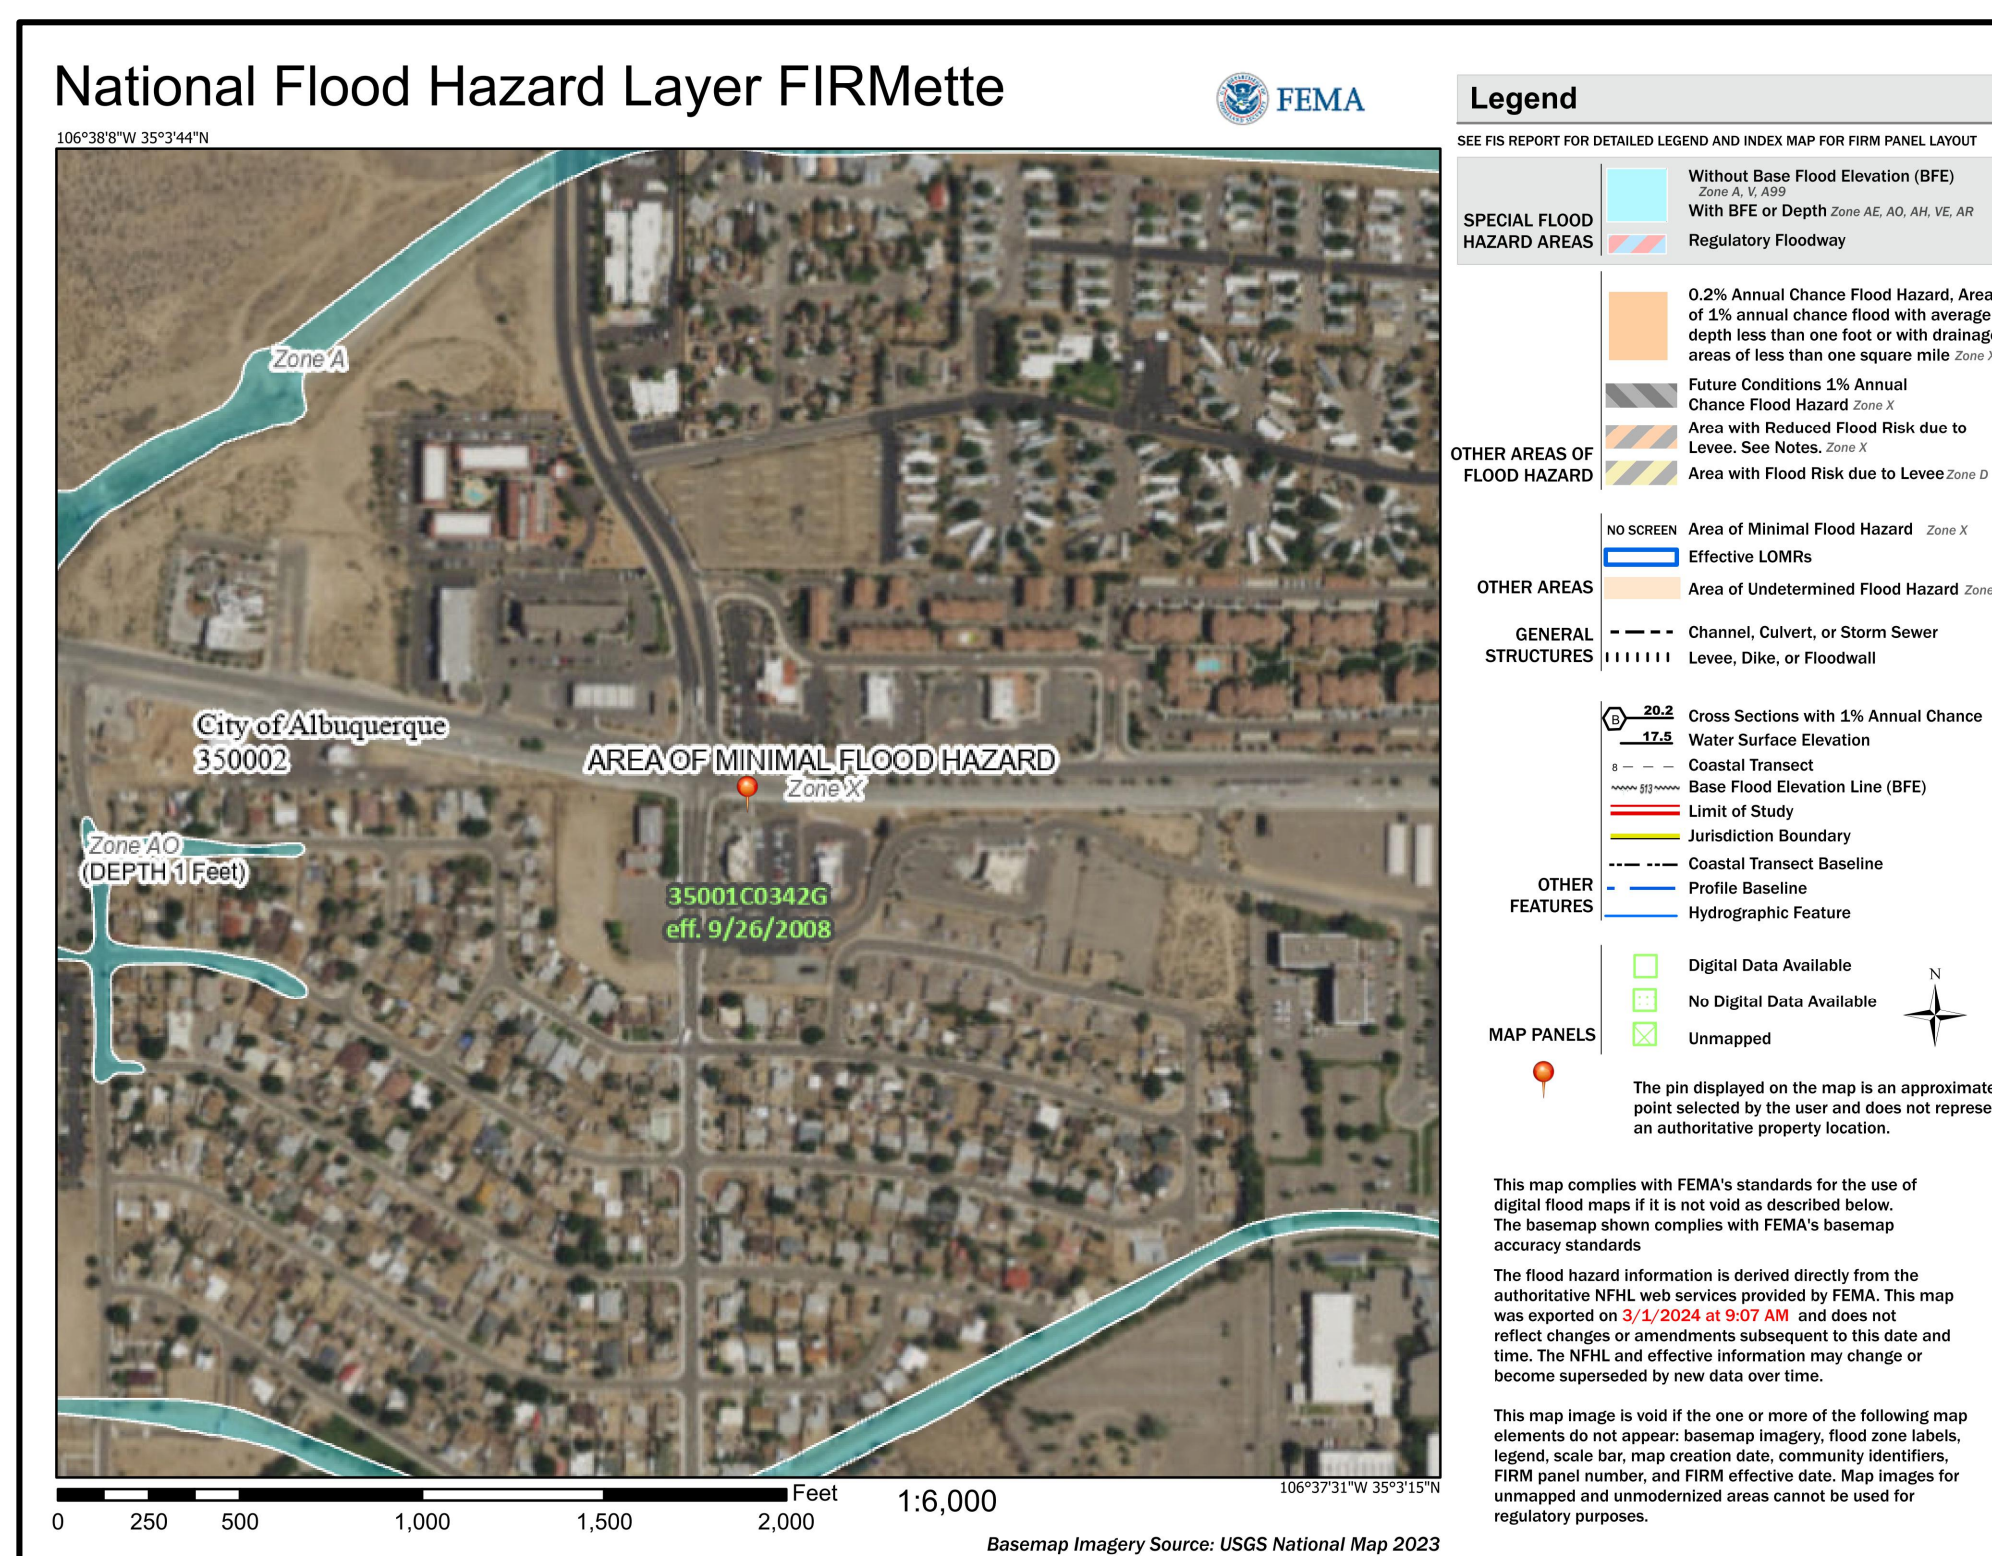

CONTACTS

LANDLORD
CHICK-FIL-A, INC
5200 BUFFINGTON ROAD,
ATLANTA, GA 30349

ENGINEER
BOWMAN CONSULTING GROUP
11475 GREAT OAKS WAY, SUITE 350
ALPHARETTA, GA 30022
KAI BURK
678-606-5276
KBURK@BOWMAN.COM

SURVEYOR
CONSTRUCTION SURVEY
TECHNOLOGIES, INC
PO BOX 16560
LAS CRUCES, NM 88004
DAVID P. ACOSTA PS NO.21082
(575) 644-0250

WATER & SEWER
ALBUQUERQUE BERNALILLO COUNTY WATER
UTILITY AUTHORITY
PH: (505) 842-9287

GAS
NEW MEXICO GAS COMPANY
PH: (505) 697-3335

ELECTRIC
PUBLIC SERVICE COMPANY OF NEW MEXICO
PH: (888) 342-5766

PLANNING AND ZONING
CITY OF ALBUQUERQUE
1600 GIBSON BOULEVARD SE,
ALBUQUERQUE, NM 87106
ALAN VARELA, DIRECTOR
PH: (505) 924-3860
EMAIL: PLANNINGDEPARTMENT@CABQ.GOV

Sheet List Table

Sheet Number	Sheet Title
C-0.0	COVER SHEET
C-1.0	EXISTING CONDITION
C-1.1	DEMOLITION PLAN
C-1.2	EROSION CONTROL PLAN
C-2.0	SITE PLAN
C-2.1	FIRE 1 PLAN
C-3.0	GRADING PLAN
C-4.0	STANDARD DETAILS
C-5.0	CONSTRUCTION DETAILS
L0.0	LANDSCAPE COVER
L1.0	PLANTING PLAN
L2.0	IRRIGATION PLAN
L3.0	LANDSCAPE DETAILS
L3.1	LANDSCAPE DETAILS
L3.2	LANDSCAPE DETAILS
L3.3	LANDSCAPE DETAILS



Chick-fil-A

Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-
2998

Bowman

Certificate of Authorization License No. LS16001241
11475 Great Oaks Way Suite 350
Alpharetta, GA 30022
Phone: (678) 374-6687
www.bowmanconsulting.com
© Bowman Consulting Group Ltd

SEAL



KAI BURK PE #28466

CHICK-FIL-A

GIBSON BLVD FSU

1600 GIBSON BLVD SE

ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

REVISION SCHEDULE
NO. DATE DESCRIPTION

CONSULTANT PROJECT # 010014-01-218

ISSUED FOR PERMIT

DATE July 28, 2024

DRAWN BY BCG

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

COVER SHEET

SHEET NUMBER

C-0.0



Know what's below.
Call before you dig.




July 28, 2024
 C-1.0 - EXISTING CONDITION
 File Path: 010014 - Chick-fil-A 010014-01-218 (ENG) - CFA 0486 Gibson Blvd Albuquerque NME Engineering Plans (Sheet Set) 10014-01-218 - C-1.0 EXISTING CONDITION PLAN.dwg
 This document is the property of Bowman Consulting Group, Inc. and is to be used only for the project and location specified herein. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Bowman Consulting Group, Inc.



Know what's below.
Call before you dig.

LEGEND	
	ELECTRICAL, UNDERGROUND LINE
	UTILITY, WATER LINE
	UTILITY, COMMUNICATIONS
	UTILITY, UNKNOWN LINE
	GAS LINE
	SANITARY LINE
	STORM DRAIN LINE
	OVERHEAD LINE
	UTILITY, FIBER OPTIC LINE
	UTILITY, ELECTRIC LINE, LEVEL B
	UTILITY, ELECTRIC LINE, LEVEL D
	UTILITY, FIBER OPTIC LINE, LEVEL B
	UTILITY, FIBER OPTIC LINE, LEVEL D
	UTILITY, GAS LINE, LEVEL B
	UTILITY, GAS LINE, LEVEL D
	UTILITY, SANITARY LINE, LEVEL B
	UTILITY, SANITARY LINE, LEVEL D
	UTILITY, WATER LINE, LEVEL B
	UTILITY, WATER LINE, LEVEL D
	RIGHT OF WAY
	PROPERTY LINE
	FENCE LINE

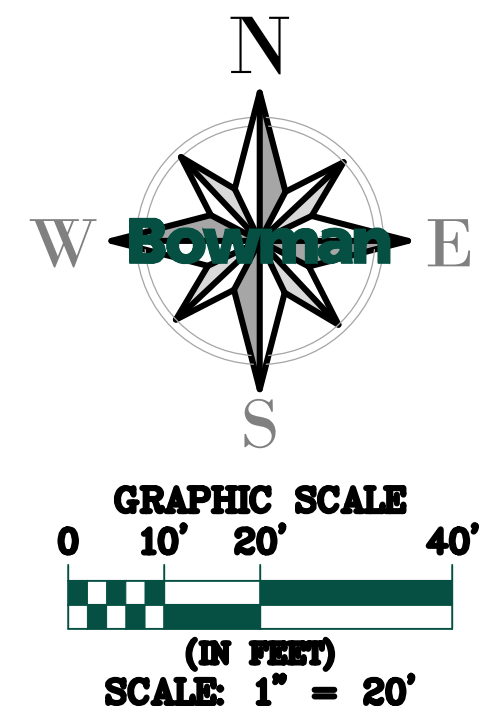

Chick-fil-A

Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-2998

Bowman
 Certificate of Authorization License No. LSE001241
 11475 Great Oaks Way Suite 350
 Alpharetta, GA 30022
 Phone: (678) 374-6687
 © Bowman Consulting Group Ltd



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION

CONSULTANT PROJECT #	010014-01-218
ISSUED FOR	PERMIT
DATE	July 28, 2024
DRAWN BY	BCG

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET
EXISTING CONDITION

SHEET NUMBER
C-1.0



July 28, 2024
 C-1.1 - DEMOLITION PLAN
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NME\Engineering\Planning Plans\Gibson_Site\010014-01-218 - C-1.1 DEMOLITION PLAN.dwg
 This document contains the completed and recorded information of a project. It is intended for use by the project team only. It is not to be distributed outside the project team. It is not to be used for any other purpose. All information is confidential and proprietary. Use of this information without the written authorization and adaptation by Bowman Consulting shall be without liability to Bowman Consulting.



GENERAL DEMOLITION NOTES

1. THE LOCATION OF THE UTILITIES SHOWN HAVE BEEN DETERMINED BY INFORMATION GATHERED AND SHALL NOT BE USED AS EXACT. CONTRACTOR SHALL CONTACT THE APPROPRIATE UTILITY COMPANIES TO VERIFY EXACT LOCATIONS PRIOR TO DEMOLITION.
2. THE CONTRACTOR SHALL COORDINATE WITH THE PROPER UTILITY COMPANIES FOR REMOVAL AND RELOCATIONS OF THE RESPECTIVE UTILITY. THE CONTRACTOR SHALL VERIFY ANY WORK THAT MAY BE DONE BY THE UTILITY COMPANIES.
3. CONTRACTOR SHALL PROTECT THE PUBLIC WITH BEST MANAGEMENT PRACTICES.
4. CONTRACTOR SHALL PROTECT AND MAINTAIN ALL STRUCTURES, PAVEMENT, AND VEGETATION THAT IS NOT TO BE DISTURBED AND IS RESPONSIBLE FOR ANY DAMAGES TO THEM.
5. THE CONTRACTOR SHALL PROPERLY DISPOSE OF ALL MATERIALS RESULTING FROM THE WORK, ACCORDING TO GOVERNING AUTHORITIES AND SHALL OBTAIN THE PROPER PERMITS REQUIRED FOR DISPOSAL AND DEMOLITION.
6. THE CONTRACTOR SHALL INSTALL EROSION AND SEDIMENT CONTROL DEVICES PRIOR TO DEMOLITION.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING SERVICES TO ANY NECESSARY UTILITIES DURING CONSTRUCTION.
8. FOR ALL ITEMS NOTED TO BE REMOVED, REMOVE NOT ONLY THE ABOVE GROUND ELEMENTS, BUT ALSO REMOVE ALL UNDERGROUND ELEMENTS AS WELL INCLUDING, BUT NOT LIMITED TO: FOUNDATIONS, GRAVEL FILLS, TREE ROOTS, PIPES, TANKS, ETC.
9. BACKFILL ALL EXCAVATIONS RESULTING FROM THE DEMOLITION WORK MEETING THE REQUIREMENTS FOR FILL OUTLINED IN THE GEOTECHNICAL INVESTIGATION REPORT FOR THIS SITE.
10. THE CONTRACTOR SHALL REFER TO THE ASBESTOS REPORT TO DETERMINE IF ASBESTOS ABATEMENT IS REQUIRED. IF REQUIRED, ASBESTOS AND ANY OTHER HAZARDOUS MATERIAL SHALL BE PROPERLY PERMITTED AND REMOVED BY THE CONTRACTOR. CONTRACTOR SHALL SECURE ALL PERMITS FOR DEMOLITION AND REMOVAL OF MATERIALS FROM THE SITE.
11. LIMIT SAW-CUT AND PAVEMENT REMOVAL TO ONLY THOSE AREAS WHERE IT IS REQUIRED AS SHOWN ON THESE PLANS. ANY DAMAGE TO ANY SURROUNDING AREAS SHALL BE REPAIRED / REPLACED AT THE RESPONSIBILITY OF THE CONTRACTOR. CONTRACTOR SHALL PROTECT ADJACENT STRUCTURES, PAVEMENT, UTILITIES, LANDSCAPE, ETC. FROM DAMAGE DURING CONSTRUCTION.
12. CONTRACTOR SHALL ENSURE THAT SERVICES TO ALL UTILITIES TO BE REMOVED HAS BEEN DISCONTINUED AND SHUT OFF. ALL UTILITY LINES SHALL BE CAPPED PER UTILITY COMPANY STANDARDS.

DEMOLITION NOTES


- 1 CONCRETE CURB AND GUTTER TO BE REMOVED
 - 2 EXISTING LANDSCAPING TO BE REMOVED
 - 3 CURB TO REMAIN
 - 4 PARKING STRIPING TO BE REMOVED
 - 5 EXISTING LIGHT POLE AND BASE TO BE RELOCATED
 - 6 FENCE TO BE REMOVED
 - 7 PROTECT EXISTING SANITARY SEWER PIPES AND STRUCTURES
 - 8 PROTECT EXISTING LIGHT POLE AND BASE TO REMAIN
 - 9 SIDEWALK TO BE REMOVED
 - 10 LIMIT OF DISTURBANCE
 - 11 PROTECT EXISTING BACKGROUND ELECTRIC LINES TO REMAIN
- ⊗ TREE REMOVAL
 X X X X X CURB AND GUTTER REMOVAL
 // // // // UTILITY REMOVAL
 REMOVAL OF ALL PAVEMENT AND LANDSCAPING
 - - - - - LOD LIMIT OF DISTURBANCE

DEMOLITION NOTES

1. ALL CONSTRUCTION DEBRIS MUST BE DISPOSED OF PROPERLY OFF SITE.

LEGEND

	ELECTRICAL, UNDERGROUND LINE
	UTILITY, WATER LINE
	UTILITY, COMMUNICATIONS
	UTILITY, UNKNOWN LINE
	GAS LINE
	SANITARY LINE
	STORM DRAIN LINE
	OVERHEAD LINE
	UTILITY, FIBER OPTIC LINE
	UTILITY, ELECTRIC LINE, LEVEL B
	UTILITY, ELECTRIC LINE, LEVEL D
	UTILITY, FIBER OPTIC LINE, LEVEL B
	UTILITY, FIBER OPTIC LINE, LEVEL D
	UTILITY, GAS LINE, LEVEL B
	UTILITY, GAS LINE, LEVEL D
	UTILITY, SANITARY LINE, LEVEL B
	UTILITY, SANITARY LINE, LEVEL D
	UTILITY, WATER LINE, LEVEL B
	UTILITY, WATER LINE, LEVEL D
	RIGHT OF WAY
	PROPERTY LINE
	FENCE LINE

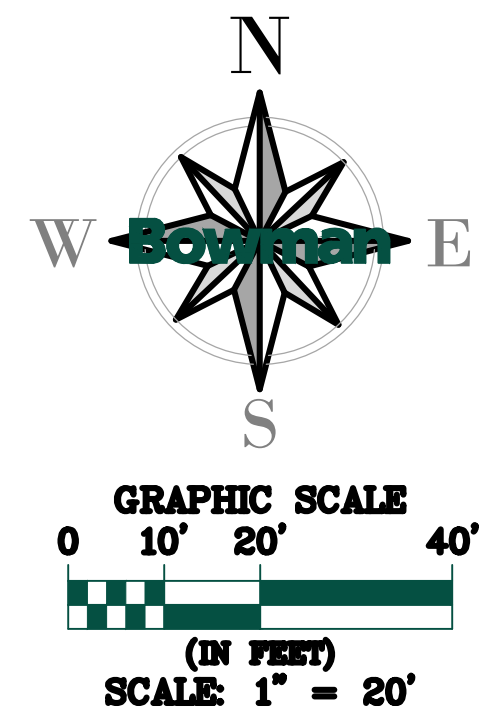

Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE

NO.	DATE	DESCRIPTION

CONSULTANT PROJECT #010014-01-218

ISSUED FOR	PERMIT
DATE	July 28, 2024
DRAWN BY	BCG

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET
 DEMOLITION PLAN

SHEET NUMBER
C-1.1

GIBSON BOULEVARD SE
 PRINCIPAL ARTERIAL; ROW VARIES
 DAILY TRAFFIC VOLUME: 16,798; V/C = 0.56

LOT 9-A-1
 66887.99 SQ FT
 ~1.5355 AC
 BUILDING

UNIVERSITY BOULEVARD SE
 MINOR ARTERIAL; 80' ROW

LO
 BLOCK A KIRTLAI
 (PLAT BOOK
 FILED:
 ZON
 LAND USE


EROSION CONTROL NOTES

- CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES AS REQUIRED AND THAT CONFORM TO FEDERAL, STATE, OR LOCAL REQUIREMENTS. ADDITIONAL BEST MANAGEMENT PRACTICES SHALL BE IMPLEMENTED AS DIRECTED BY PERMITTING AGENCY AND OWNER OR AS DICTATED BY CONDITIONS AT NO ADDITIONAL COST TO OWNER THROUGHOUT ALL PHASES OF CONSTRUCTION.
- PERMIT(S) FOR ANY CONSTRUCTION ACTIVITY MUST BE MAINTAINED ON SITE AT ALL TIMES.
- CONTRACTOR SHALL MINIMIZE CLEARING TO THE MAXIMUM EXTENT PRACTICAL.
- GENERAL CONTRACTOR SHALL DENOTE ON PLAN THE TEMPORARY PARKING AND STORAGE AREA WHICH SHALL ALSO BE USED AS THE EQUIPMENT MAINTENANCE AND CLEANING AREA, EMPLOYEE PARKING AREA, AND AREA FOR LOCATING PORTABLE FACILITIES, OFFICE TRAILERS, AND TOILET FACILITIES.
- ALL WASH WATER SHALL BE DETAINED AND PROPERLY TREATED OR DISPOSED.
- SUFFICIENT OIL AND GREASE ABSORBING MATERIALS AND FLotation BOOMS SHALL BE MAINTAINED ON SITE OR READILY AVAILABLE TO CONTAIN AND CLEAN-UP FUEL OR CHEMICAL SPILLS AND LEAKS.
- DUST ON THE SITE SHALL BE CONTROLLED. THE USE OF MOTOR OILS AND OTHER PETROLEUM BASED OR TOXIC LIQUIDS FOR DUST SUPPRESSION OPERATIONS IS PROHIBITED.
- RUBBISH, TRASH, GARBAGE, LITTER, OR OTHER SUCH MATERIALS SHALL BE DEPOSITED INTO SEALED CONTAINERS. MATERIALS SHALL BE PREVENTED FROM LEAVING THE PREMISES THROUGH THE ACTION OF WIND OR STORM WATER DISCHARGE INTO DRAINAGE DITCHES OR WATERS OF THE STATE.
- ALL STORM WATER POLLUTION PREVENTION MEASURES PRESENTED ON THIS PLAN SHALL BE INITIATED AS SOON AS PRACTICABLE.
- DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY HAS TEMPORARILY STOPPED FOR AT LEAST 7 DAYS, SHALL BE TEMPORARILY SEEDED.
- DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY HAS PERMANENTLY STOPPED SHALL BE SODDED/LANDSCAPED PER PLANS. THESE AREA SHALL BE SODDED/LANDSCAPED NO LATER THAN 7 DAYS AFTER THE LAST CONSTRUCTION ACTIVITY OCCURRING IN THESE AREAS. REFER TO THE GRADING PLAN AND/OR LANDSCAPE PLAN.
- IF THE ACTION OF VEHICLES TRAVELING OVER THE CONSTRUCTION ENTRANCES IS NOT SUFFICIENT TO REMOVE THE MAJORITY OF DIRT OR MUD, THEN THE TIRES MUST BE WASHED BEFORE THE VEHICLES ENTER A PUBLIC ROAD. IF WASHING IS USED, PROVISIONS MUST BE MADE TO INTERCEPT THE WASH WATER AND TRAP THE SEDIMENT BEFORE IT IS CARRIED OFF THE SITE.
- ALL MATERIALS SPILLED, DROPPED, WASHED, OR TRACKED FROM VEHICLES ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY.
- CONTRACTORS OR SUBCONTRACTORS WILL BE RESPONSIBLE FOR REMOVING ANY SEDIMENT THAT MAY HAVE COLLECTED IN THE STORM SEWER DRAINAGE SYSTEMS IN CONJUNCTION WITH THE STABILIZATION OF THE SITE.
- ON-SITE AND OFFSITE SOIL STOCKPILE AND BORROW AREAS SHALL BE PROTECTED FROM EROSION AND SEDIMENTATION THROUGH IMPLEMENTATION OF BEST MANAGEMENT PRACTICES.
- SLOPES SHALL BE LEFT IN A ROUGHENED CONDITION DURING THE GRADING PHASE TO REDUCE RUNOFF VELOCITIES AND EROSION.
- DUE TO CONSTRUCTION ACTIVITIES DURING THE DEVELOPMENT OF THE PROJECT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTING THE EROSION AND SEDIMENT CONTROL MEASURES TO PREVENT EROSION AND SEDIMENTATION.
- CONTRACTOR SHALL DESIGNATE/IDENTIFY AREAS INSIDE THE LIMITS OF DISTURBANCE, FOR WASTE DISPOSAL AND DELIVERY AND MATERIAL STORAGE.
- CONTRACTOR TO LIMIT DISTURBANCE OF SITE IN STRICT ACCORDANCE WITH THE EROSION CONTROL SEQUENCING SHOWN ON THIS PLAN. NO UNNECESSARY OR IMPROPERLY SEQUENCED CLEARING AND/OR GRADING SHALL BE PERMITTED.

EROSION CONTROL NOTES

- LIMIT OF DISTURBANCE
- TEMPORARY PARKING AREA
- TEMPORARY STORAGE AREA
- PROTECT EXISTING TRENCH DRAIN WITH ERTEC® SLOT GUARD™ OR APPROVED SIMILAR
- PROTECT EXISTING FLUME WITH "FILTREXX SILT/SOXX" OR APPROVED SIMILAR

**DISTURBED AREA:
 ± 0.10 ACRES**

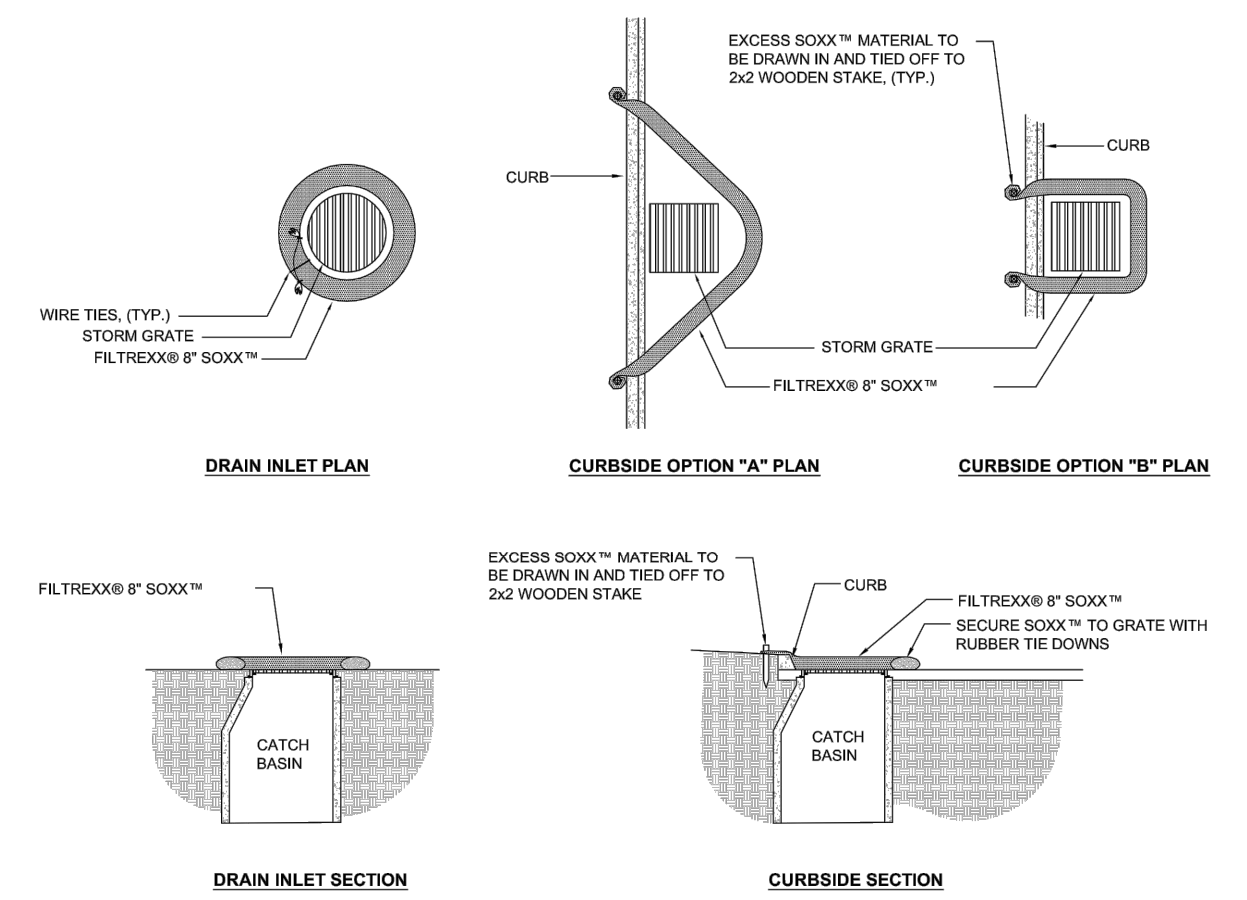


FILTREXX® INLET PROTECTION
 NTS


ERTEC® Slot Guard™ - Installation Guide - For slotted or trench drain inlets with grates in paved areas

- Installation Notes**
- Placement:** Select correct size (Table 1). Lay the Slot Guard™ on top of the slot or trench drain grate. For safety, assure that grate is in place. Do not remove grate.
 - Anchor method:** Attach with 16 gauge tie wire every 2.5 linear feet (Fig. 1). Cut wire to 12" lengths. Feed one end of wire down thru Slot Guard™, around grate bar, and back-up thru Slot Guard™. Above ground, pull tight and twist wires several times. Cut off excess and bend twisted nub down.
 - Overlap:** Slot Guard™ segments overlap for long slot/trench drains.
 - Clean:** Accumulation of leaves, debris and sediment can cause backups! Clean after every storm or as necessary.
 - Protect:** In stop and go traffic areas where exposed to constant tire abuse, it is useful to place traffic cones or delineators on or near Slot Guard to discourage run-overs. Slot Guard™ works well with periodic run-overs, but does not survive long in constant stop and start traffic.

Slot/Trench drains up to:	SG Size
6" width	SG 84x06
12" width	SG 84x12
15" width	SG 84x15
20" width	SG 84x20

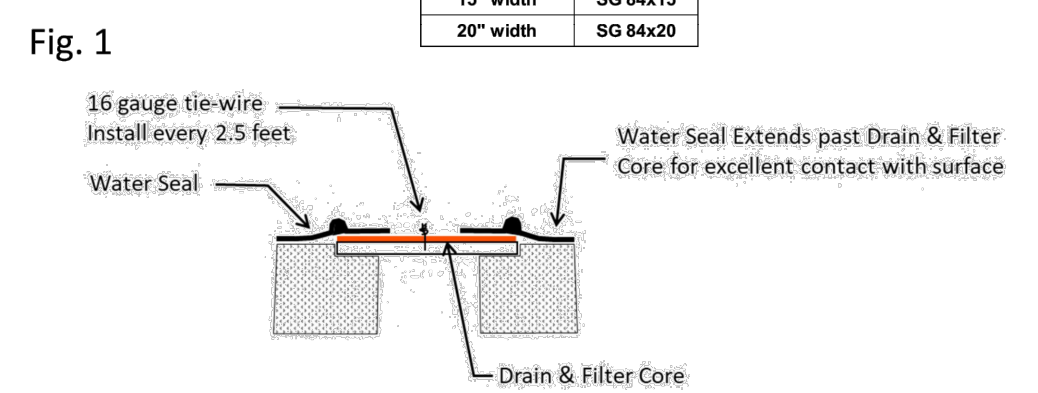

ERTEC U.S. and International Patents and Pending Patents Apply
 11880 Via Arroyo, Suite 200, Alhambra, CA 91802
 P: 626-251-0750 F: 626-251-9972 www.ertec.com

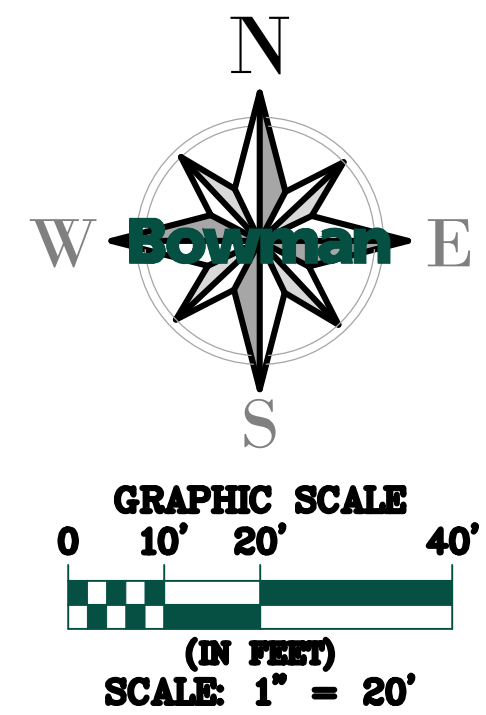

July 28, 2024
 C-1.2 - EROSION CONTROL PLAN
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NME\Engineering\Plans\Sheet Set\010014-01-218 - C-1.2 EROSION CONTROL PLAN.dwg
 This document is the property of BOWMAN CONSULTING GROUP, INC. and is to be used only for the project and location specified herein. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN AUTHORIZATION AND ADOPTION BY BOWMAN CONSULTING GROUP, INC.



Know what's below.
 Call before you dig.



Chick-fil-A

Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998



Bowman
 Certificate of Authorization License No. LS6001241
 11475 Great Oaks Way Suite 350
 Alpharetta, GA 30022
 Phone: (678) 374-6687
 © Bowman Consulting Group Ltd



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE	NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 010014-01-218
 ISSUED FOR PERMIT
 DATE July 28, 2024
 DRAWN BY BCG
 Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
 SHEET EROSION CONTROL PLAN
 SHEET NUMBER C-1.2

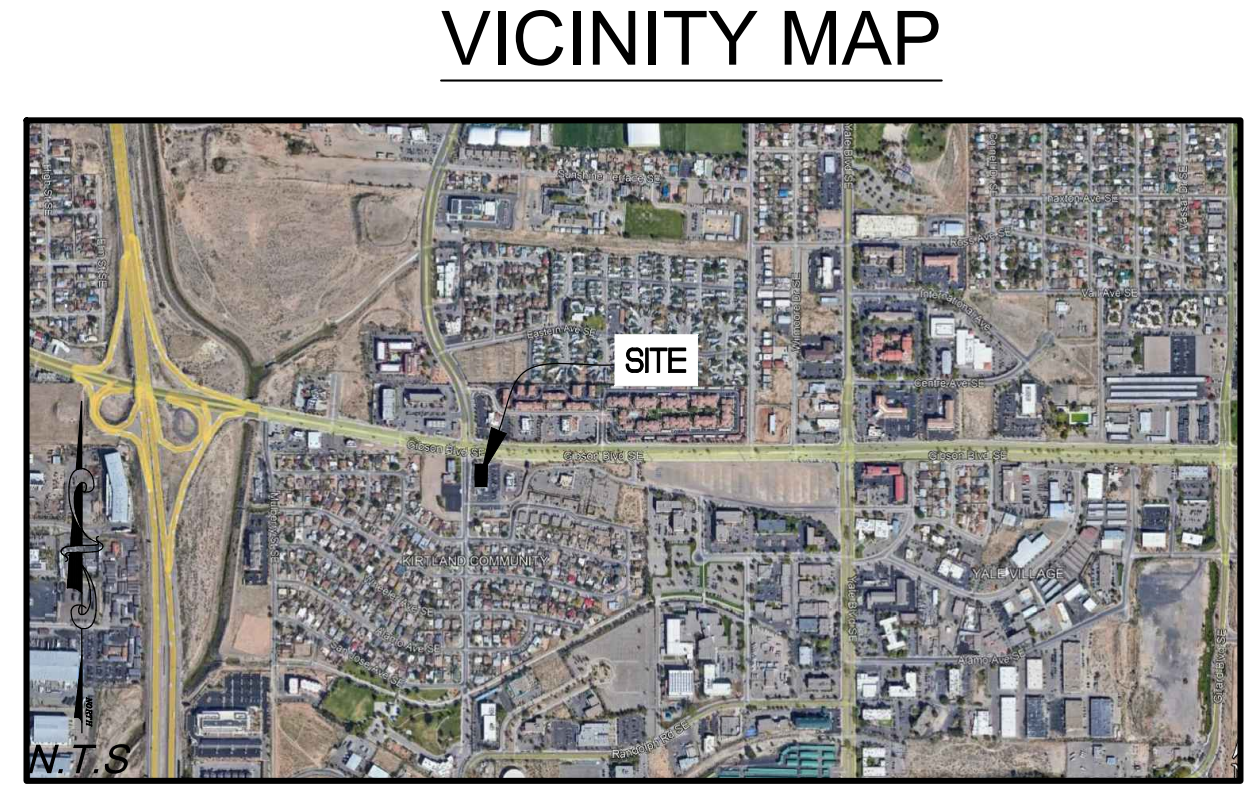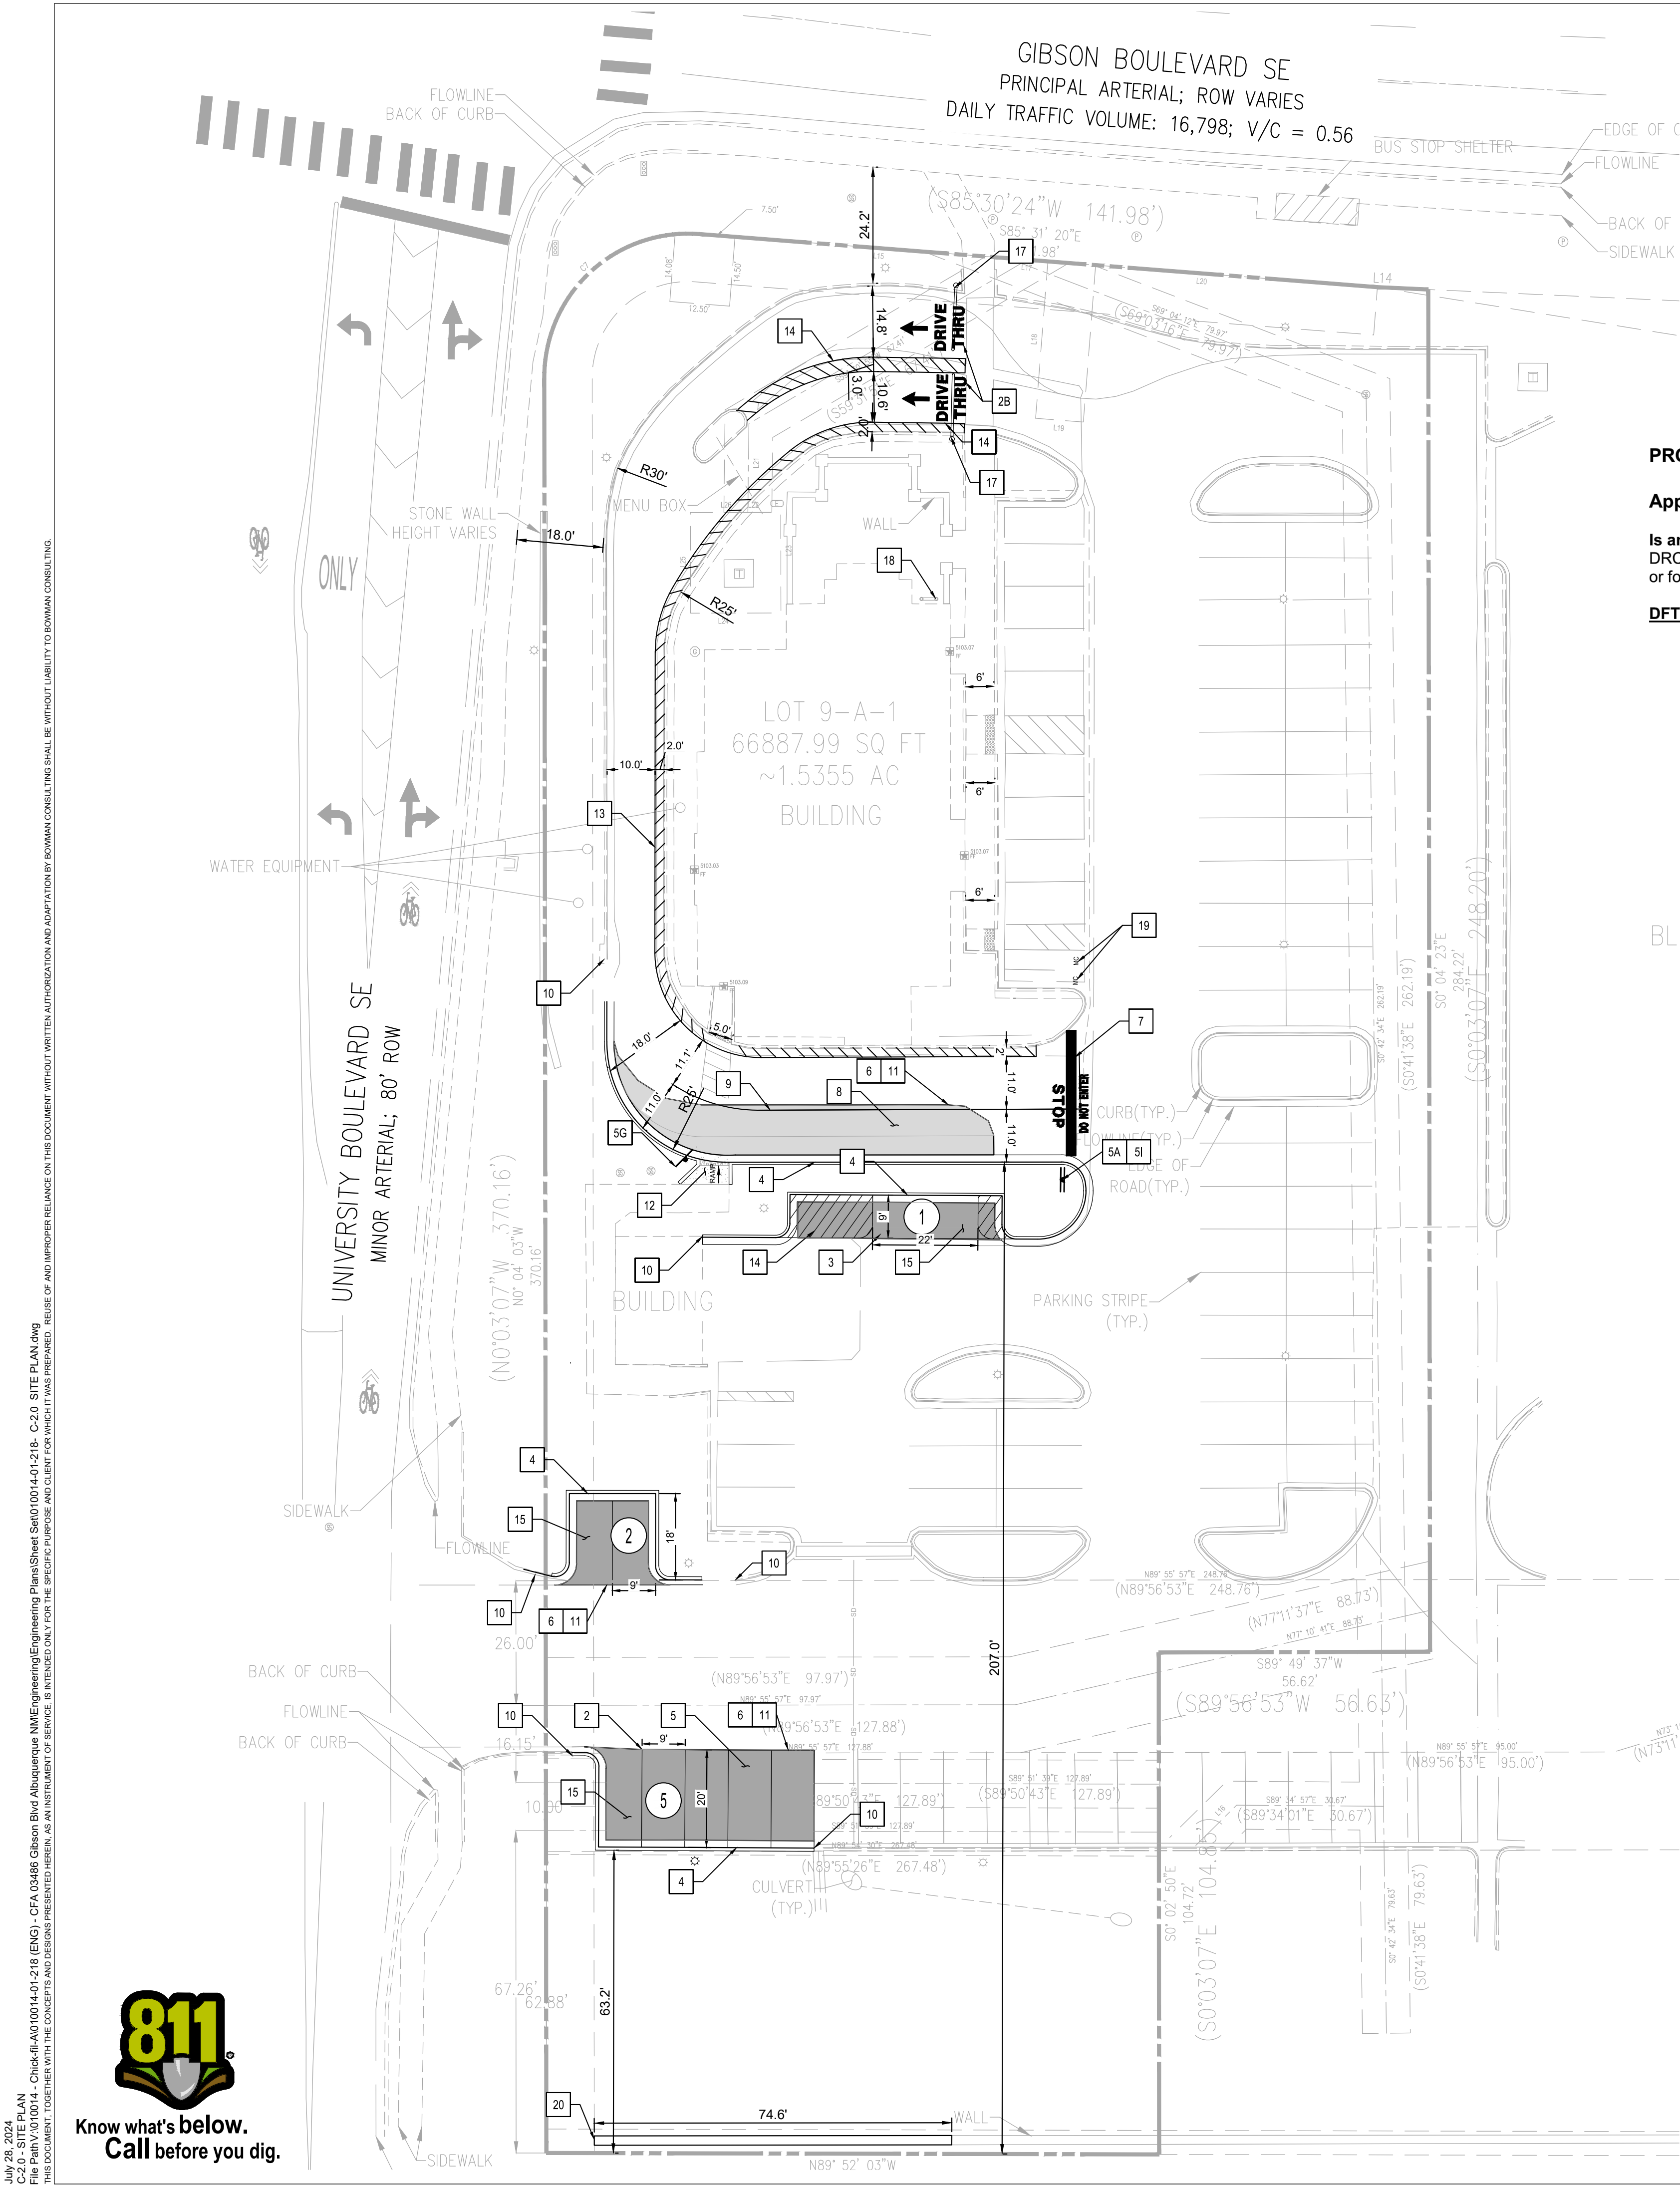

LEGEND

PROP. ASPHALT DRIVE		PROPERTY LINE	
PROP. CONC. PAVEMENT		EX. CONCRETE	
PROP. CURB		EX. CONCRETE CURB	
PROP. PARKING STRIPE		EX. SIGN	
PROP. SITE SIGNAGE		EX. LIGHT POLE	
PROP. DIRECTIONAL ARROW		EX. TREE	
PROP. PARKING COUNT		EX. ACCESSIBLE MARKING	
PROP. ORDER POINT		EX. BOLLARD	
		EX. DIRECTIONAL ARROW	

PROJECT NUMBER: PR-2021-004973

Application Number: SI-2024-00924

Is an Infrastructure List required? () Yes () No If yes, then a set of approved DRC plans with a work order is required for any construction within Public Right-of-Way or for construction of public improvements.

DFT SITE DEVELOPMENT PLAN APPROVAL:

- ____ Traffic Engineering, Transportation Division _____ Date _____
- ____ ABCWUA _____ Date _____
- ____ Parks and Recreation Department _____ Date _____
- ____ Hydrology _____ Date _____
- ____ Code Enforcement _____ Date _____
- ____ * Environmental Health Department (conditional) _____ Date _____
- ____ Solid Waste Management _____ Date _____
- ____ Planning Department _____ Date _____

PARKING CALCULATIONS

USE	QTY	RATIO	REQUIRED
BUILDING AREA	4,526	5.6 SPACE PER 1,000 SF	26
CFA STANDARD PARKING PROVIDED			68
CFA ACCESSIBLE PARKING REQUIRED			3
CFA ACCESSIBLE PARKING PROVIDED			3
MOTORCYCLE PARKING REQUIRED			2
MOTORCYCLE PARKING PROVIDED			2
BICYCLE PARKING REQUIRED			3
BICYCLE PARKING PROVIDED			3
PROPOSED TOTAL PARKING			71
EXISTING TOTAL PARKING			67
DRIVE-THROUGH STACKING REQUIRED			12
DRIVE-THROUGH STACKING PROVIDED			16

SITE SUMMARY

JURISDICTION	CITY OF ALBUQUERQUE
ZONING	MX-L (LOW INTENSITY ZONE DISTRICT)
USE	FAST FOOD RESTAURANT WITH DRIVE THRU
PARCEL ID	AB0181822 (CITY), 101505528948711715 (COUNTY)
LOT	
SIZE	66,888 SF (1.54 AC)
BUILDING	
SIZE	4,526
PARKING	
SIZE	9' X 20' (90'); 9' X 22' (PARALLEL)

BUILDING SETBACKS

SETBACKS	REQUIRED	PROVIDED
FRONT (SOUTH)	25'	67.92'
REAR (NORTH)	N/A	44.67'
SIDE (WEST)	N/A	50.90'
SIDE (EAST)	25'	95.13'

EXISTING SITE CALCULATIONS

EXISTING AREA	SF	ACRES	%
TOTAL AFFECTED AREA	66,888	1.54	100.00%
EXIST. OPEN SPACE AREA	19,108	0.44	28.57%
EXIST. PERVIOUS AREA	19,108	0.44	28.57%
EXIST. IMPERVIOUS AREA	47,780	1.10	71.43%
EXIST. BUILDING AREA	4,526	0.10	6.77%
EXIST. PAVEMENT AREA	43,169	0.99	64.54%
EXIST. VEHICULAR USE AREA	35,787	0.82	53.50%


PROPOSED SITE CALCULATIONS

PROPOSED AREA	SF	ACRES	%
TOTAL AFFECTED AREA	66,888	1.54	100.00%
PROP. OPEN SPACE AREA	17,883	0.41	26.74%
PROP. PERVIOUS AREA	17,883	0.41	26.74%
PROP. IMPERVIOUS AREA	49,005	1.13	73.26%
PROP. BUILDING AREA	4,526	0.10	6.77%
PROP. PAVEMENT AREA	44,394	1.02	66.37%
PROP. VEHICULAR USE AREA	36,883	0.85	55.14%

SITE NOTES

- 1 CONST. DIRECTIONAL ARROW (TYP.)
- 2 CONST. PAVEMENT MARKINGS GRAPHICS
 - 2A ONE WAY GRAPHICS
 - 2B DRIVE-THRU GRAPHICS
- 3 CONST. PARALLEL PARKING STALL (4" YELLOW STRIPING)
- 4 CONST. CURB
- 5 DIRECTIONAL SIGNAGE
 - 5A STOP SIGN
 - 5B BOLLARD MOUNTED ACCESSIBLE SIGN (NOT USED)
 - 5C CURBSIDE DELIVERY DESIGNATED SPACE (REMOVABLE SIGN) (NOT USED)
 - 5D NO LEFT TURN SIGN (NOT USED)
 - 5E ONE WAY SIGN (NOT USED)
 - 5F RIGHT TURN ONLY SIGN (NOT USED)
 - 5G PEDESTRIANS CROSSING SIGN
 - 5H DRIVE-THRU SIGN
 - 5I DO NOT ENTER SIGN
- 6 CONST. PAVEMENT EDGE
- 7 CONST. 24" STOP LINE GRAPHIC
- 8 CONST. CONCRETE PAVING DRIVE-THRU LANE
- 9 CONST. 4" WIDE YELLOW STRIPING
- 10 CONNECT TO EXISTING CURB
- 11 CONNECT TO EXISTING EDGE OF PAVEMENT
- 12 CONST. DOUBLE LANE P2F ORDER CANOPY (NOT USED)
- 13 EXISTING SINGLE ORDER MEAL DELIVERY CANOPY TO REMAIN (NOT USED)
- 14 CONST. SOLID 4" YELLOW STRIPING ON ENDS W/ 4" WIDE STRIPES @ 3' O.C., YELLOW REFLECTIVE PAINT WITH ANTI-SLIP ADHESIVE (NOT USED)
- 15 CONST. ASPHALT PAVEMENT
- 16 RELOCATED FLAG POLE AND BASE (NOT USED)
- 17 CONST. CLEARANCE BAR
- 18 EXISTING BICYCLE RACK
- 19 "MC" MOTORCYCLE PAVEMENT MARKING
- 20 MINIMUM 6" HIGH OPAQUE WALL. CONTRACTOR TO MATCH EXISTING WALL.

NOTE: ALL BROKEN OR CRACKED SIDEWALK MUST BE REPLACED WITH SIDEWALK AND CURB AND GUTTER PER CITY OF ALBUQUERQUE PAVING SIDEWALK DETAIL.

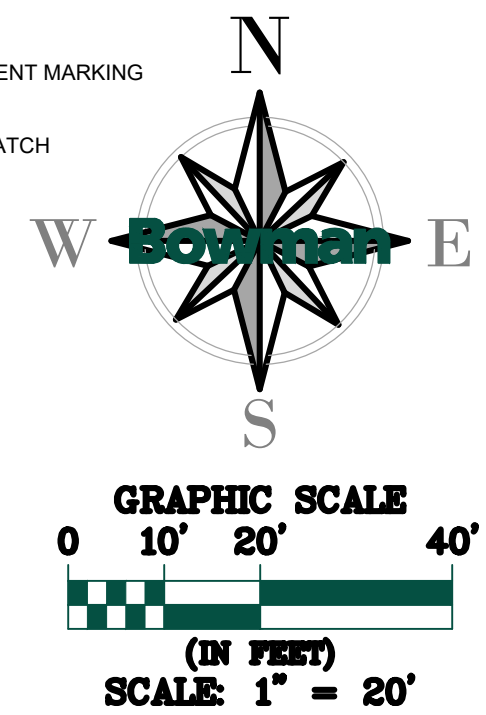

July 28, 2024
 C-2.0 - SITE PLAN
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 0486 Gibson Blvd Albuquerque NME\Engineering\Plans\Sheet\Sheet10010014-01-218 - C-2.0 SITE PLAN.dwg
 This document, together with the contract and related project documents, is intended for the specific project and site only. It is not to be used for any other project or site. The user of this document shall be without liability to Bowman Consulting.



Chick-fil-A

Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998

Bowman
 Certificate of Authorization License No. LSE001241
 11475 Great Oaks Way Suite 350
 Alpharetta, GA 30022
 Phone: (678) 374-6687
 © Bowman Consulting Group Ltd



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE

NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 010014-01-218

ISSUED FOR	PERMIT
DATE	July 28, 2024
DRAWN BY	BCG

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
 SHEET
 SITE PLAN
 SHEET NUMBER
C-2.0

July 28, 2024
 C-2.1 - FIRE 1 PLAN
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NME\Engineering\Plans\Sheets\010014-01-218 - C-2.1 - FIRE 1 PLAN.dwg
 This document, together with the contract and related correspondence, constitutes the entire agreement between the parties. No verbal agreement or other correspondence shall be relied upon in the absence of this document. No part of this document shall be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of the copyright owner.



Know what's below.
 Call before you dig.




VICINITY MAP



LEGEND	
PROP. ASPHALT DRIVE	PROPERTY LINE
PROP. CONC. PAVEMENT	EX. CONCRETE
PROP. CURB	EX. CONCRETE CURB
PROP. PARKING STRIPE	EX. SIGN
PROP. SITE SIGNAGE	EX. LIGHT POLE
PROP. DIRECTIONAL ARROW	EX. TREE
PROP. PARKING COUNT	EX. ACCESSIBLE MARKING
PROP. ORDER POINT	EX. BOLLARD
	EX. DIRECTIONAL ARROW

SITE SUMMARY	
JURISDICTION	CITY OF ALBUQUERQUE
ZONING	MX-L (LOW INTENSITY ZONE DISTRICT)
USE	FAST FOOD RESTAURANT WITH DRIVE THRU
PARCEL ID	ABQ181822 (CITY), 101505528948711715 (COUNTY)
LOT	
SIZE	66,888 SF (1.54 AC)
BUILDING	
SIZE	4,526
PARKING	
SIZE	9' X 20' (90'); 9' X 22' (PARALLEL)

NOTE: FIRE 1 PLAN BASED ON ORIGINAL FIRE PROTECTION PLANS DATED 12/02/2015 BY ALLIANCE FIRE PROTECTION, INC.

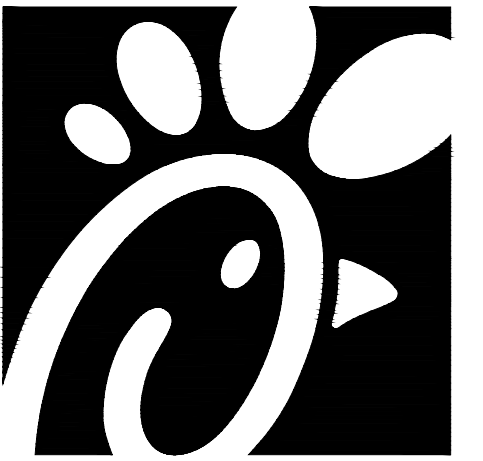

Chick-fil-A

Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998

Bowman

Certificate of Authorization License No. LSE001241
 11475 Great Oaks Way Suite 350
 Alpharetta, GA 30022
 Phone: (678) 374-6667
 © Bowman Consulting Group Ltd

SEAL



KAI BURK PE #28466

CHICK-FIL-A

GIBSON BLVD FSU

1600 GIBSON BLVD SE

ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION


CONSULTANT PROJECT #010014-01-218	
ISSUED FOR	PERMIT
DATE	July 28, 2024
DRAWN BY	BCG

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET FIRE 1 PLAN

SHEET NUMBER

C-2.1

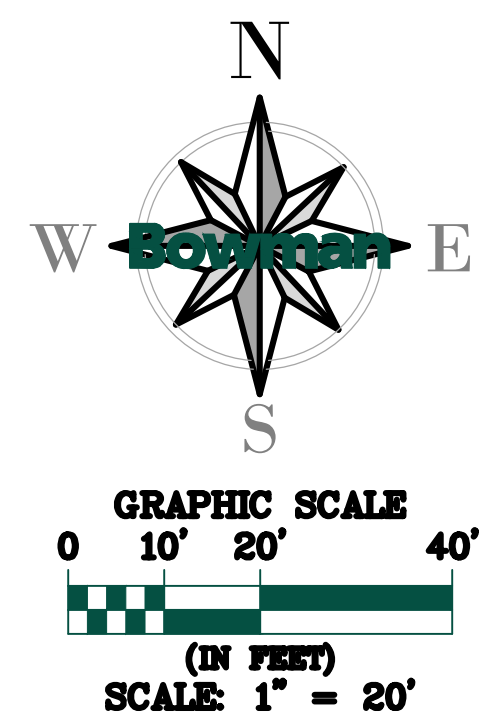

GIBSON BOULEVARD SE
PRINCIPAL ARTERIAL; ROW VARIES
DAILY TRAFFIC VOLUME: 16,798; V/C = 0.56

LOT 9-A-1
66887.99 SQ FT
~1.5355 AC
BUILDING

UNIVERSITY BOULEVARD SE
MINOR ARTERIAL; 80' ROW

GENERAL GRADING NOTES

1. ALL ELEVATIONS ARE BASED ON NAVD88. HORIZONTAL DATUM: NAD83.
2. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF ALL EXISTING UTILITIES (ABOVE AND BELOW GROUND) AS SHOWN ON THESE PLANS ARE APPROXIMATE AND WERE LOCATED BASED ON EITHER VISUAL OBSERVATIONS AT THE SITE, EXISTING SURVEYS, AND/OR FROM UTILITY OWNERS. THE OWNER DOES NOT GUARANTEE THAT EXISTING UTILITY LOCATIONS ARE EXACT. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXACT LOCATIONS OF EXISTING UTILITIES (ABOVE AND BELOW GROUND) BEFORE BEGINNING ANY CONSTRUCTION. THE CONTRACTOR SHALL CALL APPROPRIATE UTILITY COMPANIES AND THE UTILITIES PROTECTION CENTER AT LEAST 72 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATIONS OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY OWNER AND/OR ENGINEER OF ANY UTILITY CONFLICTS WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
3. ALL CUT OR FILL SLOPES SHALL BE 3:1 OR FLATTER UNLESS OTHERWISE NOTED.
4. EXISTING DRAINAGE STRUCTURES TO BE INSPECTED AND REPAIRED AS NEEDED, AND EXISTING PIPES TO BE CLEANED OUT TO REMOVE ALL SILTS AND DEBRIS.
5. IF ANY EXISTING STRUCTURES TO REMAIN ARE DAMAGED DURING CONSTRUCTION IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO REPAIR AND/OR REPLACE THE EXISTING STRUCTURE AS NECESSARY TO RETURN IT TO EXISTING CONDITIONS OR BETTER.
6. CONTRACTOR SHALL ASSURE POSITIVE DRAINAGE AWAY FROM BUILDING AND FOR ALL NATURAL AND PAVED AREAS. SLOPES IN GRASS AREAS SHALL BE GRADED AT A 1.0% MIN.

GRADING & DRAINAGE LEGEND	
	PROPOSED GRADE MAJOR CONTOUR LINE
	PROPOSED GRADE MINOR CONTOUR LINE
	EXISTING GRADE MAJOR CONTOUR LINE
	EXISTING GRADE MINOR CONTOUR LINE
	LIMITS OF DISTURBANCE
	= MATCH EXISTING GRADE

ALL CURB SPOT ELEVATIONS
REPRESENT FACE OF CURB
UNLESS OTHERWISE NOTED

GRADING DESCRIPTION

THE EXISTING SITE IS GRADED TO DRAIN PER CITY OF ALBUQUERQUE AND STATE STANDARDS WITH ALL NECESSARY CURBING, DRIVES, AND LANDSCAPING. THE PROPOSED IMPROVEMENTS WILL ADD CURB AND GUTTER WHERE NECESSARY AND TIE IN AT EXISTING ELEVATIONS AND GRADES. THE SITE CURRENTLY GRADES DOWNWARD TOWARDS THE SOUTHWEST. THERE ARE NO OTHER TOPOGRAPHIC FEATURE OF NOTE WITHIN 100' OF THE SITE.



Chick-fil-A

Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-2998

Bowman

Certificate of Authorization License No. LS6001241
11475 Great Oaks Way Suite 350
Alpharetta, GA 30022
Phone: (678) 374-6687
© Bowman Consulting Group Ltd

SEAL



KAI BURK PE #28466

CHICK-FIL-A

GIBSON BLVD FSU

1600 GIBSON BLVD SE

ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION

CONSULTANT PROJECT #	#010014-01-218
ISSUED FOR	PERMIT
DATE	July 28, 2024
DRAWN BY	BCG


Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET

GRADING PLAN

SHEET NUMBER

C-3.0

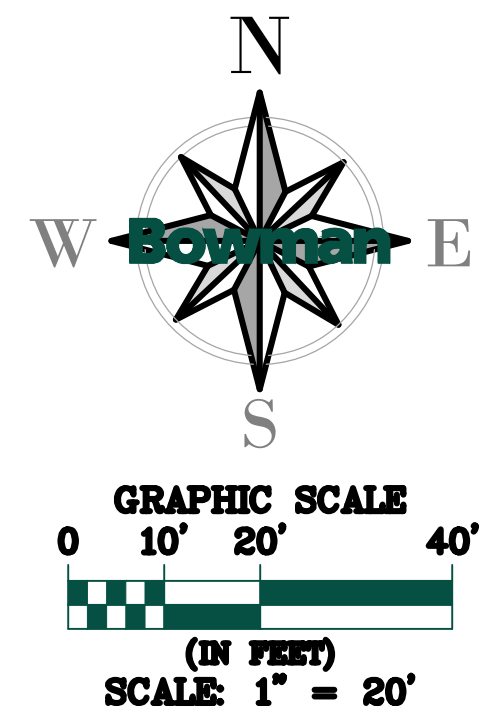

July 28, 2024
 C-3.0 - GRADING PLAN
 File Path: \\010014-01-218 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NME\Engineering\Grading\Plans\Sheet\010014-01-218 - C-3.0 GRADING PLAN.dwg
 This document is the property of Bowman Consulting Group, Inc. It is to be used only for the project and site identified herein. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Bowman Consulting Group, Inc.




Know what's below.
Call before you dig.

File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 02486 Gibson Blvd Albuquerque NME\Engineering\Plans\Sheets\010014-01-218 - C-4.0 STANDARD DETAILS.dwg
 This document contains the copyrighted and/or trademarked information of Chick-fil-A. It is to be used only for the project and location specified. No other use or reproduction is permitted without the express written consent of Chick-fil-A.




Know what's below.
Call before you dig.

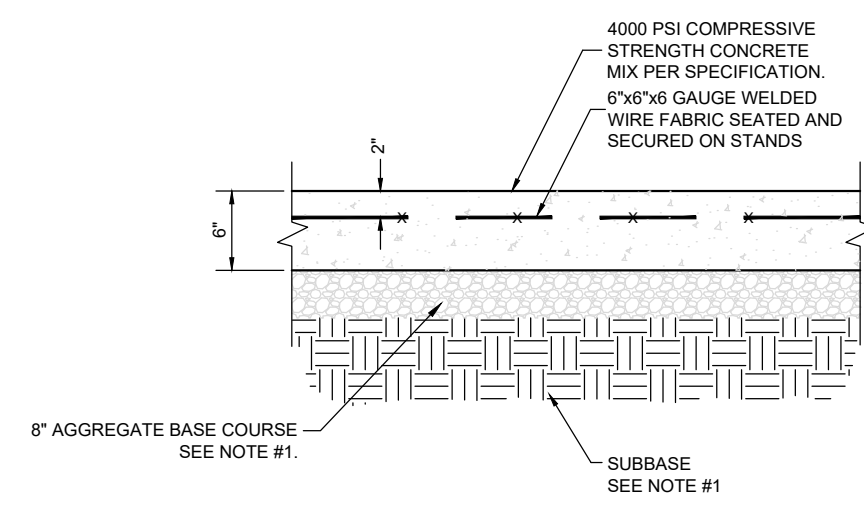

NOTE:
1. GENERAL CONTRACTOR SHALL REFERENCE GEOTECHNICAL REPORT FOR PAVEMENT SECTION REQUIREMENTS.


26 CONCRETE PAVEMENT DRIVE-THRU LANE
C2.0 NOT TO SCALE

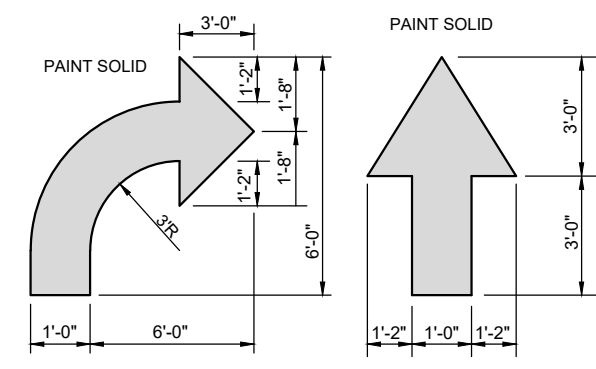

DIRECTIONAL ARROW
NOT TO SCALE


NOTES:
1. GENERAL CONTRACTOR SHALL REFER TO PARKING LOT STRIPING SPECIFICATIONS. SEE DETAIL.
2. PAVEMENT MARKINGS SHALL BE APPLIED ACCORDING TO REQUIREMENTS AS OUTLINED IN SECTION 38 OF THE CURRENT MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
3. CONTRACTOR SHALL USE WHITE REFLECTIVE PAINT ON ASPHALT & YELLOW REFLECTIVE PAINT ON CONCRETE, UNLESS UPON VERIFICATION BY THE GENERAL CONTRACTOR IT IS DETERMINED THAT LOCAL, STATE, OR ADA CODES DIFFER, IN WHICH CASE THESE CODES SHALL GOVERN.

1 PAVEMENT MARKINGS - 1
C2.0 NOT TO SCALE

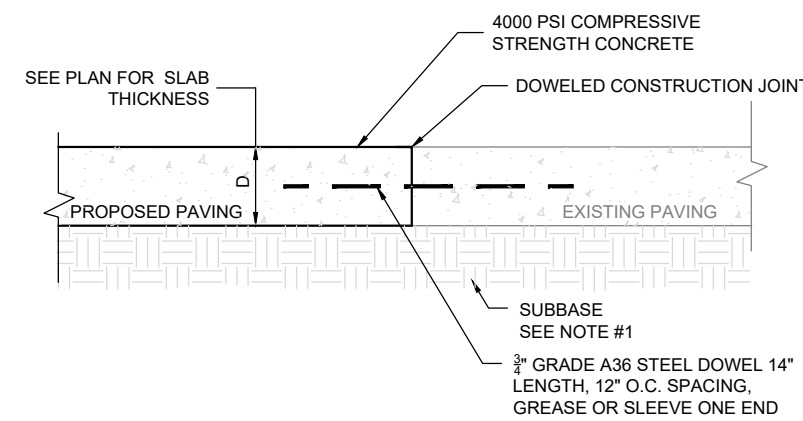


NOTE:
1. GENERAL CONTRACTOR SHALL REFERENCE GEOTECHNICAL REPORT FOR PAVEMENT SECTION REQUIREMENTS.

22 TRANSVERSE AND LONGITUDINAL DOWELED CONSTRUCTION JOINT
C2.0 NOT TO SCALE

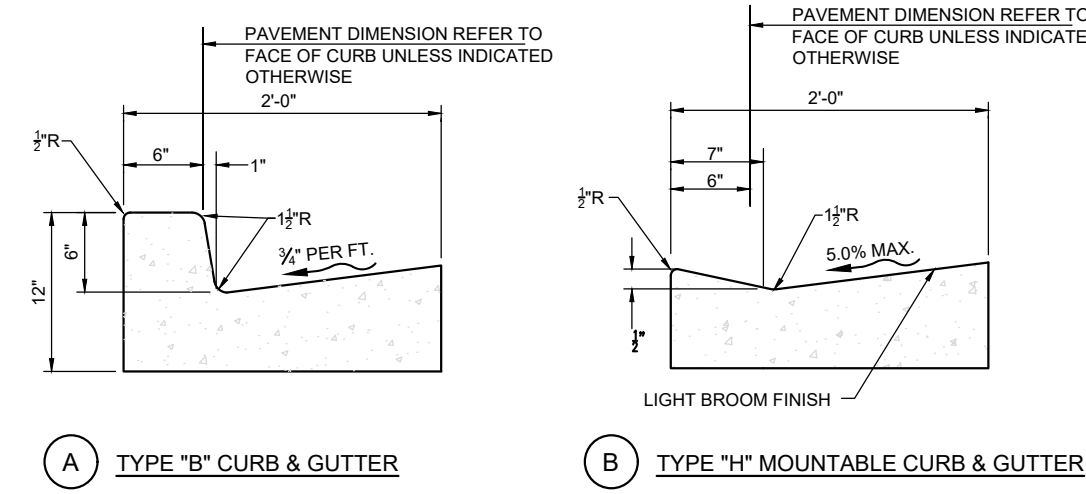


NOTES:
1. CONC. FOR CURBING SHALL HAVE A MIN. COMPRESSIVE STRENGTH OF 3,500 PSI @ 28 DAYS.
2. CONTRACTION JOINTS @ 1'-0" O.C. TOOLED 1/2" (1/4" - 3/8") WIDE, 1" OR MAX. DIA DEPTH WHICHEVER IS GREATER.
3. IF NEEDED, DOWEL INTO ADJACENT CONC. SLAB PER THE EXPANSION JOINT DETAIL.
4. GUTTER SLOPE TO MATCH ADJACENT PAVEMENT, TRAVERSE & LONGITUDINAL.

11 CONCRETE CURB & GUTTER
C2.0 NOT TO SCALE

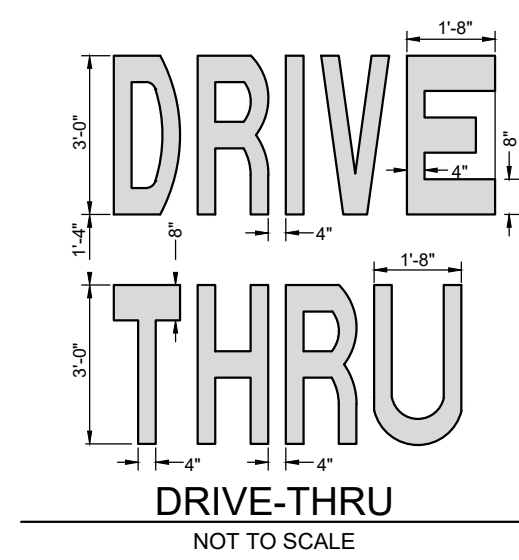


DRIVE-THRU
NOT TO SCALE

NOTES:
1. GENERAL CONTRACTOR SHALL REFER TO PARKING LOT STRIPING SPECIFICATIONS. SEE DETAIL.
2. PAVEMENT MARKINGS SHALL BE APPLIED ACCORDING TO REQUIREMENTS AS OUTLINED IN SECTION 38 OF THE CURRENT MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
3. CONTRACTOR SHALL USE WHITE REFLECTIVE PAINT ON ASPHALT & YELLOW REFLECTIVE PAINT ON CONCRETE, UNLESS UPON VERIFICATION BY THE GENERAL CONTRACTOR IT IS DETERMINED THAT LOCAL, STATE, OR ADA CODES DIFFER, IN WHICH CASE THESE CODES SHALL GOVERN.
4. IF STOP SIGNS ARE PROPOSED, 'STOP' LETTERING ON STOP BAR DETAIL, IS NOT REQUIRED.

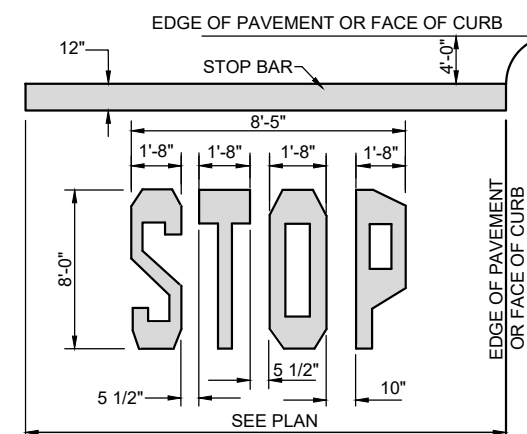

STOP BAR
NOT TO SCALE


2 PAVEMENT MARKINGS - 2
C2.0 NOT TO SCALE

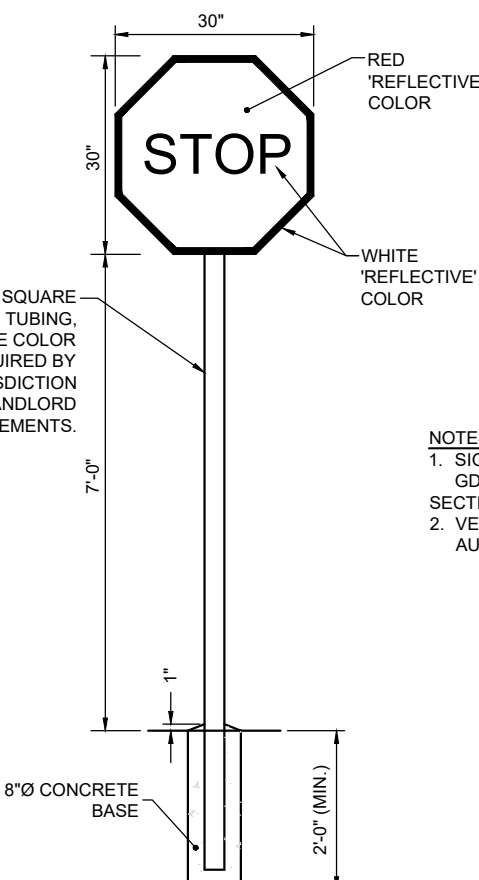

STOP SIGN & STANDARD MOUNTING POST (MUTCD R 1-1)

8 STOP SIGN
C2.0 NOT TO SCALE


NOTES:
1. DESIGN PER GEOTECH REPORT BY UNITED CONSULTING, DATED 11/02/2022.
2. PAVEMENTS & SUBGRADES INCLUDING MATERIALS & COMPACTION SHALL MEET STANDARDS & SPECIFICATIONS OF THE GOVERNING DEPARTMENT OF TRANSPORTATION.
3. JOINTING & SPACING SHALL BE PER CONCRETE JOINT DETAILS.
4. CONCRETE SHALL HAVE A MIN. COMPRESSIVE STRENGTH OF 4,000 PSI @ 28 DAYS.

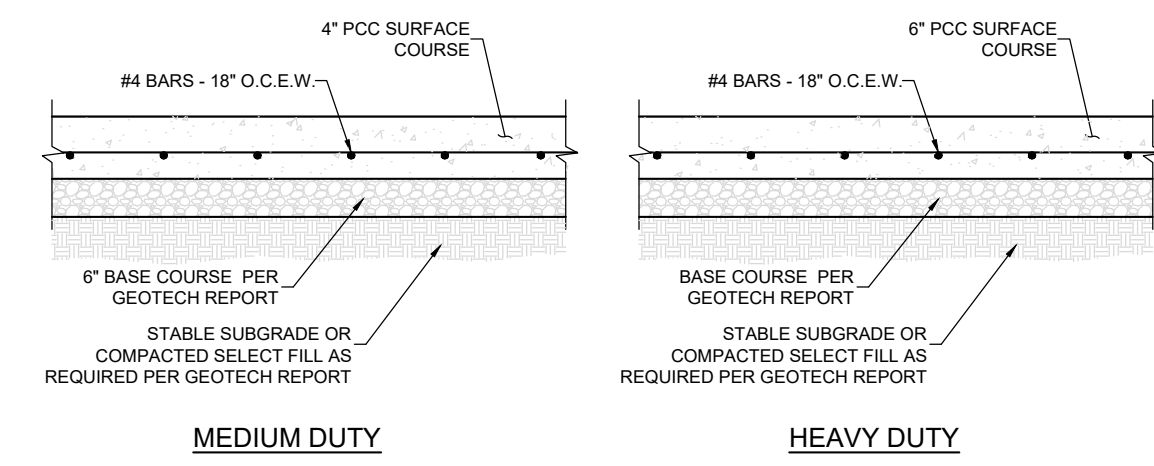

MEDIUM DUTY


HEAVY DUTY

12 CONCRETE PAVEMENTS
C4.0 NOT TO SCALE

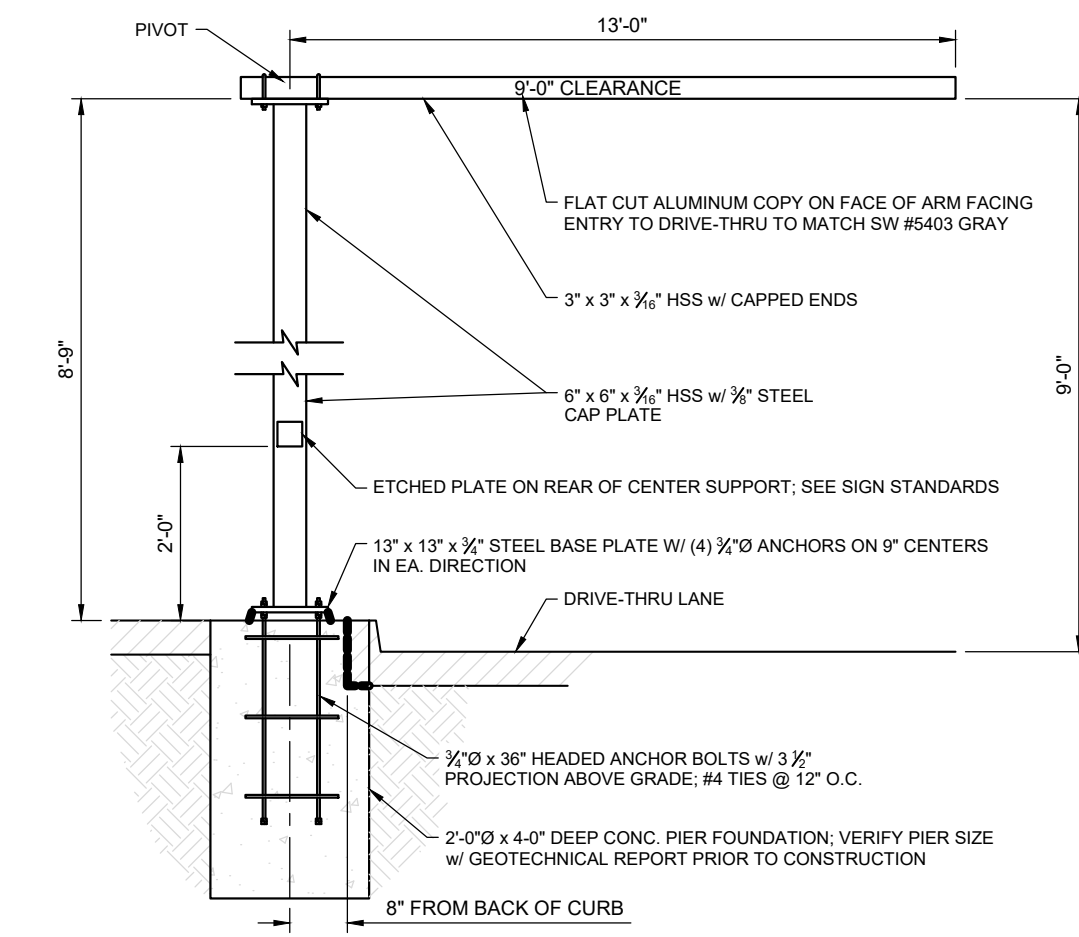


NOTES:
1. ENTIRE CLEARANCE BAR & HARDWARE TO BE POWDER COATED OPC P-820 MATTE BLACK FINISH.
2. CLEARANCE BAR ARM TO ROTATE WHEN STRUCK & RETURN TO ORIGINAL POSITION.
3. COORDINATE W/ THE ARCHITECT & STRUCTURAL ENGINEER.

5 DRIVE-THRU CLEARANCE BAR
C2.0 NOT TO SCALE

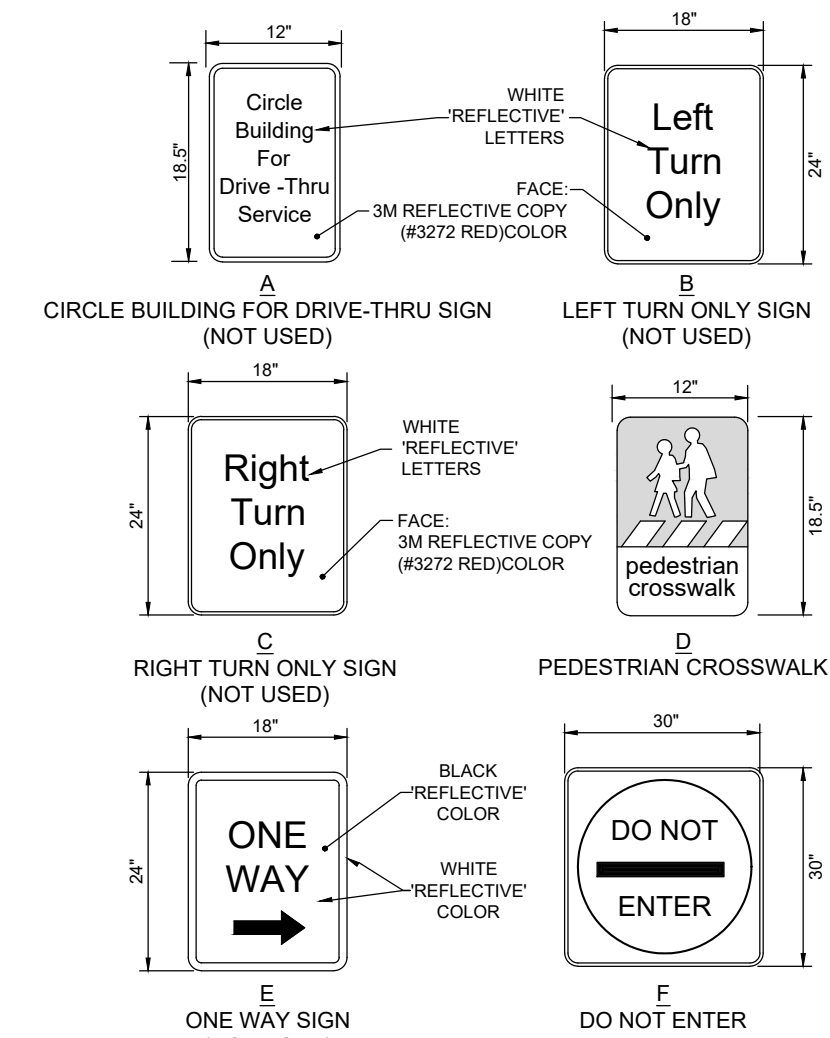

7 DIRECTIONAL SIGNAGE
C2.0 NOT TO SCALE

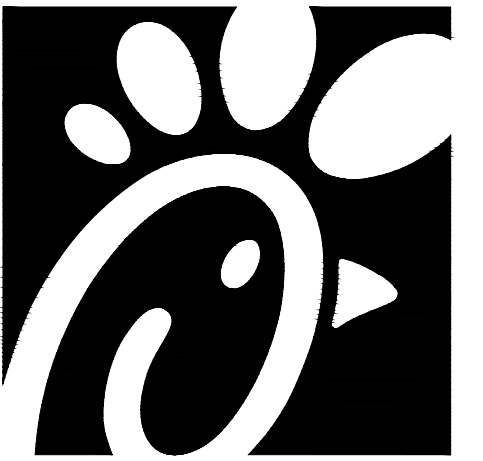

Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-2998

Bowman

Certificate of Authorization License No. LSE001241
11475 Great Oaks Way Suite 350
Alpharetta, GA 30022
Phone: (678) 374-6667
© Bowman Consulting Group Ltd



KAI BURK PE #28466

CHICK-FIL-A

GIBSON BLVD FSU

1600 GIBSON BLVD SE

ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 010014-01-218	ISSUED FOR	PERMIT
DATE	July 28, 2024	
DRAWN BY	BCG	

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

STANDARD DETAILS

SHEET NUMBER

C-4.0

July 28, 2024
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 02486 Gibson Blvd Albuquerque NME\Engineering\Plans\Sheet\010014-01-218 - C-5.0 STANDARD DETAILS.dwg
 This document contains the copyrighted and/or trademarked information of Chick-fil-A. It is intended for use only for the project and location specified. No other use, reproduction, or distribution is permitted without the express written consent of Chick-fil-A. THE USER SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES. THE USER SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES. THE USER SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.



Know what's below.
 Call before you dig.

/ TRANSPORTATION DESIGN /

Section 7-4(J)(7) Entrance and Gate Requirements for Private Ways and Streets

- All gated communities must include a turnaround for visitors at the gate so that the vehicle does not stand in or back into the City right-of-way.
- Where a single gate is provided, the minimum width shall be 20 feet. For divided streets, the minimum width shall be 12 feet.
- Additional entrance and gate requirements may be required by the Fire Marshal.

Part 7-4(K) Off-street Parking and Site Design

This section provides guidance on site design and off-street parking layout. The overall site design shall accommodate all modes of transportation including automobiles, pedestrians, bicyclists, and motorcyclists. To facilitate efficient parking operations, the designer shall also consider the interface of the site with adjacent development areas.

Section 7-4(K)(1) General Provisions

- All sites and off-street parking areas shall be designed to comply with ADA PROWAG standards.
- The number of off-street, vehicle, bicycle and motorcycle parking spaces shall be provided as established in the *IDD Section 14-16-5-5 Parking and Loading*.
- Site design shall comply with design requirements and landscape buffers established by the *IDD Part 14-16-5 Dimensional Standards*.
- Parking and site layout shall be designed such that vehicles do not back into the City right-of-way, except single-family dwellings may back into local streets.

Section 7-4(K)(2) Bicycle Parking

Off-street bicycle parking location, layout and rack options vary widely. The following guidelines shall be considered when placing and designing bicycle parking areas and choosing rack options. Alternative rack design, placement, or installation methods not meeting the guidelines below may be considered and are reviewed on a case-by-case basis by the City Engineer.

- All bicycle racks shall be designed according to the following guidelines:
 - The rack shall be a minimum of 30 inches tall and 18 inches wide.
 - The bicycle frame shall be supported horizontally at two or more places. Comb/rooster racks are not allowed.
 - The rack shall be designed to support the bicycle in an upright position. See the *IDD Section 14-16-5-5(E)* for additional information.
 - The rack allows varying bicycle frame sizes and styles to be attached.
 - The user is not required to lift the bicycle onto the bicycle rack.
 - Each bicycle parking space is accessible without moving another bicycle.
- Bicycle parking spaces shall be located in a well-lit area, visible from and, where feasible, located within 50 feet of the primary pedestrian entrance it serves. Bicycle rack placement shall meet the following placement requirements. (See *FIGURE 7.4.115* for direction on bicycle stall layout.)




LAST PRINTED: SEPTEMBER 4, 2020

/ TRANSPORTATION DESIGN /

- Bicycle parking shall be separated from vehicle parking areas and driveways by a barrier, such as a curb, rail, or bollard, or be located to minimize the possibility of vehicles striking parked bicycles.
- Bicycle racks shall be placed in a designated area and shall not infringe upon the width of the required clear pedestrian access route. (See *Part 7-4(E) Pedestrian Facilities*.)
- Bicycle racks shall not be placed directly in front of entrances or in locations that impede pedestrian flow.
- Bicycle racks shall be sturdy and anchored to a concrete pad.
- A 1-foot clear zone around the bicycle parking stall shall be provided.
- Bicycle parking spaces shall be at least 6 feet long and 2 feet wide.

FIGURE 7.4.115 Bicycle Parking Stall Layout Options


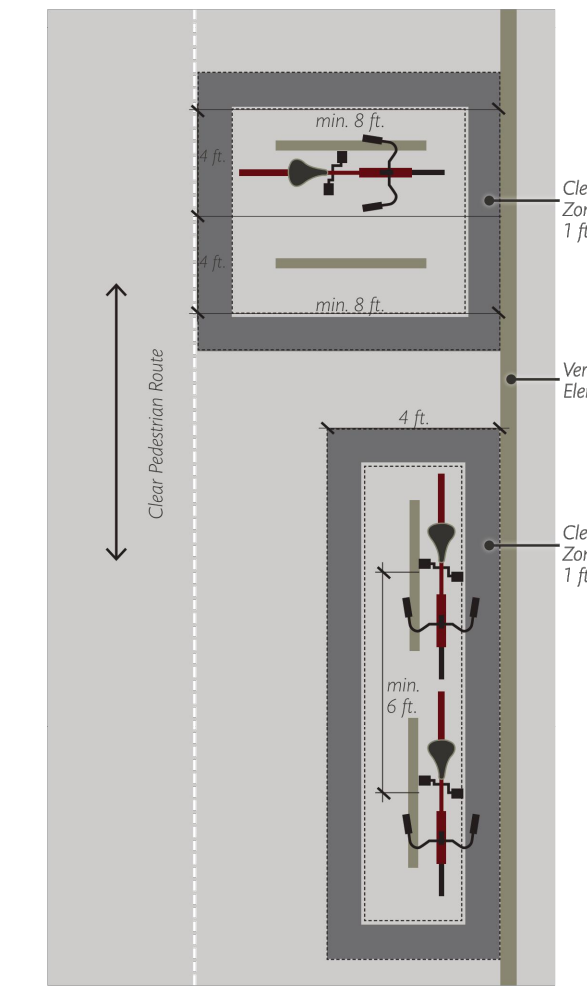


Section 7-4(K)(3) Motorcycle Parking

- Motorcycle parking shall be a minimum of 4 feet wide and 8 feet long. (See *TABLE 7.4.77* and *FIGURE 7.4.116*.)
- Motorcycle parking spaces shall be located in a well-lit area that is visible from the primary building entrance on the site.



LAST PRINTED: SEPTEMBER 4, 2020

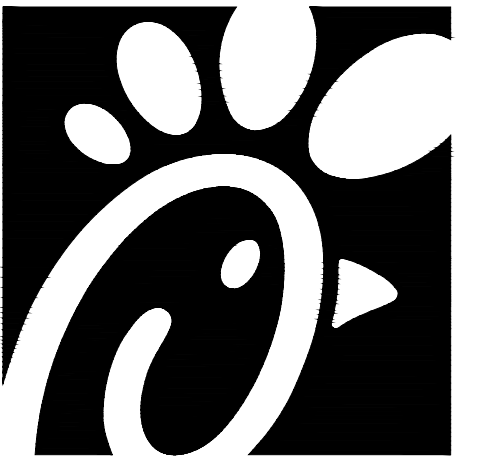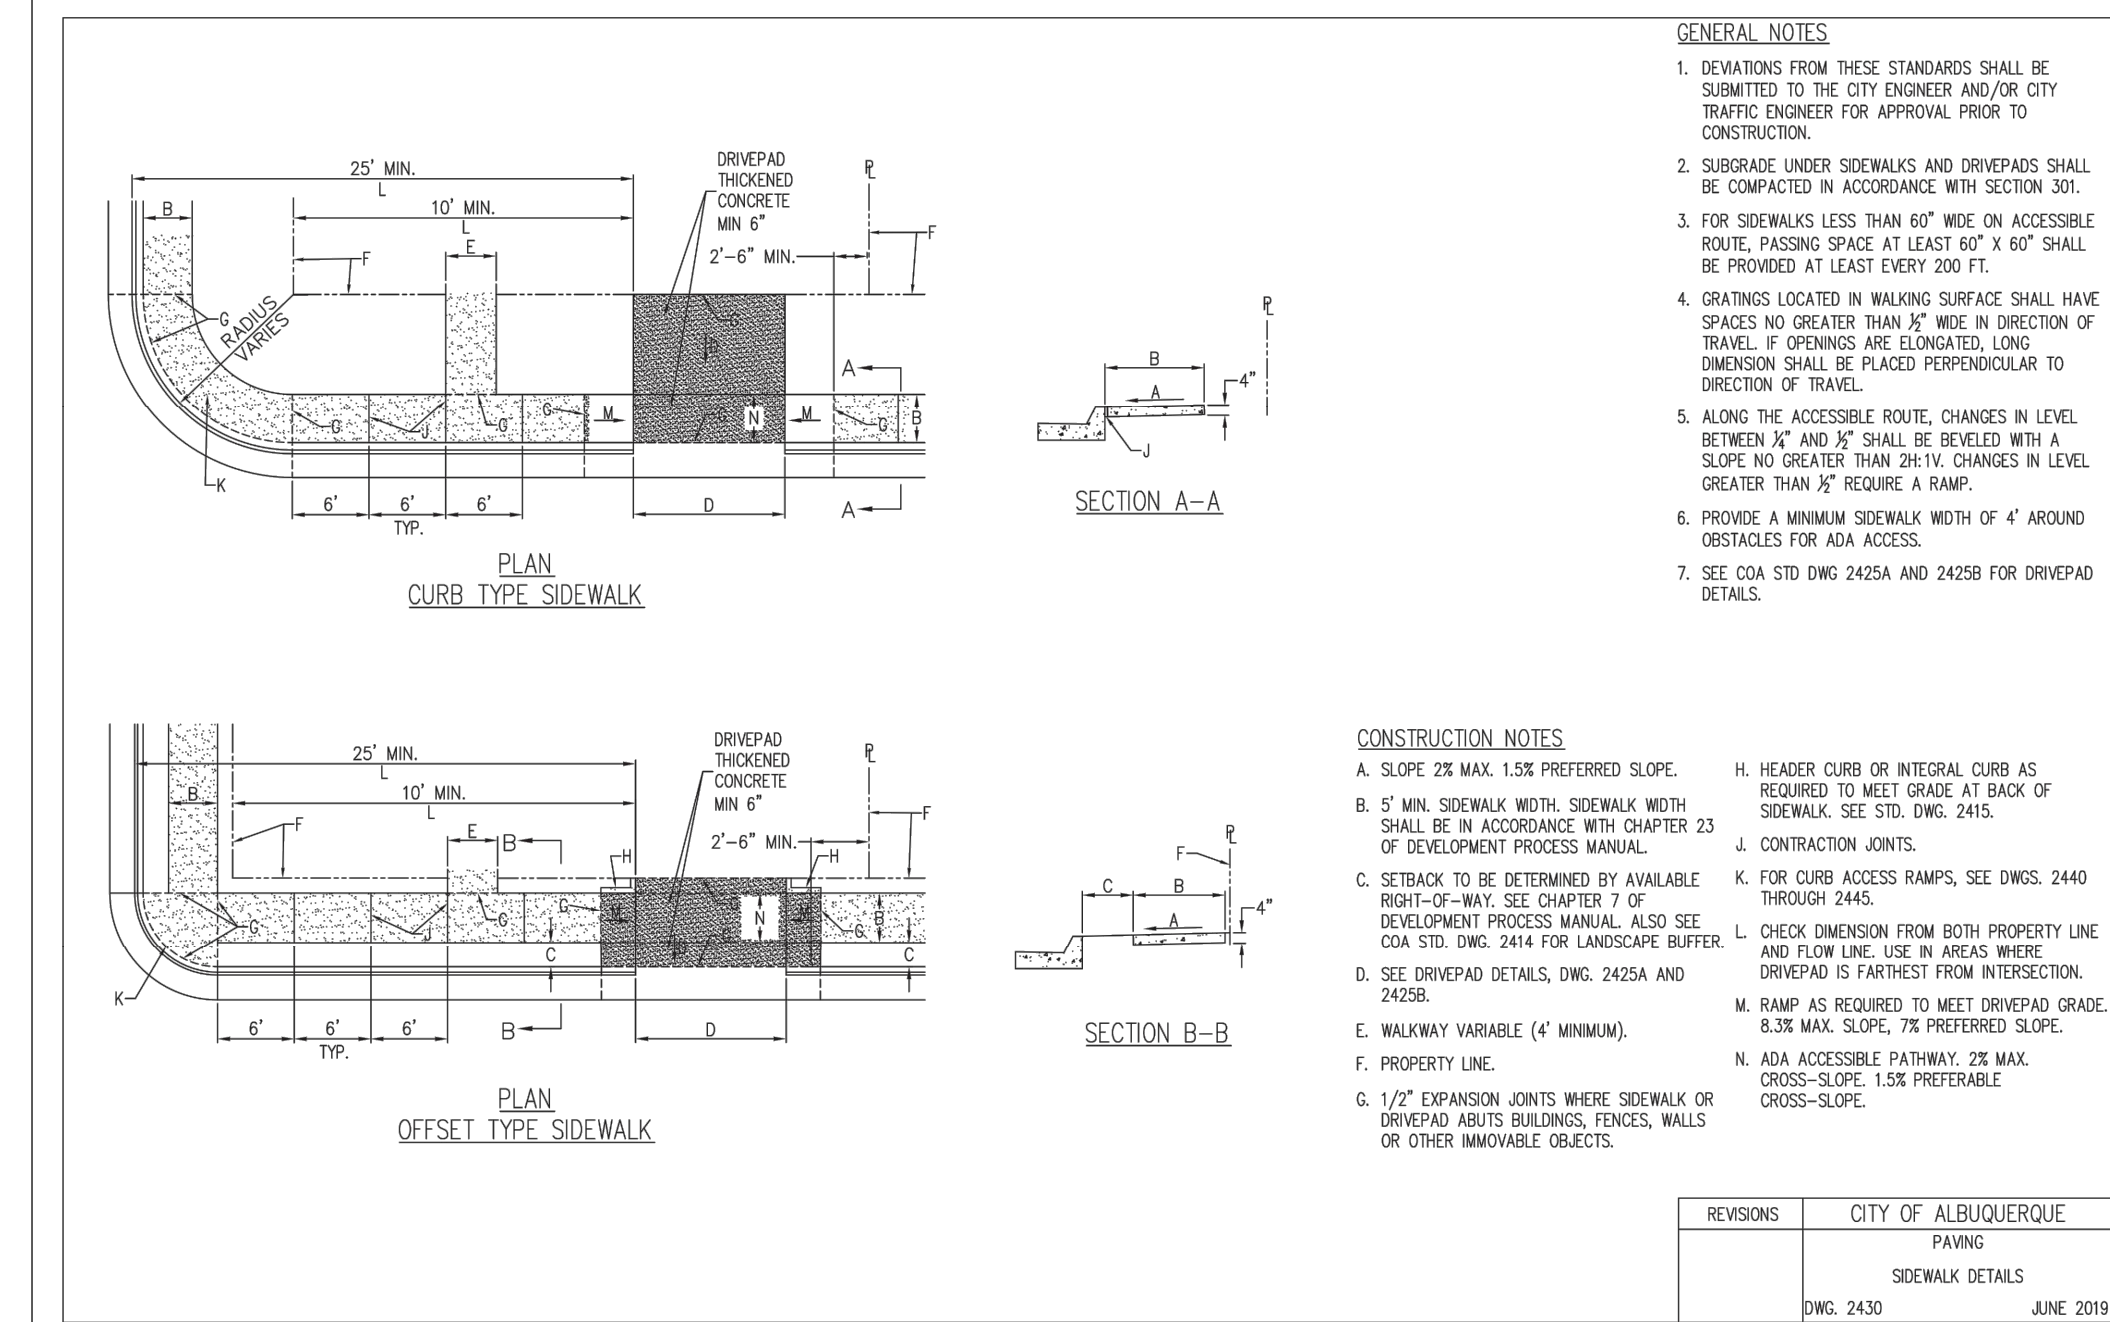

Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998



Certificate of Authorization License No. LSE001241
 11475 Great Oaks Way Suite 350
 Alpharetta, GA 30022
 Phone: (678) 374-6687
 © Bowman Consulting Group Ltd

SEAL



KAI BURK PE #28466

CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION

CONSULTANT PROJECT #	010014-01-218
ISSUED FOR	PERMIT
DATE	July 28, 2024
DRAWN BY	BCG

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET
CONSTRUCTION DETAILS

SHEET NUMBER
C-5.0

GENERAL NOTES

- PERMITS AND SURVEYS
 (NOTE: ALL REFERENCES TO "CONTRACTOR" ARE SPECIFIC TO "LANDSCAPE CONTRACTOR" UNLESS NOTIFIED AS "GENERAL OR OTHER TYPE OF CONTRACTOR")
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING QUANTITIES OF MATERIALS NEEDED TO COMPLETE THIS PLAN IN THE FIELD. NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPANCIES BETWEEN THE DRAWINGS AND CONDITIONS IN THE FIELD. GRAPHIC Q'TYS. PREVAIL OVER WRITTEN Q'TYS. PRIOR TO COMMENCEMENT OF WORK THE LANDSCAPE CONTRACTOR SHALL CONTACT OWNERS REPRESENTATIVE FOR SPECIFIC INSTRUCTIONS RELEVANT TO THE SEQUENCING AND SCOPE OF WORK.
 - CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL LANDSCAPE SHOWN ON THIS PLAN. ANY DEFICIENCIES OR DEVIATIONS FROM THIS PLAN ARE TO BE APPROVED BY OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT. ANY CHANGES FROM THE APPROVED PLANS MAY REQUIRE APPROVAL FROM THE CITY OR COUNTY PLANNING DEPARTMENTS. LANDSCAPE CONTRACTOR TO PROVIDE ALL LABOR AND MATERIALS NECESSARY TO FURNISH SCOPE OF WORK AS SHOWN PER PLAN.
 - EXISTING TOPSOIL IS TO BE STOCKPILED AND USED TO ESTABLISH FINAL GRADES WITHIN LANDSCAPE AREAS. ALL STOCKPILED SOIL MUST BE CLEAR OF WEEDS, ROCKS AND DEBRIS BEFORE REUSE. ALL BERMED PLANTING BEDS TO BE CREATED WITH IMPORTED TOPSOIL.
 - GENERAL CONTRACTOR TO RE-SPREAD STOCKPILED SOIL AND ESTABLISH ROUGH GRADE CONDITIONS TO THE FOLLOWING SPECIFICATIONS:
 - 1" BELOW CURB FOR ALL SEEDED AREAS.
 - 2.5" BELOW CURB FOR ALL SODDED AREAS.
 - 4" BELOW CURB FOR ALL PLANTING, ROCK AND MULCH BEDS.
 - CONTRACTOR TO TILL PARKING LOT ISLANDS TO A DEPTH OF 30" .
 - AMEND ALL PLANTING BEDS WITH CLASS 1 COMPOST. APPLY AT RATE OF 3 PER 1000 SQUARE FEET TO ALL PLANTING BEDS AND MANICURED LAWN AREAS, AND 2 CYDS. PER 1000 SQUARE FEET FOR SEEDED AREAS. TILL, MIXING THOROUGHLY, INTO THE UPPER 8" OF SOIL.
 - FINE GRADE TO BE ESTABLISHED BY LANDSCAPE CONTRACTOR. FINE GRADE SHALL BE FREE OF ROCKS AND DEBRIS. FINE GRADE IN SEED AREAS SHALL BE FREE FROM ROCKS AND DEBRIS 1/2" AND GREATER. FINE GRADE IN SODDED AREAS SHALL BE FREE FROM ROCKS AND DEBRIS 1/4" AND GREATER. CONTRACTOR TO REPORT ANY POOR DRAINAGE CONDITIONS PRIOR TO CONSTRUCTION.
 - MULCHS: ALL PLANTING BEDS THAT CALL FOR WOOD/ORGANIC MULCH TO RECEIVE 4" ORGANIC SHREDDED BARK MULCH. SHREDDED MULCH IS TO BE OF FIBROUS MATERIAL, NOT CHIPS OR CHUNKS. NO FABRIC IS TO BE PLACED UNDER WOOD/ORGANIC MULCH. TREES IN TURF AND NATIVE GRASS AREAS TO RECEIVE 4" DIAMETER OF WOOD MULCH, 3" DEPTH. ALL MULCHED BEDS ARE TO BE SPRAYED WITH WATER AFTER INSTALLATION TO HELP MULCH TO MAT DOWN
 - SHRUBS AND GROUNDCOVERS IN NATIVE GRASS AREAS TO RECEIVE 3" DIAMETER OF WOOD MULCH, 3" DEEP. TREES IN COBBLE/ROCK MULCH TO RECEIVE 4" DIAMETER OF WOOD MULCH, 3" DEEP. SHRUBS AND GROUNDCOVERS IN COBBLE/ROCK MULCH AREAS TO RECEIVE 3" DIAMETER OF WOOD MULCH, 3" DEEP. NO FABRIC UNDERLAYMENT IN WOOD MULCH AREAS.
 - REMOVED DEAD TWIGS AND BRANCHES FROM ALL NEW AND EXISTING PLANT MATERIAL IN A MANNER THAT DOES NOT CHANGE THE NATURAL HABIT OF THE PLANT MATERIAL. SCARES OF 1" OR MORE SHALL BE PAINTED WITH ORGANIC TREE PAINT. CENTRAL LEADERS SHALL NOT BE REMOVED AT ANYTIME. NEWLY PLANTED TREES WITHOUT CENTRAL LEADERS WILL BE REJECTED.
 - CONTRACTOR TO APPLY FERTILIZER IN SPRING & LATE SEPTEMBER. WATER THOROUGHLY AFTER APPLICATION OF FERTILIZERS. COORDINATION WITH PNM IS NECESSARY FOR THIS PROJECT REGARDING PROPOSED TREE SPECIES, THE HEIGHT AT MATURITY AND TREE PLACEMENT, SIGN LOCATION AND HEIGHT, AND LIGHTING HEIGHT IN ORDER TO ENSURE SUFFICIENT SAFETY CLEARANCES TO AVOID INTERFERENCE WITH THE EXISTING ELECTRIC OVERHEAD AND UNDERGROUND DISTRIBUTION LINES ALONG THE EAST SIDE OF EUBANK BOULEVARD NE AT THE PROJECT SITE BOUNDARY. PNM'S LANDSCAPING PREFERENCE IS FOR TREES AND SHRUBS TO BE PLANTED OUTSIDE THE PNM EASEMENT; HOWEVER, IF WITHIN THE EASEMENT, TREES AND SHRUBS SHOULD BE PLANTED TO MINIMIZE EFFECTS ON ELECTRIC FACILITY MAINTENANCE AND REPAIR. NEW TREES PLANTED NEAR PNM FACILITIES SHOULD BE NO TALLER THAN 25 FEET IN HEIGHT AT MATURITY TO AVOID CONFLICTS WITH EXISTING ELECTRIC INFRASTRUCTURE.
 - STEEL EDGING TO BE USED TO SEPARATE ALL TURF AND/OR SEEDED AREAS FROM PLANTING BEDS. USE PERFORATED EDGING SEGMENTS TO OBTAIN POSITIVE DRAINAGE FOR ALL DRAINAGE SWALES OR AREAS OF STANDING WATER.
 - CONTRACTOR TO PROVIDE COBBLE & UNDERLAYMENT FOR BUILDING DRAINS AND SWALES THROUGH LANDSCAPED AREAS
 - ALL REQUIRED LANDSCAPING TO BE INSTALLED PRIOR TO ISSUANCE OF THE CERTIFICATE OF OCCUPANCY.
 - NEW PLANT MATERIAL MUST COMPLY WITH CURRENT NEW MEXICO NURSERY ACT STANDARDS.
 - CONTRACTOR IS RESPONSIBLE FOR CONTACTING LANDSCAPE ARCHITECT FOR ALL REQUIRED INSPECTIONS. PROVIDE AT LEAST 48 HOURS NOTICE TO SCHEDULE AN INSPECTION. REQUIRED INSPECTIONS INCLUDE A LANDSCAPE LAYOUT AND PLANT MATERIAL VERIFICATION AND PLACEMENT INSPECTION, IRRIGATION MAIN LINE INSPECTION, LANDSCAPE AND IRRIGATION PUNCH LIST INSPECTION, AND A LANDSCAPE AND IRRIGATION FINAL INSPECTION.
 - CONTRACTOR IS TO PROVIDE A ONE YEAR WARRANTY ON ALL PLANT MATERIAL, TURF, IRRIGATION COMPONENTS, AND WORKMANSHIP. REPLACEMENT PLANT MATERIALS SHALL BE OF THE SAME SPECIES AND SIZE AS THE DECAYED OR DEAD PLANT MATERIAL. WARRANTY IS VOID IF PLANT MATERIAL ARE UNDER OR OVER-WATERED/FERTILIZED, DAMAGED BY VANDALISM OR NEGLECTED BY OWNER AFTER FINAL MAINTENANCE PERIOD AND FINAL ACCEPTANCE IS PROVIDED. REMOVE ALL TREE STAKING MATERIALS AT END OF WARRANTY, PRIOR TO FINAL ACCEPTANCE.
 - MAINTENANCE: THE OWNER OF THIS PROPERTY AND ANY FUTURE OWNERS SHALL BE RESPONSIBLE FOR THE PROPER LANDSCAPE AND IRRIGATION MAINTENANCE OF THIS SITE AND ANY RIGHT OF WAY AREAS BETWEEN THE CURB AND PROPERTY LINES OF THIS SITE. MAINTENANCE OF THIS SITE INCLUDES, BUT IS NOT LIMITED TO, IRRIGATION INSPECTIONS AND ADJUSTMENTS, IRRIGATION SYSTEM SHUT DOWN AND START UP, IRRIGATION LEAK REPAIR, LANDSCAPE WEEDING, MOWING, SEEDING, FERTILIZATION, WOOD MULCH AND ROCK COVER REPLACEMENT, PRUNING, AND PLANT MATERIAL REPLACEMENT (INCLUDING ANNUAL BEDS). ALL MAINTENANCE SHOULD BE IN ACCORDANCE WITH STANDARDS SPECIFIED WITHIN THE "ALCC SPECIFICATIONS HANDBOOK" REVISED EDITION- 1996. OWNER SHOULD CONTACT LANDSCAPE CONTRACTOR OR LANDSCAPE ARCHITECT REGARDING ANY QUESTIONS RELATING TO THE LANDSCAPE OR IRRIGATION MAINTENANCE OF THIS SITE.

LANDSCAPE PROPOSED FOR GIBSON BLVD FSU CHICK-FIL-A STORE NUMBER # 02793


1600 GIBSON BOULEVARD SE ALBUQUERQUE, NM 87106

LATITUDE 35° 03' 29" N, LONGITUDE 106° 37' 49" W
 PARCEL ID# ABQ181822 (CITY), 101505528948711715 (COUNTY)

VICINITY MAP



01 OVERALL PLANTING PLAN

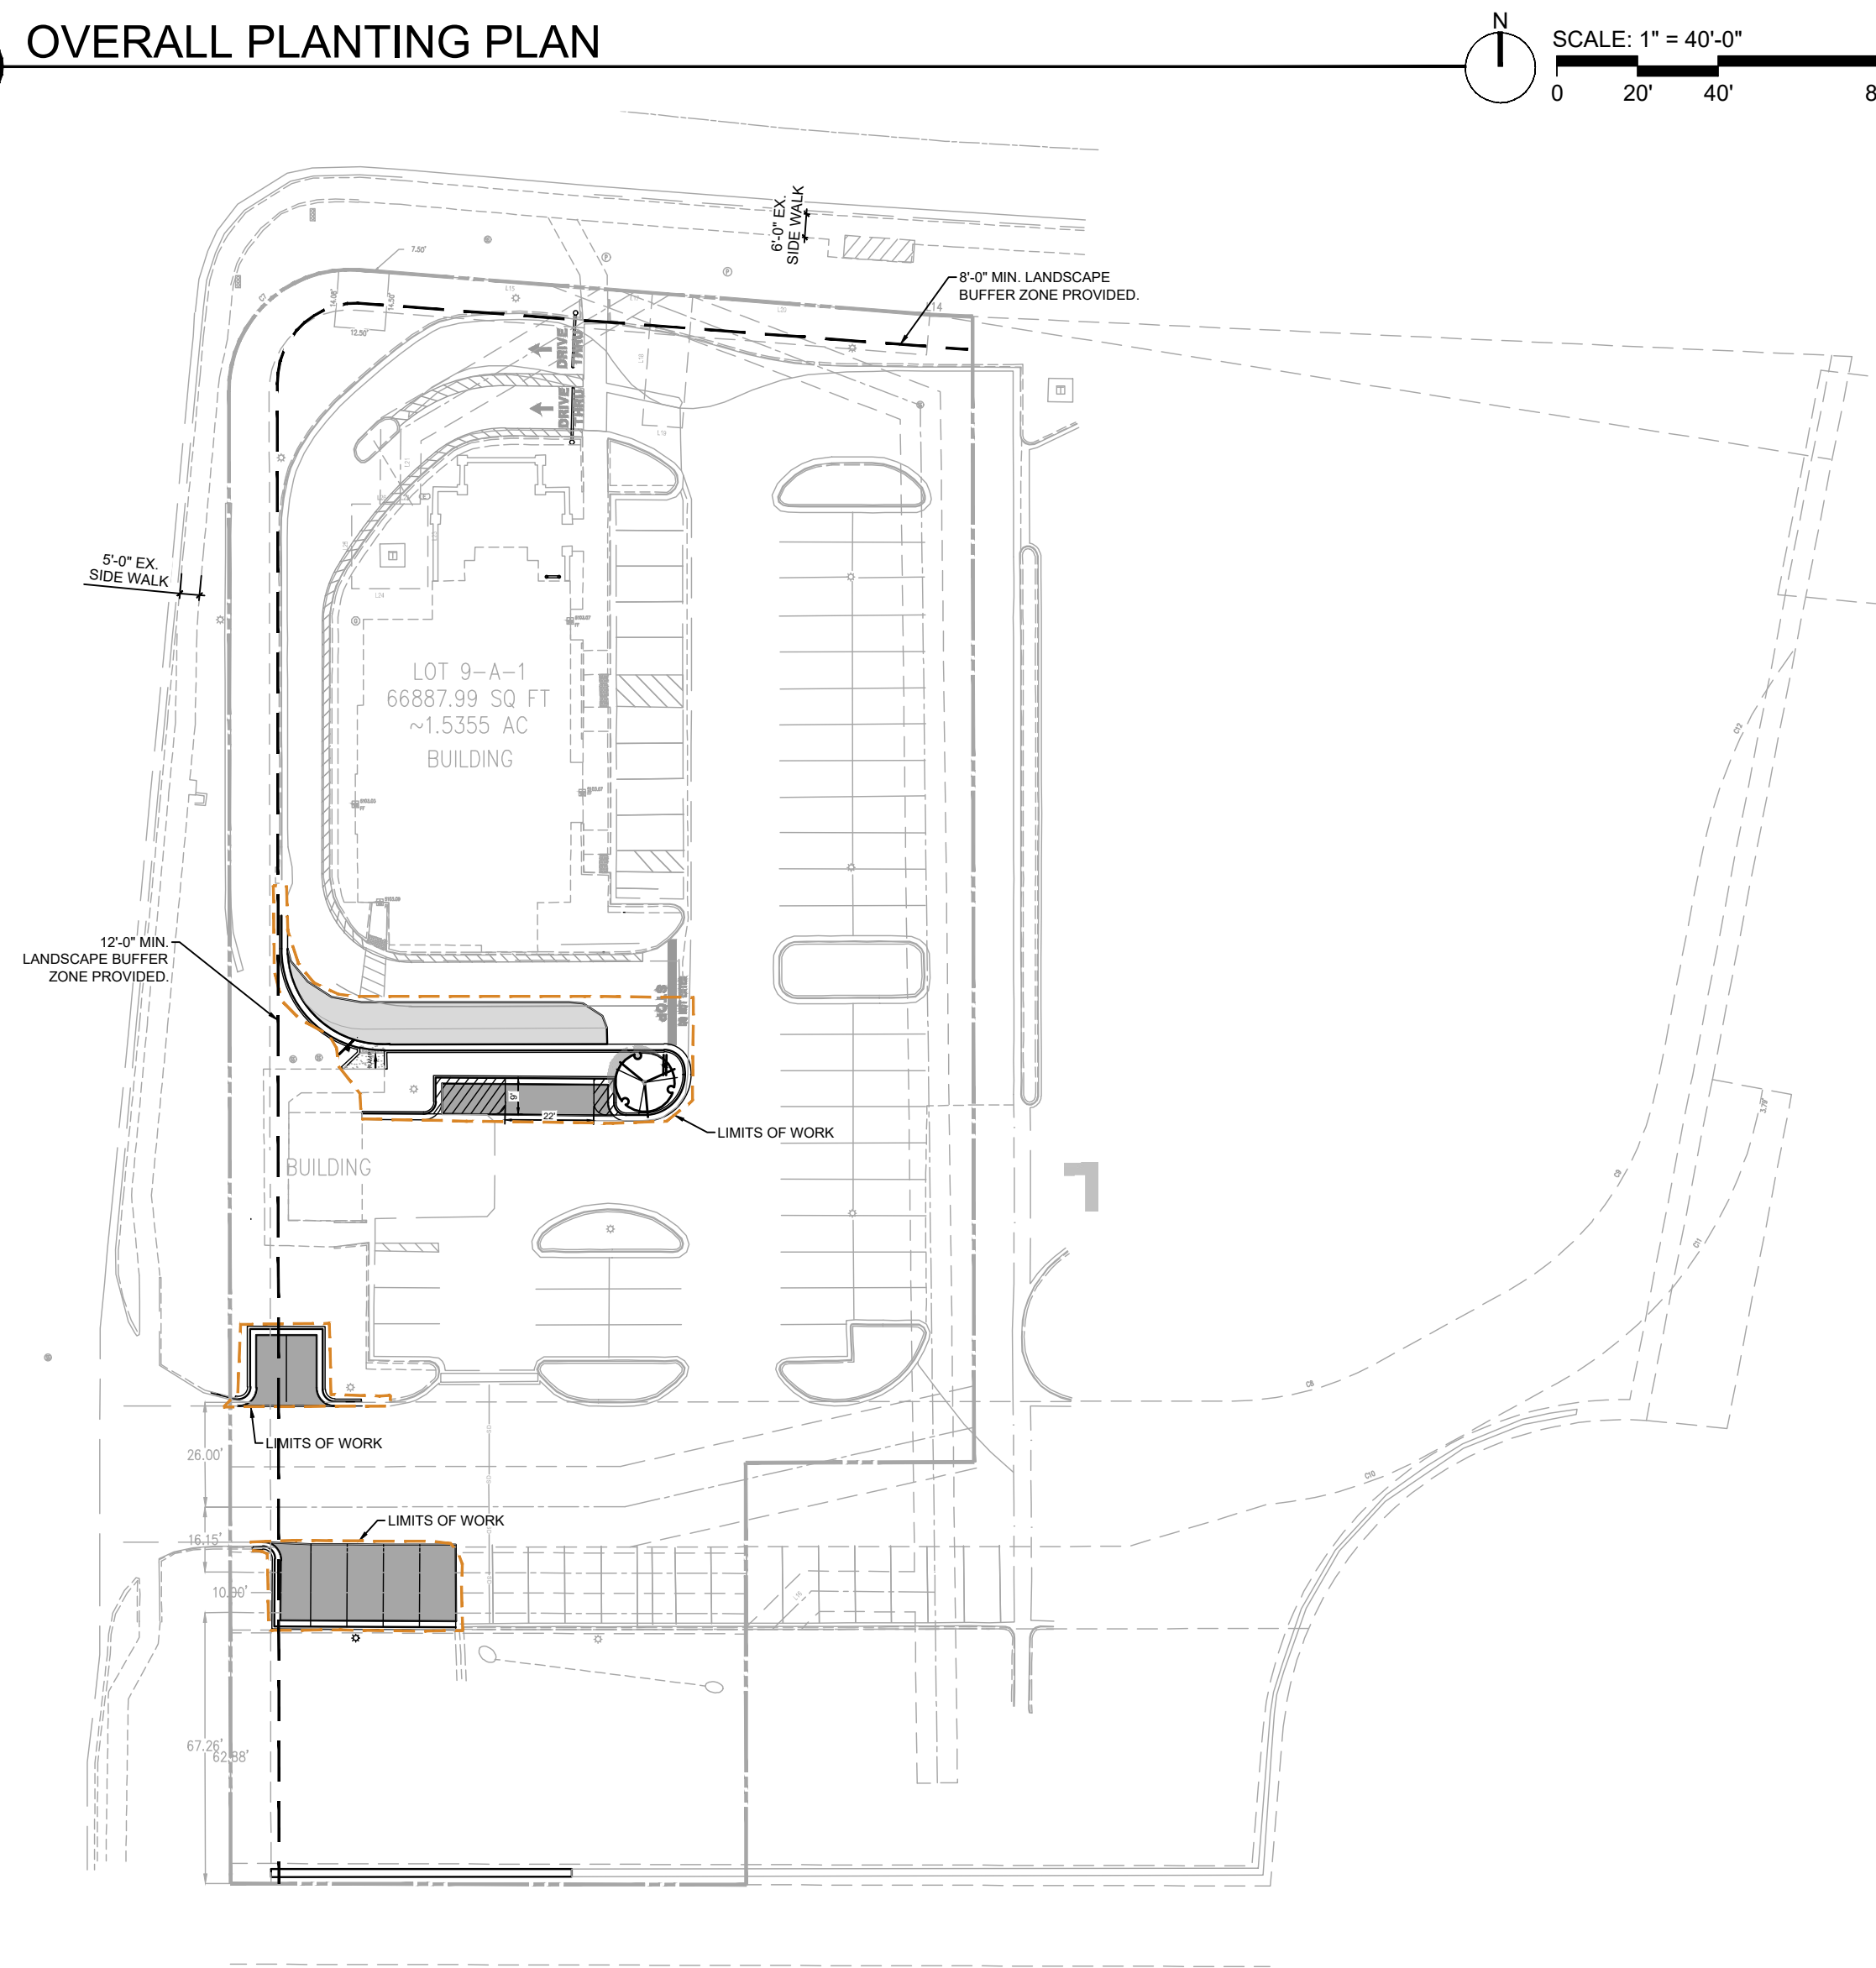

LEGEND	
PROP. ASPHALT DRIVE	PROPERTY LINE
PROP. CONC. PAVEMENT	EX. CONCRETE
PROP. CURB	EX. CONCRETE CURB
PROP. PARKING STRIPE	EX. SIGN
PROP. SITE SIGNAGE	EX. LIGHT POLE
PROP. DIRECTIONAL ARROW	EX. TREE
PROP. PARKING COUNT	EX. ACCESSIBLE MARKING
PROP. ORDER POINT	EX. BOLLARD
	EX. DIRECTIONAL ARROW

CONTACTS

LANDLORD
 CHICK-FIL-A, INC
 5200 BUFFINGTON ROAD,
 ATLANTA, GA 30349

ENGINEER
 BOWMAN CONSULTING GROUP
 11475 GREAT OAKS WAY, SUITE 350
 ALPHARETTA, GA 30022
 KAI BURK
 678-606-5276
 KBURK@BOWMAN.COM

SURVEYOR
 CONSTRUCTION SURVEY
 TECHNOLOGIES, INC
 PO BOX 16560
 LAS CRUCES, NM 88004
 DAVID P. ACOSTA PS NO.21082
 (575) 644-0250

LANDSCAPE ARCHITECT
 BOWMAN CONSULTING
 3275 WEST INA ROAD, SUITE 220
 TUCSON, AZ 85741
 PHONE: 520.463.3200
 CONTACT: TIM JOHNSON, PLA LEED AP
 EMAIL: TIMJOHNSON@BOWMAN.COM

WATER & SEWER
 ALBUQUERQUE BERNALILLO COUNTY WATER
 UTILITY AUTHORITY
 PH: (505) 842-9287

GAS
 NEW MEXICO GAS COMPANY
 PH: (505) 697-3335

ELECTRIC
 PUBLIC SERVICE COMPANY OF NEW MEXICO
 PH: (888) 342-5766

PLANNING AND ZONING
 CITY OF ALBUQUERQUE
 1600 GIBSON BOULEVARD SE,
 ALBUQUERQUE, NM 87106
 ALAN VARELA, DIRECTOR
 PH: (505) 924-3860
 EMAIL: PLANNINGDEPARTMENT@CABQ.GOV

CITY OF ALBUQUERQUE RESPONSIBILITY FOR MAINTENANCE STATEMENT

- LANDSCAPING SHALL BE INSTALLED ACCORDING TO THE APPROVED PLAN; INSTALLATION SHALL BE COMPLETED WITHIN 60 DAYS OF THE RELATED BUILDING'S OCCUPANCY.
- ANY DAMAGE TO UTILITY LINES RESULTING FROM THE NEGLIGENCE OF THE ABUTTING LANDOWNER, HIS AGENTS, OR EMPLOYEES IN THE INSTALLATION AND MAINTENANCE OF THE LANDSCAPED AREA IN THE PUBLIC RIGHT-OF-WAY SHALL BE THE RESPONSIBILITY OF SUCH LANDOWNER. ANY DAMAGE TO UTILITY LINES RESULTING FROM THE GROWTH OF PLANT MATERIALS, WHICH HAVE BEEN APPROVED BY THE APPLICABLE PUBLIC UTILITY AS PART OF A PLAN FOR LANDSCAPING ON THE PUBLIC RIGHT-OF-WAY, SHALL BE THE RESPONSIBILITY OF SUCH PUBLIC UTILITY. IF A PUBLIC UTILITY DISTURBS A LANDSCAPED AREA IN THE PUBLIC RIGHT-OF-WAY, IT SHALL MAKE EVERY REASONABLE EFFORT TO PRESERVE THE LANDSCAPING MATERIALS AND RETURN THEM TO THEIR PRIOR LOCATIONS AFTER THE UTILITY WORK. IF, NONETHELESS SOME PLANT MATERIALS DIE, IT IS THE OBLIGATION OF THE ABUTTING LANDOWNER TO REPLACE THE PLANT MATERIALS.
- LANDSCAPING SHALL HAVE ADEQUATE MAINTENANCE. LANDSCAPING WHICH DIES SHALL BE REPLACED BY THE OWNER AS EXPEDITIOUSLY AS POSSIBLE, BUT IN NO CASE LONGER THAN 60 DAYS AFTER NOTIFICATION.

UTILITIES NOTES:

- DESIGN GROUND-MOUNTED EQUIPMENT SCREENING TO ALLOW FOR ACCESS TO UTILITY FACILITIES. ALL
- SCREENING AND VEGETATION SURROUNDING GROUND-MOUNTED TRANSFORMERS AND UTILITY PADS ARE TO
- ALLOW 10 FEET OF CLEARANCE IN FRONT OF THE EQUIPMENT DOOR AND 5-6 FEET OF CLEARANCE ON THE
- REMAINING THREE SIDES FOR SAFE OPERATION, MAINTENANCE AND REPAIR PURPOSES. REFER TO THE PNM
- ELECTRIC SERVICE GUIDE AT WWW.PNM.COM FOR SPECIFIC

IRRIGATION NOTES:

- IRRIGATION: (PROPOSED TO BE A POTABLE SYSTEM)
- AN IRRIGATION SYSTEM PLAN WILL BE CREATED.
- SEED MAY BE TEMPORARILY IRRIGATED WITH POP-UP AND ROTOR SPRAY HEADS.
- TREES, SHRUBS & PERENNIALS IN PLANTING BEDS SHALL BE IRRIGATED WITH A POINT-SOURCE DRIP SYSTEM.
- A SMART CONTROLLER & RAIN SENSOR SHALL BE INSTALLED.
- WATER CONSERVATION MEASURES AND COMPONENTS ARE TO BE INSTALLED WITH THE IRRIGATION SYSTEM.

Sheet Index

Sheet Number	Sheet Title
01	L0.0 Landscape cover
02	L1.0 Planting plan
03	L2.0 Irrigation Plan
04	L3.0 Landscape Details
05	L3.1
06	L3.2



Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998

Bowman
 Bowman Consulting Group, Ltd
 3275 West Ina Road, Suite 220
 Tucson, Arizona 85741
 Phone: (520) 463-3200
 www.bowmanconsulting.com
 © 2021 Bowman Consulting Group, Ltd



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

REVISION SCHEDULE

NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 010014-01-218

ISSUED FOR	PERMIT
DATE	JUNE, 2024
DRAWN BY	GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.



LANDSCAPE COVER

SHEET NUMBER
L0.0



Know what's below.
 Call before you dig.

01 PLANTING PLAN UPDATES

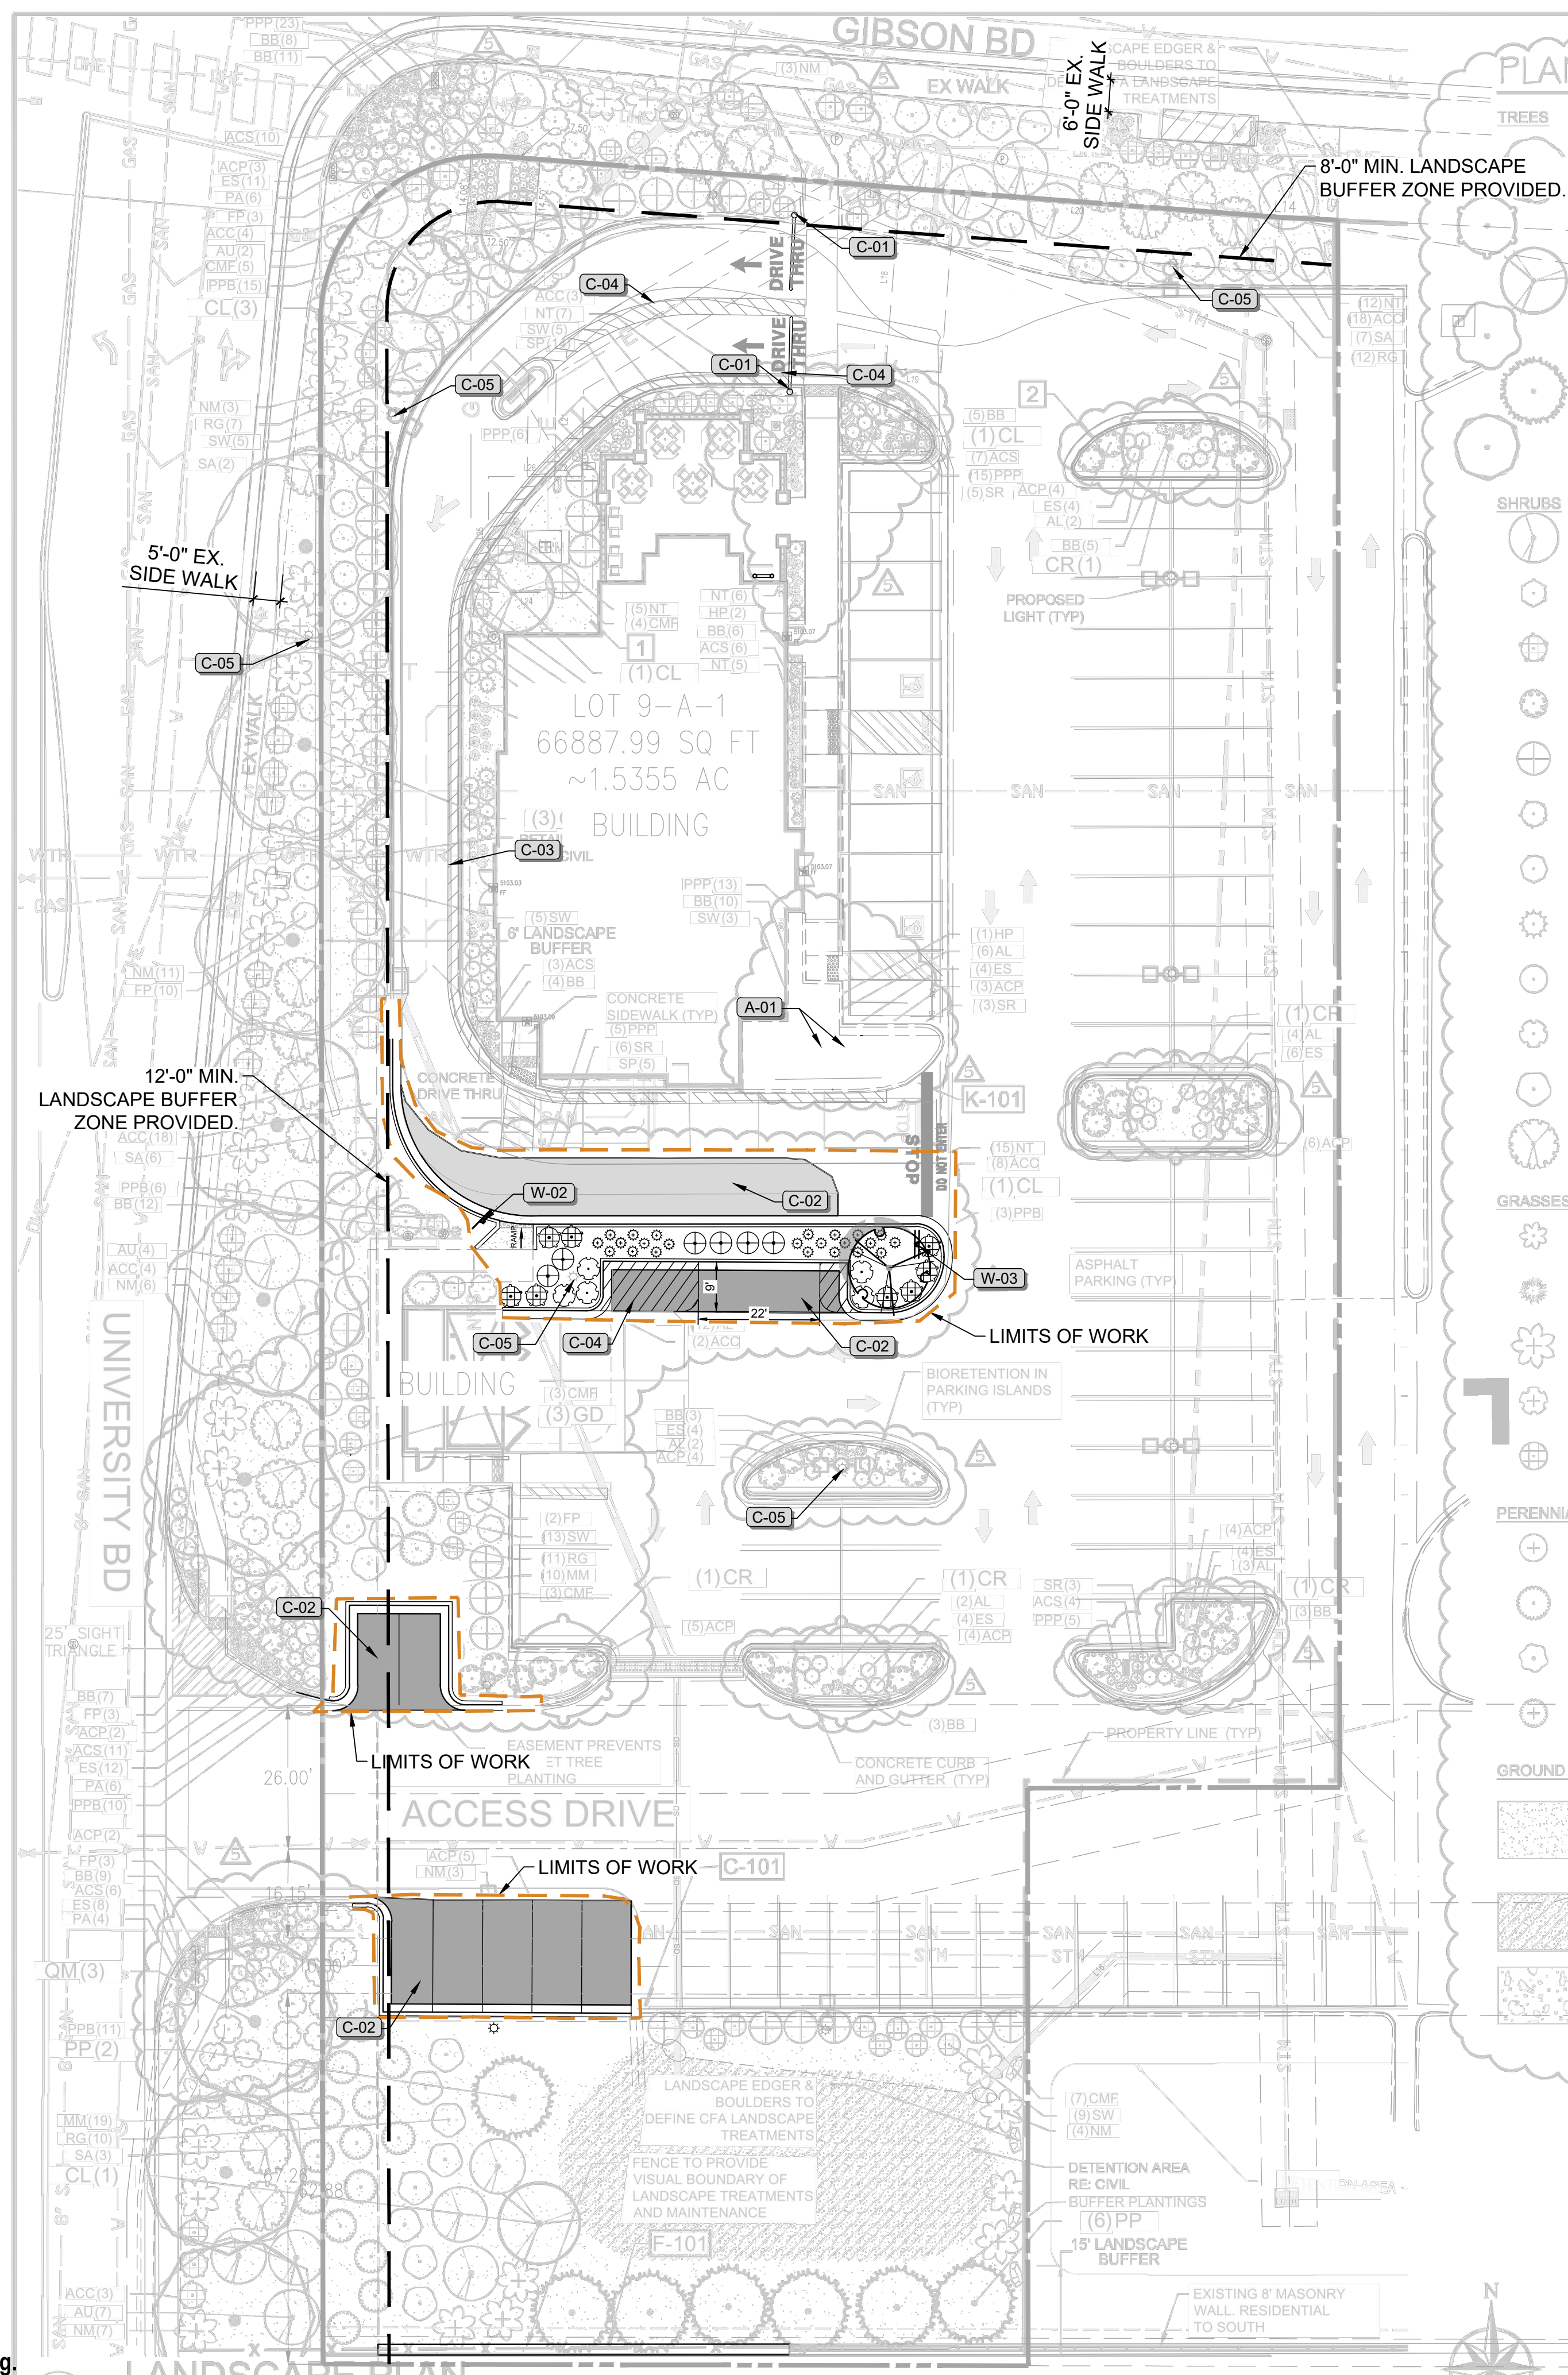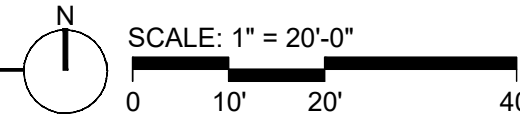

PLANT SCHEDULE

TREES	CODE	QTY	BOTANICAL NAME / COMMON NAME
	CO	3	CELTIS OCCIDENTALIS / COMMON HACKBERRY
	CR	5	CELTIS RETICULATA / NETLEAF HACKBERRY
	CL	7	CHILOPSIS LINEARIS / DESERT WILLOW CHITALPA
	GD	3	GYMNOCLADUS DIOICA 'ESPRESSO' / KENTUCKY COFFEETREE
	PP	8	PINUS EDULIS / PINON PINE BUFFER PLANTINGS
	QM	3	QUERCUS MACROCARPA / BURR OAK
SHRUBS	CODE	QTY	BOTANICAL NAME / COMMON NAME
	AU	18	AMELANCHIER UTAHENSIS / UTAH SERVICEBERRY
	AL	49	AMORPHA CANESCENS / LEADPLANT
	ACC	60	ARCTOSTAPHYLOS X COLORADOENSIS 'CHIEFTAIN' / MANZANITA
	ACP	43	ARCTOSTAPHYLOS X COLORADOENSIS 'PANCHITO' / MANZANITA
	CMF	36	CHAMAEBATIARIA MILLEFOLIUM 'FERNBUSH' / FERNBUSH
	ES	74	ERICAMERIA NAUSEOSA SPECIOSA / DWARF BLUE RABBITBRUSH
	FP	26	FALLUGIA PARADOXA / APACHE PLUME
	HP	10	HESPERALOE PARVIFLORA / RED YUCCA
	PA	16	PEROVSKIA ATRIPLICIFOLIA / RUSSIAN SAGE
	PPB	45	PRUNUS BESSEYI 'PAWNEE BUTTES' / SAND CHERRY
	RG	40	RHUS AROMATICA 'GRO-LOW' / GRO-LOW FRAGRANT SUMAC
	SA	18	SHEPHERDIA ARGENTEA / SILVER BUFFALOBERRY
	BB	102	BOUTELOUA GRACILIS 'BLONDE AMBITION' / BLUE GRAMA
	NT	77	NASSELLA TENUISSIMA / TEXAS NEEDLE GRASS
	NM	37	NOLINA MICROCARPA / SACAHUISTA
	SP	19	SCHIZACHYRIUM SCOPARIUM 'PRAIRIE BLUES' / LITTLE BLUESTEM
	SW	50	SPOROBOLUS WRIGHTII / BIG SACATON
PERENNIALS	CODE	QTY	BOTANICAL NAME / COMMON NAME
	ACS	51	AGASTACHE CANA 'SONORAN SUNSET' / SONORAN SUNSET/HYE
	MM	29	MIRABILIS MULTIFLORA / COLORADO FOUR O'CLOCK
	PPP	67	PENSTEMON PINIFOLIUS / THREADLEAF BEARDTONGUE
	SR	19	SALVIA GREGGII 'RASPBERRY' / AUTUMN-SAGE
GROUND COVERS	CODE	QTY	BOTANICAL NAME / COMMON NAME
	AGG	28,850 SF	AGGREGATE 1.5" - 2" AND 3/4" MIX 2/3 1.5" TO 2" WASHED RIVER ROCK, 30% WASHED 3/4" LOCAL RIVER ROCK, REUSE EXISTING COBBLES AS FEASIBLE
	LGS	2,542 SF	NATIVE SEED MIX / SEE SHEET L2.0 FOR SEED MIX
	PEA	1,148 SF	WASHED GRAVEL / TAN IN COLOR 3/8" WASHED GRAVEL, TAN IN COLOR

02 PLANT SCHEDULE

SYMBOL	BOTANICAL / COMMON NAME	SIZE	QTY
(Tree symbol)	CHILOPSIS LINEARIS 'AZT DESERT AMETHYST' / DESERT AMETHYST DESERT WILLOW	15 GAL.	1
(Shrub symbol)	ARCTOSTAPHYLOS X COLORADOENSIS 'PANCHITO' / PANCHITO MANZANITA CHAMAEBATIARIA MILLEFOLIUM / FERNBUSH PRUNUS BESSEYI 'P011S' / PAWNEE BUTTES SAND CHERRY SCHIZACHYRIUM SCOPARIUM 'PRAIRIE BLUES' / PRAIRIE BLUES LITTLE BLUESTEM	1 GAL.	8

FINISHING COVER TREATMENTS

(Symbol)	DG/ROCK TO MATCH EXISTING.
----------	----------------------------

03 KEY NOTES

SYMBOL	ARCHITECTURE DESCRIPTION DETAIL
(A-01)	BICYCLE RACK (SEE ARCH.)
SYMBOL	CIVIL DESCRIPTION DETAIL
(C-01)	CONST. CLEARANCE BAR (SEE CIVIL)
(C-02)	CONST. ASPHALT PAVEMENT (SEE CIVIL)
(C-03)	CANOPY TO REMAIN (SEE CIVIL)
(C-04)	STRIPING ON ENDS (SEE CIVIL)
(C-05)	LIGHT POLE (SEE CIVIL)
SYMBOL	WALLS, BARRIERS, & SIGNAGE DESCRIPTION DETAIL
(W-02)	PEDESTRIANS CROSSING SIGN (SEE CIVIL)
(W-03)	STOP SIGN (SEE CIVIL)

NOTE: BASED ON THE SITE VISIT CONDUCTED JULY 2024, THE LANDSCAPE IMPROVEMENTS APPROVED WITH THE ORIGINAL SUBMITTAL APPEAR TO HAVE BEEN INSTALLED IN THEIR ENTIRETY AND EXIST.

The following table is from the previously approved landscape plans (by others). One tree planned to be removed and one new tree proposed. Groundcover plane coverage requirements to be maintained per approved landscape plan.

SITE CATEGORY REQUIREMENTS				
OVERALL ON-SITE LANDSCAPING: 24,280 SF - 25.28%		Gross Lot Area: 107,161 SF Required Landscaping: 14,403 SF Net Lot Area: 96,023 SF x 15% OFF SITE LSP = 9150 SF		
Groundplane Veg Cover % Provided	% Coverage	# of Parking Spaces	Trees Req / Prov	Shade Trees Req / Prov
80%	79	73	7 / 7 (1 per 10)	4 / 5
FACADE LANDSCAPING				
Facade	LF of Facade	Trees Req / Prov	Shrubs Req / Prov	
West	95	2 / 1	10 / 10	
South	53	1 / 1	--	
North	53	1 / 1	--	
LANDSCAPE BUFFERS				
Frontage and LF	Bed Width / Coverage %	Additional Notes		
South - 126 LF	15' - 83%	8' Evergreens provided		
West - University Bd - 277 LF	6' / 78 %			
North - Gibson Bd - 177 LF	10' / 79 %			
STREET TREES (1 - 30 LF)				
Frontage and LF	Trees Req / Provided			
West - 360 LF	10 / 10			
North - 180 LF	5 / 2			

*LARGE UTILITY EASEMENTS PREVENT TREE PLANTING. LARGE SHRUBS USED IN PLACE OF SOME STREET TREES



Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-2998



CHICK-FIL-A
GIBSON BLVD FSU
1600 GIBSON BLVD SE
ALBUQUERQUE, NEW MEXICO 87106
FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 010014-01-218
ISSUED FOR PERMIT
DATE JUNE 2024
DRAWN BY GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

PLANTING PLAN



SHEET NUMBER

L1.0

July 26, 2024
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NM\Engineering\landscape\CAD\working DWG\Final\010014-01-218-C-2.0-LP.dwg
 File Description: CONSTRUCTION OF THE CONCEPT AND DESIGN PRESENTATION FOR THE IMPROVEMENT OF SERVICES TO THE CHICK-FIL-A RESTAURANT AND OFFICE BUILDING. REUSE OF AND MICROCOPY RELEASE ON THE DOCUMENT WITHOUT WRITTEN AUTHORIZATION AND ADAPTATION BY BOWMAN CONSULTING SHALL BE WITHOUT LIABILITY TO BOWMAN CONSULTING.



01 IRRIGATION PLAN

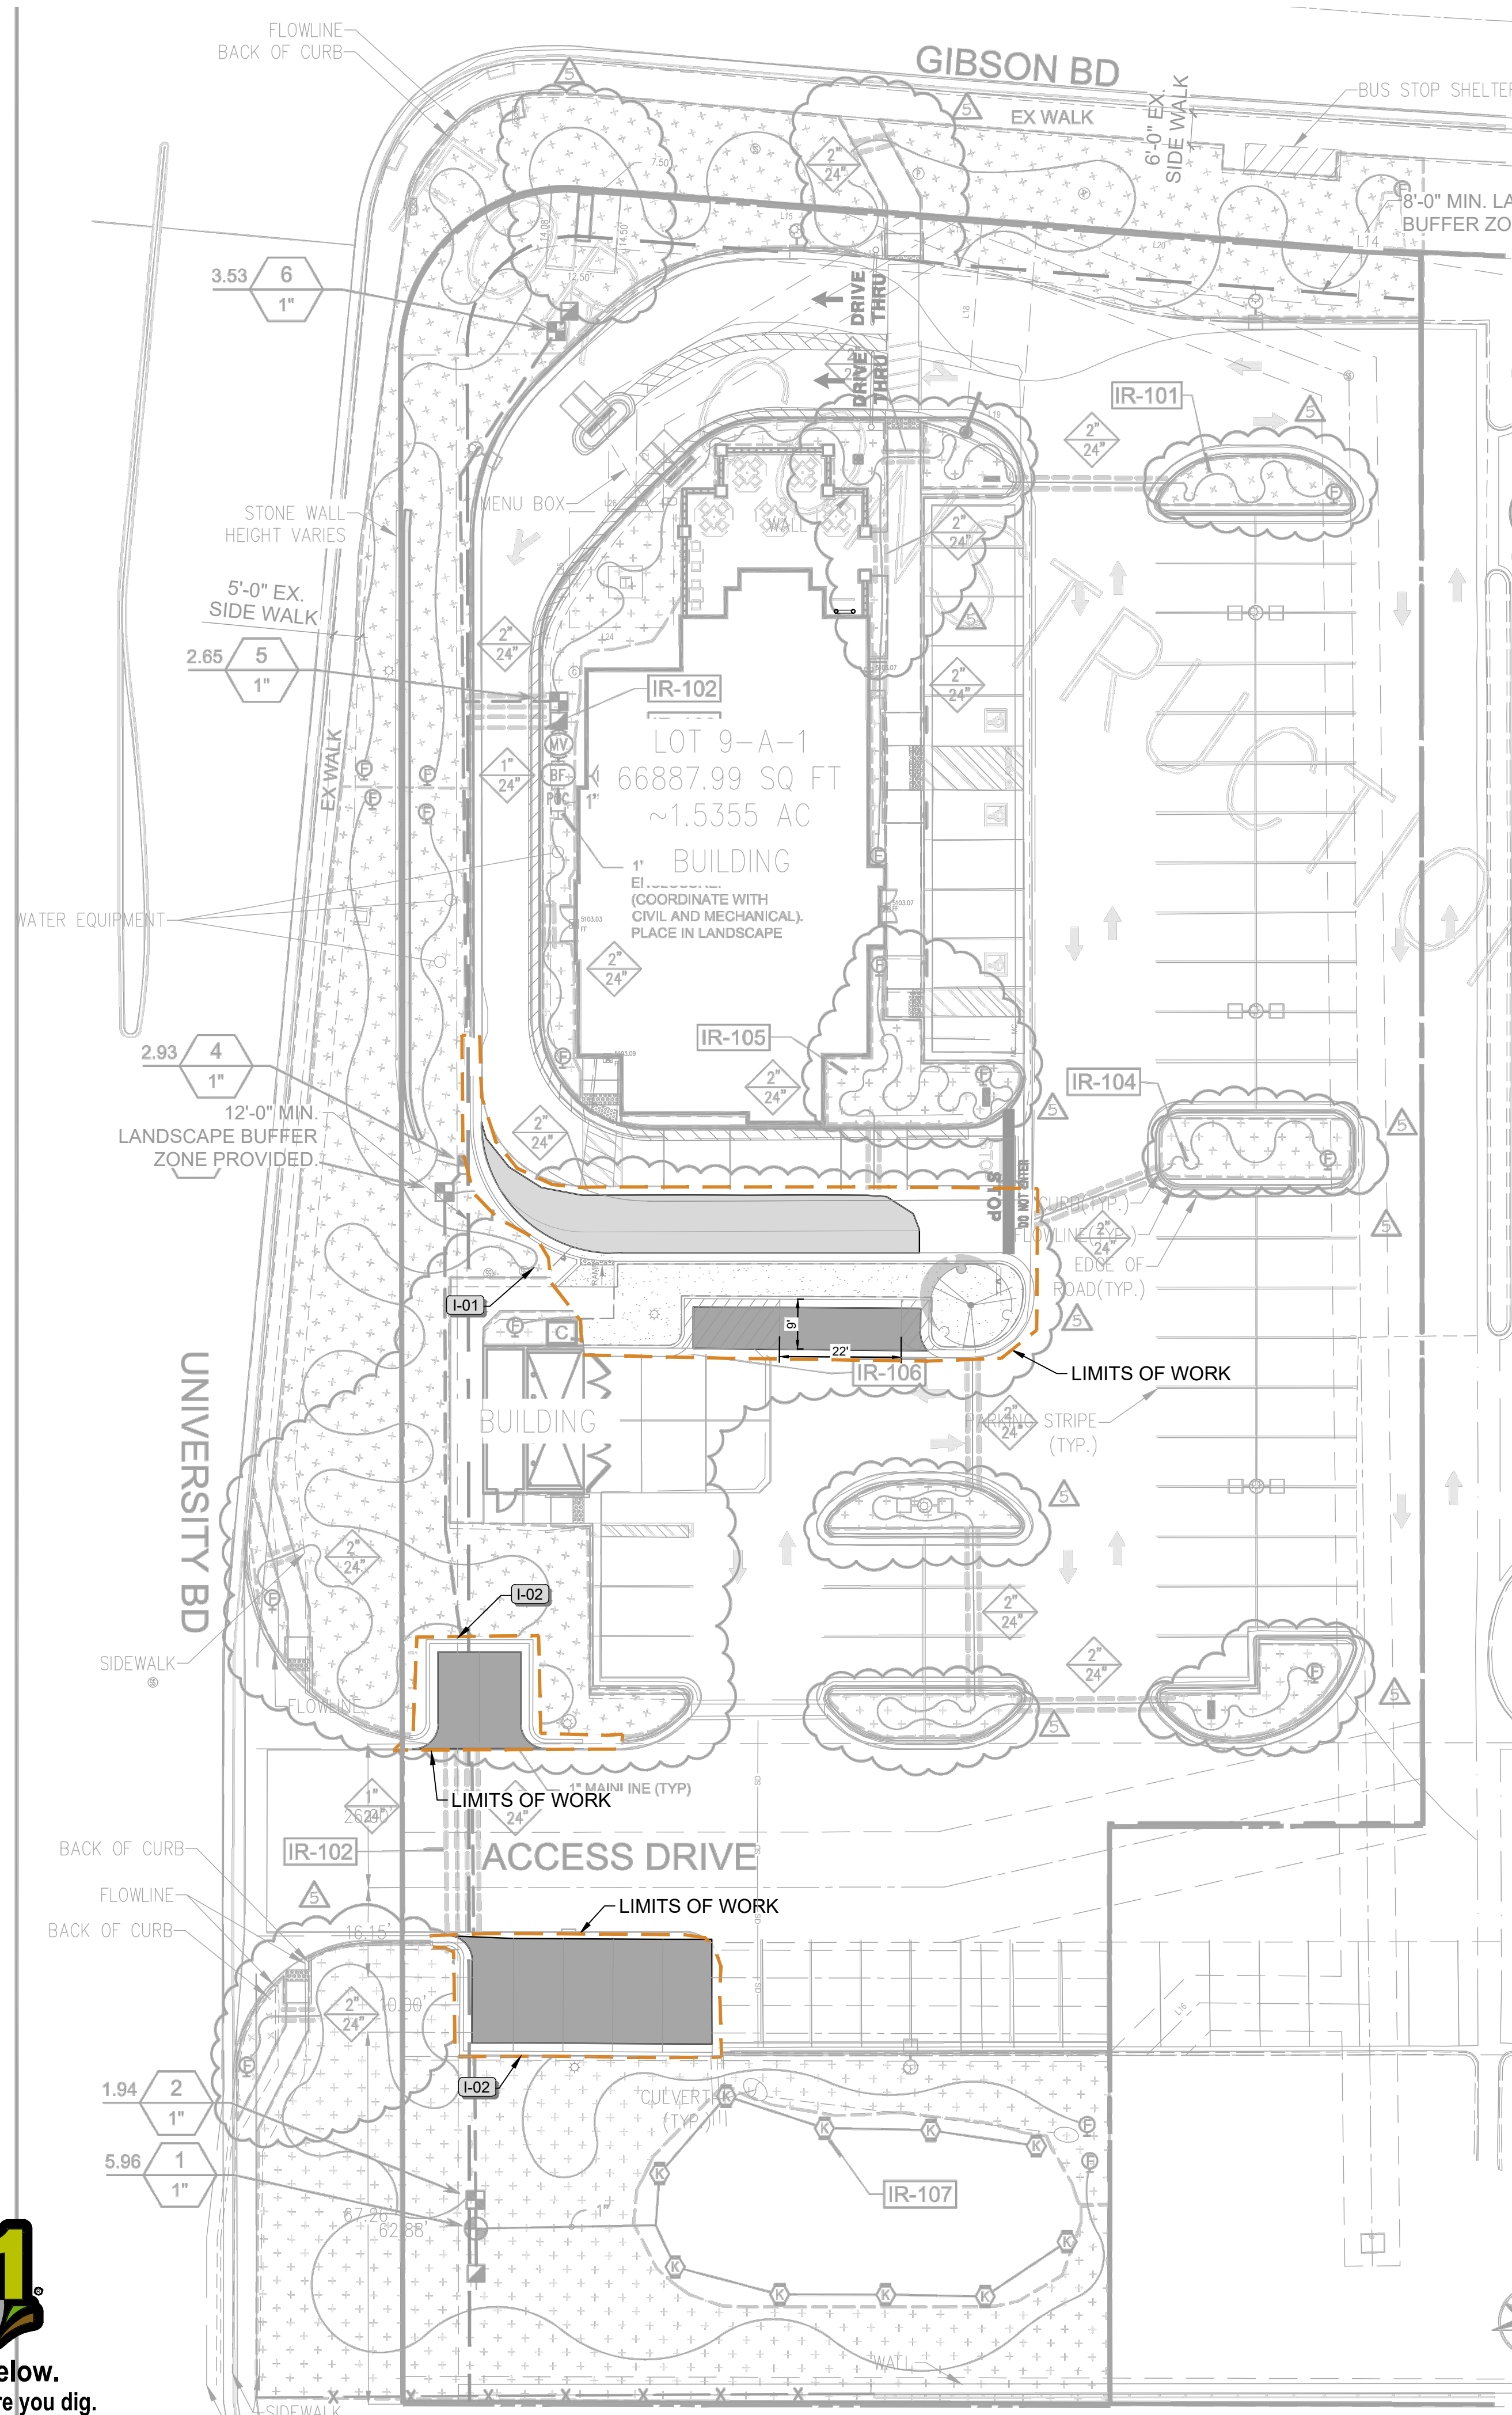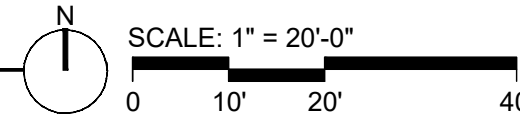

IRRIGATION SCHEDULE

CONFIRM ALL QTY'S, SF AND LF WITH ACTUAL PLAN GRAPHIC. PLAN GRAPHIC INFORMATION SUPERSEDES SCHEDULE INFORMATION.



SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	PSI
(Symbol)	HUNTER MP2000 PROS-04-CV TURF ROTATOR, 4" (10.16 CM) POP-UP WITH FACTORY INSTALLED CHECK VALVE, PRESSURE REGULATED TO 40 PSI (2.76 BAR), MP ROTATOR NOZZLE ON PRS40 BODY. K=BLACK ADJ ARC 90-210, G=GREEN ADJ ARC 210-270, R=RED 360 ARC.	10	35

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
(Symbol)	RAIN BIRD XC2-100-PRF MEDIUM FLOW DRIP CONTROL KIT, 1" DV VALVE, 1" PRESSURE REGULATING FILTER, 40PSI PRESSURE REGULATOR. 3GPM - 15GPM. USE LOW FLOW MODEL FOR FLOWS UNDER 3 GPM	5
(Symbol)	FLUSH VALVE 3/4" PVC BALL VALVE IN 10" VALVE BOX.	17
(Symbol)	AREA TO RECEIVE DRIP EMITTERS RAIN BIRD XB-PC SINGLE OUTLET, PRESSURE COMPENSATING DRIP EMITTERS. FLOW RATES OF 0.5GPH=BLUE, 1.0GPH=BLACK, AND 2.0GPH=RED. COMES WITH A SELF-PIERCING BARB INLET X BARB OUTLET. Emitter Notes: 1 gal shrub to receive 2 of 1.0 GPH emitters. 1 gal grass/perennial to receive 1 of 0.5 GPH emitters. 5 gal shrub to receive 2 of 1.0 GPH emitters. All trees to receive 6 of 2.0 GPH emitters. 4" pot plant to receive 1 of 0.5 GPH emitter.	27,085 S.F.

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
(Symbol)	RAIN BIRD PEB 1", 1-1/2", 2" PLASTIC INDUSTRIAL VALVES. LOW FLOW OPERATING CAPABILITY, GLOBE CONFIGURATION.	1
(Symbol)	RAIN BIRD 5-LRC 1" BRASS QUICK-COUPING VALVE, WITH CORROSION-RESISTANT STAINLESS STEEL SPRING, LOCKING THERMOPLASTIC RUBBER COVER, AND 1-PIECE BODY.	3
(Symbol)	NIBCO T-113-K CLASS 125 BRONZE GATE SHUT OFF VALVE WITH CROSS HANDLE, SAME SIZE AS MAINLINE PIPE DIAMETER AT VALVE LOCATION. SIZE RANGE - 1/4" - 3"	2
(Symbol)	RAIN BIRD PEB 1" 1", 1-1/2", 2" PLASTIC INDUSTRIAL VALVES. LOW FLOW OPERATING CAPABILITY, GLOBE CONFIGURATION. WITH SCRUBBER TECHNOLOGY FOR RELIABLE PERFORMANCE IN DIRTY WATER IRRIGATION APPLICATIONS.	1

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
(Symbol)	FEBCO 825YA 1" REDUCED PRESSURE BACKFLOW PREVENTER	1
(Symbol)	RAIN BIRD ESP4-SMTEI WITH (1) ESP-SM3 7 STATION INDOOR SMART MODULAR CONTROL SYSTEM FOR RESIDENTIAL AND LIGHT COMMERCIAL USE. WALL MOUNT, TIPPING BUCKET RAIN SENSOR THAT MEASURES RAINFALL.	1
(Symbol)	GUARDSHACK ENCLOSURES EC-1 BACKFLOW ENCLOSURE, MADE WITH 1" ROUNDED STEEL TUBING, ECONOMICAL, LIGHT, AND EASY TO INSTALL. STILL VANDAL RESISTANT HARDWARE. LIFT OFF MODEL. 10"W X 24"H X 22"L.	1
(Symbol)	POINT OF CONNECTION 3/4" TAP OFF OF DOMESTIC AT LEAST 6' DOWNSTREAM OF METER. COORDINATE WITH OTHER TRADES. RE: CIVIL SHEETS	1

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
(Symbol)	IRRIGATION LATERAL LINE: POLYETHYLENE AND PVC CLASS 160 POLYETHYLENE SIDR-7 UP TO 1-1/4", THEN PVC CLASS 160 SIDR 28 FOR 1-1/2" AND LARGER. ONLY LATERAL TRANSITION PIPE SIZES 1 1/4" AND ABOVE ARE INDICATED ON THE PLAN, WITH ALL OTHERS BEING 1" IN SIZE.	209.1 L.F.
(Symbol)	IRRIGATION MAINLINE: POLYETHYLENE AND PVC CLASS 200 POLYETHYLENE SIDR-7 UP TO 1-1/4", THEN PVC CLASS 200 SIDR 21 FOR 1-1/2" AND LARGER.	431.9 L.F.
(Symbol)	PIPE SLEEVE: PVC SCHEDULE 40 PIPE SLEEVE SIZE SHALL ALLOW FOR IRRIGATION PIPING AND THEIR RELATED COUPLINGS TO EASILY SLIDE THROUGH SLEEVING MATERIAL. SLEEVES TO BE MINIMUM 2X PIPE DIAMETER UNLESS OTHERWISE NOTED. EXTEND SLEEVES 18 INCHES BEYOND EDGES OF PAVING OR CONSTRUCTION.	321.7 L.F.

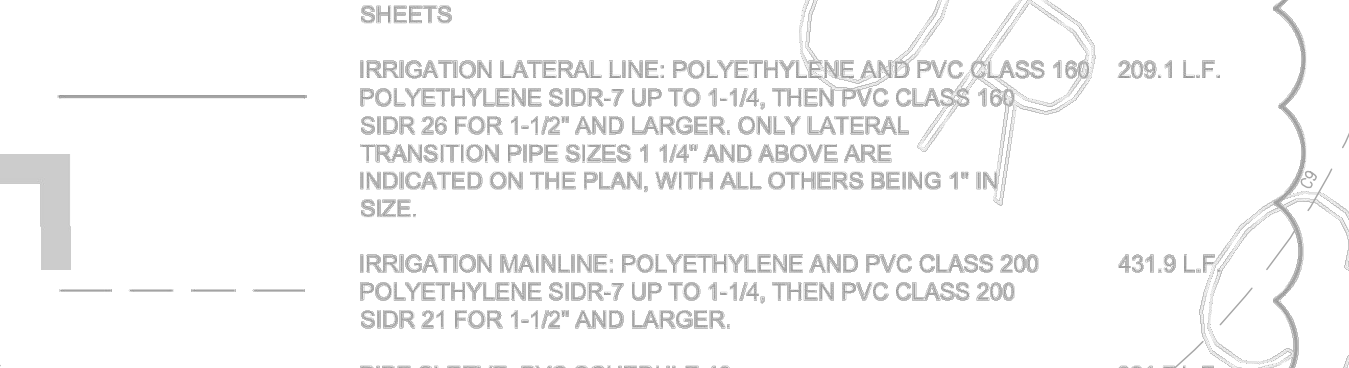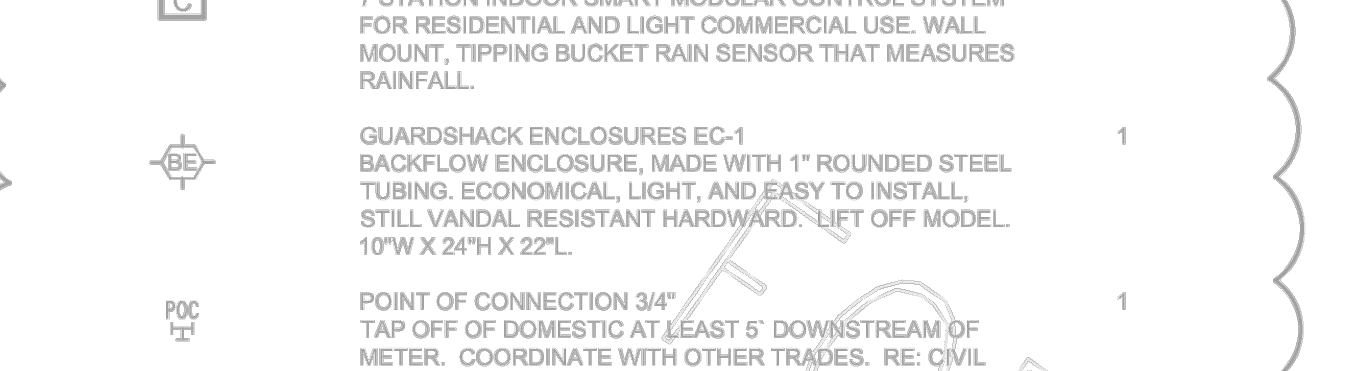

Provide separate 1" wire sleeve along all mainline crossings, of equal length to pipe sleeves

02 IRRIGATION SCHEDULE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION
(Symbol)	AREA TO RECEIVE DRIP EMITTERS RAIN BIRD XB-PC SINGLE OUTLET, PRESSURE COMPENSATING DRIP EMITTERS. FLOW RATES OF 0.5 GPH=BLUE, 1.0 GPH=BLACK, AND 2.0 GPH=RED. COMES WITH A SELF-PIERCING BARB INLET X BARB OUTLET. Emitter Notes: 1 GAL SHRUB TO RECEIVE 2 OF 1.0 GPH EMITTERS. 1 GAL GRASS/PERENNIAL TO RECEIVE 1 OF 0.5 GPH EMITTERS. 5 GAL SHRUB TO RECEIVE 2 OF 1.0 GPH EMITTERS. ALL TREES TO RECEIVE 6 OF 2.0 GPH EMITTERS. 4" POT PLANT TO RECEIVE 1 OF 0.5 GPH EMITTER.

03 KEY NOTES

- I-01** CONTRACTOR TO TIE INTO EXISTING IRRIGATION SYSTEM AT THIS LOCATION, PER APPROVED IRRIGATION PLANS (REV #5) EXTANT LATERAL IS "IRRIGATION LATERAL LINE: POLYETHYLENE AND PVC CLASS 160 209.1 L.F. POLYETHYLENE SIDR-7 UP TO 1-1/4" AND ABOVE ARE INDICATED ON THE PLAN, WITH ALL OTHERS BEING 1" IN SIZE.
- I-02** CONTRACTOR TO MODIFY EXISTING IRRIGATION TO ASSURE PROPER IRRIGATION TO ALL REMAINING PLANTS AND TREES

REFERENCE NOTES SCHED

- IRRIGATION**
- | SYMBOL | DESCRIPTION |
|--------|---|
| IR-101 | DIAGRAMMATIC DRIPLINE. ROUTE AS NECESSARY IN QUANTITIES WILL VARY FROM THOSE SHOWN ON PL |
| IR-102 | PROVIDE TWO (2) SLEEVES AT ALL MAINLINE CROSSI FOR PIPE AND ONE FOR WIRING. |
| IR-103 | ALL LOCATIONS DIAGRAMMATIC FOR CLARITY. LOC/ LANDSCAPE BEDS. FIELD ADJUST AS NECESSARY AT RECORD VIA AS-BUILTS. SEE NOTES. |
| IR-104 | ALL DRIP SUPPLY TUBING TO BE 3/4". ALL MICRO TUB 1/4" AND STAKED AT EDGE OF ROOTBALL. PROVIDE I PER SCHEDULE. PROVIDE BUG CAP AT TERMINUS OI TUBING RUNS. |
| IR-105 | PLACE ALL 3/4" DRIP TUBING AWAY FROM BUILDING V POSSIBLE, TYP. |
| IR-106 | NEW CONTROLLER AS SPECIFIED. EXTERIOR MOUNT ENCLOSURE, LOCKING CABINET, TYP. MOUNT SMAR SENSOR PER MANUFACTURERS INSTRUCTIONS (COX FINAL LOCATION) |
| IR-107 | ADJUST HEADS AS NECESSARY TO AVOID OVERSPR/ MAINTAINING PROPER COVERAGE. ADJUST TO AVOI CONFLICTS, ETC. |

July 26, 2024
 03 - L2.0
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NM\Engineering\landscapes\CA\Working DWG\Final\010014-01-218-C-2.0-LR.dwg
 This document, together with the contract and related documents, represents the entire agreement between the parties. No verbal agreement, conditions, or other project representations.



Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998

Bowman
 Bowman Consulting Group, Ltd
 2075 W. Camelback Rd., Suite 1250
 Tucson, Arizona 85741
 Phone: (520) 463-3200
 www.bowmanconsulting.com
 © 2021 Bowman Consulting Group, Ltd



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE

NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 010014-01-218


ISSUED FOR	PERMIT
DATE	JUNE 2024
DRAWN BY	GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET
 IRRIGATION PLAN


SHEET NUMBER
L2.0

July 26, 2024
 04 - L3.0
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NM\Engineering\Landscape\CAD\Working DWG\Final\010014-01-218 (L3.0).DWG
 THIS DOCUMENT, TOGETHER WITH THE CONTRACT AND RELATED INSTRUMENTS OF SERVICE, IS INTENDED TO BE USED ONLY FOR THE PROJECT AND SITE IDENTIFIED HEREIN. REUSE OF ANY INFORMATION ON THE DOCUMENT WITHOUT WRITTEN AUTHORIZATION AND ADAPTATION BY BOWMAN CONSULTING SHALL BE WITHOUT LIABILITY TO BOWMAN CONSULTING.

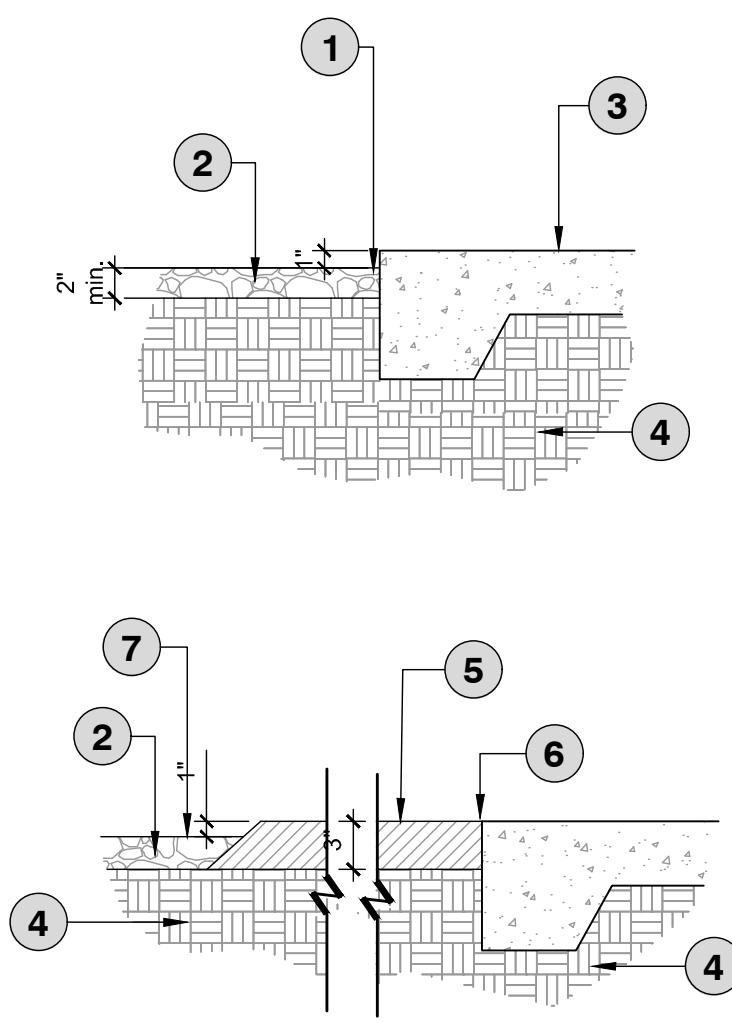


- 1 FINAL GRADE - GRADING CONTRACTOR TO COMPLETE WORK WITHIN +/- 0.10 FEET AND ALLOW FOR 2" OF DECORATIVE ROCK
- 2 DECORATIVE ROCK MULCH
- 3 HARDSCAPE (WALK, CONCRETE, PAVERS, ETC) REFER TO GRADING PLANS
- 4 COMPACTED SUBGRADE
- 5 3" THICK STABILIZED DECOMPOSED GRANITE, 45 DEG. TURNDOWN AFTER WIDTH OF PLAZA, TRAIL, ETC.
- 6 FLUSH AT EDGE OF ADJACENT HARDSCAPE
- 7 FINISH GRADE AT LANDSCAPE

- NOTES:
1. CONTRACTOR TO PROVIDE 10' SECTION MOCK UP OF 10' STABILIZED DECOMPOSED GRANITE (DG) PATH FOR APPROVAL PRIOR TO CONTINUATION OF WORK.
 2. STABILIZED DG TO BE PREMIXED OFF SITE.
 3. TOTAL DEPTH OF DG PATH TO BE 3" AND INSTALLED IN TWO LIFTS WITH TACKIFIER AND PER MANUFACTURER'S RECOMMENDATIONS.

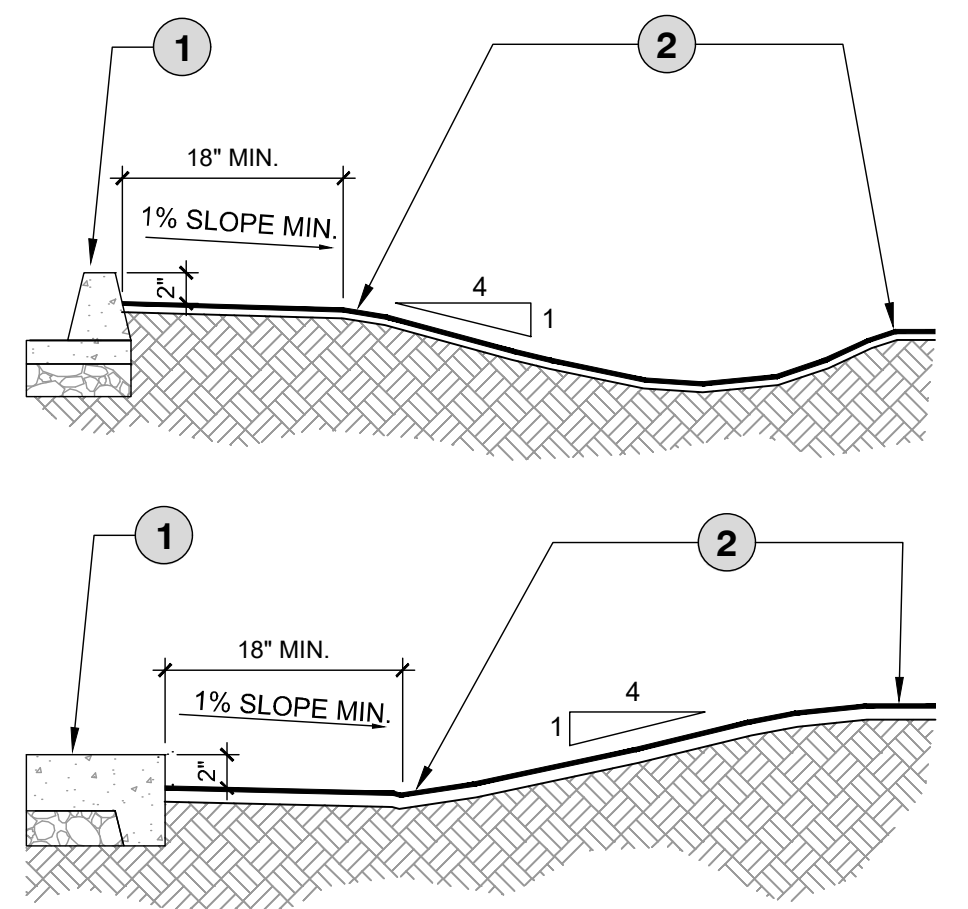

- 1 TOP OF HARDSCAPE (WALK, CURB, ETC.)
- 2 REVERSE CURVE FINISHED GRADE TO CREATE SMOOTH TRANSITION

- NOTES:
1. ALL EARTHWORK TO BE PLACED AND WORKED SO THAT ALL WATER DRAINS AWAY FROM SIDEWALKS AND STRUCTURES.
 2. GRADE ALL MATERIAL TO FINISHED GRADE.
 3. REVERSE GRADE EARTH WORK TO CREATE SMOOTH TRANSITIONS BETWEEN SLOPES.

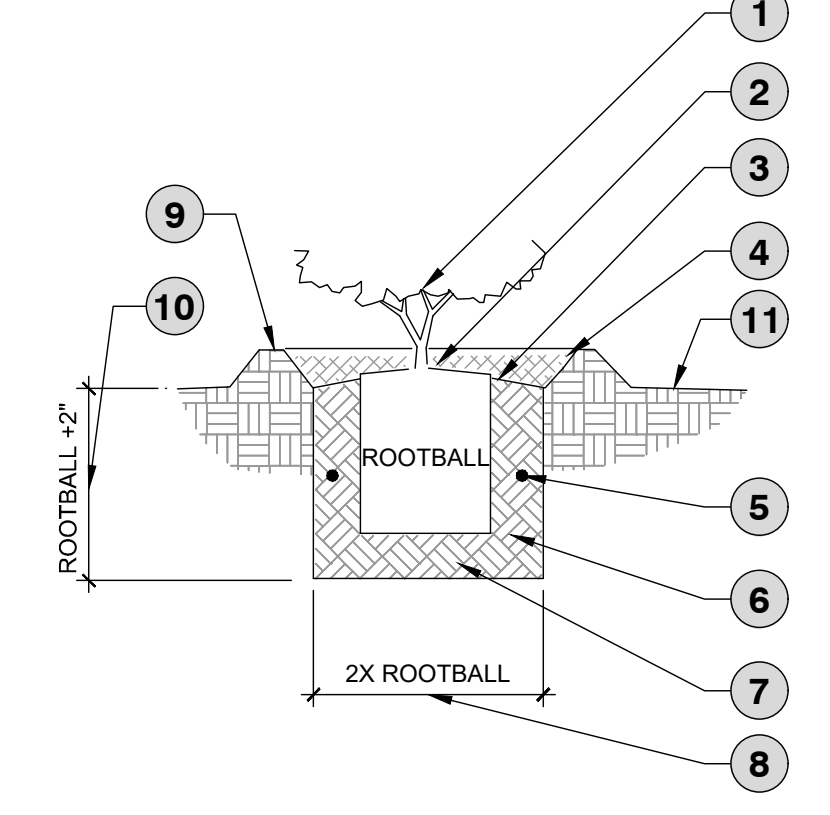

- 1 SHRUB / ACCENT
- 2 1" HIGHER THAN SURROUNDING FINISHED GRADE.
- 3 SLOPE FINISHED GRADE AT BACKFILL AWAY FROM ROOTBALL.
- 4 MULCH TO 2" DEPTH AT WATER WELL.
- 5 PLANT TABLETS AS NOTED OR SPECIFIED.
- 6 BACKFILL MIX. SEE NOTES AND SPECS.
- 7 NATIVE SOIL MIX FIRMLY COMPACTED
- 8 12" AT 1 GAL.
22" AT 5 GAL.
32" AT 15 GAL.
- 9 WATER WELL: 4" HIGH AT SHRUB, NO WATER WELL AT LAWN AREA.
- 10 8" AT 1 GAL.
14" AT 5 GAL.
20" AT 15 GAL.
- 11 FINISHED GRADE

- NOTES:
1. SCARIFY BOTTOM & SIDES OF PLANTING PIT.
 2. SET CROWN OF ROOTBALL 1-2" ABOVE FINISHED GRADE TO ALLOW FOR SETTLING.
 3. DO NOT COVER CROWN WITH SOIL.
 4. SETTLE BACKFILL BY WATERING AND REMOVING AIR POCKETS/COMPACTING.
 5. SHRUBS AND ACCENTS SHALL BE MAINTAINED IN THEIR NATURAL FORM. OVER PRUNING AND/OR "BALLING" IS PROHIBITED.

1 GRADE AT HARDSCAPE-CURB / WALK



1" = 1'-0" P-CH-02

2 GRADE TRANSITION: SWALE / BERM & HARDSCAPE

1" = 1'-0" P-CH-05


3 SHRUB/ACCENT PLANTING

1 1/2" = 1'-0" P-CH-09

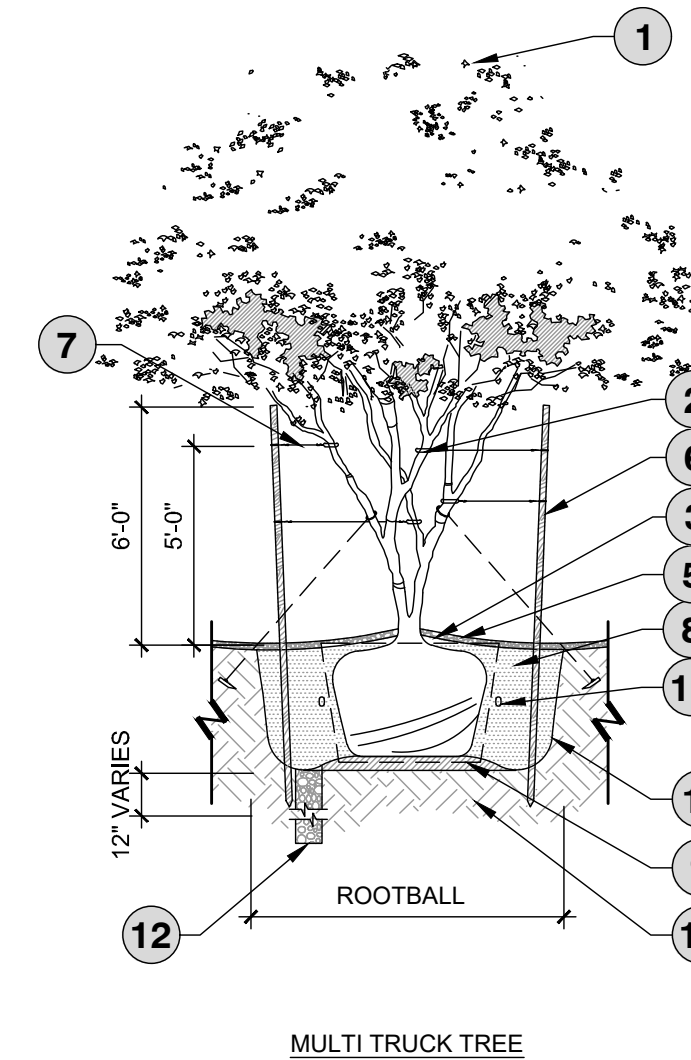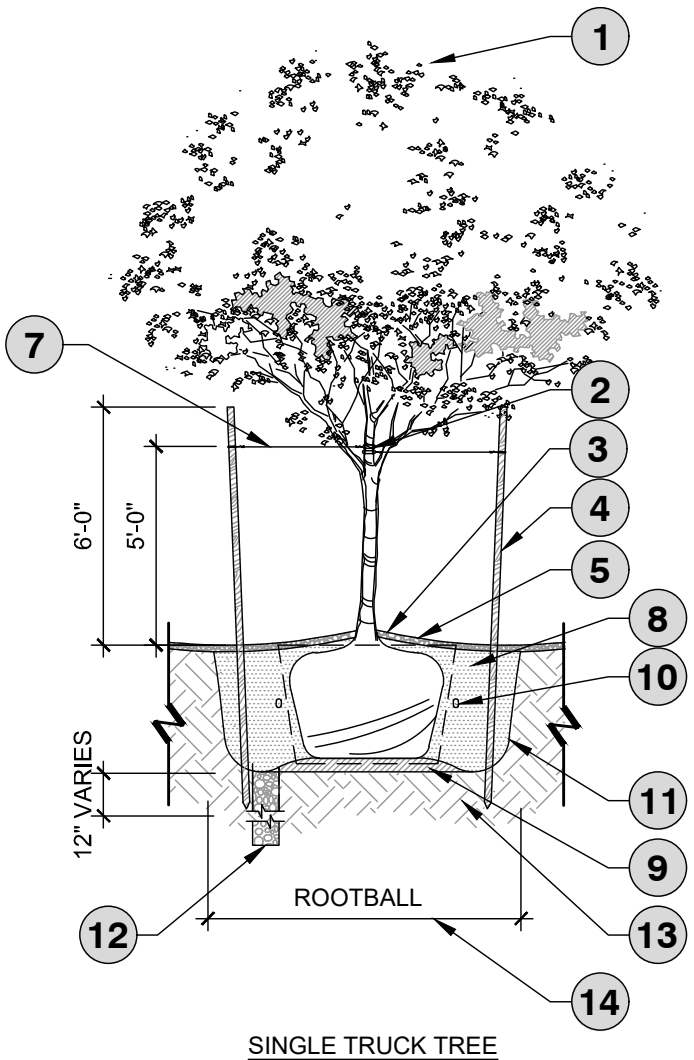

- 1 TREE, SEE LANDSCAPE SCHEDULE
- 2 3/4" ARBOR TAPE- GREEN INTALL PER MANUFACTURER RECOMMENDATIONS
- 3 KEEP MULCH 6"-8" MIN. FROM TREE BASE
- 4 (2) MIN 3" DIA. X 10' LODGEWOOD STAKES, FREE OF KNOTS & CRACKS, DRIVEN INTO SUBGRADE MIN 3" VERTICAL
- 5 TOP OF THE ROOTBALL to be 1"-2" ABOVE BOTTO OF PLANT WELL
- 6 DUCKBILL STAKED, FOR LARGE SALVAGED MULTI TRUNK TREES ONLY AS NECESSARY
- 7 18" POLYPROPYLENE TREE STRAP, BEIGE, WIRE THREADED THROUGH GROMMETS; ADDITIONAL AS REQUIRED DUE TO WEATHER CONDITIONS
- 8 BACKFILL W/ SPECIFIED SOIL MIX PER SPECS. WATER & TAMP TO REMOVE AIR POCKETS
- 9 AMENDED SOIL, BELOW ROOTBALL PER SPECIFICATIONS
- 10 FERTILIZER PER SPECIFICATIONS
- 11 SCARIFY SIDES OF PLANTING HOLE TO PREVENT GLAZING
- 12 TREE WELL, CHIMNEY DRAIN: 4" DIA. X 24" DEEPER THAN HARD PAN/CALICHE LAYER BOTTOM, AUGER DUG WELL FILLED W 3/8 PEA GRAVEL FOR DRAINAGE WHEN HARDPAN/CALICHE CONDITIONS EXIST
- 13 NATIVE SUBGRADE SOIL
- 14 2X ROOTBALL WIDTH FOR 24" BOX EQUIVALENT AND SMALLER;
3X ROOTBALL WIDTH FOR 36" BOX EQUIVALENT AND LARGER

- NOTES:
1. SCARIFY BOTTOM & SIDES OF PIT, AND BORE HOLES ON ALL PITS (SEE PLANTING PIT DETAIL).
 2. SET CROWN OF ROOTBALL 1-2" ABOVE FINISHED GRADE TO ALLOW FOR SETTLING.
 3. DO NOT COVER CROWN WITH SOIL.
 4. SETTLE BACKFILL BY WATERING AND REMOVING AIR POCKETS/COMPACTING.
 5. STAKE TREE TO ALLOW FOR SOME FLEXIBILITY AND MOVEMENT IN WIND.
 6. TREES SHALL BE MAINTAINED IN THEIR NATURAL FORM. OVER PRUNING AND/OR "BALLING" IS PROHIBITED.

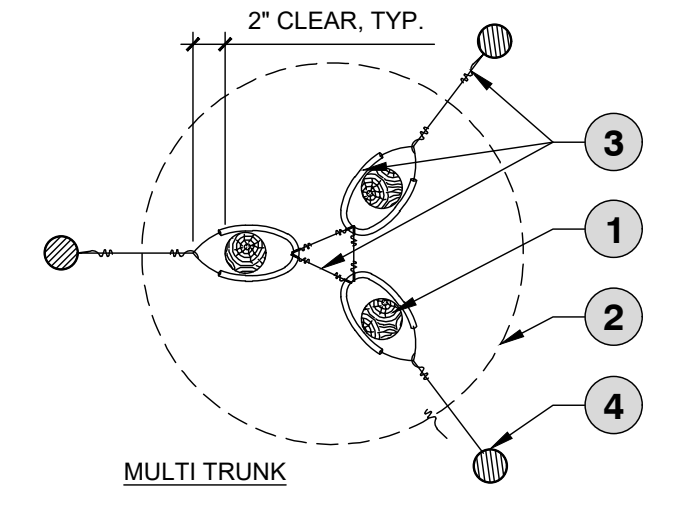



- 1 TREE TRUNK
- 2 PLANT ROOTBALL
- 3 3/4" ARBOR TAPE -GREEN INTALL PER MANUFACTURER RECOMMENDATIONS
- 4 (2-3) MIN. 3" DIA. X 10' LODGEWOOD STAKES, FREE OF KNOTS & CRAKS, DRIVEN INTO SUBGRADE VERTICAL

5 TREE STAKING DETAILS

1" = 1'-0" P-CH-28

4 TREE PLANTING DETAIL

1" = 50' P-CH-13

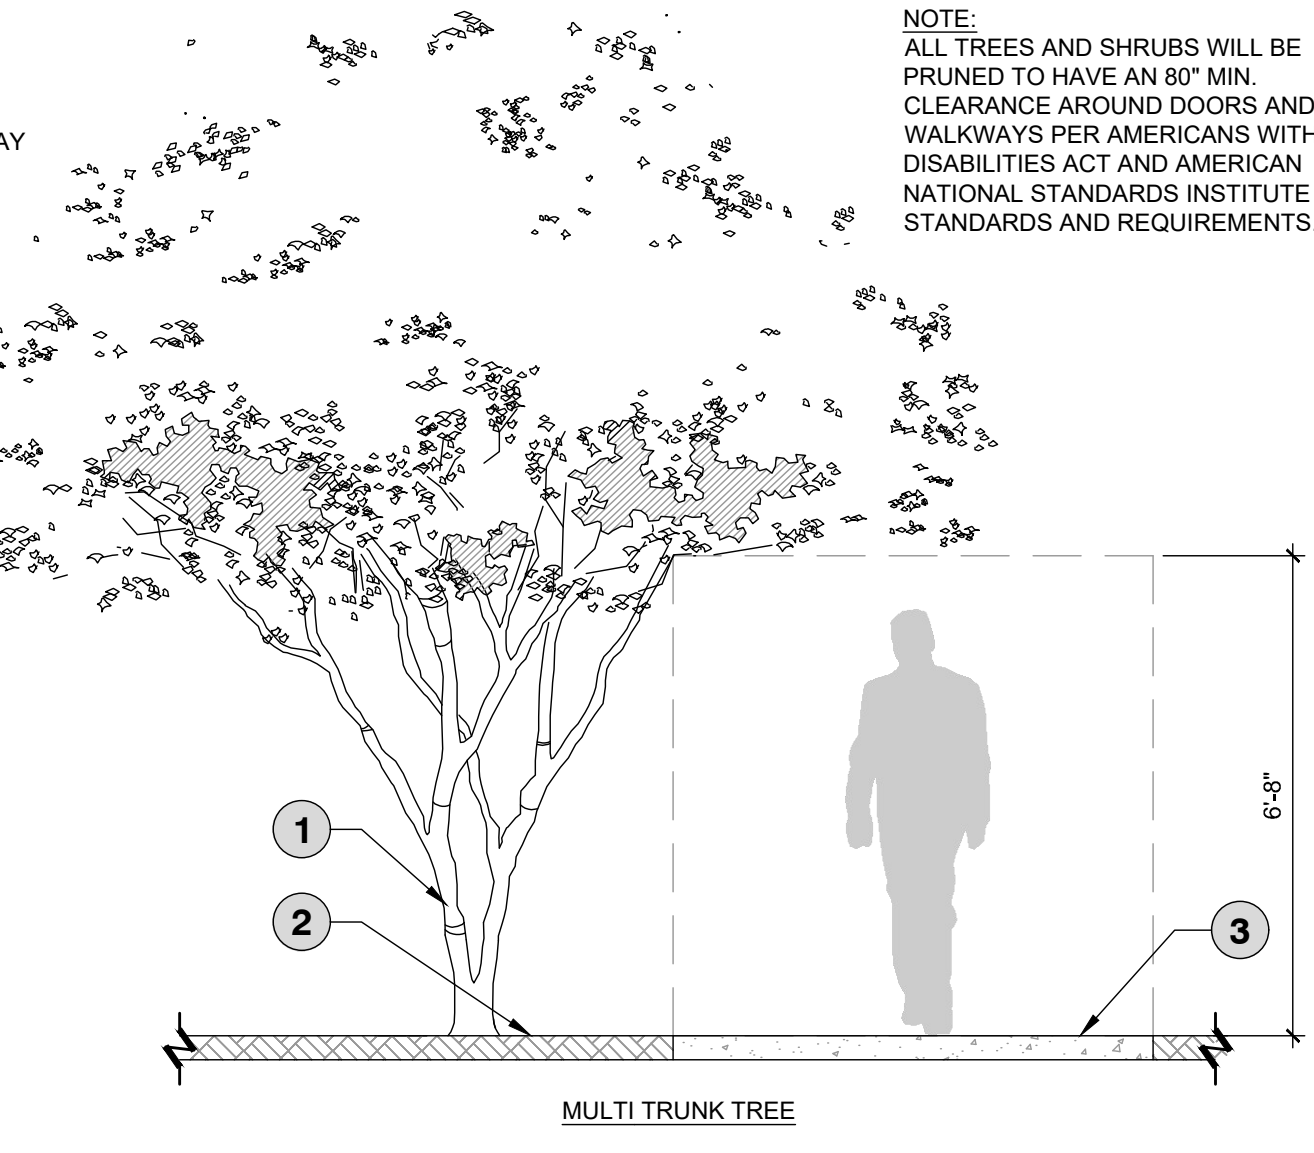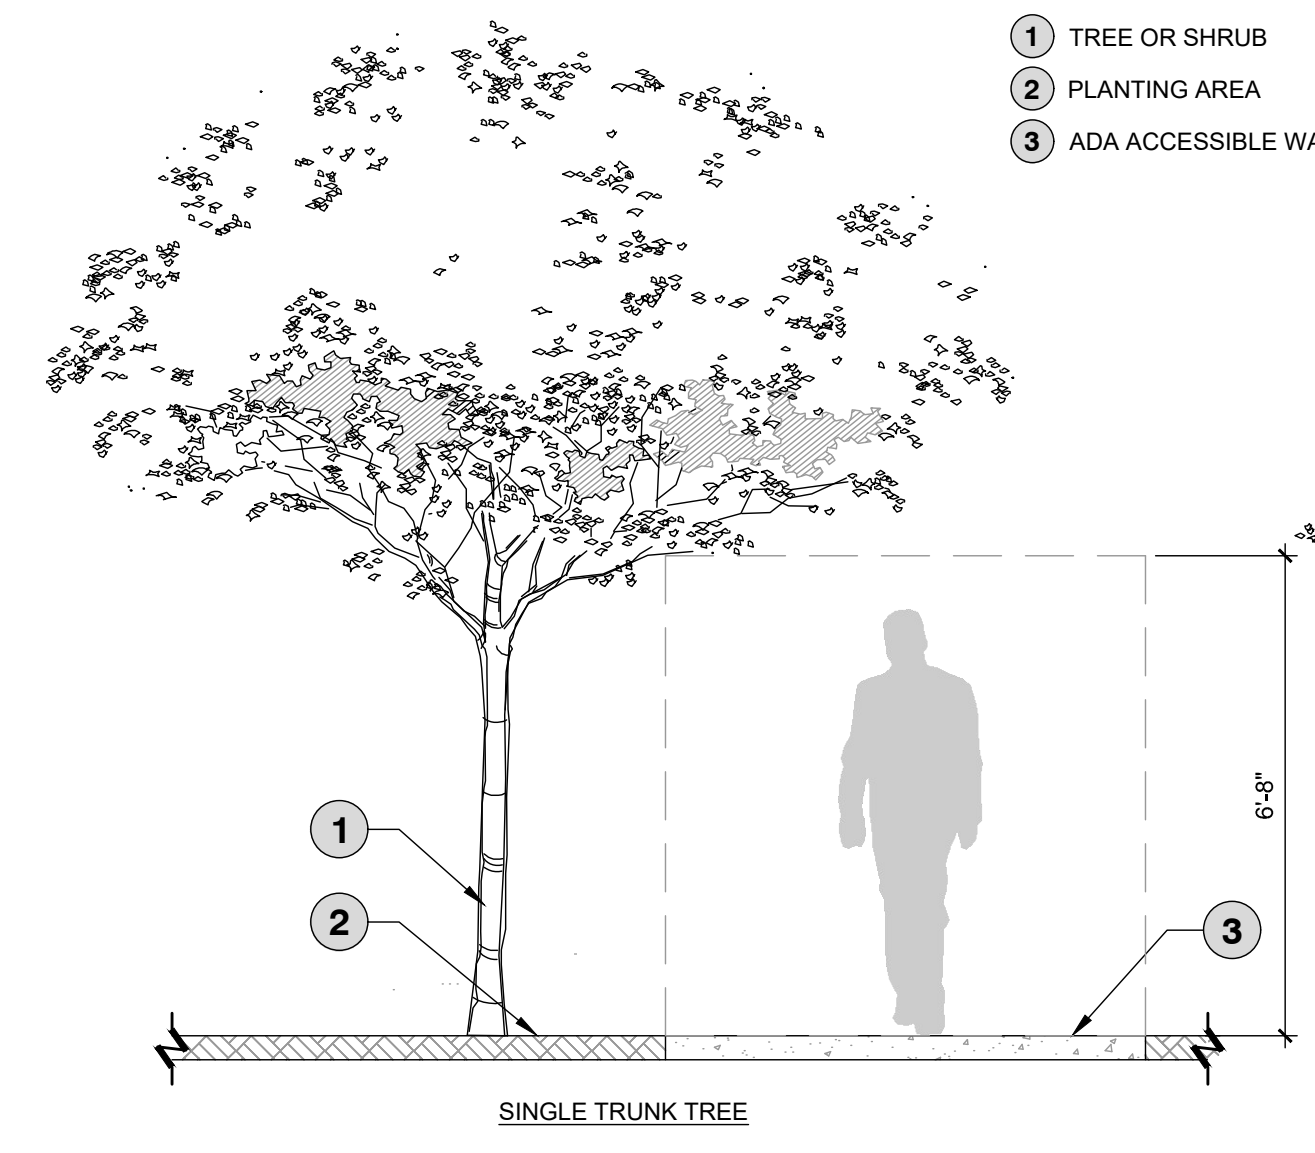

- 1 TREE OR SHRUB
- 2 PLANTING AREA
- 3 ADA ACCESSIBLE WALKWAY

NOTE:
ALL TREES AND SHRUBS WILL BE PRUNED TO HAVE AN 80" MIN. CLEARANCE AROUND DOORS AND WALKWAYS PER AMERICANS WITH DISABILITIES ACT AND AMERICAN NATIONAL STANDARDS INSTITUTE STANDARDS AND REQUIREMENTS.

6 ACCESSIBLE ROUTE CLEARANCES

3/8" = 1'-0" P-CH-31



Know what's below.
Call before you dig.



Chick-fil-A

Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-2998

Bowman

Bowman Consulting Group, Ltd
3025 W. Camelback Rd., Suite 220
Tucson, Arizona 85741
Phone: (520) 463-3200
www.bowmanconsulting.com
© 2021 Bowman Consulting Group, Ltd



CHICK-FIL-A
GIBSON BLVD FSU
1600 GIBSON BLVD SE
ALBUQUERQUE, NEW MEXICO 87106
FSU#03486

REVISION SCHEDULE		
NO.	DATE	DESCRIPTION

CONSULTANT PROJECT #	010014-01-218
ISSUED FOR	PERMIT
DATE	JUNE 2024
DRAWN BY	GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.


LANDSCAPE DETAILS

SHEET NUMBER
L3.0

July 26, 2024
 05 - L3.1
 File Path: \\010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NM\Engineering\Landscapes\CA\Working DWG\Final\010014-01-218-C-20-LD.dwg
 This document, together with the contract and related documents, is intended to provide a complete and accurate description of the project. It is not to be used for any other purpose without the written consent of the consultant. The consultant shall not be held liable for any errors or omissions in this drawing.



Know what's below.
 Call before you dig.

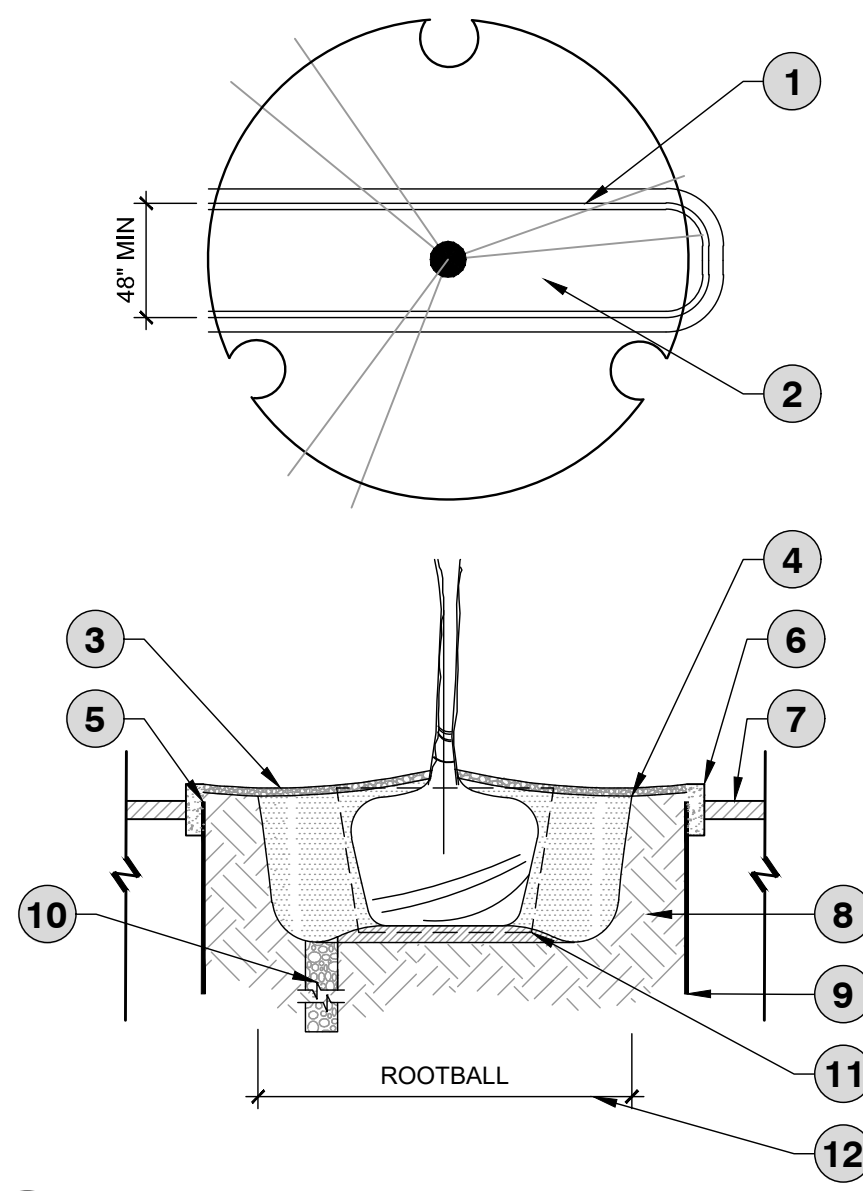

1 ROOT BARRIER ADJACENT TO SIDEWALK AND PAVEMENT

1/2" = 1'-0"

P-CH-06

- 1 24" DEEP ROOT BARRIER SURROUND AT ALL AREAS ADJACENT TO SIDEWALK AND PAVEMENT
- 2 TAMP SOIL ADJACENT TO ROOT BARRIERS TO STABILIZE THEN ASSURE IRRIGATION FLOWS DIRECTLY THROUGH ROOTBALL POST TAMPING
- 3 DECORATIVE ROCK/MULCH PER DRAWING/SPECS
- 4 BACKFILL FINISH GRADE
- 5 SET TOP OF BARRIER 2" BELOW FINISH GRADE
- 6 TOP OF CONCRETE CURB OR CONCRETE PAVEMENT
- 7 TOP OF ASPHALT
- 8 BACKFILL SEE SPECIFICATIONS
- 9 24" UB 24-2 DEEP-ROOT BARRIER SET SURROUND AT BACK OF CURB AND ADJACENT TO SIDEWALK
- 10 CHIMNEY FOR DRAINAGE THROUGH COMPACTED SOILS
- 11 AMENDED SOIL, BELOW ROOTBALL PER SPECIFICATIONS
- 12 2X ROOTBALL WIDTH FOR 24" BOX EQUIVALENT AND SMALLER 3X ROOTBALL WIDTH FOR 36" BOX EQUIVALENT AND LARGER

THIS DETAIL TO BE USED EVERYWHERE A TREE IS PLANTED WITHIN 5' CURB FACE AND/OR CONCRETE PAVING

SPECIFIED TREE ROOT BARRIER IS A MECHANICAL BARRIER AND ROOT DEFLECTOR USED TO PREVENT TREE ROOTS FROM DAMAGING HARDSCAPES AND LANDSCAPES. ASSEMBLED IN 24" (609 MM) LONG MODULES TO CREATE VARYING LENGTHS FOR LINEAR APPLICATIONS, OR PERIMETER SURROUND APPLICATIONS IN VARYING SIZES.



A. MATERIALS

1. THE CONTRACTOR SHALL FURNISH AND INSTALL TREE ROOT BARRIER AS SPECIFIED. THE TREE ROOT BARRIER SHALL BE EITHER PRODUCT #UB 18-2 AS MANUFACTURED BY DEEPROOT® GREEN INFRASTRUCTURE, LLC, 530 WASHINGTON STREET, SAN FRANCISCO, CA, WWW.DEEPROOT.COM (800.458.7668) OR APPROVED EQUAL.
2. ROOT BARRIER SHALL BE RECYCLABLE, BLACK, INJECTION MOLDED PANELS WITH 0.75" (1.90 MM) WALL THICKNESS IN MODULES 24" (609 MM) LONG AND 18" (460 MM) DEEP.
3. ROOT BARRIER SHALL BE MANUFACTURED WITH 75% REPROCESSED POLYPROPYLENE WITH ADDED ULTRAVIOLET INHIBITORS.
4. ROOT BARRIER SHALL BE COMPRISED OF 24" (609 MM) PANELS. EACH PANEL SHALL HAVE NO LESS THAN FOUR (4) MOLDED INTEGRAL VERTICAL ROOT DIRECTING RIBS OF A MINIMUM 0.060" (1.52 MM) THICKNESS, PROTRUDING 1/2" (12.7 MM) AT 90° FROM INTERIOR OF THE BARRIER PANEL, SPACED 6" (152.4 MM) APART. (SEE DETAILS A & D)
5. ROOT BARRIER SHALL HAVE A DOUBLE TOP EDGE CONSISTING OF TWO PARALLEL, INTEGRAL, HORIZONTAL RIBS AT THE TOP OF THE PANEL AT 0.060" (1.52 MM) THICKNESS, 3/8" (9.53 MM) WIDE AND 1/4" (6.35 MM) APART WITH THE LOWER RIB ATTACHED TO THE VERTICAL ROOT DIRECTING RIBS (SEE DETAIL A).
6. ROOT BARRIER SHALL HAVE A MINIMUM OF NINE (9) ANTI-LIFT GROUND LOCK TABS CONSISTING OF INTEGRAL HORIZONTAL RIDGES OF MINIMUM 0.060" (1.52 MM) THICKNESS, IN THE SHAPE OF A SEGMENT OF A CIRCLE, THE 2-1/4" (57.15 MM) CHORD OF THE SEGMENT JOINING THE PANEL WALL AND THE SEGMENT PROTRUDING 3/8" (9.53 MM) FROM THE PANEL. THE GROUND LOCKS ON EACH PANEL SHALL BE ABOUT EQUALLY SPACED BETWEEN EACH OF THE VERTICAL ROOT DIRECTING RIBS (SEE DETAILS B & D).
7. ROOT BARRIER SHALL HAVE AN INTEGRATED ZIPPER JOINING SYSTEM FOR ASSEMBLY BY SLIDING ONE PANEL INTO ANOTHER (SEE DETAIL C).


2 TREE RING MULCH (ORGANIC)

1" = 40"

P-CH-12

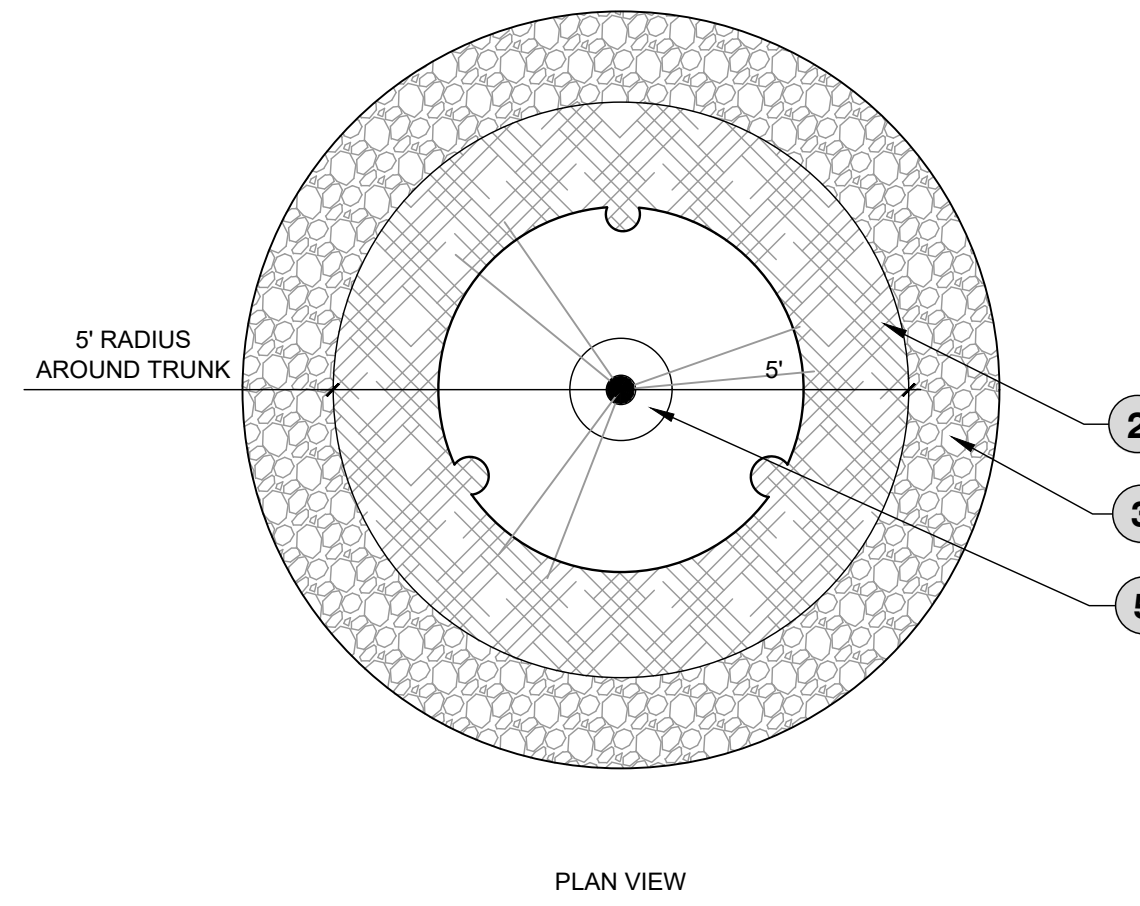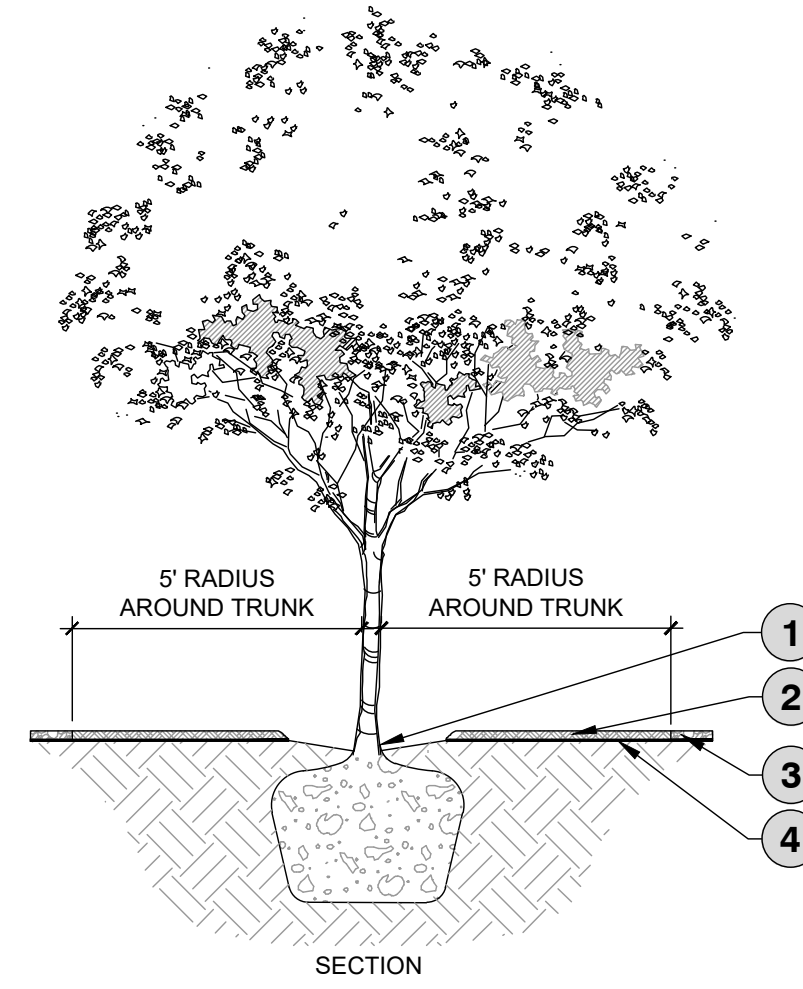

- 1 EXPOSED ROOT BALL
- 2 WOOD FIBER MULCH, MIN. 2" DEPTH.
- 3 DECORATIVE ROCK, DG, GRASS, OR OTHERS
- 4 WEED BARRIER, IF REQUIRED BY LOCAL CODE/STANDARDS
- 5 SOIL

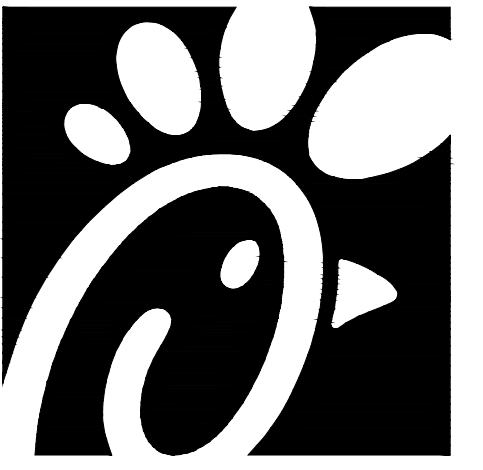

Chick-fil-A

Chick-fil-A
 5200 Buffington Rd
 Atlanta, GA 30349-2998

Bowman

Bowman Consulting Group, Ltd
 2025 W. Camelback Rd., Suite 720
 Tucson, Arizona 85741
 Phone: (520) 463-3200
 www.bowmanconsulting.com
 © 2021 Bowman Consulting Group, Ltd



CHICK-FIL-A
 GIBSON BLVD FSU
 1600 GIBSON BLVD SE
 ALBUQUERQUE, NEW MEXICO 87106
 FSU#03486

REVISION SCHEDULE	NO.	DATE	DESCRIPTION

CONSULTANT PROJECT #	010014-01-218
ISSUED FOR	PERMIT
DATE	JUNE 2024
DRAWN BY	GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET
 LANDSCAPE DETAILS

SHEET NUMBER
L3.1

01 LANDSCAPE NOTES

A. PERMITS AND SURVEYS

THE CONTRACTOR SHALL ESTABLISH ALL LOT LINES AND RESTRICTIONS. ALL OTHER LINES, GRADES AND LEVELS SHALL BE ESTABLISHED BY THE CONTRACTOR. AND HE SHALL VERIFY ALL DIMENSIONS, LINES AND GRADES INDICATED ON THE DRAWINGS. THE CONTRACTOR SHALL FURNISH ALL SURVEYS, PERMITS AND LICENSES REQUIRED FOR EXECUTION OF THE WORK SHALL BE PROCURED AND PAID FOR BY THE CONTRACTOR.

1.02 GENERAL CONDITIONS

A. GENERAL
1. THE TERMS AND DEFINITIONS STATED IN THESE GENERAL CONDITIONS SHALL APPLY TO ALL SECTIONS OF THE SPECIFICATIONS AS SET FORTH FULLY THEREIN.

GENERAL WORK PROCEDURES

2.01 SOILS

A. STOCKPILED NATIVE SOIL
1. STOCKPILED NATIVE SOIL MAY BE AVAILABLE FROM OWNER'S STOCKPILE FOR USE IN PLANTING AREAS. SOILS FOR TURF BEDS ARE CLASSIFIED AS BY "3/8 INCH MINUS"; SOILS FOR GENERAL MOUNDING ARE CLASSIFIED AS "2 INCH MINUS"

PROGRAM RECOMMENDATIONS / LANDSCAPE AREAS:
GENERAL SOIL PREPARATION. APPLY PER 1000 SQUARE FEET: 4 CUBIC YARDS CLASS 1 COMPOST, (BIOCOMP OR EQUAL), APPLY PH AMENDMENTS AS RECOMMENDED BY SOIL TEST REPORT.

- 9. BACK FILL: BACK FILL MIX - SEE PLANTING DETAILS. 1 PART BY VOLUME COMPOST TO 2 PARTS NATIVE SOIL. 1 LB. APPLY PH AMENDMENTS AS RECOMMENDED BY SOIL TEST REPORT.
10. NATIVE PLANT FERTILIZATION: NATIVE PLANTS DO NOT NEED TO BE FERTILIZED. NATIVE PLANTS SHALL RECEIVE AMENDED SOIL BACKFILL AT A RATE OF 2 PARTS NATIVE SOIL AND 1 PART CLASS I COMPOST (BIOCOMP OR EQUAL).

2.02 CHEMICAL COMPONENTS:

THE FOLLOWING ADDITIVES MAY BE USED DEPENDING ON THE OUTCOME OF THE SOILS REPORT:

- A. GROUND LIMESTONE: AGRICULTURAL LIMESTONE CONTAINING NOT LESS THAN 85% OF TOTAL CARBONATES, GROUND TO SUCH FINENESS THAT 50% WILL PASS #100 SIEVE AND 90% WILL PASS #20 SIEVE.
B. DOLOMITE LIME: AGRICULTURAL GRADE MINERAL SOIL CONDITIONER CONTAINING 35% MINIMUM MAGNESIUM CARBONATE AND 49% MINIMUM CALCIUM CARBONATE.
C. GYPSUM: AGRICULTURAL GRADE PRODUCT CONTAINING 80% MINIMUM CALCIUM SULFATE.
D. IRON SULFATE (FERRIC OR FERROUS): SUPPLIED BY A COMMERCIAL FERTILIZER, CONTAINING 20% TO 30% IRON AND 35% TO 40% SULFUR.
E. SULFATE OR POTASH: AGRICULTURAL GRADE CONTAINING 50% TO 53% OF WATER-SOLUBLE POTASH.
F. SINGLE SUPERPHOSPHATE: COMMERCIAL PRODUCT CONTAINING 20% TO 25% AVAILABLE PHOSPHORIC ACID.
G. AMMONIUM SULFATE: COMMERCIAL PRODUCT CONTAINING APPROXIMATELY 21% AMMONIA NITROGEN.
H. AMMONIUM FORMALDEHYDE: GRANULAR COMMERCIAL PRODUCT CONTAINING 34% AMMONIA NITROGEN.
I. UREA FORMALDEHYDE: GRANULAR COMMERCIAL PRODUCT CONTAINING 38% NITROGEN.
J. I.B.D.U. (ISO BUTYLDIENE DIUREA): COMMERCIAL PRODUCT CONTAINING 31% NITROGEN.
K. SOIL SULFUR: AGRICULTURAL GRADE SULFUR CONTAINING A MINIMUM OF 96% SULFUR.
L. IRON SEQUESTRENE: GEIGY IRON SEQUESTRENE 138 FE, OR APPROVED EQUAL.

2.03 TOP SOIL APPLICATION

- A. GENERAL: SPREAD TOPSOIL OVER ACCEPTED SUBGRADES IN DESIGNATED AREAS PRIOR TO INCORPORATING AMENDMENTS.
B. RESTRICTIONS: DO NOT COMMENCE SPREADING TOPSOIL PRIOR TO ACCEPTANCE OF SOIL CULTIVATION. DO NOT PLACE SOIL UNDER MUDDY CONDITIONS.
C. SOIL DEPTH: TOPSOIL DEPTH INDICATED IN THE CONSTRUCTION DOCUMENTS IS AFTER NATURAL SETTLEMENT AND LIGHT ROLLING. CONFORM TO FINISHED GRADES ON THE CIVIL DRAWINGS.

3.01 QUALITY ASSURANCE

- A. COMPLY WITH FEDERAL, STATE AND LOCAL LAWS REQUIRING INSPECTION FOR PLANT DISEASE AND INFESTATIONS. INSPECTION CERTIFICATES REQUIRED BY STATE LAW SHALL ACCOMPANY EACH SHIPMENT OF PLANTS AND DELIVER CERTIFICATES TO THE OWNER.
B. TRANSPORT PLANT MATERIALS IN ENCLOSED OR TARPED VEHICLES TO MINIMIZE DAMAGE FROM WIND.
C. ALL PLANTS SHALL BE TRUE TO NAME AND ONE OF EACH LOT SHALL BE TAGGED WITH THE NAME AND SIZE OF THE PLANTS IN ACCORDANCE WITH THE STANDARDS OF PRACTICE RECOMMENDED BY THE AMERICAN ASSOCIATION OF NURSERYMEN.
D. SHIPMENTS OF PLANTS WILL BE CAREFULLY INSPECTED BY THE OWNER'S REPRESENTATIVE AND/OR LANDSCAPE ARCHITECT AT THE SITE AT THE TIME OF OFF-LOADING TRUCKS TO VERIFY COMPLIANCE WITH THE ABOVE SHIPPING REQUIREMENTS.
E. SUBSTITUTIONS OF PLANT MATERIALS WILL NOT BY PERMITTED UNLESS AUTHORIZED IN WRITING BY LANDSCAPE ARCHITECT.
F. SPECIAL CARE SHALL BE TAKEN TO INSURE THAT PLANTS IN CONTAINERS ARE ADEQUATELY WATERED, PREPARATION, PLANTING AND IRRIGATION WILL BE FURNISHED BY OWNER.
G. PLANTS IN CONTAINERS SPECIFIED FOR SHADE LOCATIONS ARE TO BE PROTECTED FROM SUN PRIOR TO PLANTING.
H. PERSONNEL: EMPLOY ONLY QUALIFIED PERSONNEL FAMILIAR WITH REQUIRED WORK.

3.02 INSPECTIONS AND SUBMITTALS

- A. THE OWNER'S REPRESENTATIVE RESERVES THE RIGHT TO INSPECT PLANT MATERIALS AT THE NURSERY OR GROWING GROUND PRIOR TO LOADING AND TRANSPORTING. IF OWNER'S REPRESENTATIVE SELECTS TO INSPECT AT THE NURSERY, TAG ALL TREES AND REPRESENTATIVE SAMPLES OF SHRUBS AND GROUNDCOVER PRIOR TO THE INSPECTION AND ARRANGE WITH THE OWNER'S REPRESENTATIVE TEN (10) DAYS IN ADVANCE FOR THE INSPECTION.
B. IF TREES ARE NOT HAND SELECTED BY LANDSCAPE ARCHITECT THEN THREE REPRESENTATIVE SAMPLES OF EACH SIZE OF TREE AND SHRUB SPECIES ARE TO BE DELIVERED TO THE PROJECT SITE FOR THE OWNER'S REPRESENTATIVE TO REVIEW AND APPROVE, PRIOR TO ORDERING ANY PLANTS.
C. FILE CERTIFICATES OF INSPECTION OF PLANT MATERIALS BY COUNTY, STATE AND FEDERAL AUTHORITIES WITH OWNER'S REPRESENTATIVE.
D. SUBMIT WITHIN 30 DAYS AFTER NOTICE TO PROCEED A COMPLETE LIST OF MATERIALS TO BE FURNISHED AND CONFIRMED SOURCES FOR SAME. OWNER RESERVES THE RIGHT TO APPROVE OR REJECT SUPPLIERS AND CONTRACTORS.



Chick-fil-A
5200 Buffington Rd
Atlanta, GA 30349-2998

Bowman
Bowman Consulting Group Ltd
2975 W.
Tucson, Arizona 85741
Phone: (520) 463-3200
www.bowmanconsulting.com
© 2021 Bowman Consulting Group Ltd

SEAL



CHICK-FIL-A
GIBSON BLVD FSU
1600 GIBSON BLVD SE
ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

Table with 3 columns: NO., DATE, DESCRIPTION. Row 1: NO., DATE, DESCRIPTION

Table with 2 columns: CONSULTANT PROJECT #, ISSUED FOR, DATE, DRAWN BY. Row 1: #010014-01-218, PERMIT, JUNE, 2024, GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

LANDSCAPE DETAILS

SHEET NUMBER
L3.2



Know what's below. Call before you dig.

01 LANDSCAPE NOTES

3.03 PRODUCT DELIVERY, STORAGE AND HANDLING

A. PREPARATION

- 1. BALLED AND BURLAPPED (B & B) PLANTS: DIG AND PREPARE SHIPMENT ACCORDING TO THE ACCEPTED INDUSTRY STANDARDS AND IN A MANNER THAT WILL NOT DAMAGE ROOTS, BRANCHES, SHAPE, SHORT AND LONG TERM HEALTH, AND FUTURE DEVELOPMENT. SIZE OF ROOTBALL SHALL BE AS DEFINED IN THE AMERICAN STANDARD FOR NURSERY STOCK (AMERICAN ASSOCIATION OF NURSERYMEN; LATEST EDITION). B & B PLANTS MAY ONLY BE USED IF SPECIFIED IN THE CONTRACT DOCUMENTS OR IF AUTHORIZED IN WRITING BY THE LANDSCAPE ARCHITECT.
2. CONTAINER GROWN PLANTS: DELIVER PLANTS IN CONTAINER SUFFICIENTLY RIGID TO HOLD BALL SHAPE AND PROTECT ROOT MASS.
3. AT CONTRACTOR'S OPTION, SPRAY EVERGREEN PLANTS AND DECIDUOUS PLANTS IN FULL LEAF WITH ANTI-DESSICANT IMMEDIATELY PRIOR TO SHIPMENT.
4. PRE-DELIVERY INSPECTION: NOTIFY OWNER'S REPRESENTATIVE MINIMUM OF TWO WEEKS PRIOR TO SHIPPING TO ALLOW FOR PRE-DELIVERY INSPECTION OF PLANT MATERIALS AT THE NURSERY.
B. DELIVERY
1. DELIVER ONLY PLANT MATERIALS THAT CAN BE PLANTED IN ONE DAY UNLESS ADEQUATE STORAGE AND WATERING FACILITIES ARE AVAILABLE ON PROJECT SITE.
2. PROTECT B & B ROOT BALLS DURING SHIPPING BY PROPER HANDLING TECHNIQUES; CRACKED OR CRUMBLING ROOTBALLS WILL BE REJECTED. PROTECT AT THE SITE BY MAINTAINING A THOROUGHLY MOIST ROOTBALL; HEEL IN WITH SAWDUST (OR COMPARABLE MATERIAL) IF NOT PLANTED WITHIN 24 HOURS OF DELIVERY. MAINTAIN ROOTBALL IN A MOIST CONDITION AND DO NOT ALLOW TO DRY OUT.
3. NOTIFY OWNER'S REPRESENTATIVE OF DELIVERY SCHEDULE A MINIMUM OF 48 HOURS IN ADVANCE SO PLANT MATERIAL CAN BE INSPECTED PRIOR TO UNLOADING FROM TRUCKS.
4. REMOVE REJECTED MATERIAL IMMEDIATELY FROM SITE.
5. DO NOT LIFT, MOVE, ADJUST TO PLUMB, OR OTHERWISE MANIPULATE PLANTS BY TRUNK OR STEMS.

3.04 PLANT STANDARDS

A. USE THE FOLLOWING PUBLICATIONS FOR QUALIFYING PLANT MATERIAL ACCEPTABLE FOR INSTALLATION:

- 1. "AMERICAN STANDARD FOR NURSERY STOCK"; EDITION APPROVED 1985 BY AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (Z60.1) PLANT MATERIALS.
2. "HORTUS THIRD", 1976; CORNELL UNIVERSITY PLANT NOMENCLATURE.
3. ARIZONA NURSERY ASSOCIATION GROWER'S COMMITTEE "RECOMMENDED SPECIFICATIONS", 1988, ARIZONA NURSERY ASSOCIATION.
B. PLANTS SHALL BE NURSERY GROWN IN ACCORDANCE WITH GOOD HORTICULTURAL PRACTICES UNDER CLIMATIC CONDITIONS SIMILAR TO THOSE OF PROJECT FOR AT LEAST TWO YEARS UNLESS SPECIFICALLY NOTED OTHERWISE. PLANTS SHALL BE EXCEPTIONALLY HEAVY, SYMMETRICAL, TIGHTLY KNIT, SO TRAINED OR FAVORED IN DEVELOPMENT AND APPEARANCE AS TO BE SUPERIOR IN FORM, NUMBER OF BRANCHES, COMPACTNESS AND SYMMETRY
C. PLANTS SHALL BE SOUND, HEAVY AND VIGOROUS, WELL BRANCHED AND DENSELY FOLIATED WHEN IN LEAF. THEY SHALL BE FREE OF DISEASE, INSECT PESTS, EGGS OR LARVAE, AND SHALL HAVE HEALTHY, WELL DEVELOPED ROOT SYSTEMS. THEY SHALL BE FREE FROM PHYSICAL DAMAGE OR ADVERSE CONDITIONS THAT WOULD PREVENT THRIVING GROWTH. SOIL IN THE CONTAINERS SHALL BE FREE OF DISEASE AND PATHOGENS.
D. PLANTS SHALL BE TRUE TO SPECIES AND VARIETY AND SHALL CONFORM TO MEASUREMENTS SPECIFIED, EXCEPT THAT PLANTS LARGER THAT SPECIFIED MAY BE USED IF APPROVED BY LANDSCAPE ARCHITECT. USE OF SUCH PLANTS SHALL NOT INCREASE CONTRACT PRICE. IF LARGER PLANTS ARE APPROVED, THE BALL OF EARTH SHALL BY INCREASED IN PROPORTION TO THE SIZE OF THE PLANT. PLANTS SHALL BE MEASURED WHEN BRANCHES ARE IN THEIR NORMAL POSITION. HEIGHT AND SPREAD DIMENSIONS SPECIFIED REFER TO MAIN BODY OF PLANT AND NOT BRANCH TO TIP. CALIPER MEASUREMENT SHALL BE TAKEN AT A POINT ON THE TRUNK 6" ABOVE NATURAL GROUND LINE. FOR TREES OVER 4" IN CALIPER, THIS MEASUREMENT SHOULD BE TAKEN FROM A POINT 12" ABOVE THE NATURAL GROUND LINE. IF A RANGE OF SIZE IS GIVEN, NO PLANT SHALL BE LESS THAN THE MINIMUM RANGE OF SIZE AND NOT LESS THAT 40% OF THE PLANTS SHALL BE AS LARGE AS THE MAXIMUM SIZE SPECIFIED. THE MEASUREMENTS SPECIFIED ARE THE MINIMUM SIZE ACCEPTABLE AND ARE THE MEASUREMENTS AFTER PRUNING. WHERE PRUNING IS REQUIRED, PLANTS NOT CONFORMING TO THE REQUIREMENTS SPECIFIED WILL BE CONSIDERED DEFECTIVE. SUCH PLANTS, WHETHER IN PLACE OR NOT, WILL BE MARKED AS REJECTED AND SHALL BE IMMEDIATELY REMOVED FROM THE PREMISES. THESE WILL BE REPLACED WITH NEW ACCEPTABLE PLANTS.
E. SPECIAL CARE SHALL BE TAKEN TO INSURE THAT PLANTS IN CONTAINERS ARE ADEQUATELY WATERED, WATER FOR SOIL PREPARATION, PLANTING AND IRRIGATION WILL BE FURNISHED BY OWNER.
F. UNDER NO CONDITIONS WILL THERE BE ANY SUBSTITUTION OF PLANTS OR SIZES FOR THOSE LISTED ON THE ACCOMPANYING PLANS, EXCEPT WITH THE EXPRESS WRITTEN CONSENT ON THE LANDSCAPE ARCHITECT.
G. CONTAINER STOCK SHALL HAVE GROWN IN THE CONTAINERS IN WHICH DELIVERED FOR AT LEAST SIX MONTHS, BUT NOT OVER TWO YEARS. SAMPLES MUST PROVE NO ROOTBOUND CONDITION EXIST. NO CONTAINER PLANTS THAT HAVE CRACKED OR BROKEN BALLS OF EARTH WHEN TAKEN FROM CONTAINER SHALL BE PLANTED EXCEPT UPON SPECIAL APPROVAL BY LANDSCAPE ARCHITECT.
H. FIELD DUG PLANTS MAY BE USED ONLY IF SPECIFICALLY APPROVED IN WRITING BY THE LANDSCAPE ARCHITECT PRIOR TO ORDERING. UNLESS OTHERWISE AUTHORIZED, FIELD DUG PLANTS WILL BE HARVESTED WITH A TWO STEP METHOD, IN WHICH THE FOUR SIDES ARE CUT AND BOX SIDES INSTALLED FOR A MINIMUM OF FOUR (4) MONTHS DURING THE GROWTH SEASON PRIOR TO DIGGING AND BOXING THE BOTTOM. SPRAY FIELD DUG TREES IMMEDIATELY PRIOR TO BOXING THE BOTTOM WITH ANTI-DESICCANT. ENSURE ADEQUATE COVERAGE TO TRUNKS, BRANCHES, AND FOLIAGE.
I. PLANTS SHALL NOT BE PRUNED BEFORE DELIVERY. TREES WHICH HAVE DAMAGED OR CROOKED LEADERS, OR MULTIPLE LEADERS, UNLESS SPECIFIED, WILL BE REJECTED. TREES WITH ABRASIONS OF THE BARK, SUNSCALDS, DISFIGURING KNOTS, OR FRESH CUTS OF LIMBS OVER 3/4" WHICH HAVE NOT COMPLETELY CALLOUSED, WILL BE REJECTED.

3.05 PREPLANTING

A. SITE PREPARATION

- 1. EXAMINE SUBGRADE AND VERIFY CONDITIONS UNDER WHICH WORK WILL BE PERFORMED. NOTIFY OWNER'S REPRESENTATIVE IF THERE IS A DISCREPANCY BETWEEN SITE CONDITIONS AND CONTRACT DOCUMENTS.
2. DO NOT BEGIN SOIL PREPARATION AND PLANTING UNTIL ALL WORK SUCH AS HEADER INSTALLATION, WALKS, PAVING, CONCRETE WORK, ELECTRICAL EXCEPT FOR FIXTURE LOCATION, FENCING EXCEPT WHERE ACCESS IS NECESSARY, DRAINAGE WORK, GAS LINE INSTALLATION, IRRIGATION WORK, AND ANY OTHER WORK REQUIRED UNDER PLANS AND SPECIFICATIONS AROUND PLANTING AREAS IS COMPLETED AND APPROVED. SPECIMEN TREES TWENTY (20) INCH, AND LARGER BOX SIZES ARE EXEMPT FROM THIS RULE WHERE ACCESS MIGHT BE RESTRICTED BY CONSTRUCTION PHASES OF LANDSCAPING OR BUILDING. ALL PLANTS AND PLANTING SHALL BE CONTINUALLY MAINTAINED BY THE LANDSCAPE CONTRACTOR.
3. SOIL PREPARATION: DO NOT COMMENCE PLANTING WORK PRIOR TO COMPLETION AND ACCEPTANCE OF SOIL PREPARATION.
4. IRRIGATION: DO NOT COMMENCE PLANTING WORK PRIOR TO INSTALLATION AND ACCEPTANCE OF IRRIGATION SYSTEM, UNLESS APPROVED IN WRITING BY OWNER'S REPRESENTATIVE.
5. WEED BEFORE AND DURING PRELIMINARY GRADING AND FINISH GRADING. ALL WEED AND GRASSES SHALL BE DUG OUT BY THE ROOTS AND REMOVED FROM SITE. SITE SHALL BE MAINTAINED AND REMAIN WEED FREE UNTIL TURNOVER TO THE OWNER'S AUTHORIZED REPRESENTATIVE.
6. LAYOUT AND STAKING: LAY OUT PLANTS AT LOCATIONS SHOWN ON DRAWINGS. USE STEEL WIRED FLAGS, COLOR CODED FOR EACH SPECIES OF PLANTS, OR SET PLANTS IN CONTAINERS ON GRADE. STAKE EACH TREE.
7. RIGHT IS RESERVED TO REFUSE ON SITE REVIEW AT ANY TIME IF, IN THE OPINION OF THE LANDSCAPE ARCHITECT, AN INSUFFICIENT QUANTITY OF PLANTS IS PROVIDED. LANDSCAPE ARCHITECT RESERVES THE RIGHT TO INTERCHANGE OR ADJUST THE LOCATIONS OF PLANTS PRIOR TO PLANTING.
8. EQUIPMENT FOR DIGGING PLANT PITS: USE BACKHOE, TREE SPADE OR HAND WORK TO DIG TREE PITS. SCARIFY SIDES OF THE TREE PIT AFTER EXCAVATION (SEE BELOW).
9. CONTAINERIZED PLANT PITS: EXCAVATE SQUARE PLANT PITS AS FOLLOWS: SEE PLANTING DETAILS REMOVE EXCESS EXCAVATED SOIL FROM PROJECT SITE AND/OR DISPOSE OF AS DIRECTED BY OWNER'S REPRESENTATIVE.
B. DRAINAGE TEST OF PLANT PITS/OBSTRUCTIONS
1. PRE-WETTING OF TREE PLANT PITS: FILL TREE PLANT PITS TO THE TOP WITH WATER WITHIN 72 HOURS OF PLANTING. PLANT PITS CAN BE PLANTED AS SOON AS WATER IS COMPLETELY DRAINED, IF WATER IS NOT 90% GONE WITHIN 24 HOURS, DO NOT PLANT AND BRING TO THE IMMEDIATE ATTENTION OF THE OWNER AND LANDSCAPE ARCHITECT. CONTRACTOR MAY BE REQUIRED TO EITHER DIG A SUBSTITUTE PLANT PIT OR TO MITIGATE THE EXISTING PLANT PIT WITH A DRAINAGE SUMP. SUBSTITUTE PLANT PITS AND DRAINAGE SUMPS ARE NOT PART OF THE BASIC SERVICES AND COMPENSATION WILL BE AWARDED TO THE CONTRACTOR.
2. DOCUMENTATION: SUBMIT WRITTEN DOCUMENTATION OF TEST PIT DRAINAGE RESULTS, WITH LOCATIONS, DATE AND SIGNATURE OF TESTER.
3. OBSTRUCTIONS: IF ROCK, CALICHE, UNDERGROUND CONSTRUCTION WORK, TREE ROOTS OR OTHER OBSTRUCTIONS ARE ENCOUNTERED IN THE EXCAVATION OF PLANT PITS, ACCEPTABLE ALTERNATE LOCATIONS MAY BE USED AS DIRECTED BY THE LANDSCAPE ARCHITECT. EXCAVATION OF CALICHE IS NOT PART OF THE CONTRACT PRICE, AND IF AUTHORIZED BY THE OWNER'S REPRESENTATIVE, CONTRACTOR WILL BE COMPENSATED FOR EXCAVATION PURSUANT TO THE SCHEDULE OF LABOR AND EQUIPMENT RATES.
4. AUXILIARY TREE STAKES: SOME TREES MAY REQUIRE AN AUXILIARY OR LEADER TREE STAKE IN ADDITION TO THE STAKES SHOWN IN THE STANDARD DETAILS. THIS WILL BE DETERMINED BY THE OWNER'S REPRESENTATIVE; THIS WORK IS PART OF THE CONTRACT PRICE.
5. MULTI-TRUNK TREES: AT THE OPTION OF THE OWNER'S REPRESENTATIVE, AN ALTERNATE FORM OF STAKING ON MULTI-TRUNK TREES WILL CONSIST OF THREE TREE STAKES PLACED ADJACENT TO THE MAIN TRUNKS AND AT A SIMILAR ANGLE. EXISTING NURSERY LEADER STAKES OR AUXILIARY TREE STAKES MAY OR MAY NOT BE REQUIRED. AN ENCIRCLING TREE TIE MAY OR MAY NOT BE REQUIRED. THIS ALTERNATE STAKING METHOD IS PART OF THE CONTRACT PRICE.
6. ALL TREE STAKES, GUY WIRES AND OTHER STAKING MATERIALS TO BE REMOVED AT THE END OF THE GUARANTEE PERIOD.

4.01 GROUND COVER

A. PLANTING

- 1. GROUND COVER PLANTS SHALL HAVE BEEN GROWN IN FLATS OR CONTAINERS AND SHALL REMAIN IN THOSE FLATS OR CONTAINERS UNTIL TIME FOR TRANSPLANTING. AT TIME OF TRANSPLANTING, THE PLANT SOIL SHALL CONTAIN SUFFICIENT MOISTURE SO THAT THE SOIL DOES NOT FALL APART WHEN LIFTING PLANTS FROM THE FLAT OR CONTAINER. EACH PLANT SHALL BE PLANTED WITH ITS PROPORTIONATE AMOUNT OF THE SOIL IN A MANNER THAT WILL INSURE A MINIMUM OF DISTURBANCE TO THE ROOT SYSTEM.
2. GROUND COVER PLANTS SHALL NOT BE ALLOWED TO DRY OUT BEFORE OR WHILE BEING PLANTED. WILTED PLANTS WILL NOT BE ACCEPTED.
3. GROUND COVERS SHALL BE PLANTED SUFFICIENTLY DEEP TO COVER ALL ROOTS AND SPACED AS SPECIFIED IN GROUND COVER LIST ON LANDSCAPE PLAN.
4. INSTALL IN NEAT, EVENLY SPACED ROWS IN TRIANGULAR LAYOUT, OR AS SHOWN IN THE DRAWINGS.

- 5. TOP-DRESS FERTILIZER (N-P-K RATIO OF 3:3:1): APPLY AT THE RATE OF 1 LB. NITROGEN PER 1,000 SQ. FT. IMMEDIATELY AFTER COMPLETION OF PLANTING. PROVIDE ORGANIC MULCH FOR ALL PERENNIAL BEDS (TYPICAL).
6. WATERING: IMMEDIATELY WATER GROUND COVER AREAS AFTER FERTILIZER APPLICATION TO WASH FERTILIZER OFF LEAVES.

3.06 PLANTING OPERATIONS - TREES, SHRUBS AND VINES

A. HANDLING AND DE-POTTING

- 1. MOISTURE LEVEL: THOROUGHLY MOISTEN ROOTBALLS PRIOR TO PLANTING TO ENSURE SOIL COHESIVENESS; DO NOT PLANT DRY ROOTBALLS.
2. CAREFULLY REMOVE PLANT FROM THE CONTAINER, CUT TIN CONTAINERS, OTHER THAN KNOCK-OUT CANS, ON TWO SIDES WITH THE PROPER TYPE OF CAN CUTTER TO FACILITATE REMOVAL OF PLANTS WITH A MINIMUM OF ROOTBALL DISTURBANCE. SUPPORT ROOTBALL DURING INSTALLATION TO PREVENT CRACKING.
3. PRY OFF BOTTOM BOARDS OF BOXED TREES RATHER THAN HAMMERING BOARDS OFF. BOXED PLANTS MAY NOT BE PLANTED WITH THE BOTTOM OR SIDES OF THE BOX IN PLACE, UNLESS AUTHORIZED IN WRITING BY THE LANDSCAPE ARCHITECT.

B. SCARIFICATION

- 1. PLANT PIT: SCARIFY SIDES OF PLANT PIT THOROUGHLY BREAKING UP SURFACE AND ELIMINATING "GLAZED" AREAS.
2. PLANT ROOTBALL: AFTER REMOVING PLANT FROM CONTAINER, SCARIFY THE SIDES OF THE ROOTBALL TO A DEPTH OF INCH AT FOUR TO SIX EQUALLY SPACED INTERVALS AROUND THE PERIMETER OF THE BALL OR AT 12 INCH INTERVALS AROUND THE SIDES OF BOXED MATERIAL. CUT AND REMOVE CIRCLING ROOTS OVER 3/8 INCH DIAMETER. SCARIFICATION SHOULD BE PERFORMED WITH A SHARP SOIL KNIFE.

C. PLANTING

- 1. FOR TREES, BACKFILL PLANT PIT TO ALLOW CROWN OF ROOTBALL TO SETTLE TO A POSITION EVEN WITH FINISHED GRADE. THOROUGHLY TAMP BACKFILL UNDER ROOTBALL TO REDUCE SETTLING, AND ON SIDES OF ROOTBALL. PREPARE A RAISED BASIN AS WIDE AS THE ROOTBALL AT EACH TREE FOR WATERING PRIOR TO SHRUB AND GROUND COVER PLANTING. REFER TO DETAIL.
2. PLACE FERTILIZER TABLETS, AS DIRECTED, EVENLY IN PLANT PITS WHEN BACKFILLED.
3. ALL SHRUBS AND VINES SHALL BE SET SO THAT WHEN SETTLED THE ROOTBALLS ARE 1-2" ABOVE FINISHED GRADE. PROVIDE BASIN. REFER TO DETAIL.
4. WHEN PLANT PITS HAVE BEEN BACKFILLED APPROXIMATELY 2/3 FULL, WATER THOROUGHLY AND SATURATE ROOTBALL, BEFORE INSTALLING REMAINDER OF THE BACKFILL MIX ON TOP OF PIT, ELIMINATING AIR POCKETS.
5. REMOVE NURSERY TYPE PLANT LABELS FROM PLANTS.
6. FOR TREES IN LAWN AREAS, KEEP A 2' DIAMETER CIRCLE CENTERED ON THE TREE TRUNK FREE OF TURF AND WEEDS. USE A PRECISE TEMPLATE COVERING THE AREA OUTSIDE OF THE 2' CIRCLE IF APPLYING HERBICIDE TO PREVENT OVERSPRAY DIEBACK.
D. STAKING AND GUYING
1. TREES SHALL BE ABLE TO STAND UPRIGHT WITHOUT SUPPORT AND SHALL RETURN TO THE VERTICAL AFTER THEIR TOPS HAVE BEEN DEFLECTED HORIZONTALLY AND RELEASED. IMMEDIATELY STAKE TREES WHICH DO NOT MEET THIS QUALIFICATION, AS WELL AS PLANTS THAT ARE SUBJECT TO BREAKAGE BECAUSE OF STRONG WINDS.
2. TREES SHALL REMAIN PLUMB AND STRAIGHT FROM INSTALLATION THROUGHOUT THE MAINTENANCE AND WARRANTY PERIOD.
3. REFER TO STANDARD DETAILS FOR STAKING AND GUYING REQUIREMENTS.


NOTES:

SEE PROJECT PLAN FOR ADDITIONAL INFORMATION AND SPECIFICATIONS. PLANTING DETAILS SUPERCEDE ANY DISCREPANCIES FOUND HERE/WITHIN SPECIFICATIONS PAGES.

July 26, 2024 07:13:33 File Path: \010014 - Chick-fil-A\010014-01-218 (ENG) - CFA 03486 Gibson Blvd Albuquerque NM\Engineering\Landscapes\CAD\Working DWG\Final\010014-01-218-C-20-LD.dwg



Know what's below. Call before you dig.

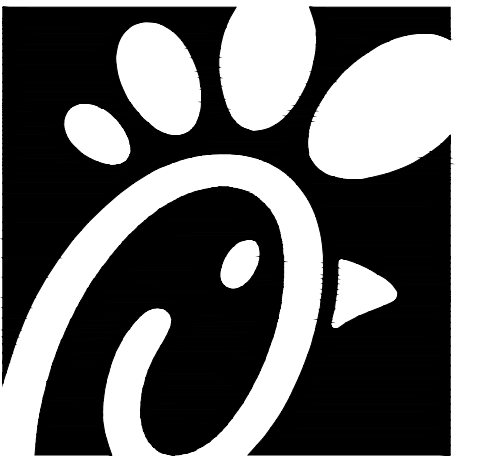

Chick-fil-A 5200 Buffington Rd Atlanta, GA 30349-2998



CHICK-FIL-A GIBSON BLVD FSU 1600 GIBSON BLVD SE ALBUQUERQUE, NEW MEXICO 87106

FSU#03486

Table with 3 columns: NO., DATE, DESCRIPTION. Row 1: REVISION SCHEDULE

Table with 2 columns: CONSULTANT PROJECT #010014-01-218, ISSUED FOR PERMIT, DATE JUNE 2024, DRAWN BY GM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

LANDSCAPE DETAILS

SHEET NUMBER L3.3