



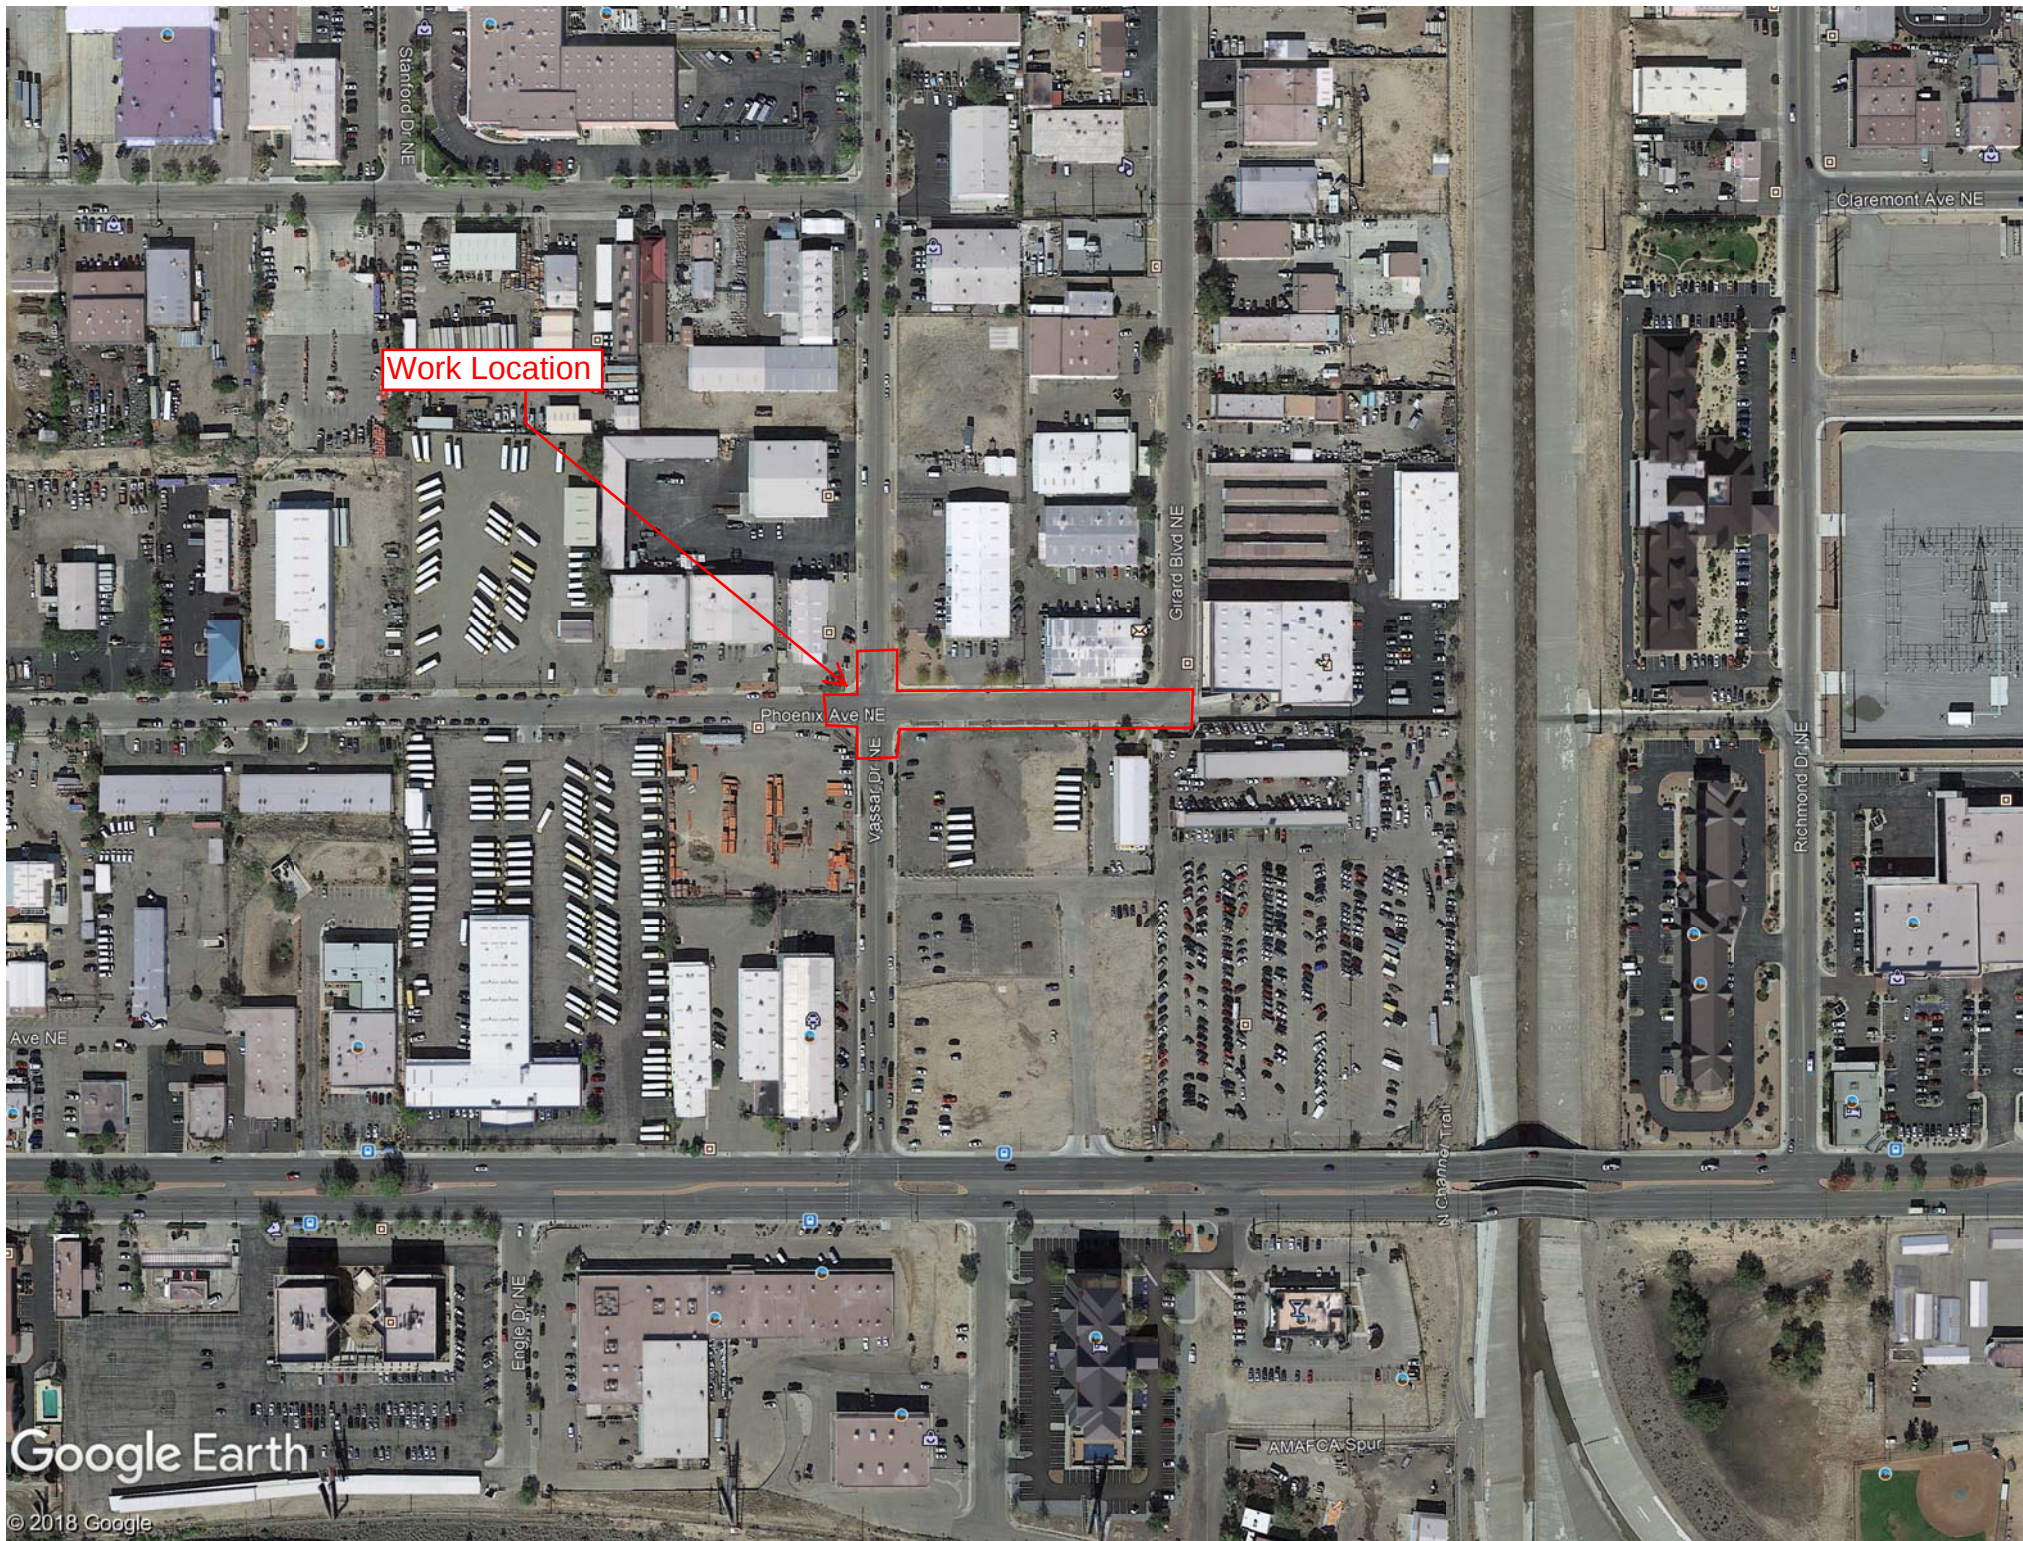


Google Earth

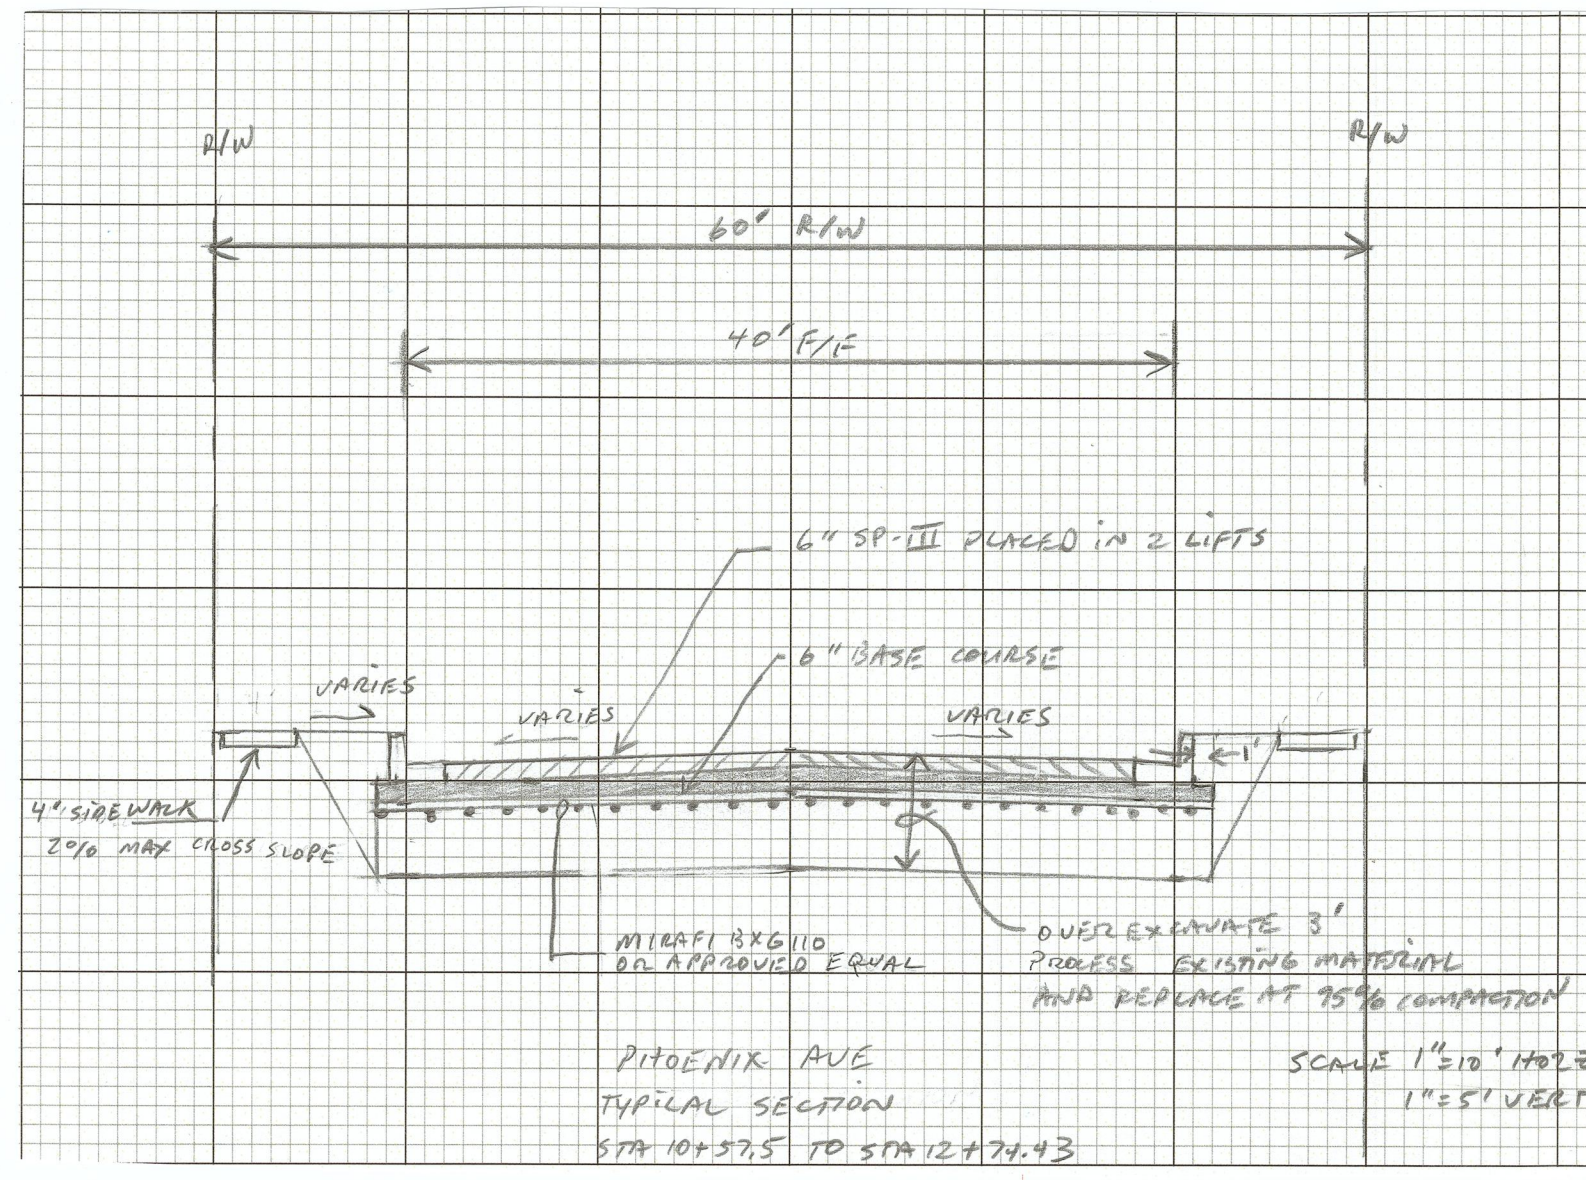

SURVEY NOTES

1. THIS IS NOT A BOUNDARY SURVEY. APPARENT PROPERTY LINES AND FOUND CORNERS AS MAY BE SHOWN HEREIN ARE FOR ORIENTATION PURPOSE ONLY. FIELD WORK WAS COMPLETED IN DECEMBER 2018 USING CONVENTIONAL SURVEYING.
2. TOPOGRAPHIC MAP IS BASED ON MODIFIED NEW MEXICO STATE PLANE COORDINATE SYSTEM, CENTRAL ZONE (3002) US SURVEY FEET.
3. THE HORIZONTAL DATUM IS BASED ON NAD83 AND THE VERTICAL DATUM IS BASED ON NAVD88.
4. THE PROJECT BENCHMARK IS AGRS CONTROL MONUMENT STAMPED I_40_12 ELEV. 5117.289 THIS MAPPING DATA SET WAS COLLECTED TO SUPPORT A HORIZONTAL SCALE OF 1"=40' AND A VERTICAL CONTOUR OF 0.50 US FT.
5. THE CENTER OF THE PROJECT CAN BE LOCATED BY GEOGRAPHIC COORDINATES 35° 06' 40" N, 106° 36' 55" W.

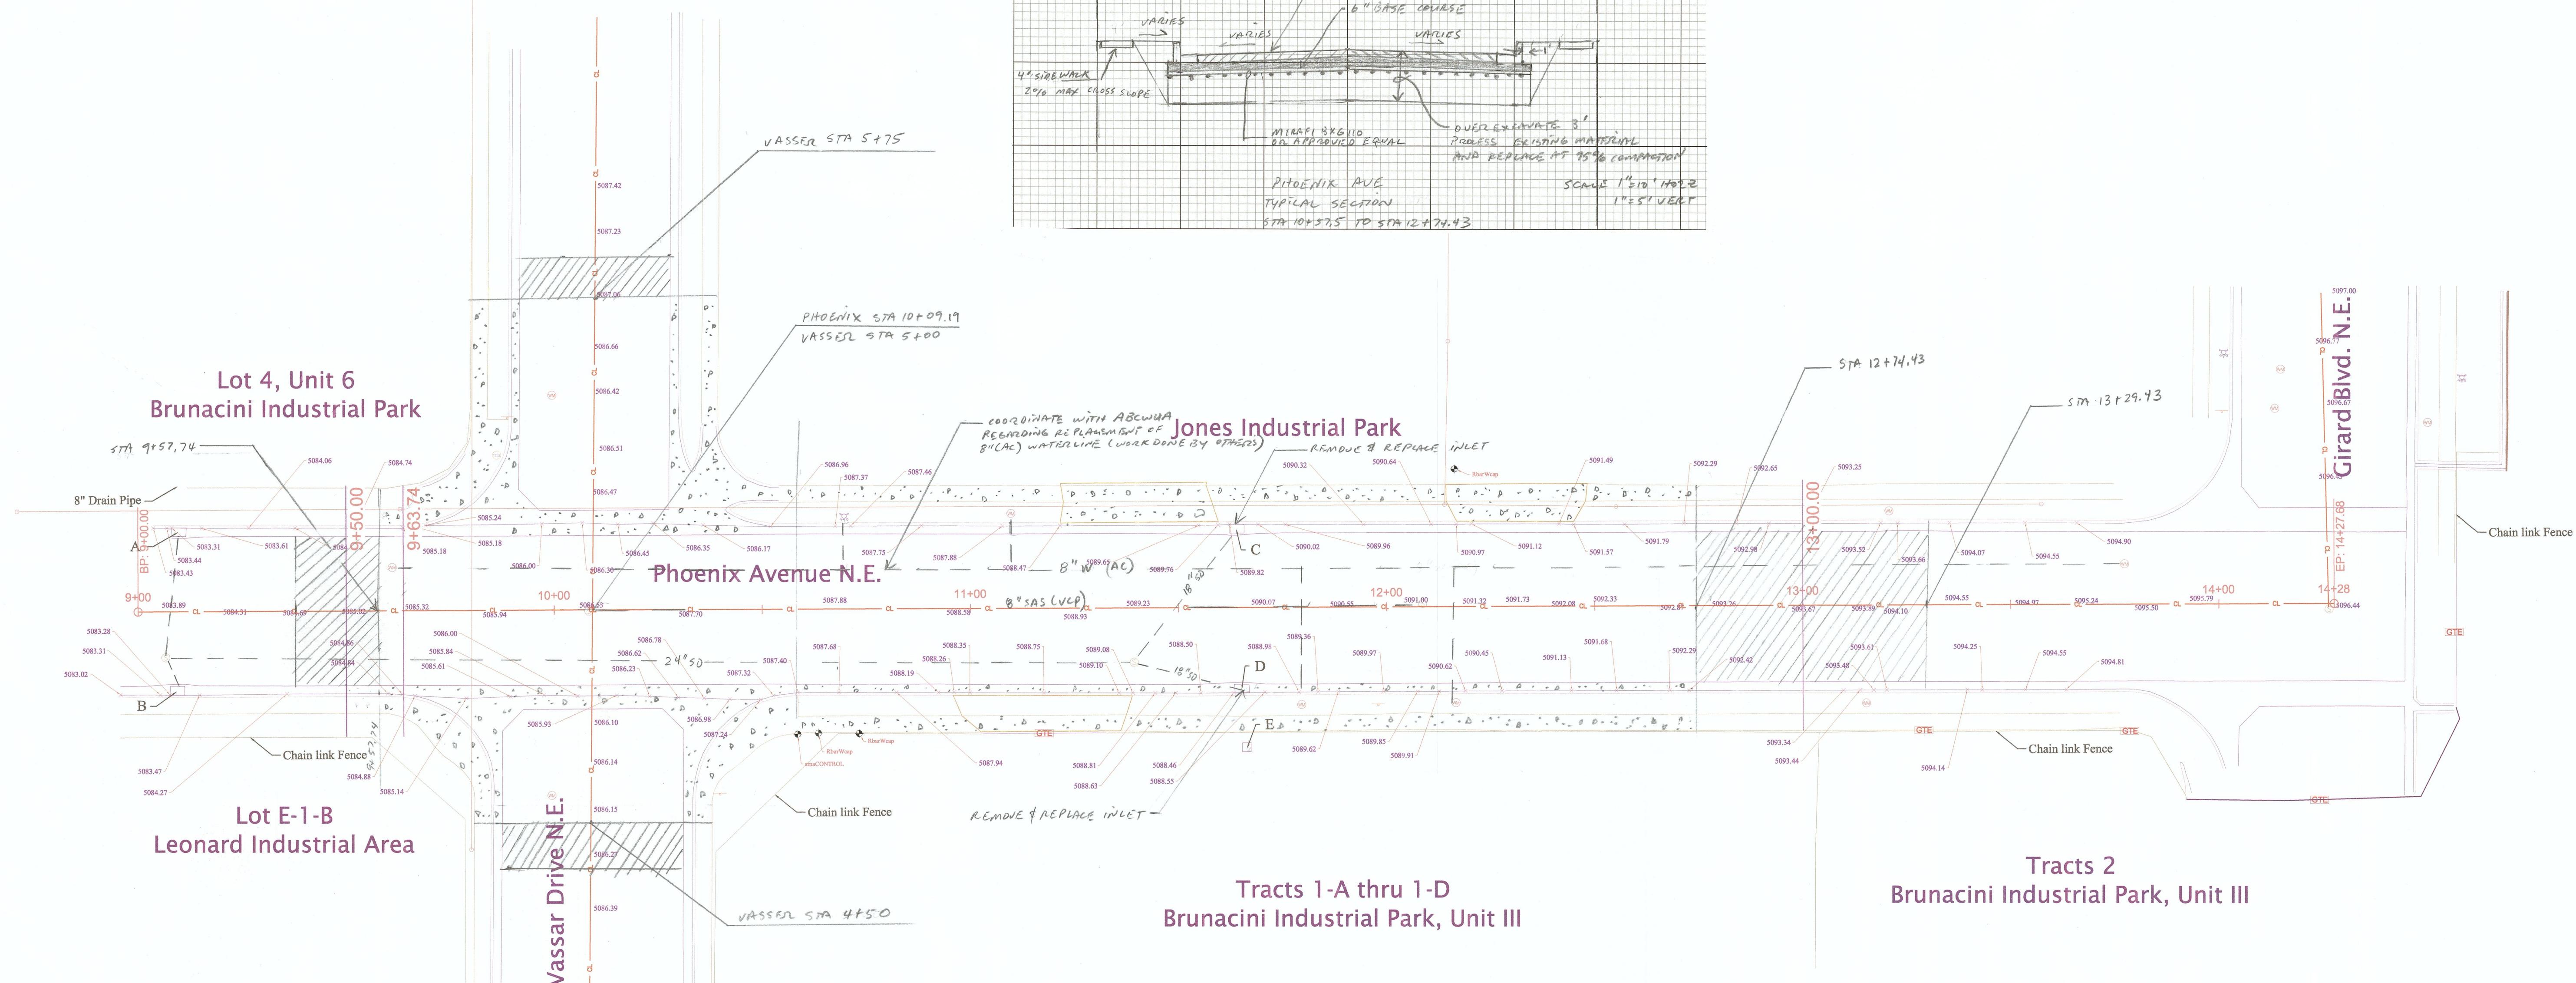


- A DROP INLET INFORMATION
GRATE ELEVATION: 5083.79'
INLET ELEVATION: 5080.80'
OUTLET INVERT: 7.63'
- B DROP INLET INFORMATION
GRATE ELEVATION: 5083.57'
OUTLET INVERT: 3.98'
- C DROP INLET INFORMATION
GRATE ELEVATION: 5090.01
OUTLET INVERT: 8.52'
- D DROP INLET INFORMATION
GRATE ELEVATION: 5086.26'
OUTLET INVERT: 3.91'
- E DROP INLET INFORMATION
GRATE ELEVATION: 5088.79'
INLET INVERT: 2.11'
OUTLET INVERT: 2.12'

LEGEND	
	POWER POLE
	SANITARY, SEWER MANHOLE
	CHAIN LINK FENCE
	FIRE HYDRANT
	WATER METER
	SIGN
	OVERHEAD UTILITY LINES
	GATE

PHOINEX SCOPE OF WORK	
STATION TO STATION	DESCRIPTION
9+37.74 TO 9+57.74	3" MILL AND INALY ASPHALT TRANSITION
9+57.74 TO 12+74.43	REMOVE AND REPLACE ASPHALT, CURB AND GUTTER, VALLEY GUTTER, SIDEWALK, ADA RAMP, DRIVE PADS PER COA STANDARDS AND THE TYPICAL SECTION ON THIS SHEET
12+74.43 TO 13+29.43	3" MILL AND INALY ASPHALT TRANSITION

VASSAR SCOPE OF WORK	
STATION TO STATION	DESCRIPTION
4+50 TO 4+60	3" MILL AND INALY ASPHALT TRANSITION
4+60 TO 5+75	REMOVE AND REPLACE ASPHALT, CURB AND GUTTER, VALLEY GUTTER, SIDEWALK, ADA RAMP, DRIVE PADS PER COA STANDARDS AND THE TYPICAL SECTION ON THIS SHEET
5+75 TO 5+85	3" MILL AND INALY ASPHALT TRANSITION

STATION ELEVATION TABLE			
STATION	CENTERLINE	RIGHT FLOWLINE	LEFT FLOWLINE
9+57.74	5085.24	5084.95	5084.95
10+00	5086.27	5085.95	5085.95
10+50	5087.49	5087.14	5087.14
11+00	5088.73	5088.32	5088.32
12+00	5091.18	5090.69	5090.69
12+74.43	5093.00	5092.46	5092.46
OVERALL SLOPE	2.45%	2.37%	2.37%

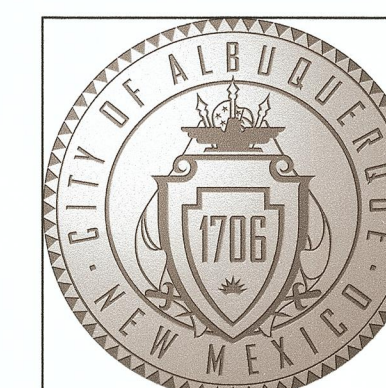

DEPARTMENT OF MUNICIPAL DEVELOPMENT
CONSTRUCTION SERVICES / SURVEY SECTION

~~WYOMING AND MODESTO~~
PHOENIX AND VASSAR

DRAWN BY: AP

APPROVED BY: LR

DWG NO. 1 OF 1

FIELD WORK PERFORMED 3/18/2014

SHEET 1

REV