

[Benches](#) [/products/benches] > [Contour Bench with Back](#)



## Contour Bench with Back

965-UltraCoat

Select a Length:

6' ▼

Select a Mount:

PORTABLE

INGROUND

SURFACE MOUNT

Select a Finish:




THERMOPLASTIC

Select a Seat Color: **BLUE**



[See more](#)  
[Deselect Color](#)

The UltraCoat Contour Bench is with or without back. Available in Portable, Inground, or Surface Mount.



[Select Pattern](#)

## SPECIFICATIONS

- 4', 6', 8' lengths can be extended with 4', 6', or 8' add on (AO) benches
- Thermoplastic finish with powder coated frame
- 2-3/8" O.D. frame
- All stainless steel hardware
- Portable, inground, or surface mount
- Cover plate available for inground or surface mount

Select a Quantity:

< 1



ADD TO QUOTE





0 50 100 200 Feet



Lomas Blvd. Missing Sidewalk



NE end looking SW

Tie to existing  
sidewalk here.






Middle looking NE

Construct 6' x 6' level landing every 100 linear feet for ADA compliance.

Landscape gravel in this space

Construct new 6' wide COA standard 4" PCCP sidewalk against back of existing curb; clear and grade remainder of width to match.

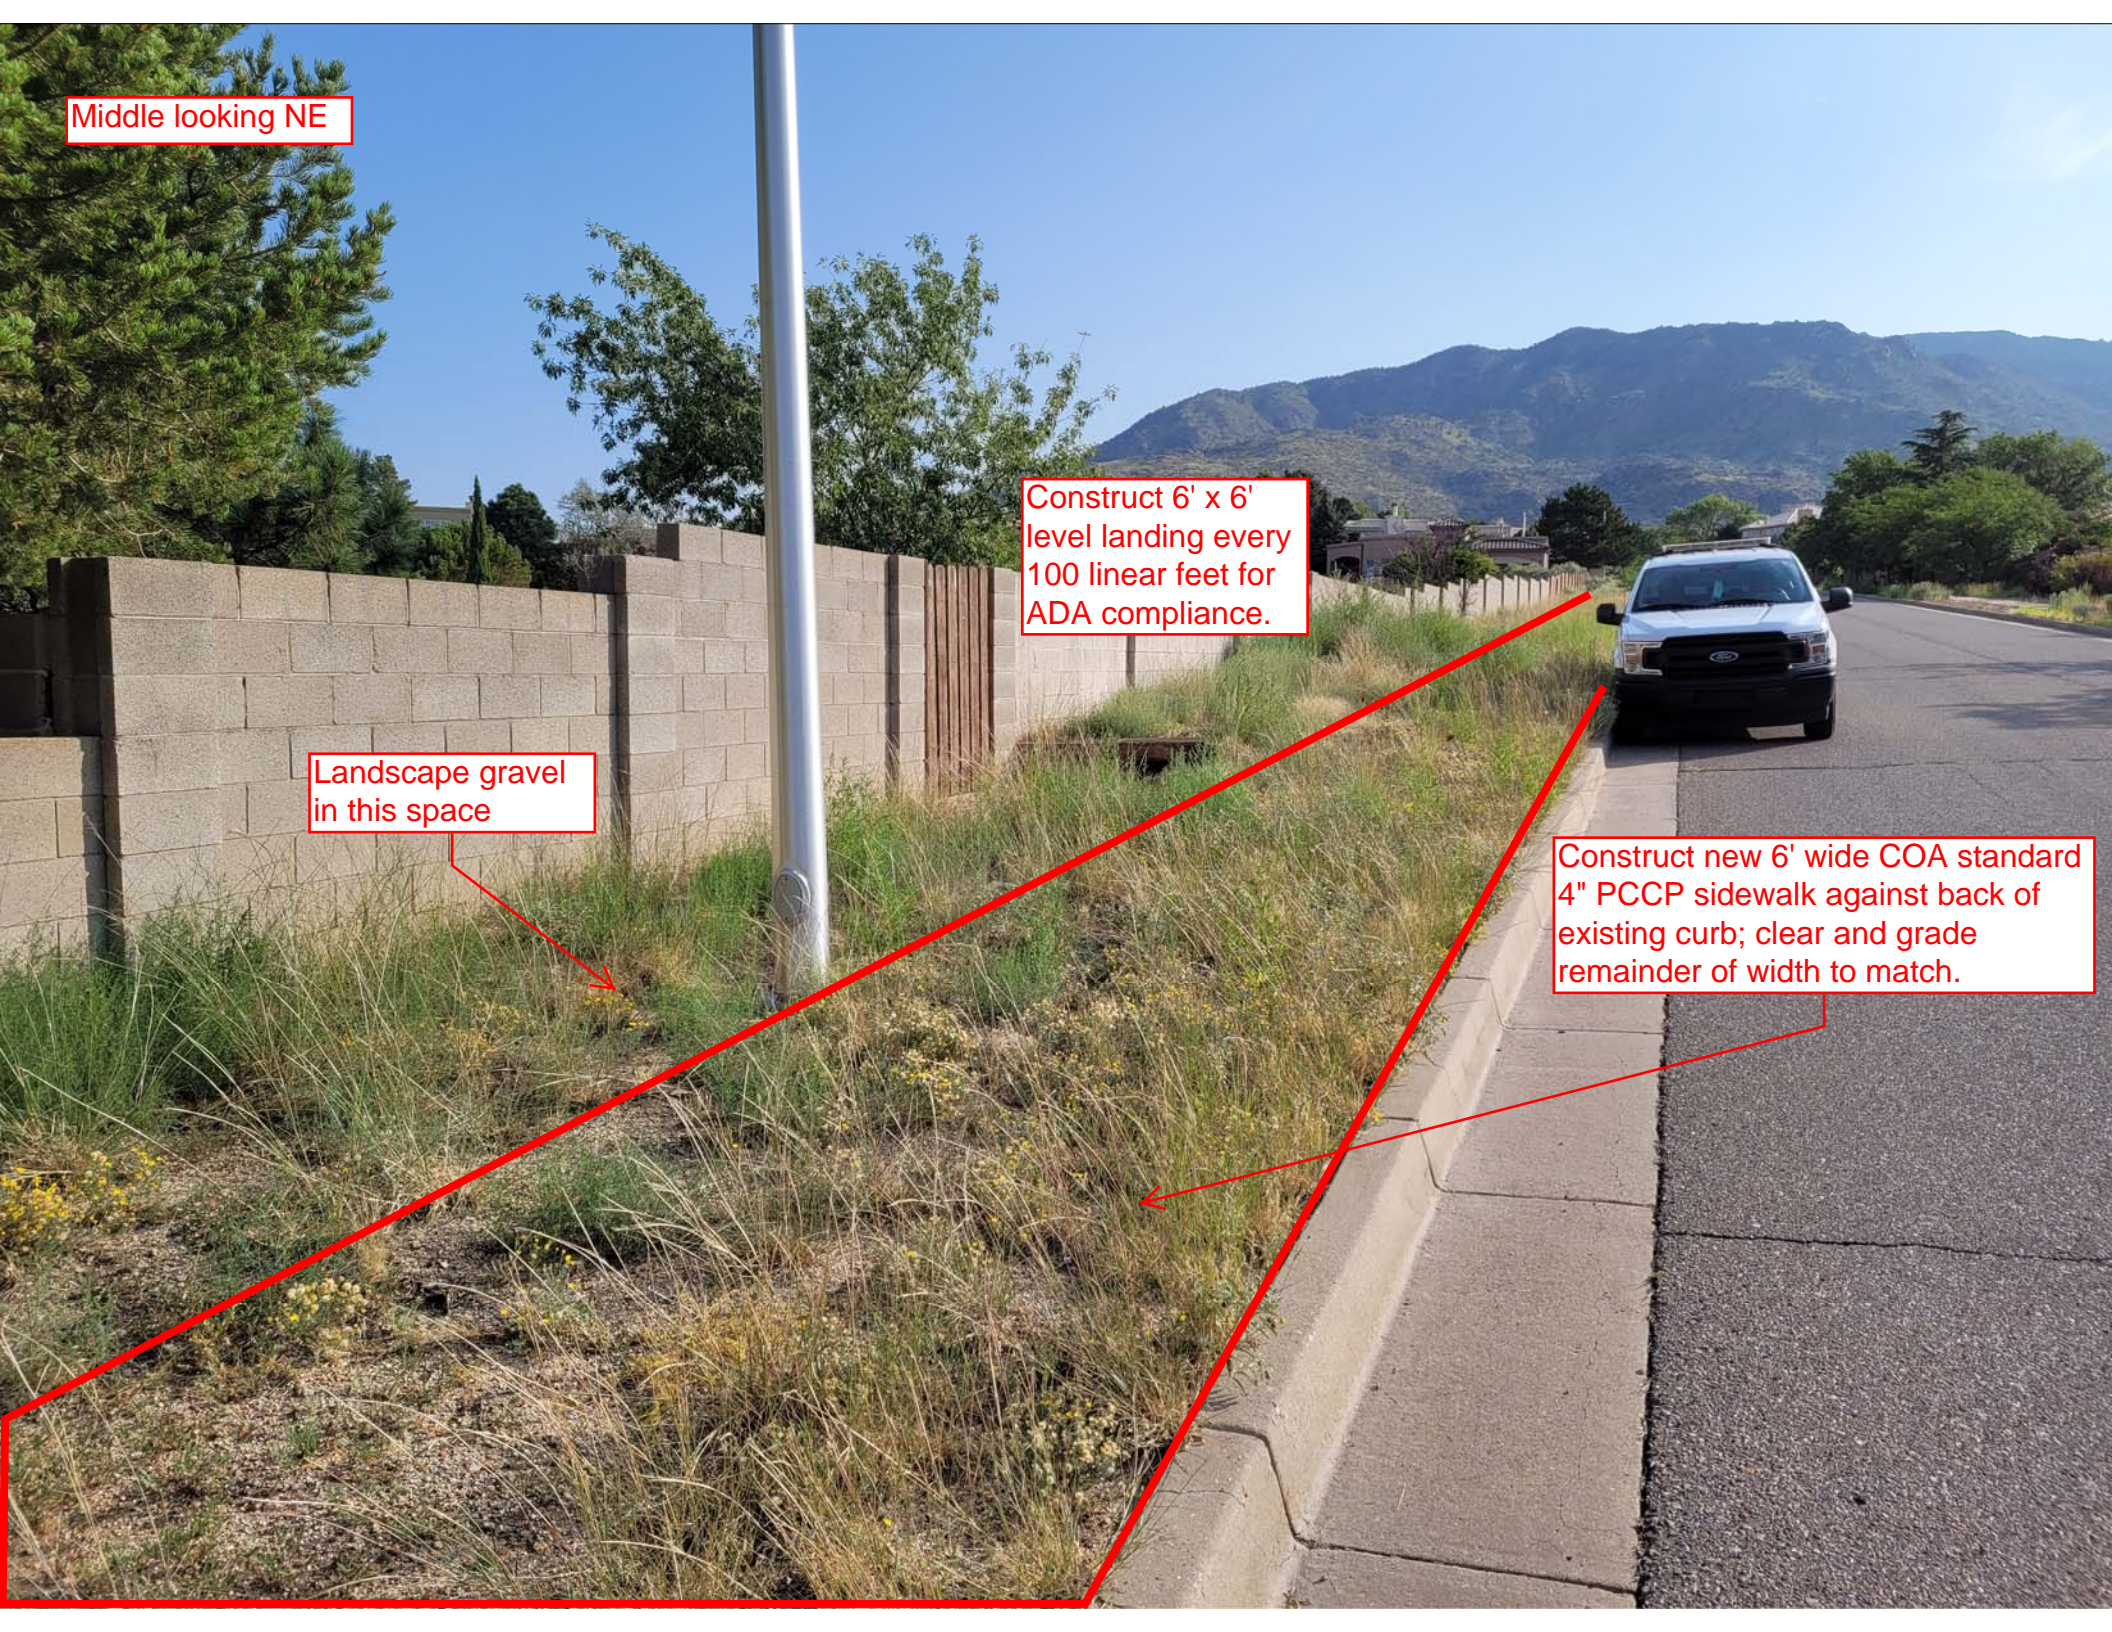



SW end looking NE

Begin new  
sidewalk here.

Remove and  
replace curb ramp  
and fillet.







Please provide a separate cost to install three benches similar in color and style to the existing benches at Embudo Hills Park. Benches shall be mounted on a level 4" concrete pad between sidewalk and existing CMU wall, locations TBD in the field.