


Parameter	Value
Overall Length	40.000ft
Overall Width	8.167ft
Overall Body Height	7.745ft
Min Body Ground Clearance	0.656ft
Track Width	8.167ft
Lock-to-lock time	5.00s
Max Wheel Angle	45.00°


**GENERAL NOTES**

- PAVEMENT SECTION IS BASED ON AN ESTIMATED 18,000-POUND EQUIVALENT SINGLE AXLE LOADS. CONCRETE SHALL HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 4,000 PSI.
- BUILDING WILL BE SPRINKLED. SEE ARCHITECTURAL PLANS.
- PER 2015 IBC, NO SEPARATION IS NEEDED WITH THIS BUILDING.
- FIRE FLOW DATA
 

CODE FOR ANALYSES:	2015 IFC
CONSTRUCTION TYPE:	V-B
BUILDING AREA:	4,997 SF
FIRE FLOW:	2000 GPM
50% REDUCTION FOR FULLY SPRINKLED:	1000 GPM
MINIMUM FIRE FLOW REQUIREMENT:	1000 GPM
- NUMBER OF FIRE HYDRANTS REQUIRED PER APPENDIX C-1 OF 2015 IFC
- ALL REQUIRED FIRE HYDRANTS SHALL BE INSTALLED AND OPERATE BEFORE ANY BUILDING (OR PORTION OF THE BUILDING) IS OCCUPIED. AN APPROVED AND ADEQUATE WATER SUPPLY SHALL BE PROVIDED BEFORE AND COMBUSTIBLE MATERIALS ARE DELIVERED TO THE BUILDING SITE. IT SHALL BE UNLAWFUL TO OCCUPY ANY PORTION OF THE BUILDING OR STRUCTURE UNTIL THE REQUIRED FIRE DETECTION, ALARM, AND SUPPRESSION SYSTEMS HAVE BEEN TESTED AND APPROVED.

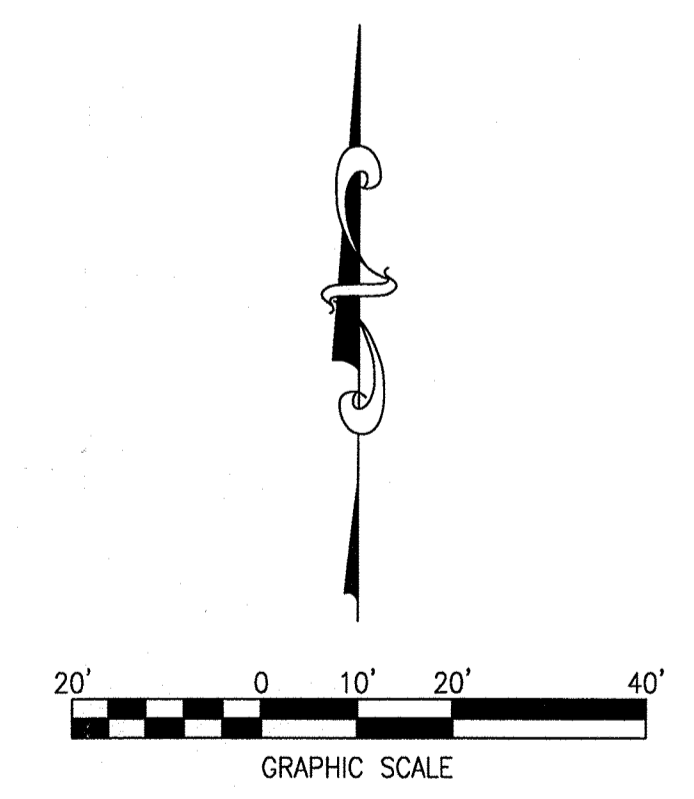

5779-17  
 HYDRANT AND FIRE ACCESS  
 ALBUQUERQUE FIRE MARSHAL'S OFFICE  
 PLANS CHECKING DIVISION  
 SOFT 5779-17 CONSTRUCTION TYPE V-B  
 GPM 1500 NUMBER OF HYDRANTS 1  
 APPROVED / DISAPPROVED  
 Signature: Kamalawad 05-17  
 EXPIRATION: 7/30/17

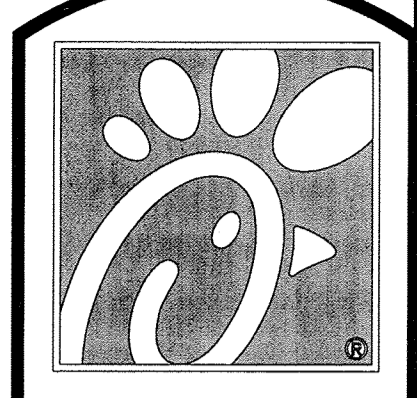

**Chick-fil-A**  
 5200 Buffington Rd.  
 Atlanta, Georgia  
 30349-2998

Revisions:

Mark	Date	By
△		
△		
△		

Seal

**MERRICK & COMPANY**  
 5876 GREENWOOD PLAZA BLVD  
 GREENWOOD VILLAGE, CO 80111  
 303-751-0741

STORE  
 CHICK-FIL-A  
 FSU #04107  
 COORS BLVD.  
 COORS BLVD NW  
 & St. JOSEPHS DR NW  
 ALBUQUERQUE, NM  
 87120

SHEET TITLE  
 FIRE 1

DWG EDITION ---

Job No. : 65119594  
 Store : 04107  
 Date : 07/18/17  
 Drawn By : KW  
 Checked By : KW

Sheet  
 FIRE 1

CALL NMOC  
 TWO WORKING DAYS  
 BEFORE YOU DIG  
 NM811  
 OR  
 1-888-NM-GAS-CO  
 NMOCALL.ORG