


A 218 UNIT MOTEL
FOR ALBUQUERQUE
NEW MEXICO

**DOLLAR INNS
OF AMERICA**
280 HOTEL CIRCLE NORTH, SAN DIEGO, CALIF.

SHEET #
A-1
OF
1/10

BLOK SYMBOL	GREEN	DOUBLE-LEVEL	SITE	MINI-SUITE	TOTAL
A	13	5	2	2	22
B	16	8	4	4	32
C	20	12	2	2	36
D	30	20	2	2	60
E	30	25	2	2	68
TOTAL	115	79	12	12	218

- GENERAL NOTES**
1. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE CONSTRUCTION
 2. GENERAL CONTRACTOR TO PROVIDE CONC BUMPERS TO PREVENT PARKED CARS FROM PROTRUDING OVER INTO WALKWAYS AND/OR CARS FROM HITTING COLUMNS.
 3. GENERAL CONTRACTOR TO PROVIDE PROPER DRAINAGE OF THE SITE
 4. GENERAL CONTRACTOR TO VERIFY SIZE & LOCATION OF ALL MECH & ELECTRICAL EQUIPMENT BY CONTRACTOR INVOLVED BEFORE CONSTRUCTION
 5. ERRORS OR OMISSIONS IN THE PLANS OR SCHEDULES DO NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY OF FURNISHING THE REQUIRED TO COMPLETE THE PROJECT PROPERLY
 6. SEE SHEET G-1/100010, FOR OTHER SPECS

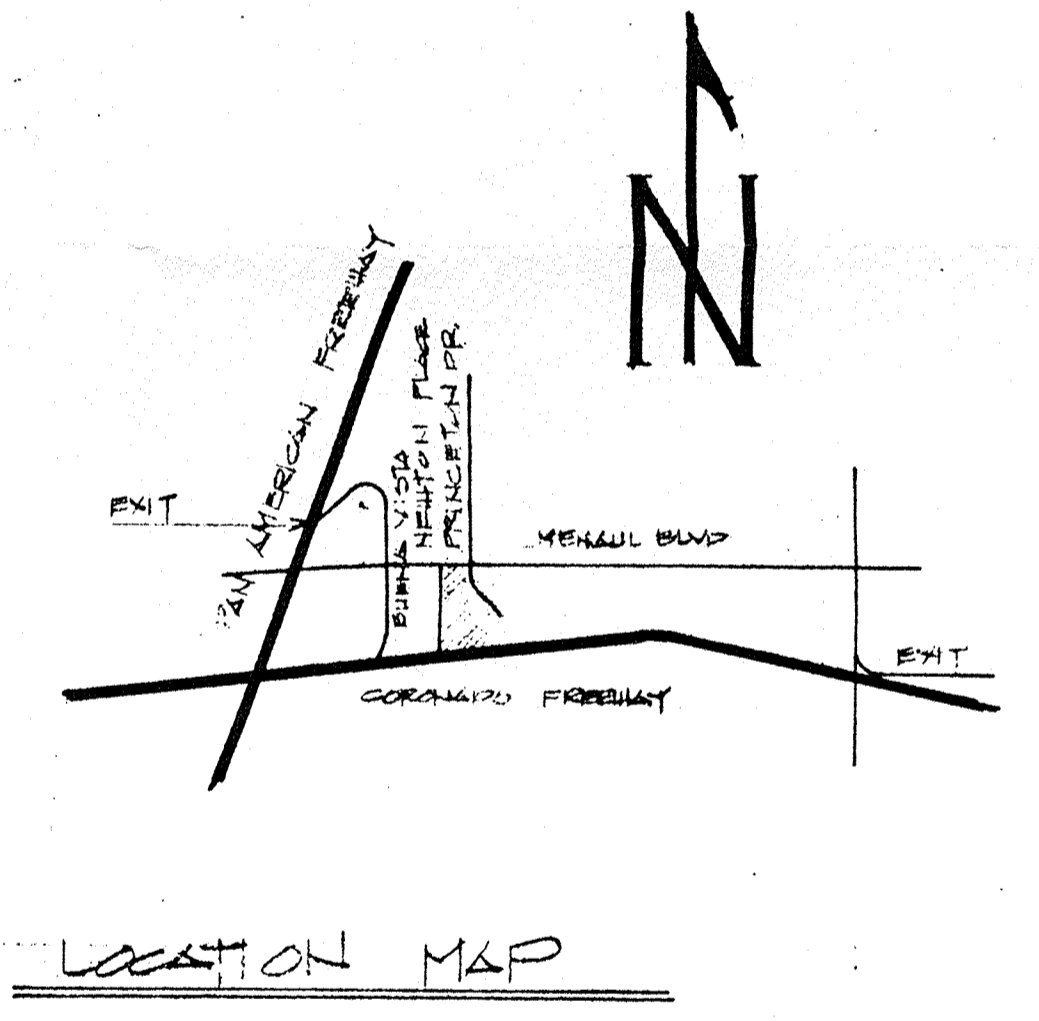

SITE PLAN
SCALE: 1"=30'-0"
TOTAL: 218 UNITS
282 PARKING SPACES
(7'0" WIDE / 10'0" DEEP)

DOLLAR INNS OF AMERICA • ALBUQUERQUE NEW MEXICO

3/28/73

