

Light Fixture
Graphic Signage
Painted Split-Face CMU Color #2
Painted Split-Face CMU Color #1

Illuminated Signage
Steel Truss
Wood Siding and Trim

** BUILDING MOUNTED SIGNS SHALL COMPLY WITH GENERAL SIGN REGULATIONS SECTION 14-16-3-5 OF THE CITY OF ALBUQUERQUE ZONING CODE AND SHALL BE SUBMITTED UNDER SEPARATE PERMIT **

Elevation General Notes:

Stone Veneer system at Pillasters to be bonded to 4" CMU masonry backup using Laticrete's Latex-Portland Mortar. Stone Veneer joints to be pointed using Laticrete's color 24 Natural Grey. The specified veneer ranges in size and shape 3/4" to 3-1/2" Thk. and in face areas from 9 in² to 2-1/4 ft². Minimum pilaster thickness to be 6"thk. Specified veneer includes pre-formed corner stones.


Portland Cement Plastering assembly (Stucco) at side elevations to be Sto Corp's StoQuik Silver Cement Board Stucco System applied over a cement board attached to metal framing on the Exterior CMU wall. The finished coating will be of the troweled texture. A Color will be selected to match Painted split-face CMU Color #2.

EXTERIOR ELEVATION - FRONT FACADE



Stone Veneer on 4" CMU Pilaster (6" min. Assembly Thickness)
Stone Veneer Base w/ Precast Banding
Wood Siding and Stone Veneer Wrapped Column w/ Precast Banding
Alum. Storefront Frames
Illuminated Signage
Stucco Assembly
Pre-finished Metal Coping
Wood Siding on 2x Furring
Wood Trimmed Canopy with Standing Seam Metal Roof
Standing Seam Metal Roof Beyond

EXTERIOR ELEVATION - LEFT FACADE

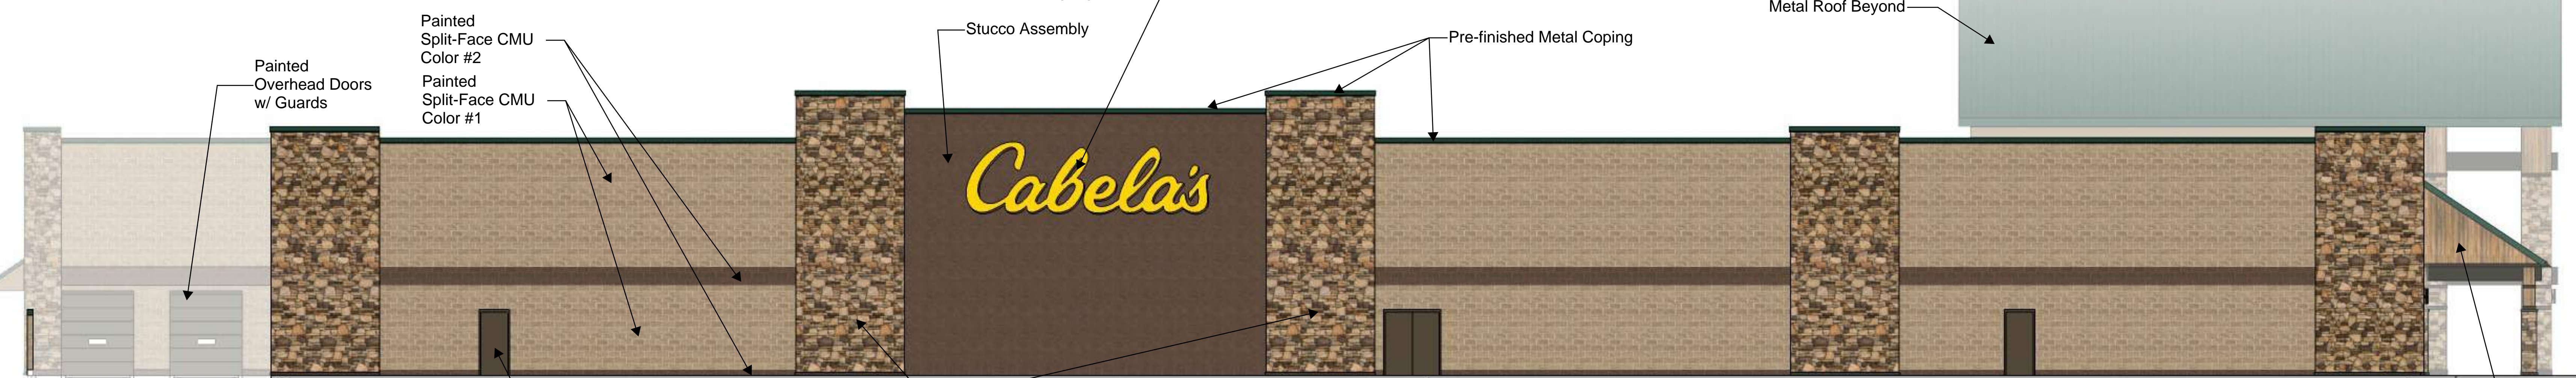


Painted Overhead Doors w/ Guards
Painted Split-Face CMU Color #2
Painted Split-Face CMU Color #1
Painted Doors
Stone Veneer on 4" CMU Pilaster (6" min. Assembly Thickness)
Illuminated Signage
Stucco Assembly
Pre-finished Metal Coping
Wood Siding @ Canopy End Wall

EXTERIOR ELEVATION - REAR FACADE



Painted Split-Face CMU Color #2
Painted Split-Face CMU Color #1
Painted Doors
5'-0" Standing Seam Metal Roof Canopy
Painted Split-face CMU 8'-0" h. Screen Wall
Painted Overhead Door
Stucco or Fiber Cement Panels on High Bay Wall Beyond
Pre-finished Metal Coping

EXTERIOR ELEVATION - RIGHT FACADE

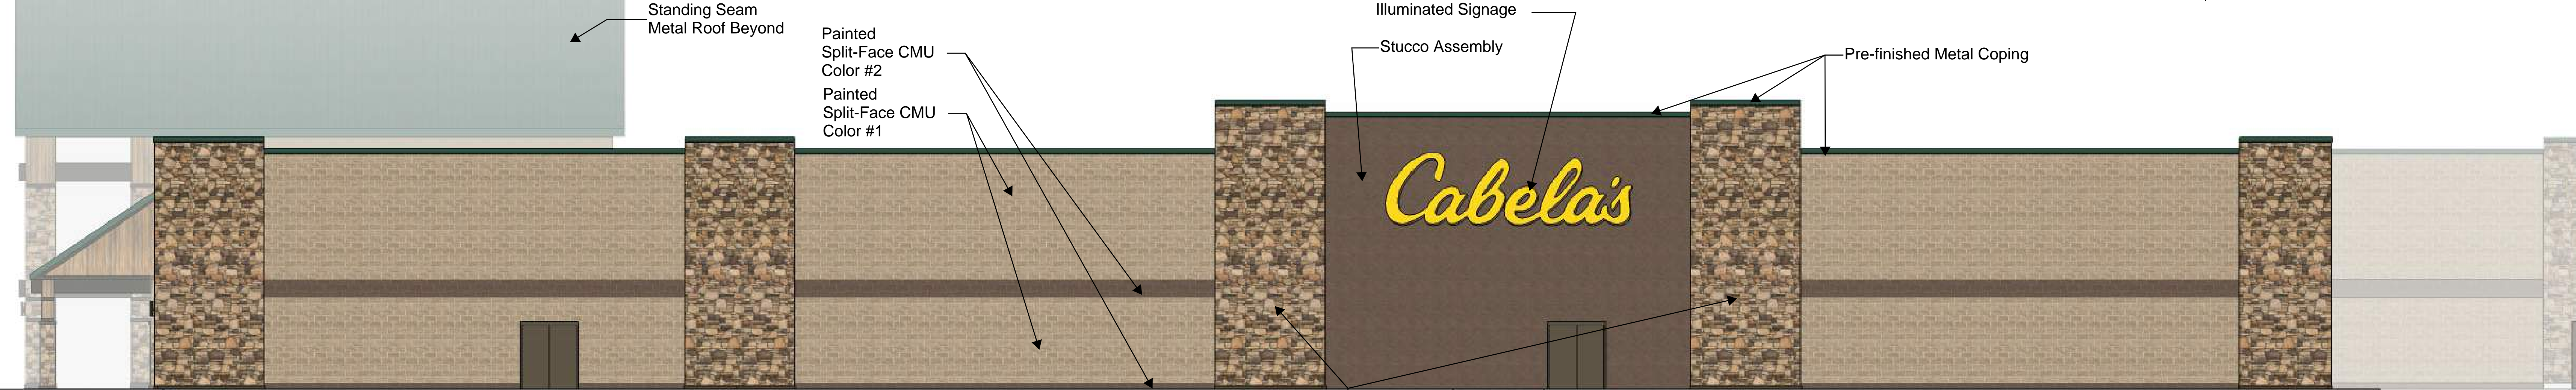

Standing Seam Metal Roof Beyond
Painted Split-Face CMU Color #2
Painted Split-Face CMU Color #1
Stone Veneer on 4" CMU Pilaster (6" min. Assembly Thickness)
Illuminated Signage
Stucco Assembly
Pre-finished Metal Coping

Seal:
PROTOTYPE DOCUMENTS
NOT FOR CONSTRUCTION

Revisions:

Revision	Date