


BUILDING INFORMATION


ADDRESS: 10100 LOMAS BOULEVARD NE
 LEGAL DESCRIPTION: TRACT 4 MUNICIPAL ADDN NO 2
 ZONE ATLAS: K-20
 LARGEST ON-SITE BUILDING (INCLUDES NEW AND EXISTING): 22,400 SF
 CONSTRUCTION TYPE: II-B
 SPRINKLERED: YES
 FIRE FLOW: 1,825 GPM
 BUILDING HEIGHT: 2F
 HYDRANTS REQUIRED: 1

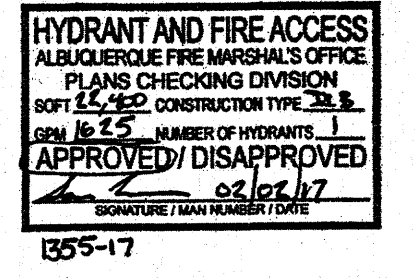

NOTES

1. ALL RADI ALONG FIRE LANE SHALL BE 20'.
2. MONUMENT SIGN IDENTIFY BUILDINGS WILL BE PROVIDED AT ADJACENT ROADWAYS.
3. ALL BUILDINGS SHALL HAVE A KNOX BOX FOR FIRE DEPARTMENT ACCESS.
4. FIRE ACCESS LANES SHALL BE MARKED FIRE LANE ON BOTH SIDES.
5. FIRE DEPARTMENT CONNECTION SHALL BE WITHIN 100 FT OF A FIRE HYDRANT.
6. ALL AREAS PAVED INCLUDING FIRE ACCESS.
7. SLOPES WILL NOT EXCEED 10% IN GRADE FOR THE FIRE ACCESS ROAD.
8. ALL BUILDINGS WILL BE SPRINKLERED.

--- PROPERTY LINE
 --- MARKED FIRE ACCESS

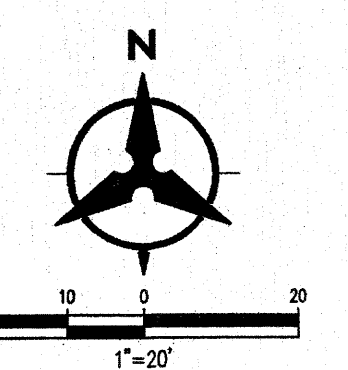

LEGEND

---	EXISTING EASEMENT	---	PROPOSED EASEMENT
---	EXISTING SANITARY SEWER	---	PROPOSED SANITARY SEWER LINE
---	EXISTING WATER LINE	●	PROPOSED SANITARY SEWER MANHOLE
---	EXISTING WATER METER	●	PROPOSED CLEANOUT
---	EXISTING CAP	---	PROPOSED WATER LINE
---	EXISTING VALVE	---	PROPOSED VALVE
---	EXISTING FIRE HYDRANT	---	PROPOSED FIRE WATER LINE
---	EXISTING SANITARY SEWER MANHOLE	---	PROPOSED FIRE WATER LINE
---	EXISTING STORM DRAIN MANHOLE	---	PROPOSED HYDRANT
---	EXISTING INLET	---	PROPOSED CAP
		---	PROPOSED WATER METER
		---	PROPOSED PIV
		---	REMOTE FIRE DEPARTMENT CONNECTION

GREER STAFFORD/S&P ARCHITECTURE, INC.
 1717 LOUISIANA NE, SUITE 205
 ALBUQUERQUE, NM 87110-7087
 (505) 887-4850 • FAX (505) 887-0846
 3005 NORTHSHORE DR, SUITE F
 PARKHUTCHINSON, NM 87401-8065
 (505) 888-7471 • FAX (505) 888-4464

THIS DRAWING IS INCOMPLETE AND NOT TO BE USED FOR CONSTRUCTION UNLESS IT IS STAMPED, SIGNED, AND DATED BELOW

THE NEW LOS ALTOS POOL
 CITY OF ALBUQUERQUE
 10100 LOMAS BOULEVARD NE
 ALBUQUERQUE, NM 87123

PROJECT NO: 5280.00
 DRAWN BY: MHS
 CHECKED BY: JLM
 © GREER-STAFFORD/S&P, INC.
 SHEET TITLE: FIRE ONE PLAN
 DRAWING SHEET