

12 RETAINING GARDEN WALL DETAIL
N.T.S



1 BOLLARD DETAIL
N.T.S

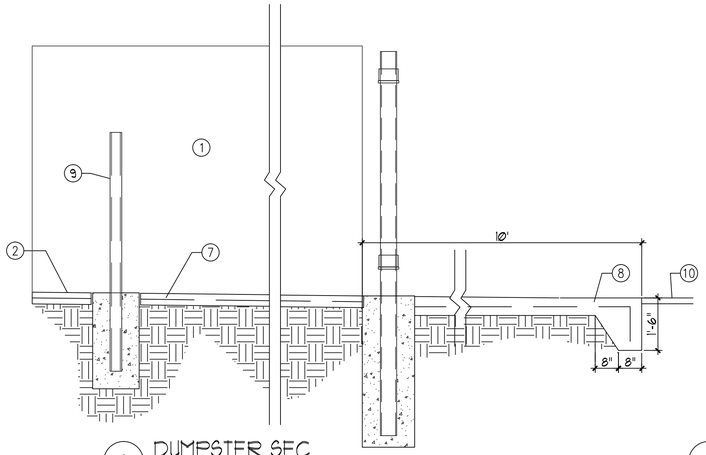

2 DUMPSTER SEC.
N.T.S

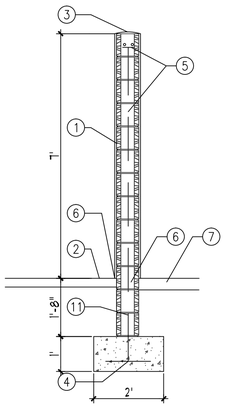

3 DUMPSTER SEC.
N.T.S

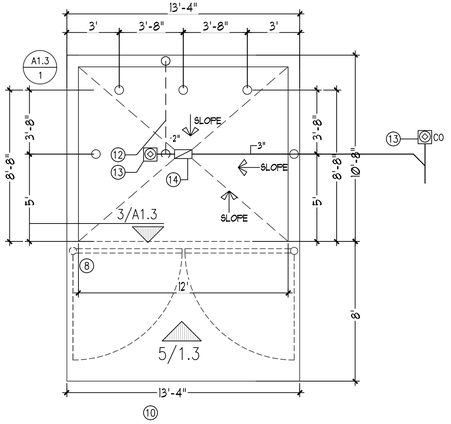

4 DUMPSTER PLAN
N.T.S

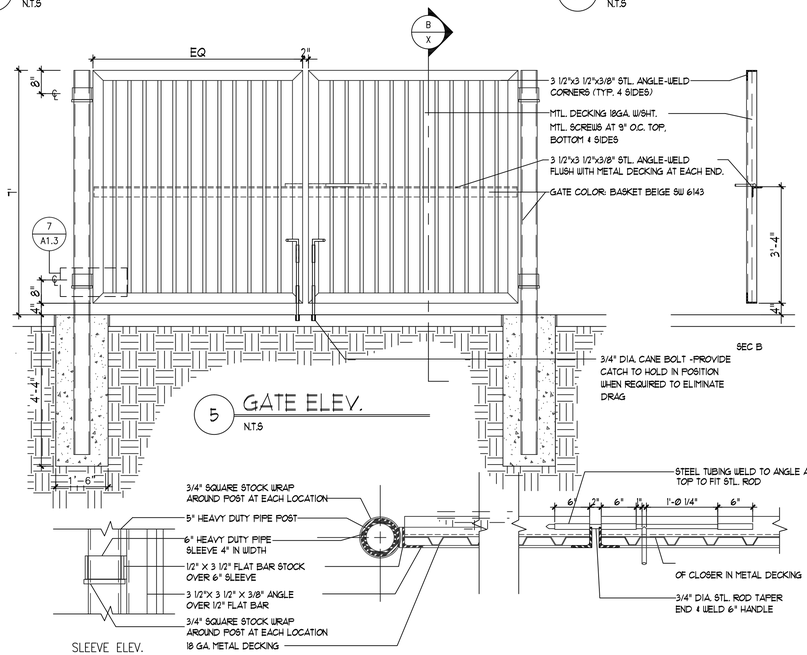

5 GATE ELEV.
N.T.S

SLEEVE ELEV.

7 GATE POST/SLIDE BOLT DETAIL
N.T.S



8A 2 WAY CLEANOUT DETAIL
N.T.S



8 CLEANOUT DETAIL
N.T.S

KEYED NOTES

1. 8" CMU WALL WITH 2 COAT SYN. STUCCO SYSTEM. COLOR: BASKET BEIGE SW 6143
2. FINISH GRADE.
3. SLOPE STUCCO CAP.
4. 4-#4 BARS CONT. @ BOTTOM OF FOOTING & @ 16" O.C. ACROSS BOTTOM OF FOOTING.
5. 2-#5 BARS @ TOP KNOCK-OUT BLOCK BOND BEAM, CONTINUOUS. #5 BARS @ 32" O.C. VERTICAL. GROUT REIN-FORCED CELLS. DURAWALL @ 16" O.C. HORIZONTAL.
6. 1/2" EXPANSION JOINT MATERIAL
7. 4" CONCRETE SLAB 4000 PSI 3/4" AGGREGATE WITH 6X6 - 10X10 WLM.
8. 6" CONCRETE APRON 4000 PSI 3/4" AGGREGATE WITH 6X6 - 10X10 WLM W/ TURNDOWN EDGE.
9. 6" CONCRETE FILLED PIPE IN 16' DIA. X 2'-6" DEEP CONC. FOOTING, PAINT TO MATCH STUCCO FINISH.
10. ASPHALT PAVING
11. GROUT ALL CELLS SOLID BELOW GRADE, TYPICAL.
12. 2" VENT TO 6" ABOVE TOP OF ENCLOSURE WALL. PROVIDE BREATHABLE VENT CAP
13. CLEAN OUT RE: DET 8/SD3 FOR INFO
14. CATCH BASIN ZURN Z-887 6" X 20", SANI-FLO CATCH BASIN, FABRICATED 16 GAGE TYPE 304 STAINLESS STEEL BASIN WITH BOLTED FLANGED CONNECTION COMPLETE WITH FLANGE GASKET. PROVIDE SPECIAL DUTY, CLASS "E" Z-882-DGE DUCTILE IRON SLOTTED GRATE, AND SEDIMENT BASKET.
15. GREASE INTERCEPTOR ZURN I1106 600 (RE: DETAIL 9/SD3) 25 GPM FLOW RATE, 50 LB CAPACITY. WITH INTERNAL AIR RELIEF BYPASS, BRONZE CLEANOUT PLUG, VISIBLE DOUBLE WALL TRAP SEAL WITH REMOVABLE DIFFUSING BAFFLE AND SEDIMENT TRAY. FURNISH WITH Z-1108 VENTED FLOW CONTROL VALVE(17)) AND Z-1106 SOLID-S INTERCEPTOR (NOTE 15). DET. 10/SD3 LOCATED PER DETAIL 4/SD3

7 ENCLOSURE NOTES
N.T.S

REV	DATE	BY	REVISION
6			
5			
4			
3			
2			
1			

MODULUS ARCHITECTS
100 SUN AVE. N.W. SUITE 305
ALBUQUERQUE, NEW MEXICO 87109
PHONE (505) 338-1499 FAX (505) 338-1498

PROJECT TITLE: PROJECT I-25 NWC OF I-25 FRONTAGE RD ALBUQUERQUE
PROJECT MANAGER: STEPHEN DUNBAR, AIA
JOB NO.: PROJECT-125
DRAWN BY: SJF
SHEET TITLE: SITE DETAILS

DATE: 8/04/2017
SCALE: RE:BAR SCALE
sheet- A1.3 of-