


EXISTING			
⊙	Sanitary Sewer Manhole	○	Hand Railing
■	Power Pole w/underground feed	☆	Light Pole
□	Power Pole	●	Bollard
⊕	High Voltage Tower	⊞	Concrete Symbol
—	Guy Wire	⊞	Telephone Pedestal
—	Overhead Wires	—	Underground Electric Line
⊞	Water Meter	—	Underground Communications Line
⊞	Water Valve	—	Underground Gas Line
⊞	Hydrant	—	Underground Water Line
⊞	Electric Meter	—	SAS Sanitary Sewer Line
⊞	Traffic Box	—	SD Storm Drain Line
⊞	Overhead Traffic Light Pole	⊞	Control Point
—	Fence	—	Wall

PROPOSED	
—	BOUNDARY LINE
—	CONCRETE CURB AND GUTTER
—	CF CONSTRUCTION FENCE (SEE DETAIL SHEETS)
—	CFP CONSTRUCTION FENCE ON PAVEMENT (SEE DETAIL SHEETS)
—	BUILDING/CANOPY CONTROL POINT

- GENERAL SITE NOTES**
- ALL DIMENSIONS SHOWN ARE TO THE FACE OF CURB UNLESS OTHERWISE NOTED.
 - ALL CURB RETURN RADII SHALL BE 5', AS SHOWN TYPICAL ON THIS PLAN, UNLESS OTHERWISE NOTED.
 - UNLESS OTHERWISE SHOWN, CALLED OUT OR SPECIFIED HEREON:
 - ALL CURB AND GUTTER ADJACENT TO CONCRETE PAVING SHALL BE INSTALLED PER DETAIL 1B.
 - PAVEMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE PAVING PLAN OVER THE ENTIRE PARKING LOT AREA AND ALL APPROACH DRIVES.
 - SEE ASSOCIATED PLANS FOR CANOPY, COLUMN, PUMP ISLAND DETAILS AND LAYOUT.
 - CONTRACTOR SHALL BEGIN CONSTRUCTION OF ANY LIGHT POLE BASES FOR RELOCATED LIGHT FIXTURES AND RELOCATION OF ELECTRICAL SYSTEM AS SOON AS DEMOLITION BEGINS. CONTRACTOR SHALL BE AWARE THAT INTERRUPTION OF POWER TO ANY LIGHT POLES OR SIGNS SHALL NOT EXCEED 24 HOURS.
 - THE LOCATION OF THE CONSTRUCTION FENCE ON THE DRAWINGS IS FOR GRAPHICAL REPRESENTATION ONLY. THE CONTRACTOR IS TO ENSURE THAT THE CONSTRUCTION FENCE ENCOMPASSES THE ENTIRE WORK AREA.
 - ALL SLOPES AND AREAS DISTURBED BY CONSTRUCTION SHALL BE GRADED SMOOTH AND FOUR INCHES OF TOPSOIL APPLIED. IF ADEQUATE TOPSOIL IS NOT AVAILABLE ON SITE, THE CONTRACTOR SHALL PROVIDE TOPSOIL, APPROVED BY THE OWNER, AS NEEDED. THE AREA SHALL THEN BE SEEDED/SODDED, FERTILIZED, MULCHED, WATERED AND MAINTAINED UNTIL HARDY GRASS GROWTH IS ESTABLISHED IN ALL AREAS. ANY AREAS DISTURBED FOR ANY REASON PRIOR TO FINAL ACCEPTANCE OF THE PROJECT SHALL BE CORRECTED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.
 - CONTRACTOR SHALL PURCHASE AND INSTALL A MAILBOX, AND SHALL COORDINATE LOCATION OF MAILBOX WITH MURPHY CONSTRUCTION MANAGER AND/OR ON-SITE REPRESENTATIVE AND LOCAL POSTMASTER.
 - ALL PROPOSED PAVEMENT STRIPING OR MARKINGS SHALL FOLLOW THE SPECIFICATIONS FOR PAINT INCLUDED IN DETAIL 10A.

- FIRE 1 NOTES**
- REFER TO ARCHITECTURAL BUILDING PLANS FOR KNOX BOX LOCATION
 - PREMISE ID SHALL BE ON THE MURPHY FREESTANDING SIGN
 - CONSTRUCTION TYPE II-B SQUARE FOOTAGE: 3445
 - MURPHY STANDARD 5" CONCRETE SECTION WILL SUPPORT A 75,000 POUND FIRE TRUCK.

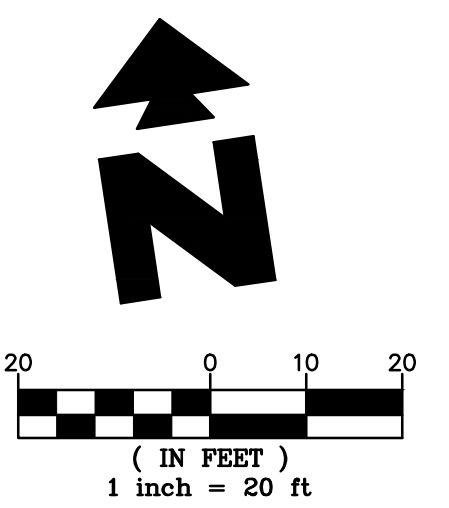

SHEET NO. C-10

FIRE 1
 MURPHY EXPRESS
 3751 HIGHWAY 528 NW
 ALBUQUERQUE NEW MEXICO

GreenbergFarrow
 1430 W. PEACHTREE ST., NW SUITE 200
 ATLANTA, GA 30309
 P: (404) 875-1000
 F: (404) 875-1000
 DWG. NAME: ALBUQUERQUE, NM
 JOB NO.: 20160897.0

MURPHY OIL USA, INC.
 200 PEACH STREET
 EL DORADO, AR 71730
MURPHY USA