


RICHMOND DR. NE



LANDSCAPE PLAN

SCALE: 1" = 10'-0"




SCHEDULE OF PLANT MATERIALS

QTY.	BOTANICAL NAME	COMMON NAME	SIZE	REMARKS
5	QUERCAS VIRGINIANA	SOUTHERN LIVE OAK	8' MIN.	
6	COTINUS COGGYGRIA	SMOKE TREE	3 GAL.	
5	ROBINIA PSEUDOACACIA	BLACK LOCUST	(SEE PLAN)	(EXISTING)
5	JUNIPERUS HORIZONTALIS	HORIZONTALIS JUNIPER		(EXISTING)
1	PRUNUS CISTENA	PURPLE LEAF PLUM	(SEE PLAN)	(EXISTING)
6	PEROVSKIA ATRIPLICIFOLIA	RUSSIAN SAGE		(EXISTING)
7	RAPHIOLEPIS INDICA	INDIA HAWTHORN		(EXISTING)
10	JUNIPERUS CHINENSIS	CHINESE JUNIPER	1 GAL.	(7 NEW, 3 EXISTING, REFER TO PLAN)
3	FALLUGIA PARADOXA	APACHE PLUME		(EXISTING)

LANDSCAPING NOTES

- AUTOMATICALLY CONTROLLED IRRIGATION SYSTEM IS EXISTING. EXTEND IRRIGATION TO NEW PLANT MATERIALS, USING (2) 1/4" POLY LINES WITH 4GPH EMITTERS FOR EACH NEW TREE, AND 1GPH EMITTER FOR EACH NEW JUNIPER. INSPECT EXISTING IRRIGATION AND REPLACE TUBING OR EMITTERS AS NECESSARY.
- MAINTENANCE OF LANDSCAPING MATERIALS AND IRRIGATION SYSTEM IS THE RESPONSIBILITY OF THE PROPERTY OWNER, INCLUDING PROMPT REPLACEMENT OF DEAD OR DISEASED PLANTS.

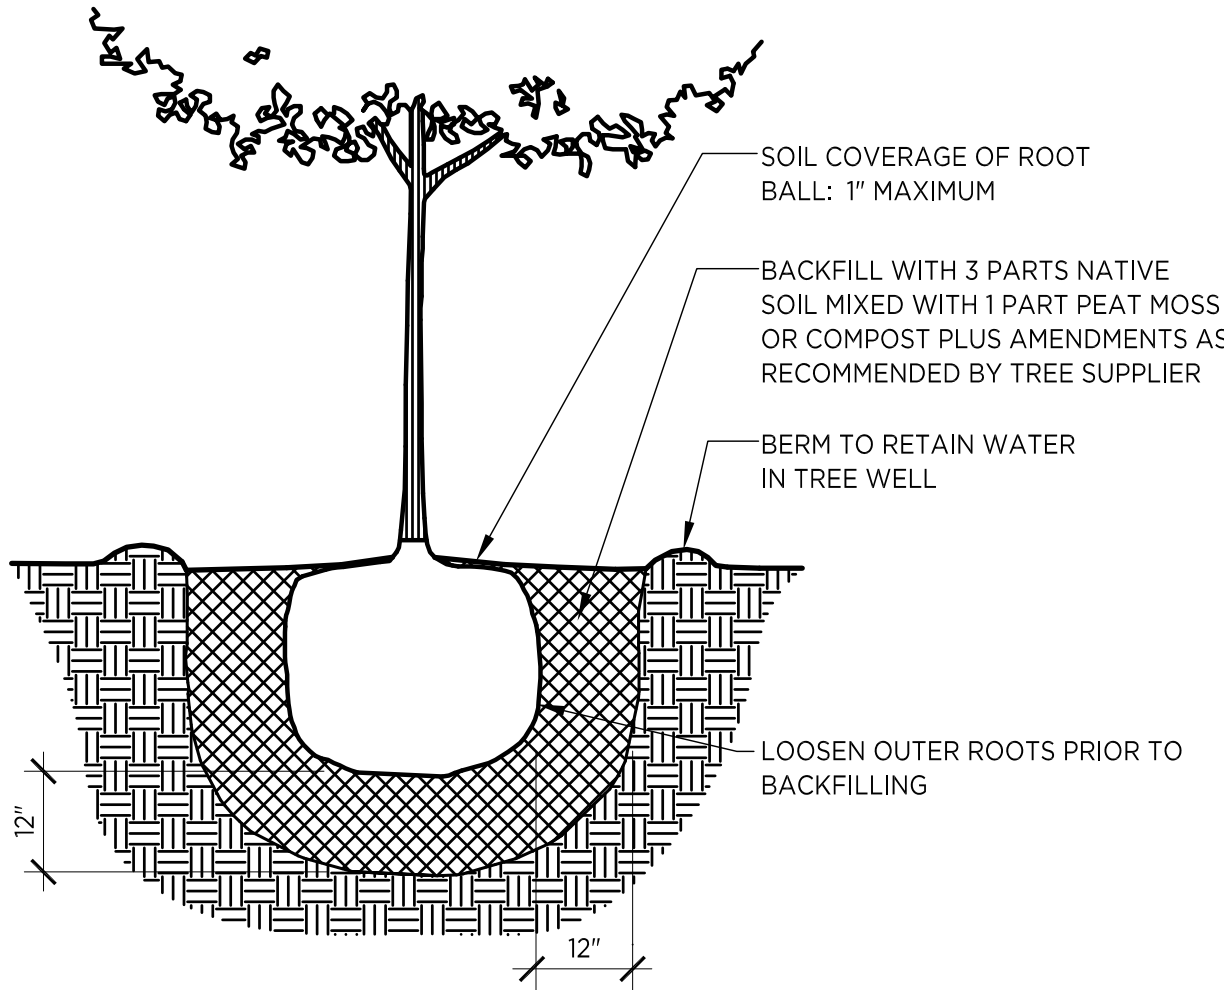

TREE PLANTING DETAIL

(NOT TO SCALE)