

TO 85% STANDARD PROCTOR DENSITY.

(9) INERT MULCH OR DECOMPOSED GRANITE

1) IN AREAS WHERE CALICHE OR HARDPAN OCCURS DIG A MIN. OF 3 DRAINAGE CHIMNEY HOLES BESIDE ROOT BALL AND THROUGH

HARDPAN. FILL WITH SAME BACKFILL SOIL,

NOT GRAVEL. CHIMNEY TO BE MIN. 8" DIA. AND

(DG). SEE LANDSCAPE LEGEND.

. TRIM AND MAINTAIN TO PROVIDE A

MINIMUM 8'-0" CLEARANCE FROM ADJACENT PATH OR PAVEMENT TO

10) UNDISTURBED HARDPAN.

<u> 12" DEEP.</u>

TREE CANOPY.

4 PER 24"BOX OR LARGER

1 PER 1 GAL., 2 PER 5 GAL.,

3 PER 15 GAL.,

FERTILIZER TABLET SCHEDULE

AGRIFORM FERTILIZER TABLETS OR EQUAL.

PLACE TABLETS DOWN ALONG PLANT ROOTBALL SIDE

MIN. 8'-0

DEPTH OF

ROOTBALL

TREE PLANTING

SCALE: N.T.S.

LANDSCAPE NOTES

- PERFORM WORK IN ACCORDANCE WITH THESE PLANS, DETAILS, AND SPECIFICATIONS.
- CAREFULLY INSPECT SITE AND VERIFY CONDITIONS PRIOR TO BIDDING. NOTIFY LANDSCAPE ARCHITECT OF DISCREPANCIES WITH THESE DOCUMENTS PRIOR TO BEGINNING CONSTRUCTION. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN COPIES OF THE ABOVE STANDARDS, SPECIFICATIONS AND DRAWINGS, AS WELL AS ALL OTHER STANDARDS AND SPECIFICATIONS WHICH MAY BE NECESSARY TO COMPLETELY AND ACCURATELY INTERPRET THESE PLANS.
- HOLD HARMLESS AND INDEMNIFICATION CLAUSE THE CONTRACTOR SHALL AGREE THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES. THE CONTRACTOR SHALL BE REQUIRED TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT. INCLUDING SAFETY TO ALL PERSONS AND PROPERTY; THAT THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS; AND THAT THE CONTRACTOR SHALL DEFEND, INDEMNIFY, AND HOLD THE LANDSCAPE ARCHITECT HARMLESS FROM ANY AND ALL LIABILITY; REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE LANDSCAPE ARCHITECT.
- UNAUTHORIZED CHANGES TO DRAWINGS THE LANDSCAPE ARCHITECT SHALL NOT BE RESPONSIBLE FOR, OR LIABLE FOR, UNAUTHORIZED CHANGES TO OR USE OF DRAWINGS. CHANGES TO THE PLANS MUST BE IN WRITING AND MUST BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO COMMENCEMENT OF
- UNDERGROUND SERVICE ALERT NOTIFY BLUE STAKE 48 HOURS PRIOR TO DIGGING AT 1-800-STAKE-IT. EXERCISE EXTREME CARE IN WORKING NEAR EXISTING UTILITIES. VERIFY THE LOCATION AND CONDITION OF UTILITIES PRIO TO CONSTRUCTION.
- INSPECTIONS NOTIFY OWNER REPRESENTATIVE AND APPROPRIATE AGENCY REPRESENTATIVE AT LEAST 48 HOURS IN ADVANCE PRIOR TO REQUIRED GOVERNING AGENCY INSPECTION.
- QUANTITIES INDICATED IN DRAWINGS ARE PROVIDED AS A COURTESY ONLY. VERIFY QUANTITIES SHOWN BY CONDUCTING A INDEPENDENT QUANTITY TAKE OFF.
- OWNER AND LANDSCAPE ARCHITECT WILL DECIDE QUESTIONS RELATING TO INTERPRETATION OF DRAWINGS AND ACCEPTABLE FULFILLMENT OF THE WORK SHOWN IN CONTRACT DOCUMENTS.
- MAINTAIN PREMISES CLEAN AND FREE OF EXCESS EQUIPMENT, MATERIALS, AND RUBBISH INCIDENTAL TO THE WORK AT ALL TIMES INCLUDING WEEKENDS AND HOLIDAYS. DISPOSE OF RUBBLE, TRASH, OR DISPOSABLE ITEMS RESULTING FROM DEMOLITION IN A LEGAL, LAWFUL, AND SAFE MANNER TO AN APPROVED DISPOSAL SITE.
- 10. APPLY PRE-EMERGENT AFTER COMPLETION OF EARTHWORK, LEACHING, BED PREPARATION AND FINE GRADING PRIOR TO TOP DRESS.
- 11. ALL EXISTING LANDSCAPE AREAS OUTSIDE THE PROJECT AREA THAT ARE DISTURBED BY ANY ACTIVITY UNDER THIS CONTRACT SHALL BE REPAIRED TO EQUAL OR BETTER CONDITION AND TO THE SATISFACTION OF THE OWNER AT THE CONTRACTORS EXPENSE.
- 12. THE CONTRACTOR SHALL PROVIDE FLAGGED AND/OR STAKED LAYOUT OF ALL PLANTING LOCATIONS FOR REVIEW AND ADJUSTMENT, IF NECESSARY, BY THE OWNER'S REPRESENTATIVE PRIOR TO STARTING IRRIGATION OR PLANT PIT EXCAVATIONS.
- ANY AND ALL PLANTS OR TREES, NOT DESIGNATED TO BE REMOVED, WHICH ARE DISTURBED OR DAMAGED AS A RESULT OF WORK UNDER THIS CONTRACT SHALL BE REPLACED AT CONTRACTOR'S EXPENSE WITH A PLANT OF EQUAL OR BETTER QUALITY AND OF THE SAME SIZE AND SPECIES OF THE ORIGINAL EXISTING PLANT UNLESS OTHERWISE DIRECTED BY THE OWNER'S REPRESENTATIVE.

DEVELOPER CONTACT

WHATABRANDS REAL ESTATE 300 CONCORD PLAZA DRIVE SAN ANTONIO, TEXAS 78216 CLINT SAAVADRA 210-476-6181

LANDSCAPE ARCHITECT

HARRINGTON PLANNING + DESIGN (HP+D) 1921 S. ALMA SCHOOL RD. SUITE 204 MESA, AZ 85210 JASON HARRINGTON, RLA, ASLA, ASIC, APWA (480) 250-0116 JASON@HARRINGTONPLANNINGDESIGN.COM

CIVIL ENGINEER

SUSTAINABILITY ENGINEERING GROUP 8280 E GELDING DR #101, SCOTTSDALE, AZ 85260 ALI FAKIH, PE, LEED AP (480) 588-7226 ALI@AZSEG.COM

PLANTING MATERIAL LEGEND

	TREES	SIZE	NOTES	QTY
OR	Quercus fusiformis Escarpment Live Oak Caliper Size: 2.0"	36" Box		17
′	Vitex agnus-castus Chaste Tree Caliper Size: 2.0"	36" Box		8


GROUNDCOVERS		QTY
Euonymus fortunei 'Coloratus' Purple Wintercreeper	5 Gallon can full	34
Cotoneaster horizontalis Trailing Rock Cotoneaster	5 Gallon can full	33
SHRUBS / ACCENTS	3	QTY
·		

	SHRUBS / ACCENTS		QIY	
*	Hesperaloe parviflora Red Yucca	5 Gallon can full	32	
	Potentilla fruticosa Shrubby Cinquefoil	5 Gallon can full	31	
	Caesalpinia gillesii Yellow Bird of Paradise	5 Gallon can full	13	
	Muhlenbergia rigida 'Nashville' Nashville Muhly Grass	5 Gallon can full	25	
\odot	Euphorbia antisyphilitica Candelilla	5 Gallon can full	15	

LANDSCAPE MATERIALS

Decomposed Granite. 1/2" screened "Rose Gold", 2" deep in planting areas per plan.

VICINITY MAP

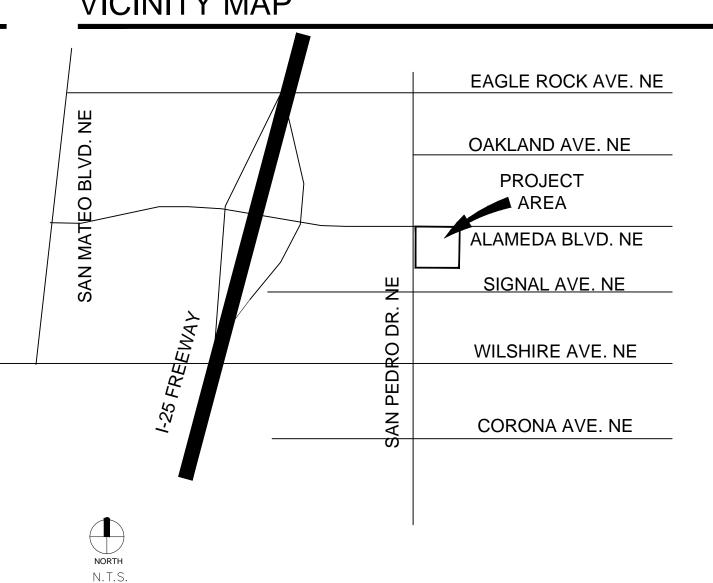



NOT FOR CONSTRUCTION JASON E. HARRINGTON 22

AGE! ATABUR(STAURA WHA

REV. COMMENT Preliminary Re-Submittal 03.21.22 Preliminary Re-Submittal 01.21.22 Preliminary Submittal 10.08.21

7,820 s.f.

LANDSCAPE PACKAGE

MARCH 21, 2022 DRAWN BY: | TKW CHECK BY: JEH PROJ. NO.: 2021-056 CASE NO.: TBD

NORTH

0 10 20 LANDSCAPE PLAN

1 of 1

CITY OF ALBUQUERQUE LANDSCAPE CALCULATIONS

	REQUIRED	PROVIDED
PARKING AREAS: PER 14-16-5 DEVELOPMENT STDS. PER 5-6(F)	1 TREE PER 10 PARKING STALLS 10% LOT AREA	17 STALLS ON SITE 1.7 TREES REQUIRED / 3 TREES PROVIDED 817 SF PARKING LOT (82SF REQ.) / 27.5%
	10% LOT ARLA	LANDSCAPE (225 SF PROVIDED)
NET LANDSCAPE AREA: PER 5-6(C)	15% MINIMUM	NET AREA = 30,000 SF 15% NET = 4,500 SF
		PROVIDED AREA = 8,380 SF
		27.93% PROVIDED
SHADE COVERAGE AREA	75% OF LS AREA	75% COVERAGE
GROUND LEVEL COVERAGE AREA	30% OF LS AREA	60% COVERAGE
LANDSCAPE DIVERSITY	5 SPECIES MIN.	9 PROVIDED 2 TREE SPECIES 7 UNDERSTORY SPECIES
MINIMUM TREE SIZE:	2" CALIPER	2" CALIPER
STREET FRONTAGE L/S AREA: PER 5-6(D) WITHIN 20 FT OF CURB	1 TREE / 3 SHRUBS PER 25FT.	EXISTING TREES TO REMAIN N-SIDE. NEW TREES BEYOND 20 FT DISTANCE. W-SIDE = 153' (6.12 TREES - 6 PROVIDED)
EDGE BUFFER L/S AREA: PER 5-6(E)(2)(a)	1 TREE (6 FT MIN) / 3 SHRUBS PER 25FT.	W EDGE = STREET FRONTAGE N EDGE = STREET FRONTAGE E EDGE = 153' (6.12 TREES - 7 PROVIDED) S EDGE = EXISTING L/S BUFFER PROTECT