CITY OF ALBUQUERQUE



April 11, 2017

Levi J. Valdez, PE George T Rodriguez-Development Consultant 12800 San Juan Rd. SE Albuquerque, NM 87123

Re: Life Springs Christian Church

1130 Griegos Rd NW

Request Permanent C.O. - Accepted

Engineer's Stamp dated: 3-28-16 (F14D073)

Certification dated: 3-29-17

Dear Mr. Valdez,

Based on the Certification received 4/10/2017, the site is acceptable for permanent release of Certificate of Occupancy by Hydrology.

PO Box 1293

If you have any questions, you can contact me at 924-3695 or Totten Elliott at 924-3982.

Albuquerque

Sincerely,

New Mexico 87103

Dana Peterson, P.E.


Senior Engineer, Planning Dept. Development Review Services

www.cabq.gov

TE/DP

C: email Cordova, Camille C.; Miranda, Rachel; Sandoval, Darlene M.; Blocker,


Lois

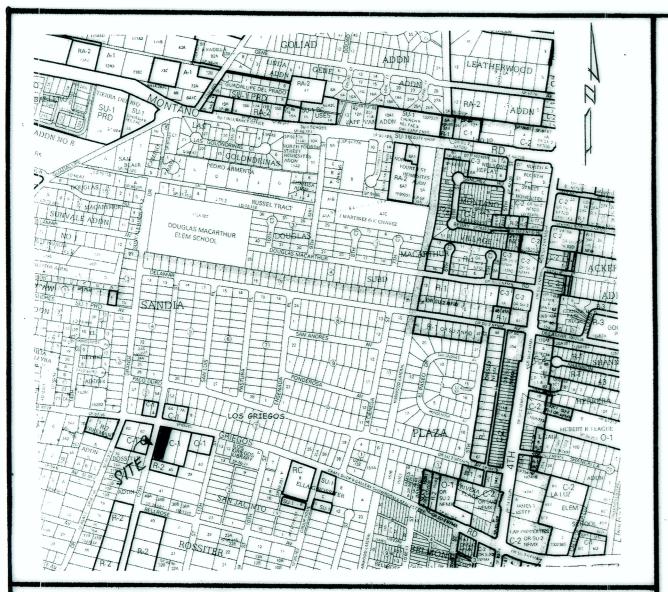

VICINITY MAP

Fe

F-14-Z

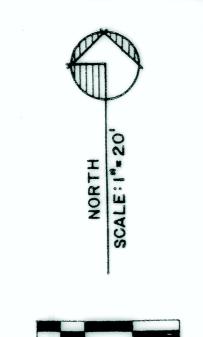

Note: Grey Shading Represents Area Outs of the City Limits


I, LEVI J. VALDEZ, N.M.P.E. NO. 5693, HEREBY CERTIFY THAT THIS PROJECT HAS BEEN GRADED AND WILL DRAIN IN SUBSTANTIAL COMPLIANCE WITH AND IN ACCORDANCE WITH THE DESIGN INTENT OF THE APPROVED PLAN DATED MARCH 28, 2016. THE RECORD INFORMATION EDITED ONTO THE ORIGINAL DESIGN DOCUMENT HAS BEEN OBTAINED BY ME OR UNDER MY DIRECT SUPERVISION AND IS TRUE AND CORRECT TO THE BEST OF MY KNOW-LEDGE AND BELIEF. THIS CERTIFICATION IS SUBMITTED IN SUPPORT OF A RE-QUEST FOR CERTIFICATE OF OCCUPANCY (PERMANENT)

THE RECORD INFORMATION PRESENTED HEREON IS NOT NECESSARILY COMPLETE AND INTENDED ONLY TO VERIFY SUBSTANTIAL COMPLIANCE OF THE GRADING AND DRAINAGE ASPECTS OF THIS PROJECT. THOSE RELYING ON THIS RECORD DOCUMENT ARE ADVISED TO OBTAIN INDEPENDENT VERIFICATION OF ITS ACCURACY BEFORE USING IT FOR ANY OTHER PURPOSES.

CI



DRAINAGE CERTIFICATION:

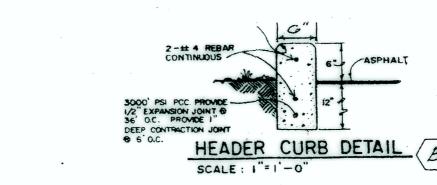





TABLE A-1. PRECIPITATION ZONES				
LOCATION				
West of the Rio Grande				
Between the Rio Grande and San Mateo				
Between San Mateo and Bubank, North of Interstate 40; and between San Mateo and the East boundary of Range East; South of Interstate 40				
East of Eubank, North of Interstate 40; and East of the East boundary of Range 4 East, South of Interstate 40				

TABLE A-10. PEAK INTENSITY (INHR at t = 0.2 hour)				
ne	Intensity	100-YR (2-YR, 10-YR)		
<u> </u>	4.70 (1.84, 3.14)		
	5.05 (2.04, 3.41)		
	5.38 (2.21, 3.65)		
	5.61 (2.34, 3.83)		

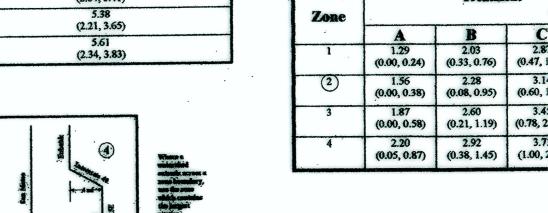

THE SUBJECT SITE:

TABLE A-4. LAND TREATMENTS roent slopes. Native grasses, weeds and shrubs, and oil uncompacted by human activity with slopes greater getation. Unperved parking, roads, trails. Most vacant . Gravel or rock on plastic (desert landscaping). Impervious areas, pavement and room ment D, the areal percentages in TABLE A-5 may be employ

Zone	Treatment 100-YR (2-YR, 10-TR)			
	A	В	C	D
1	1.29	2.03	2.87	4.37
	(0.00, 0.24)	(0.33, 0.76)	(0.47, 1.49)	(1.69, 2.89)
2	1.56 (0.00, 0.38)	2.28 (0.08, 0.95)	3.14 (0.60, 1.71)	4.70 1.86, 3.14)
3	1.87	2.60	3.45	5.02
	(0.00, 0.58)	(0.21, 1.19)	(0.78, 2.009)	(2.04, 3.39)
4	2.20	2.92	3.73	5.25
	(0.05, 0.87)	(0.38, 1.45)	(1.00, 2.26)	(2.17, 3.57)

1.) DOES NOT ACCEPT OFFSITE FLOWS FROM ADJACENT PROPERTIES, 2.)

DOES NOT CONTRIBUTE OFFSITE FLOWS TO ADJACENT PROPERTIES, 3.) DEVELOPED FLOWS SHOWN ON THE PLAN HEREON ARE TO BE DIRECTED

TO A "FIRST FLUSH RETENTION POND" AND DISCHARGED AT A DESIG-

HAVE NO ADVERSE AFFECT TO DOWNSTREAM PROPERTIES).

1440 = 2.75 in. 10 day = 3.95 in.

SITE AREA = 0.48 ACRE ZONE: TWO (2)

0.53 in.

0.78 in.

1.13 in.

0.00 ac.

0.00 ac.

0.33 ac.

0.15 ac.

Weighted E= (0.53)x(0.00)+(0.78)x(0.00)+(1.13)x(0.33)+(2.12)x(0.15)/0.48

V100-360= (1.44)x(0.48)/12 = 0.05760 ac-ft = 2,509.1 cf

EXISTING EXCESS PRECIPITATION:

PRECIPITATION: 360 = 2.35 in.

EXCESS PRECIPTATION:

TREATMENT D 2.12 in.

EXISTING CONDITIONS:

TREATMENT A

TREATMENT B

TREATMENT C

TREATMENT A

TREATMENT B

TREATMENT C

TREATMENT D

NATED SPILLWAY ELEVATION INTO 12TH STREET N..W., (SAID FLOWS WILL

PEAK DISCHARGE:

1.56 cfs/ac.

2.28 cfs/ac.

3.14 cfs/ac.

4.70 cfs/ac.

PROPOSED CONDITIONS:

AREA 0.00 ac.

0.00 ac.

0.13 ac.

0.35 ac.

EROSION CONTROL MEASURES:

THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR MANAGEMENT OF STORM RUNOFF

- ADJACENT PROPERTY SHALL BE PROTECTED AT ALL TIMES BY CONSTRUCTION OF BERMS, DIKES, SWALES, PONDS, AND OTHER TEMPORARY GRADING AS REQUIRED TO PREVENT STORM RUNOFF FROM LEAVING THE SUBJECT SITE AND
- 2) ADJACENT PUBLIC RIGHT-OF-WAYS SHALL BE PROTECTED AT ALL TIMES FROM STORM WATER RUNOFF FROM THE SUBJECT SITE. NO SEDIMENT BEARING WATER SHALL BE PERMITTED TO ENTER PUBLIC STREET RIGHT-OF-WAYS.
- 3) THE CONTRACTOR SHALL IMMEDIATELY AND THOROUGHLY REMOVE ANY AND ALL SEDIMENT FROM PUBLIC STREETS THAT HAS BEEN ERODED FROM THE

- TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE AT 260-1990 FOR THE ACTUAL FIELD LOCATION OF THE EXISTING SURFACE OF SUB-SURFACE UTILITIES.
- 2) PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATION(S) OF ALL POTENTIAL OBSTRUCTIONS; SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM OF
- 3) ALL WORK ON THIS PROJECT SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL LAWS, RULES AND REGULATIONS
- 4) ALL CONSTRUCTION WITHIN PUBLIC STREET RIGHT-OF-WAY(S) SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE CITY OF ALBUQUERQUE/BERNALILLO COUNTY STANDARDS AND PROCEDURES.

CONCERNING CONSTRUCTION SAFETY AND HEALTH.

NO PERIMETER BOUNDARY CORNERS HAVE BEEN FIELD ESTABLISHED PER THIS SURVEY OF THE SUBJECT PROPERTY.

2) NO SEARCH HAS BEEN MADE FOR EASEMENTS OF RECORD OTHER THAN


TOP OF CURB ELEVATION = 7C=72.38 CURB FLOWLINE ELEVATION = 12 = 71.79 EXISTING SPOT ELEVATION = • 4 7272 PROPOSED SPOT ELEVATION = \$ 72 \frac{50}{2}

PROPOSED CONTOUR ELEVATION = \$ 74.0 PROPOSED OR EXISTING CONCRETE SURFACE = EXISTING FENCE LINE =

LEGAL DESCRIPTION: REMAINING PORTION OF LOT 44, ROSSITER ADDITION, ALBUQUERQUE, NEW MEXICO.

BENCH MARK REFERENCE: AS SHOWN ON THE PLAN HEREON; T.B.M. AS SHOWN ON THE PLAN HEREON.

THE CONTRACTOR SHALL INFORM ITSELF OF THE LOCATION OF ANY UTILITY LINE, PIPELINE, OR UNDERGROUND UTILITY LINE IN OR NEAR THE AREA OF THE WORK IN ADVANCE OF AND DURING EXCAVATION WORK. THE CONTRACTOR IS FULLY RESPONSIBLE FOR ANY AND ALL DAMAGE CAUSED BY ITS FAILURE TO LOCATE, IDENTIFY AND PRESERVE ANY AND ALL EXISTING UTILITIES, PIPELINES, AND UNDERGROUND UTILITY LINES. IN PLANNING AND CONDUCTING EXCAVATION, THE CONTRACTOR SHALL COMPLY WITH STATE STATUTES, MUNICIPAL AND LOCAL ORDINANCES, RULES AND REGULATIONS, IF ANY, PERTAINING TO THE LOCATION OF THESE LINES AND FACILITIES.

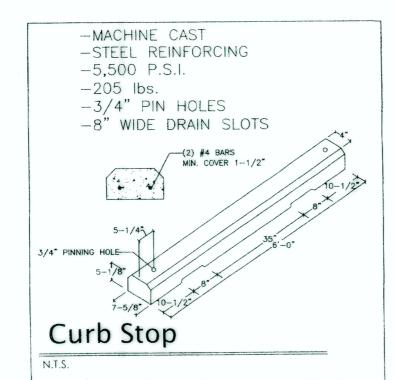

ASPHALT PAVEMENT SECTION NO SCALE
ASPHALTIC CONCRETE (2 1/2") PAVING SURFACE ◎ MIN. 1800 LB. STABILITY (ASTM D-1559)
2 1/2 1
O O O O O O O O O O O O O O O O O O O
COMPACTED EARTH
BIKE RACK DETAIL NO SCALE
2" DIA STEEL PIPE/PAINT SET INTO SIDEWALK 18" FROM EDGE
SPACE SPACE SPACE
EXTÉND PIPE 12" MIN BELOW CONCRETE SURFAI

DRAINAGE COMMENTS:

AS SHOWN ON THE VICINITY MAP HEREON, THE SUBJECT SITE IS LOCATED AT THE SOUTHEAST CORNER OF THE INTERSECTION OF GRIEGOS ROAD N.W. AND 12TH STREET N.W., IN THE CITY OF ALBUQUERQUE, NEW MEXICO.

MIN. 3" CONCRETE COVERAGE

MOTORCYCLE SIGN DETAIL NO SCALE

PAINTED 14 GA. SIGN

- WHERE REQUIRED


_ 2" GALVANIZED PIPE


THE SUBJECT SITE IS PRESENTLY A DEVELOPED PROPERTY WITH AN EXISTING VACANT BUILDING; THE PROPOSED PLAN AS SHOWN HEREON IS TO PROVIDE A TENANT IMPROVEMENT DEVELOPMENT (T-I) OF THE EXIST-ING STRUCTURE TOGETHER WITH REQUIRED NEW ASSOCIATED IMPROVE-MENTS THEREON.

DRAINAGE CALCULATIONS ARE PER SECTION 22.2, HYDROLOGY OF THE DEVELOPMENT PROCESS MANUAL, VOLUME 2, DESIGN CRITERIA FOR THE CITY OF ALBUQUERQUE, BERNALILLO COUNTY, NEW MEXICO.

NOTE: "1st Flush retention pond volume: (Total required) 0.34" (0.03') x 15,246.0 SQ. FT. = 457.4 CU.FT.

RETENTION PONDS PROVIDED:

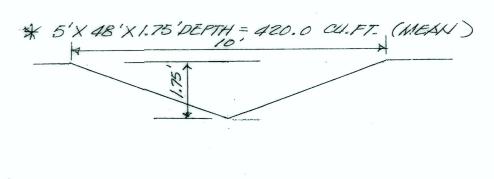

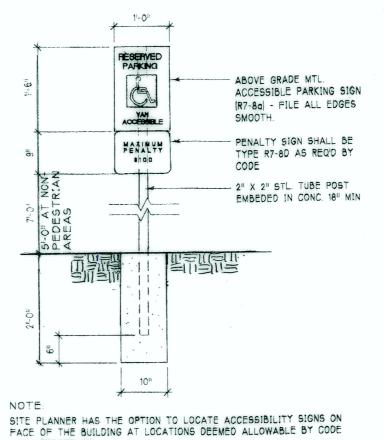

A.D.A. PARKING SIGN


EXISTING PEAK DISCHARGE: Q100= (1.56)x(0.00)+(2.28)x(0.00)+(3.14)x(0.33)+(4.70)x(0.15) = 1.74 cfsPROPOSED EXCESS PRECIPITATION: Weighted E= (0.53)x(0.00)+(0.78)x(0.00)+(1.13)x(0.13)+(2.12)x(0.35)/0.48V100-360= (1.85)x(0.48)/12 = 0.07400 ac-ft = 3,223.4 cfV100-1440= (0.07)+(0.35)x(2.75-2.35)/12 = 0.081667 ac-ft = 3557.4 cfV100-10day= (0.07)+(0.35)x(3.95-2.35)/12 = 0.11667 ac-ft = 5,082.1 cf PROPOSED PEAK DISCHARGE: Q100= (1.56)x(0.00)+(2.28)x(0.00)+(3.14)x(0.13)+(4.70)x(0.35) = 2.05 cfs

03-29-17

(ENGINEER'S CERTIFICATION)

INCREASE: Q100 = 0.31 CFS V100-360 = 714.3 CU. FT.

A PROPOSED PLAN

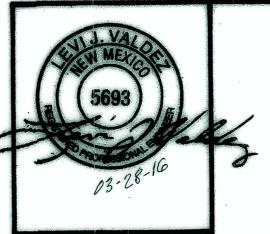

ENGINEER'S SEAL

LIFE SPRINGS CHRISTIAN CHURCH

1130 GRIEGOS ROAD N.W.

ALBUQUERQUE, NEW MEXICO MARCH, 2016

GRADING AND DRAINAGE PLAN

FILED: 4/27/2015