

4 DUMPSTER PLAN  
NTS


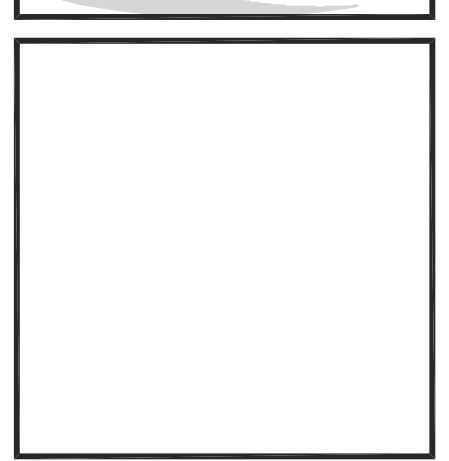
7 GATE POST/SLIDE BOLT DETAIL  
NTS

- KEYED NOTES
- 1 8" CMU WALL WITH 2 COAT SYN. STUCCO SYSTEM. COLOR TO MATCH BLDG. BASE
  - 2 FINISH GRADE.
  - 3 SLOPE STUCCO CAP.
  - 4 4-#4 BARS CONT. # BOTTOM OF FOOTING # 16" O.C. ACROSS BOTTOM OF FOOTING.
  - 5 2-#5 BARS # TOP KNOCK-OUT BLOCK BOND BEAM. CONTINUOUS. #5 BARS # 32" O.C. VERTICAL. GROUT REINFORCED CELLS. DURAWALL # 16" O.C. HORIZONTAL.
  - 6 1/2" EXPANSION JOINT MATERIAL
  - 7 4" CONCRETE SLAB 4000 PSI 3/4" AGGREGATE WITH 6x6 - 10x10 WUM.
  - 8 6" CONCRETE APRON 4000 PSI 3/4" AGGREGATE WITH 6x6 - 10x10 WUM W/ TURNDOWN EDGE.
  - 9 6" CONCRETE FILLED PIPE IN 1 1/2" DIA. X 2'-6" DEEP CONC. FOOTING. PAINT TO MATCH STUCCO FINISH.
  - 10 ASPHALT PAVING
  - 11 GROUT ALL CELLS SOLID BELOW GRADE, TYPICAL.
  - 12 2" VENT TO 16" ABOVE TOP OF ENCLOSURE WALL. PROVIDE BREATHABLE VENT CAP
  - 13 CLEAN OUT RE: DET IT/113 FOR INFO
  - 14 CATCH BASIN ZURN Z-891 6" X 20" SANI-FLO CATCH BASIN FABRICATED 1/2" GAGE TYPE 304 STAINLESS STEEL. BASIN WITH BOLTED FLANGED CONNECTION. COMPLETE WITH FLANGE GASKET. PROVIDE SPECIAL DUTY, CLASS "E" Z-882-DGE, DUCTILE IRON SLOTTED GRATE, AND SEDIMENT BASKET.

6 ENCLOSURE NOTES  
NTS

REV	DATE	BY	REVISION
1			
2			
3			
4			
5			

**MODULUS ARCHITECTS**  
 220 COPPER AVE. N.W. SUITE 350  
 ALBUQUERQUE, NEW MEXICO 87102  
 PHONE (505) 338-1499 FAX (505) 338-1498

PROJECT TITLE CARLISLE CROSSING 2000 CARLISLE BLVD. NE ALBUQUERQUE, NEW MEXICO	JOB NO. XXXXX	DRAWN BY: 5
PROJECT MANAGER STEPHEN DUNBAR, AIA	SHEET TITLE SITE DETAILS	

DATE: 7/24/2019	Sheet:
SCALE: AS NOTED	A13