


TRAFFIC CIRCULATION LAYOUT APPROVED

11/10/2020

Jeanne Wolfenbarger

ASPHALT PAVEMENT SECTION



4" ASPHALTIC CONCRETE 4" AGGREGATE BASE COURSE


MIN. 12" COMPACTED SUBGRADE


- NOTES:

 1. ASPHALT PAVEMENT, BASE COURSE, AND SUBGRADE SHALL MEET
 THE SPECIFICATIONS OF THE NMDOT 2014 SPECIFICATIONS FOR HIGHWAY AND BRIDGE CONSTRUCTION. 2. ASPHALT PAVEMENT SHALL BE SP-III PER NMDOT SPEC SECTION
- 423.
 3. AGGREGATE BASE COURSE SHOULD BE TYPE 1 PER NMDOT SPEC SECTION 303.

 4. SUBGRADE SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM DRY DENSITY AT OPTIMUM MOISTURE CONTENT (+/-3%) AS DETEMINED BY ASTM D-1557.
- 5. ALL FILL BELOW SUBGRADE SHALL EXHIBIT A MINIMUM R-VALUE OF 45.

Pavement Section

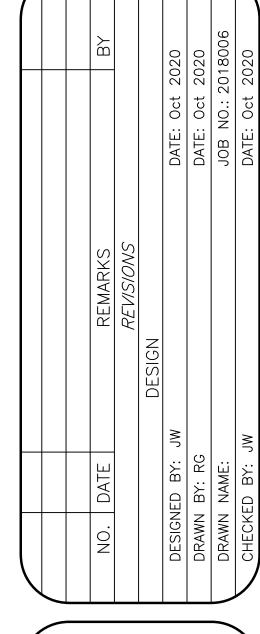



20VID—19 Testing Site 5200 San Mateo Blvd Albuquerque, NM

Ō

etail

 \Box

Site