



Urban Rack (UB-1000-STD)
NTS

TRAFFIC CIRCULATION LAYOUT APPROVED Curtis A Cherns 1-16-24 Signed

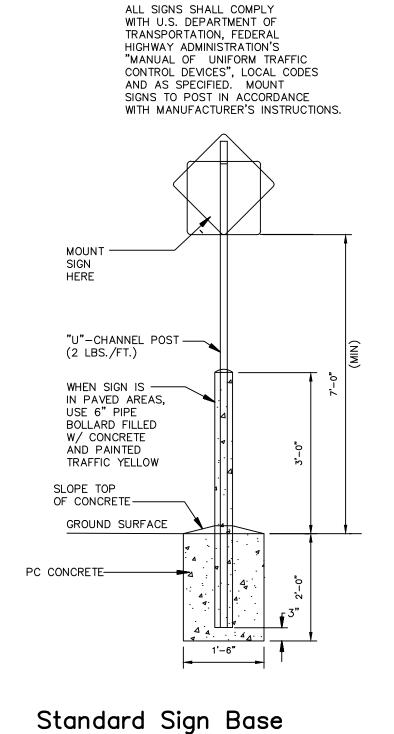

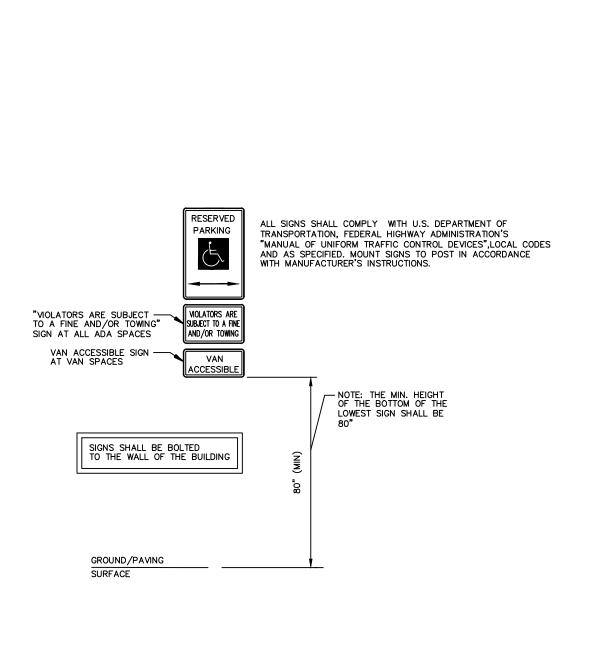

H/C Sign Detail NTS

3" ASPHALTIC CONCRETE (2 LIFTS)

6" AGGREGATE BASE COURSE

1. ASPHALT PAVEMENT, BASE COURSE, AND SUBGRADE SHALL MEET THE SPECIFICATIONS OF THE NMDOT 2014 SPECIFICATIONS FOR HIGHWAY AND BRIDGE CONSTRUCTION. 2. ASPHALT PAVEMENT SHALL BE SP-III PER NMDOT SPEC SECTION


5. ALL FILL BELOW SUBGRADE SHALL EXHIBIT A MINIMUM R-VALUE OF 45.

Asphalt Pavement Section


Concrete Pavement Section


AND LOAD TRANSFER JOINT SPACING.

MIN. 12" COMPACTED SUBGRADE

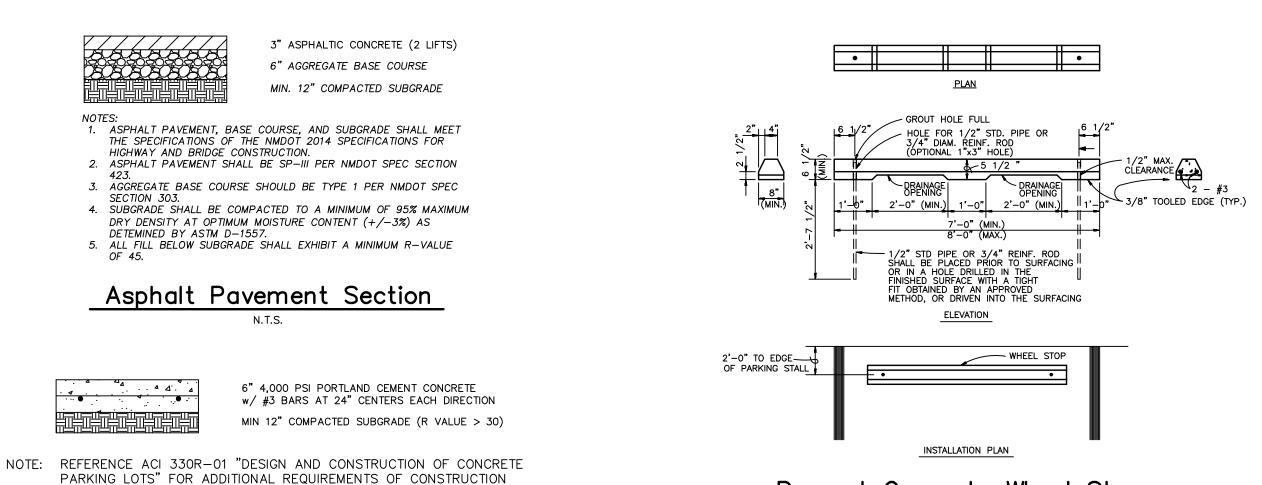


Precast Concrete Wheel Stop

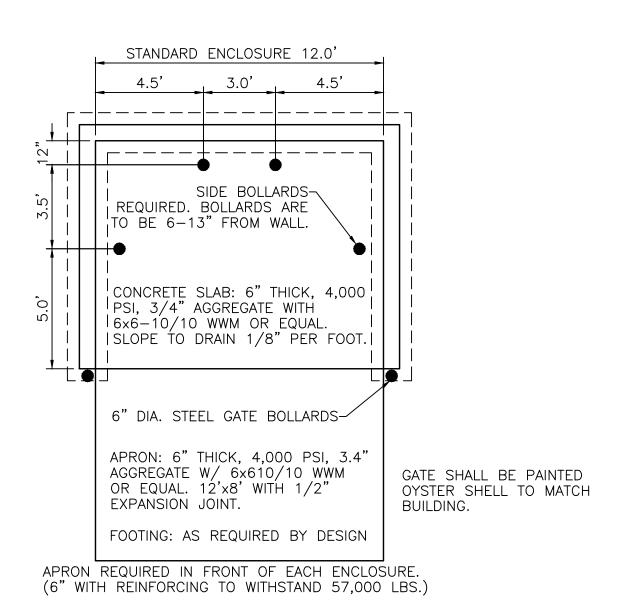


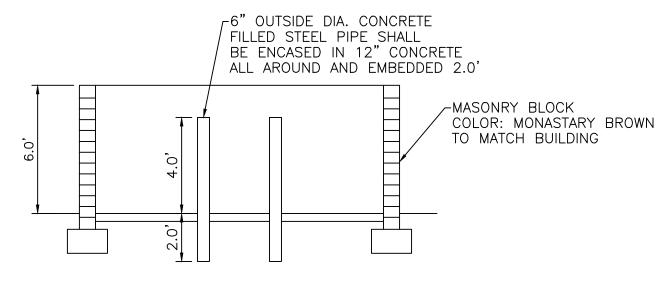


NOTE: THESE ARE THE MINIMUM REQUIREMENTS FOR TRASH ENCLOSURES. DESIGNS MAY VARY TO FIT THE SELECTED ENCLOSURE.

Dumpster Enclosure Detail NTS

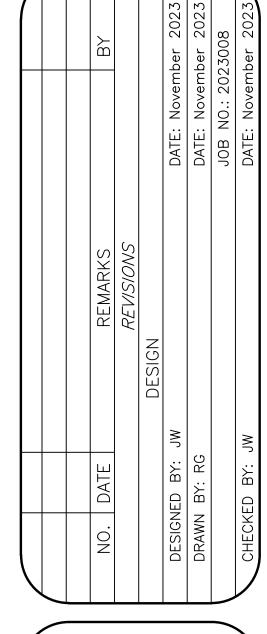



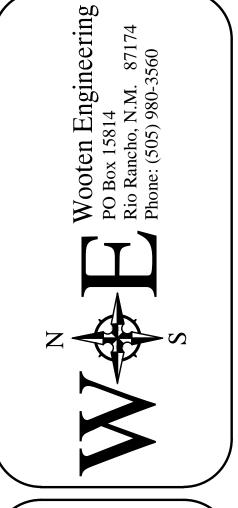



**DETAILS**