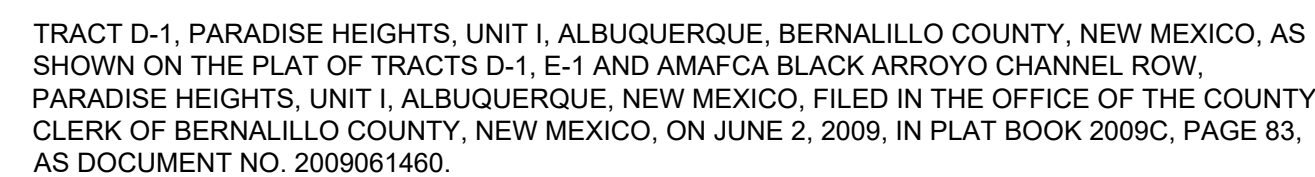


1. PERIMETER CONTROLS (PER CGP 2.2.4)
  - 1.1. REMOVE SEDIMENT BEFORE IT HAS ACCUMULATED TO ONE-HALF OF THE ABOVE-GROUND HEIGHT OF ANY PERIMETER, AND
  - 1.2. AFTER A STORM EVENT, IF THERE IS EVIDENCE OF STORMWATER CIRCUMVENTING OR UNDERCUTTING THE PERIMETER CONTROL, EXTEND CONTROLS AND/OR REPAIR UNDERCUT AREAS TO FIX THE PROBLEM.
2. CONSTRUCTION ENTRANCE (PER 2.2.4)
  - 2.1. IMPLEMENT ADDITIONAL TRACK-OUT CONTROLS AS NECESSARY TO ENSURE THAT SEDIMENT REMOVAL OCCURS PRIOR TO VEHICLE EXIT, AND
  - 2.2. WHERE SEDIMENT HAS BEEN TRACKED-OUT FROM YOUR SITE ONTO PAVED ROADS, SIDEWALKS, OR OTHER PAVED AREAS OUTSIDE OF YOUR SITE, REMOVE THE DEPOSITED SEDIMENT BY THE END OF THE SAME BUSINESS DAY IN WHICH THE TRACK-OUT OCCURS OR BY THE END OF THE NEXT BUSINESS DAY IF TRACK-OUT OCCURS ON A NON-BUSINESS DAY. REMOVE THE TRACK-OUT BY SWEEPING, SHOVELING, OR VACUUMING THESE SURFACES, OR BY USING OTHER SIMILARLY EFFECTIVE MEANS OF SEDIMENT REMOVAL. YOU ARE PROHIBITED FROM HOSING OR SWEEPING TRACKED-OUT SEDIMENT INTO AN UNCONSTRUCTED OR NATURAL SITE DRAINAGE FEATURE, STORM DRAIN INLET, OR RECEIVING WATER
3. INLET PROTECTION (PER CGP 2.2.10)
  - 3.1. CLEAN, OR REMOVE AND REPLACE, THE INLET PROTECTION MEASURES AS SEDIMENT ACCUMULATES. THE FILTER BECOMES CLOGGED, AND/OR PERFORMANCE DEGRADATION OCCURS, THERE IS NO SPACE FOR SEDIMENT ACCUMULATION ADJACENT TO THE INLET PROTECTION MEASURE. REMOVE THE DEPOSITED SEDIMENT BY THE END OF THE SAME BUSINESS DAY IN WHICH IT IS FOUND OR BY THE END OF THE FOLLOWING BUSINESS DAY IF REMOVAL BY THE SAME BUSINESS DAY IS NOT FEASIBLE.



01	TEMPORARY SILT FENCE (REF DETAIL SHEET 3)
02	OFFSITE TRACKING PREVENTION (REF DETAIL SHEET 3)
03	TEMPORARY CONCRETE WASHOUT AREA (REF DETAIL SHEET 3)
04	IP-1 BLOCK & ROCK SOCK SUMP OR ON GRADE INLET PROTECTION (REF DETAIL SHEET 3)
05	PERMANENT STABILIZATION (REF FINAL LANDSCAPE PLAN SHEET)
06	CULVERT PROTECTION (REF DETAIL SHEET 3)
07	TEMPORARY DIVERSION SWALE (REF DETAIL SHEET 4)
08	TEMPORARY SEDIMENT TRAP (REF DETAIL SHEET 4)

1. ALL EROSION AND SEDIMENT CONTROL (ESC) WORK ON THESE PLANS, EXCEPT AS OTHERWISE STATED OR PROVIDED HEREON SHALL BE PERMITTED, CONSTRUCTED, INSPECTED, AND MAINTAINED IN ACCORDANCE WITH:
  - 1.1. THE CITY ORDINANCE 14-5-2-11, THE ESC ORDINANCE,
  - 1.2. THE EPA'S 2022 CONSTRUCTION GENERAL PERMIT (CGP), AND
  - 1.3. THE CITY OF ALBUQUERQUE CONSTRUCTION BMP MANUAL.
2. ALL BMP'S MUST BE INSTALLED PRIOR TO BEGINNING ANY EARTH MOVING ACTIVITIES EXCEPT AS SPECIFIED HEREON IN THE PHASING PLAN. CONSTRUCTION OF EARTHEN BMP'S SUCH AS SEDIMENT TRAPS, SEDIMENT BASINS, AND DIVERSION BERMS SHALL BE COMPLETED AND INSPECTED PRIOR TO ANY OTHER CONSTRUCTION OR EARTHWORK. SELF-INSPECTION IS REQUIRED AFTER INSTALLATION OF THE BMP'S AND PRIOR TO BEGINNING CONSTRUCTION.
3. SELF-INSPECTIONS - AT A MINIMUM A ROUTING SELF-INSPECTION IS REQUIRED TO REVIEW THE PROJECT FOR COMPLIANCE WITH THE CONSTRUCTION GENERAL PERMIT ONCE EVERY 14 DAYS AND AFTER ANY REVISIONATION OF 14 INCH OR GREATER UNTIL THE SITE CONSTRUCTION HAS BEEN COMPLETED AND THE SITE DETERMINED AS STABILIZED BY THE CITY. REPORT OF THESE INSPECTIONS SHALL BE KEPT BY THE PERSON OR ENTITY AUTHORIZED TO DIRECT THE CONSTRUCTION ACTIVITIES ON THE SITE AND MADE AVAILABLE UPON REQUEST.
4. CORRECTIVE ACTION REPORTS MUST BE KEPT BY THE PERSON OR ENTITY AUTHORIZED TO DIRECT THE CONSTRUCTION ACTIVITIES ON THE SITE AND MADE AVAILABLE UPON REQUEST.
5. THE PROPERTY OWNER MUST CONTINUE PERMIT COVERAGE, SELF-INSPECTIONS, SWPPP AND BMP MAINTENANCE UNTIL THE CITY DETERMINES THAT THE FINAL STABILIZATION CRITERIA CGP.2.14.C HAS BEEN SATISFIED. THEN THE PROPERTY OWNER MUST REMOVE THE BMP'S AND SEND DOCUMENTATION OF THE FINAL STABILIZATION TO THE EPA WITH A NOTICE OF TERMINATION (NOT) PER CGP 8.2 TO END YOUR COVERAGE UNDER THE CGP.
6. WHEN DOING WORK IN THE CITY RIGHT-OF-WAY (E.G. SIDEWALK, DRIVE PADS, UTILITIES, ETC.) PREVENT DIRT FROM GETTING INTO THE STREET. IF DIRT IS PRESENT IN THE STREET, THE STREET SHOULD BE SWEEP DAILY OR PRIOR TO A RAIN EVENT OR CONTRACTOR INDUCED WATER EVENT (E.G. CURB CUT OR WATER TEST).
7. WHEN INSTALLING UTILITIES BEHIND THE CURB, THE EXCAVATED DIRT SHOULD NOT BE PLACED IN THE STREET.
8. WHEN CUTTING THE STREET FOR UTILITIES THE DIRT SHALL BE PLACED ON THE UPHILL SIDE OF THE STREET CUT AND THE AREA SWEEP AFTER THE WORK IS COMPLETE. A WATTLE OR MULCH SOCK MAY BE PLACED AT THE TOE OF THE EXCAVATED DIRT PILE IF SITE CONSTRAINTS DO NOT ALLOW PLACING THE EXCAVATED DIRT ON THE UPHILL SIDE OF THE STREET CUT.
9. ESC PLANS MUST SHOW LONGITUDINAL STREET SLOPE AND STREET NAMES. ON STREETS WHERE THE LONGITUDINAL SLOPE IS STEEPER THAN 2.5%, WATTLES/MULCH SOCKS OF J-HOOD SILT FENCE SHALL BE SHOWN IN THE FRONT YARD SWALE OR ON THE SIDE OF THE STREET.



- a. BRIEF DESCRIPTION: PROPOSED GAS STATION WITH CONVENIENCE STORE, PAVED PARKING AND DRIVE AISLES, AND STORMWATER QUALITY POND.
- b. PROPERTY SIZE: 2.03 ACRES
- c. EXPECTED DISTURBED AREA: 1.90 ACRES
- d. CONSTRUCTION ACTIVITY COVERED BY CGP: INSTALLATION OF EROSION CONTROL MEASURES AS SHOWN ON THIS PLAN.
- e. MAXIMUM AREA EXPECTED TO BE DISTURBED AT ONE TIME: 1.90 ACRES
- f. PROJECTED SCHEDULE
  1. INSTALL STABILIZED CONSTRUCTION ENTRANCES (FEB 2024)
  2. PREPARE TEMPORARY PARKING AND STORAGE AREA (FEB 2024)
  3. INSTALL SILT FENCE AND CONSTRUCTION FENCE (FEB 2024)
  4. CLEAR AND GRUB THE SITE (FEB 2024)
  5. BEGIN GRADING THE SITE (FEB 2024)
  6. BEGIN CONSTRUCTION OF BUILDING PAD AND STRUCTURES (JULY 2024)
  7. INSTALL UTILITIES, CURB AND GUTTER (SEP 2024)
  8. PREPARE SITE FOR PAVING (DEC 2024)
  9. PAVE SITE (DEC 2024)
  10. COMPLETE GRADING AND INSTALL PERMANENT SEEDING AND PLANTING (RE: LANDSCAPE PLAN) (JAN 2025)
  11. REMOVE ALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES ONCE SITE IS STABILIZED (FEB 2025)

SOIL NAME: BLUEPOINT LOAMY FINE SAND, 1 TO 9 PERCENT SLOPES (PER WEB SOIL SURVEY)  
SOIL TYPE: HYDROLOGIC SOIL TYPE A (PER WEB SOIL SURVEY)  
PARTICLE SIZES: SAND SOILS WITH VARYING AMOUNTS OF CLAY, SILT AND GRAVEL.  
(PER GEOTECHNICAL ENGINEERING REPORT BY TERRACON DATED 1/25/2021)

	PROPERTY LINE
	LIMITS OF DISTURBANCE (82850± SF / 1.90± AC)
	TEMPORARY SILT CONTROL FENCE
	TEMPORARY CONSTRUCTION FENCE
	TEMPORARY DIVERSION SWALE
	SURFACE FLOW DIRECTION
	OFFSITE TRACKING PREVENTION
	TEMPORARY CONCRETE WASHOUT AREA
	ROCK SOCK
	SEDIMENT TRAP