CITY OF ALBUQUERQUE



October 9, 2012

Genevieve Donart L., P.E gennyd@iacivil.com

Isaacson & Arfman, P.A.

128 Monroe Street N.E.

Albuquerque, NM 87108

Re: Country Club Place - Lot 2 - Phase I, 1900Central Ave SW,

Request for Permanent C.O. -Accepted

Engineer's Stamp dated: 04-05-11, (J13/D011)

Certification dated: 10-03-12

Dear Ms. Donart,

Based upon the information provided in the Certification received 10-03-12, the above referenced Certification is acceptable for a release of a Permanent Certificate of Occupancy by Hydrology.

Hydrology is asking for an electronic copy, in .pdf format, of this certification for our records. This certification can be e-mailed to me at: <u>tsims@cabq.gov</u>.

If you have any questions, you can contact me at 924-3982.

Albuquerque

PO Box 1293

Timothy E. Sims.

Sincerely,


Plan Checker—Hydrology Section Development and Building Services

www.cabq.gov

NM 87103

C: CO Clerk—Katrina Sigala File

Albuquerque - Making History 1706-2006

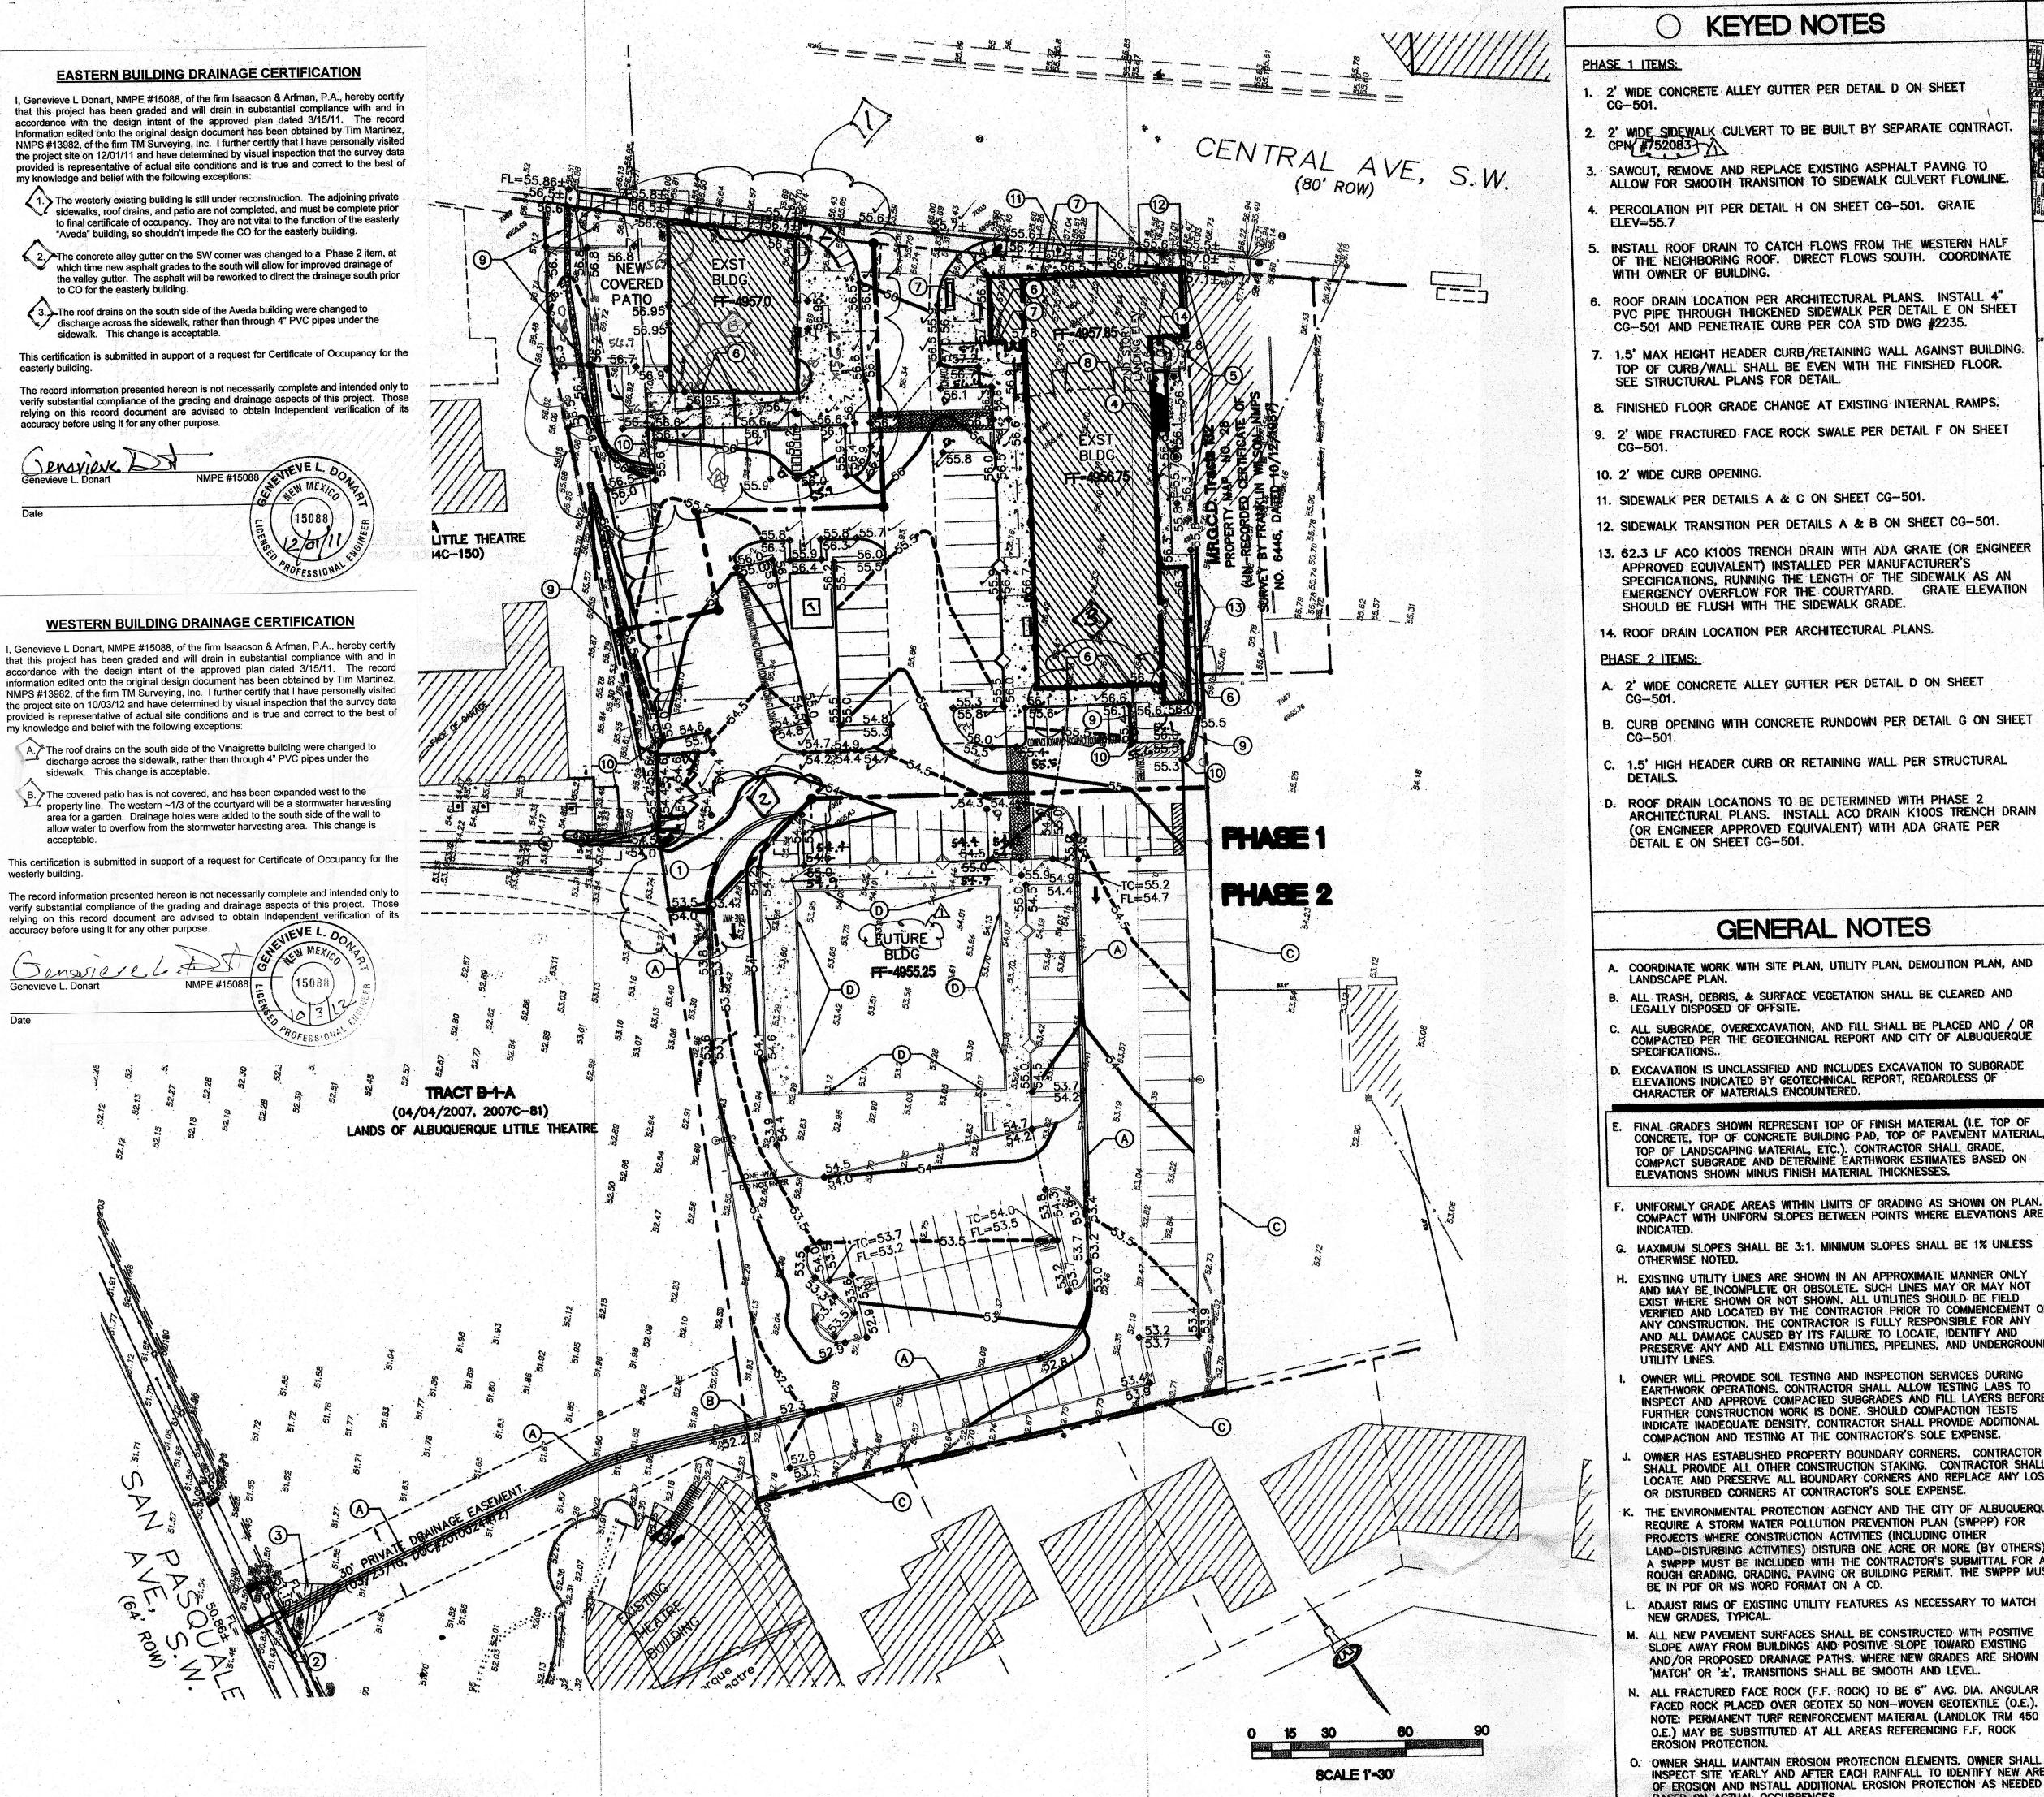

KEYED NOTES

- 1. 2' WIDE CONCRETE ALLEY GUTTER PER DETAIL D ON SHEET
- 2. 2' WIDE SIDEWALK CULVERT TO BE BUILT BY SEPARATE CONTRACT.
- . SAWCUT, REMOVE AND REPLACE EXISTING ASPHALT PAVING TO
- 4. PERCOLATION PIT PER DETAIL H ON SHEET CG-501. GRATE
- 5. INSTALL ROOF DRAIN TO CATCH FLOWS FROM THE WESTERN HALF OF THE NEIGHBORING ROOF. DIRECT FLOWS SOUTH. COORDINATE WITH OWNER OF BUILDING.
- 6. ROOF DRAIN LOCATION PER ARCHITECTURAL PLANS. INSTALL 4" PVC PIPE THROUGH THICKENED SIDEWALK PER DETAIL E ON SHEET CG-501 AND PENETRATE CURB PER COA STD DWG #2235.
- 7. 1.5' MAX HEIGHT HEADER CURB/RETAINING WALL AGAINST BUILDING. TOP OF CURB/WALL SHALL BE EVEN WITH THE FINISHED FLOOR.
- 8. FINISHED FLOOR GRADE CHANGE AT EXISTING INTERNAL RAMPS.
- 9. 2' WIDE FRACTURED FACE ROCK SWALE PER DETAIL F ON SHEET
- 11. SIDEWALK PER DETAILS A & C ON SHEET CG-501.
- 12. SIDEWALK TRANSITION PER DETAILS A & B ON SHEET CG-501.
- 13. 62.3 LF ACO K100S TRENCH DRAIN WITH ADA GRATE (OR ENGINEER APPROVED EQUIVALENT) INSTALLED PER MANUFACTURER'S SPECIFICATIONS, RUNNING THE LENGTH OF THE SIDEWALK AS AN EMERGENCY OVERFLOW FOR THE COURTYARD. GRATE ELEVATION SHOULD BE FLUSH WITH THE SIDEWALK GRADE.
- 14. ROOF DRAIN LOCATION PER ARCHITECTURAL PLANS.
- A. 2' WIDE CONCRETE ALLEY GUTTER PER DETAIL D ON SHEET
- B. CURB OPENING WITH CONCRETE RUNDOWN PER DETAIL G ON SHEET
- C. 1.5' HIGH HEADER CURB OR RETAINING WALL PER STRUCTURAL
- D. ROOF DRAIN LOCATIONS TO BE DETERMINED WITH PHASE 2 ARCHITECTURAL PLANS. INSTALL ACO DRAIN K100S TRENCH DRAIN (OR ENGINEER APPROVED EQUIVALENT) WITH ADA GRATE PER DETAIL E ON SHEET CG-501.

GENERAL NOTES

- A. COORDINATE WORK WITH SITE PLAN, UTILITY PLAN, DEMOLITION PLAN, AND
- B. ALL TRASH, DEBRIS, & SURFACE VEGETATION SHALL BE CLEARED AND LEGALLY DISPOSED OF OFFSITE.
- C. ALL SUBGRADE, OVEREXCAVATION, AND FILL SHALL BE PLACED AND / OR COMPACTED PER THE GEOTECHNICAL REPORT AND CITY OF ALBUQUERQUE SPECIFICATIONS...
- EXCAVATION IS UNCLASSIFIED AND INCLUDES EXCAVATION TO SUBGRADE ELEVATIONS INDICATED BY GEOTECHNICAL REPORT, REGARDLESS OF CHARACTER OF MATERIALS ENCOUNTERED.
- TOP OF LANDSCAPING MATERIAL, ETC.). CONTRACTOR SHALL GRADE, COMPACT SUBGRADE AND DETERMINE EARTHWORK ESTIMATES BASED ON ELEVATIONS SHOWN MINUS FINISH MATERIAL THICKNESSES.
- UNIFORMLY GRADE AREAS WITHIN LIMITS OF GRADING AS SHOWN ON PLAN. COMPACT WITH UNIFORM SLOPES BETWEEN POINTS WHERE ELEVATIONS ARE
- G. MAXIMUM SLOPES SHALL BE 3:1. MINIMUM SLOPES SHALL BE 1% UNLESS
- H. EXISTING UTILITY LINES ARE SHOWN IN AN APPROXIMATE MANNER ONLY AND MAY BE INCOMPLETE OR OBSOLETE. SUCH LINES MAY OR MAY NOT EXIST WHERE SHOWN OR NOT SHOWN. ALL UTILITIES SHOULD BE FIELD VERIFIED AND LOCATED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. THE CONTRACTOR IS FULLY RESPONSIBLE FOR ANY AND ALL DAMAGE CAUSED BY ITS FAILURE TO LOCATE, IDENTIFY AND PRESERVE ANY AND ALL EXISTING UTILITIES, PIPELINES, AND UNDERGROUND
- OWNER WILL PROVIDE SOIL TESTING AND INSPECTION SERVICES DURING EARTHWORK OPERATIONS. CONTRACTOR SHALL ALLOW TESTING LABS TO INSPECT AND APPROVE COMPACTED SUBGRADES AND FILL LAYERS BEFORE FURTHER CONSTRUCTION WORK IS DONE. SHOULD COMPACTION TESTS INDICATE INADEQUATE DENSITY, CONTRACTOR SHALL PROVIDE ADDITIONAL COMPACTION AND TESTING AT THE CONTRACTOR'S SOLE EXPENSE.
- OWNER HAS ESTABLISHED PROPERTY BOUNDARY CORNERS. CONTRACTOR SHALL PROVIDE ALL OTHER CONSTRUCTION STAKING. CONTRACTOR SHALL LOCATE AND PRESERVE ALL BOUNDARY CORNERS AND REPLACE ANY LOST OR DISTURBED CORNERS AT CONTRACTOR'S SOLE EXPENSE.
- THE ENVIRONMENTAL PROTECTION AGENCY AND THE CITY OF ALBUQUERQUE REQUIRE A STORM WATER POLLUTION PREVENTION PLAN (SWPPP) FOR PROJECTS WHERE CONSTRUCTION ACTIVITIES (INCLUDING OTHER LAND-DISTURBING ACTIVITIES) DISTURB ONE ACRE OR MORE (BY OTHERS). A SWPPP MUST BE INCLUDED WITH THE CONTRACTOR'S SUBMITTAL FOR A ROUGH GRADING, GRADING, PAVING OR BUILDING PERMIT. THE SWPPP MUST BE IN PDF OR MS WORD FORMAT ON A CD.
- ADJUST RIMS OF EXISTING UTILITY FEATURES AS NECESSARY TO MATCH NEW GRADES, TYPICAL.
- M. ALL NEW PAVEMENT SURFACES SHALL BE CONSTRUCTED WITH POSITIVE SLOPE AWAY FROM BUILDINGS AND POSITIVE SLOPE TOWARD EXISTING AND/OR PROPOSED DRAINAGE PATHS. WHERE NEW GRADES ARE SHOWN AS 'MATCH' OR '±', TRANSITIONS SHALL BE SMOOTH AND LEVEL.
- N. ALL FRACTURED FACE ROCK (F.F. ROCK) TO BE 6" AVG. DIA. ANGULAR FACED ROCK PLACED OVER GEOTEX 50 NON-WOVEN GEOTEXTILE (O.E.). NOTE: PERMANENT TURF REINFORCEMENT MATERIAL (LANDLOK TRM 450 O.E.) MAY BE SUBSTITUTED AT ALL AREAS REFERENCING F.F. ROCK
- O. OWNER SHALL MAINTAIN EROSION PROTECTION ELEMENTS. OWNER SHALL INSPECT SITE YEARLY AND AFTER EACH RAINFALL TO IDENTIFY NEW AREAS OF EROSION AND INSTALL ADDITIONAL EROSION PROTECTION AS NEEDED BASED ON ACTUAL OCCURRENCES.



VICINITY MAP

PROJECT DATA

LEGAL DESCRIPTION: M.R.G.C.D. TRACTS 133-A-1, 133-A-2, 133-B, 134 AND 135-A PROPERTY MAP NO. 38, TRACT B-2-A, LANDS OF ALBUQUERQUE LITTLE THEATRE

2.338 AC SITE AREA:

FLOOD ZONE: THE SUBJECT PROPERTY (AS SHOWN HEREON) LIES WITHIN ZONE "X" (AREAS OF 500-YEAR FLOOD; AREAS OF 100-YEAR FLOOD WITH AVERAGE DEPTHS OF LESS THAN 1 FOOT OR WITH DRAINAGE AREAS LESS THAN 1 SQUARE MILE; AND AREAS PROTECTED BY LEVEES FROM 100-YEAR FLOOD) FLOOD PLAIN ACCORDANCE WITH THE NATIONAL FLOOD INSURANCE PROGRAM RATE MAP NUMBER 35001C0331E, EFFECTIVE DATE NOVEMBER 19, 2003.

ENGINEER:

FRED ARFMAN, NMPE#7322 ISAACSON & ARFMAN, P.A. 128 MONROE ST NE, ABQ. NM 87108 PHONE: (505) 268-8828

LARRY W. MEDRANO, NMPS #11993 SURVEYOR: PRECISION SURVEYS, INC. 8414-D JEFFERSON ST NE, ABQ. NM 87113

PHONE: (505) 856-5700

ALBUQUERQUE CONTROL SURVEY MONUMENT "13-413" HAVING A PUBLISHED ELEVATION OF 4956.09 FEET (NGVD 88)

LEGEND

PROPOSED CONTOUR

EXISTING SPOT ELEVATION PROPOSED SPOT ELEVATION

FLOW ARROW

FINISH FLOOR ELEVATION

SIDEWALK CULVERT FRACTURED FACE ROCK SWALE

FLOWLINE ELEVATION

ISAACSON & ARFMAN, P.A. Consulting Engineering Associates


128 Monroe Street N.E. Albuquerque, New Mexico 87108 Ph. 505-268-8828 Fax. 505-268-2632 1782 CG-101.dwg May 04,2011

CG-101

Mullen Heller Architecture P.C. 924 Park Avenue SW Albuquerque,NM 87102 505 268 4144[p]

505 268 4244 [f]

49999



elopment