CITY OF ALBUQUERQUE

Planning Department Alan Varela, Director



Mayor Timothy M. Keller

March 5, 2024

Jeffrey T. Wooten, P.E Wooten Engineering P.O Box 15814 Rio Rancho, NM 87174

Re: Route 66 Lofts 7600 Central Ave. SW Traffic Circulation Layout Engineer's Stamp 3-5-24 (K10D065)

Dear Mr. Wooten,

The revised TCL submittal received 3-5-2024 is approved for Building Permit by Transportation. A copy of the stamped and signed plan will be needed for each of the building permit plans. Please keep the original to be used for certification of the site for final C.O. for Transportation.

PO Box 1293 When the site construction is completed and an inspection for Certificate of Occupancy (C.O.) is requested, use the original City stamped approved TCL for certification. Redline any minor changes and adjustments that were made in the field. A NM registered architect or engineer must stamp, sign, and date the certification TCL along with indicating that the development was built in "substantial compliance" with the TCL. Submit this certification, the TCL, and a completed <u>Drainage and Transportation Information Sheet</u> to front counter personnel for log in and evaluation by Transportation.

NM 87103


Once verification of certification is completed and approved, notification will be made to Building Safety to issue Final C.O. To confirm that a final C.O. has been issued, call Building Safety at 924-3690.

www.cabq.gov

Sincerely,

Ernest Armijo, P.E. Principal Engineer, Planning Dept. Development Review Services

C: CO Clerk, File

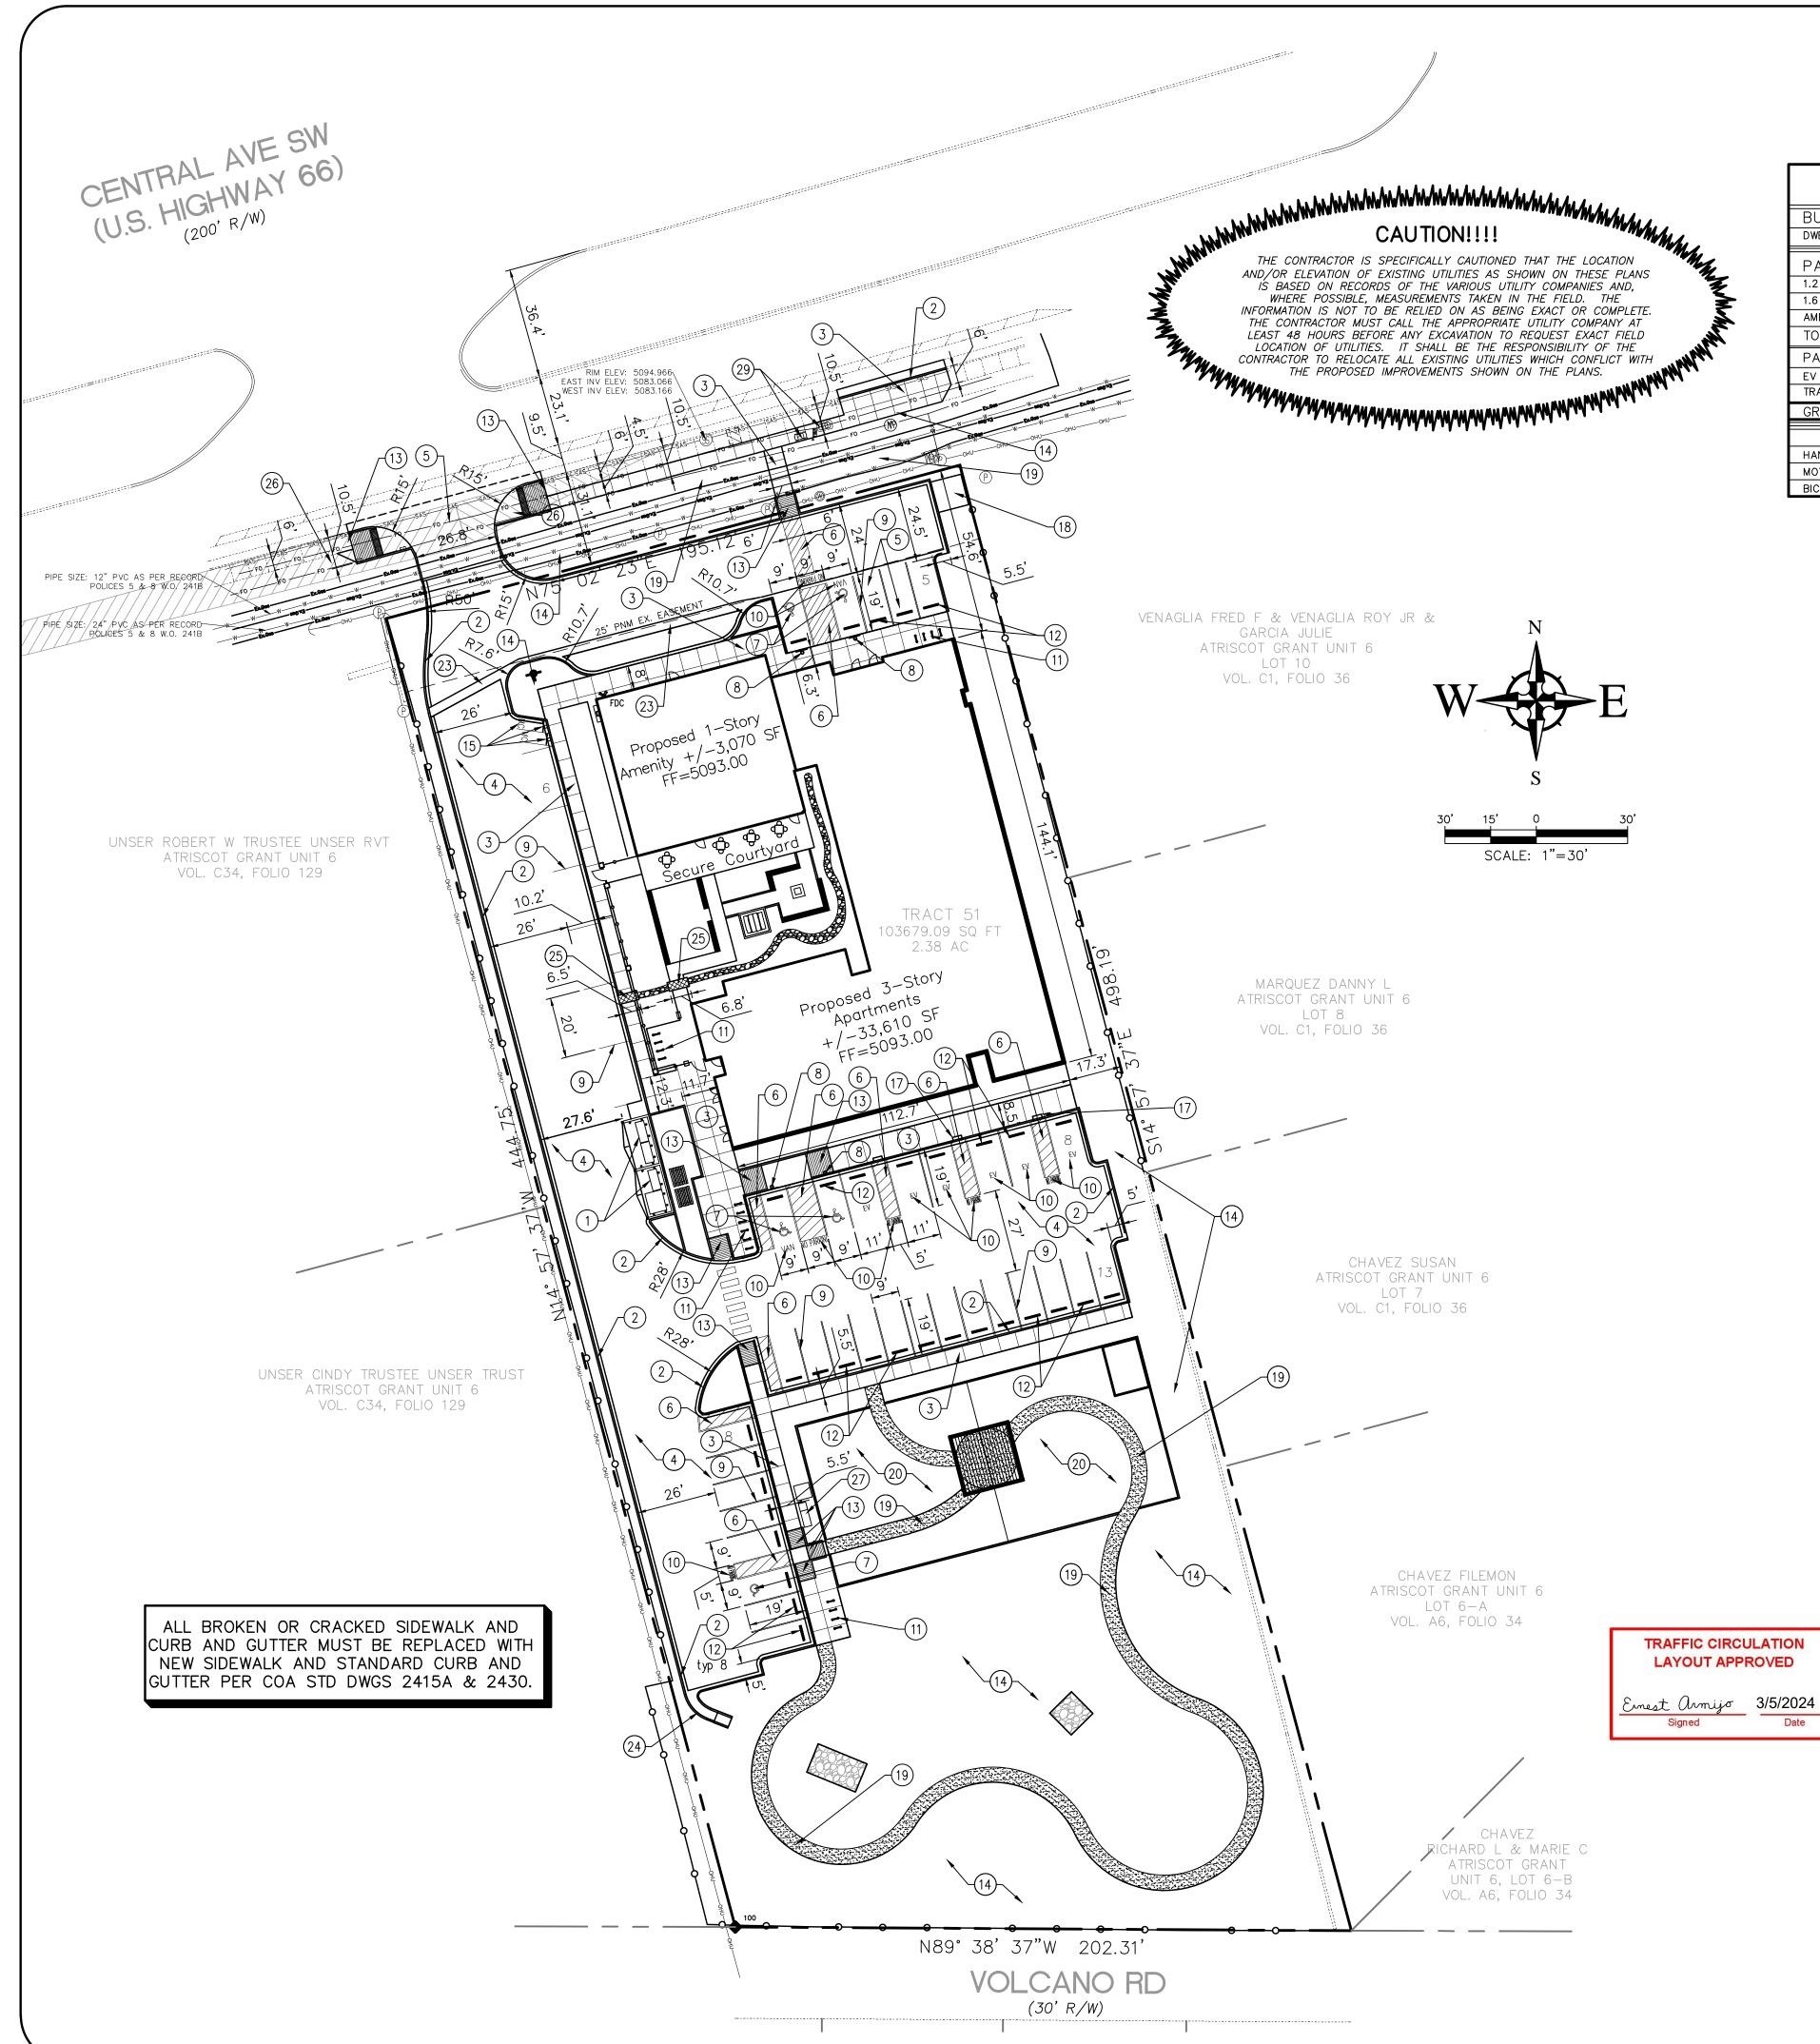


PARKING CALCULATIONS			
BUILDING AREA:	AREA (SQL	JARE FE	
DWELLING, MULTI-FAMILY	+/- 36,680 SI		
PARKING REQUIREMENTS:	REQUIRED	PR	
1.2 / UNIT 1 BEDROOM: 47 UNITS	56 spaces		
1.6 / UNIT 2 BEDROOM: 1 UNIT	1 spaces		
AMENITY 3 / 1,000 SF: 3,070 SF	9 spaces		
TOTAL	66 spaces		
PARKING REDUCTIONS			
EV STALLS (1 CAR REDUCTIONS PER STALL)	-6 spaces		
TRANSIT CORRIDOR (30% REDUCTIONS)	-20 spaces		
GRAND TOTAL	40 spaces	40	
	REQUIRED	PR	
HANDICAP PARKING	2 spaces	5	
MOTORCYCLE PARKING	2 spaces	2 :	
BICYCLE PARKING	6 spaces	36	


<u>KEYED NOTES</u>

- ARCHITECTURAL DETAILS.
- SHALL BE SLOPED TO MATCH THE ADJACENT PAVEMENT.
- DETAIL ON SHEET C102.
- DETAIL ON SHEET C102.
- PARKING AREAS). MIN. TWO COATS.
- C102.
- COATS.
- AND 2 INCHES WIDE. MIN. TWO COATS.
- 11. INSTALL BIKE RACK(S) PER DETAIL, SHEET C-102.
- SHALL BE INSTALLED PER COA STD DWG 2446.
- 14. LANDSCAPE AREA. REF. LANDSCAPE PLANS.
- PER COA CODE. SIGN DETAIL ON SHEET C102.
- DETAILS.
- 18. INSTALL TRANSFORMER. REF. MEP PLANS FOR DETAILS.
- 19. NATURE TRAIL. REF. LANDSCAPE PLANS FOR DETAILS.
- 21. BIKE STORAGE RACK. REF. ARCHITECTURAL PLANS FOR DETAILS.
- 22. NOT USED.

- SIGHT TRIANGLE.

- REQUIRED.



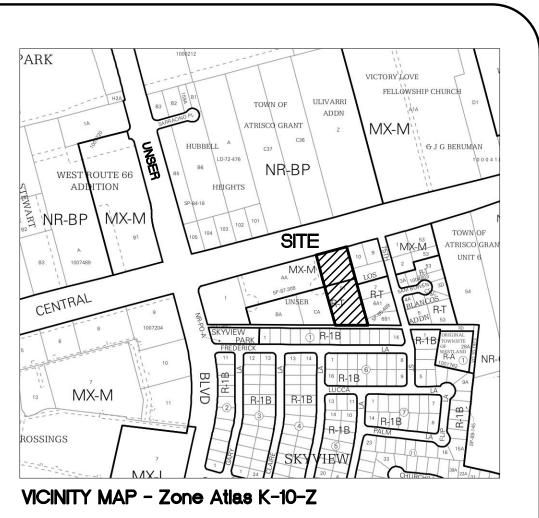

LEGAL DESCRIPTION: The West One-Half of Tract 52, Unit No. 6 of Plat of Town of Atrisco Grant, Bernalillo County, NM.

1. PROPOSED TRASH ENCLOSURE TO COMPLY WITH MINIMUM COA SOLID WASTE STANDARDS. CONTRACTOR SHALL COORDINATE WITH THE SOLID WASTE DEPARTMENT FOR THE REQUIRED INSPECTIONS DURING CONSTRUCTION. REF.

2. INSTALL MEDIAN CURB/GUTTER (6" HIGH) PER COA STD DWG 2415B. GUTTER PAN

3. INSTALL CONCRETE SIDEWALK PER COA STD DWG 2430. SIDEWALK CROSS SLOPE SHALL BE 2% MAX AND SLOPE AWAY FROM CURB.

4. INSTALL ASPHALT PAVEMENT PER GEOTECHNICAL REPORT. RECOMMENDATIONS &

5. INSTALL CONCRETE PAVEMENT PER GEOTECHNICAL REPORT. RECOMMENDATIONS &

6. INSTALL 4" WIDE PAINT STRIPES AT 45° ANGLE TO PARKING STRIPES OR DRIVEWAY, SPACED AT 1'-6" (WHITE PAINT IN PARKING LOT, BLUE PAINT IN ACCESSIBLE

7. PAINTED INTERNATIONAL WHEELCHAIR SYMBOL (BLUE) PER ADA STANDARDS. MIN. TWO COATS. INDICATE VAN ONLY SPACE AS SHOWN ON PLAN.

8. INSTALL H/C SIGNAGE PER DETAIL, SHEET C102. ADD VAN ACCESSIBLE SIGNAGE WHERE NOTED. H/C SIGN MUST INCLUDE LANGUAGE PER 66-7-352.4C NMSA 1978 "VIOLATORS ARE SUBJECT TO A FINE AND/OR TOWING." REF DETAIL ON SHEET

9. INSTALL 4" WIDE PAINT STRIPES (WHITE) FOR ALL PARKING SPACES. MIN. TWO

10. PAINT WORDS 'NO PARKING', 'VAN' & 'EV' WITH LETTERS AT LEAST ONE FOOT HIGH

12. INSTALL PRE-CAST WHEEL STOP PER DETAIL, SHEET C-102.

13. INSTALL PARALLEL CURB RAMP PER COA STD DWGS 2440-2446. TRUNCATED DOMES

15. MOTORCYCLE PARKING; 2 SPACES. ADD PAINT LABEL (2 COATS) AND SIGNAGE

16. INSTALL STAMPED CONCRETE CROSSWALK PER DETAIL, SHEET C102.

17. INSTALL ELECTRIC VEHICLE CHARGING STATIONS. REF. ARCHITECTURAL PLANS FOR

20. COMMUNITY GARDEN AREA. REF. LANDSCAPE PLANS FOR DETAILS.

23. INSTALL 3' WIDE VALLEY GUTTER. DETAIL ON SHEET C102.

24. INSTALL 3' WIDE CONCRETE FLUME. DETAIL ON SHEET C102.


25. INSTALL 24" WIDE SIDEWALK CULVERT PER COA STD DWG 2236.

26. CLEAR SIGHT TRIANGLES (15'x590' LEFT, 15'x480' RIGHT). LANDSCAPING, FENCING, AND SIGNAGE WILL NOT INTERFERE WITH CLEAR SIGHT REQUIREMENTS. THEREFORE; SIGNS, WALLS, TREES, AND SHRUBBERY BETWEEN 3 AND 8 FEET TALL (AS MEASURED FROM THE GUTTER PAN) WILL NOT BE ACCEPTABLE IN THE CLEAR

27. GARDEN WASTE & COMPOST AREA. REF. LANDSCAPE PLANS FOR DETAILS.

28. INSTALL ADD'L 4.5' WIDE CONCRETE SIDEWALK ADJACENT TO EXISTING SIDEWALK FOR 10' TOTAL BETWEEN EXISTING BACK OF CURB AND EDGE OF NEW SIDEWALK. SIDEWALK CROSS SLOPE SHALL BE 2% MAX TO MATCH EXISTING. SIDEWALK PER COA STD DWG 2430. INSTALL DOWELS PER CONCRETE SIDEWALK BUTT JOINT DETAIL, SHEET C102. TOOLED JOINTS SHALL MATCH EXISTING.

29. ADJUST EXISTING UTILITY BOXES TO GRADE IN NEW SIDEWALK AS MAY BE

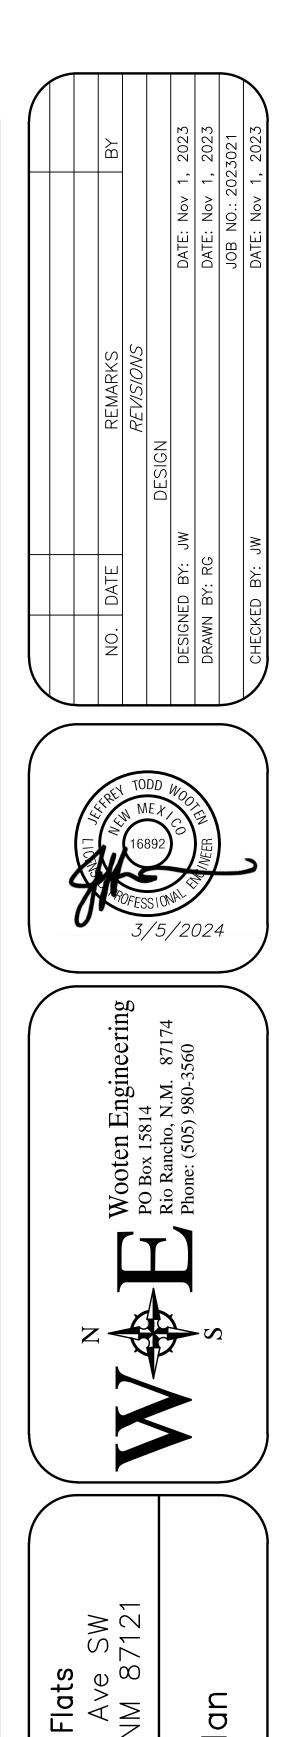

₹Σ

<u>a</u>

e, tr

eni eni

qu qu

ΟŤ


bu bu

Ζ


σ

Ð

- $\overline{0}$

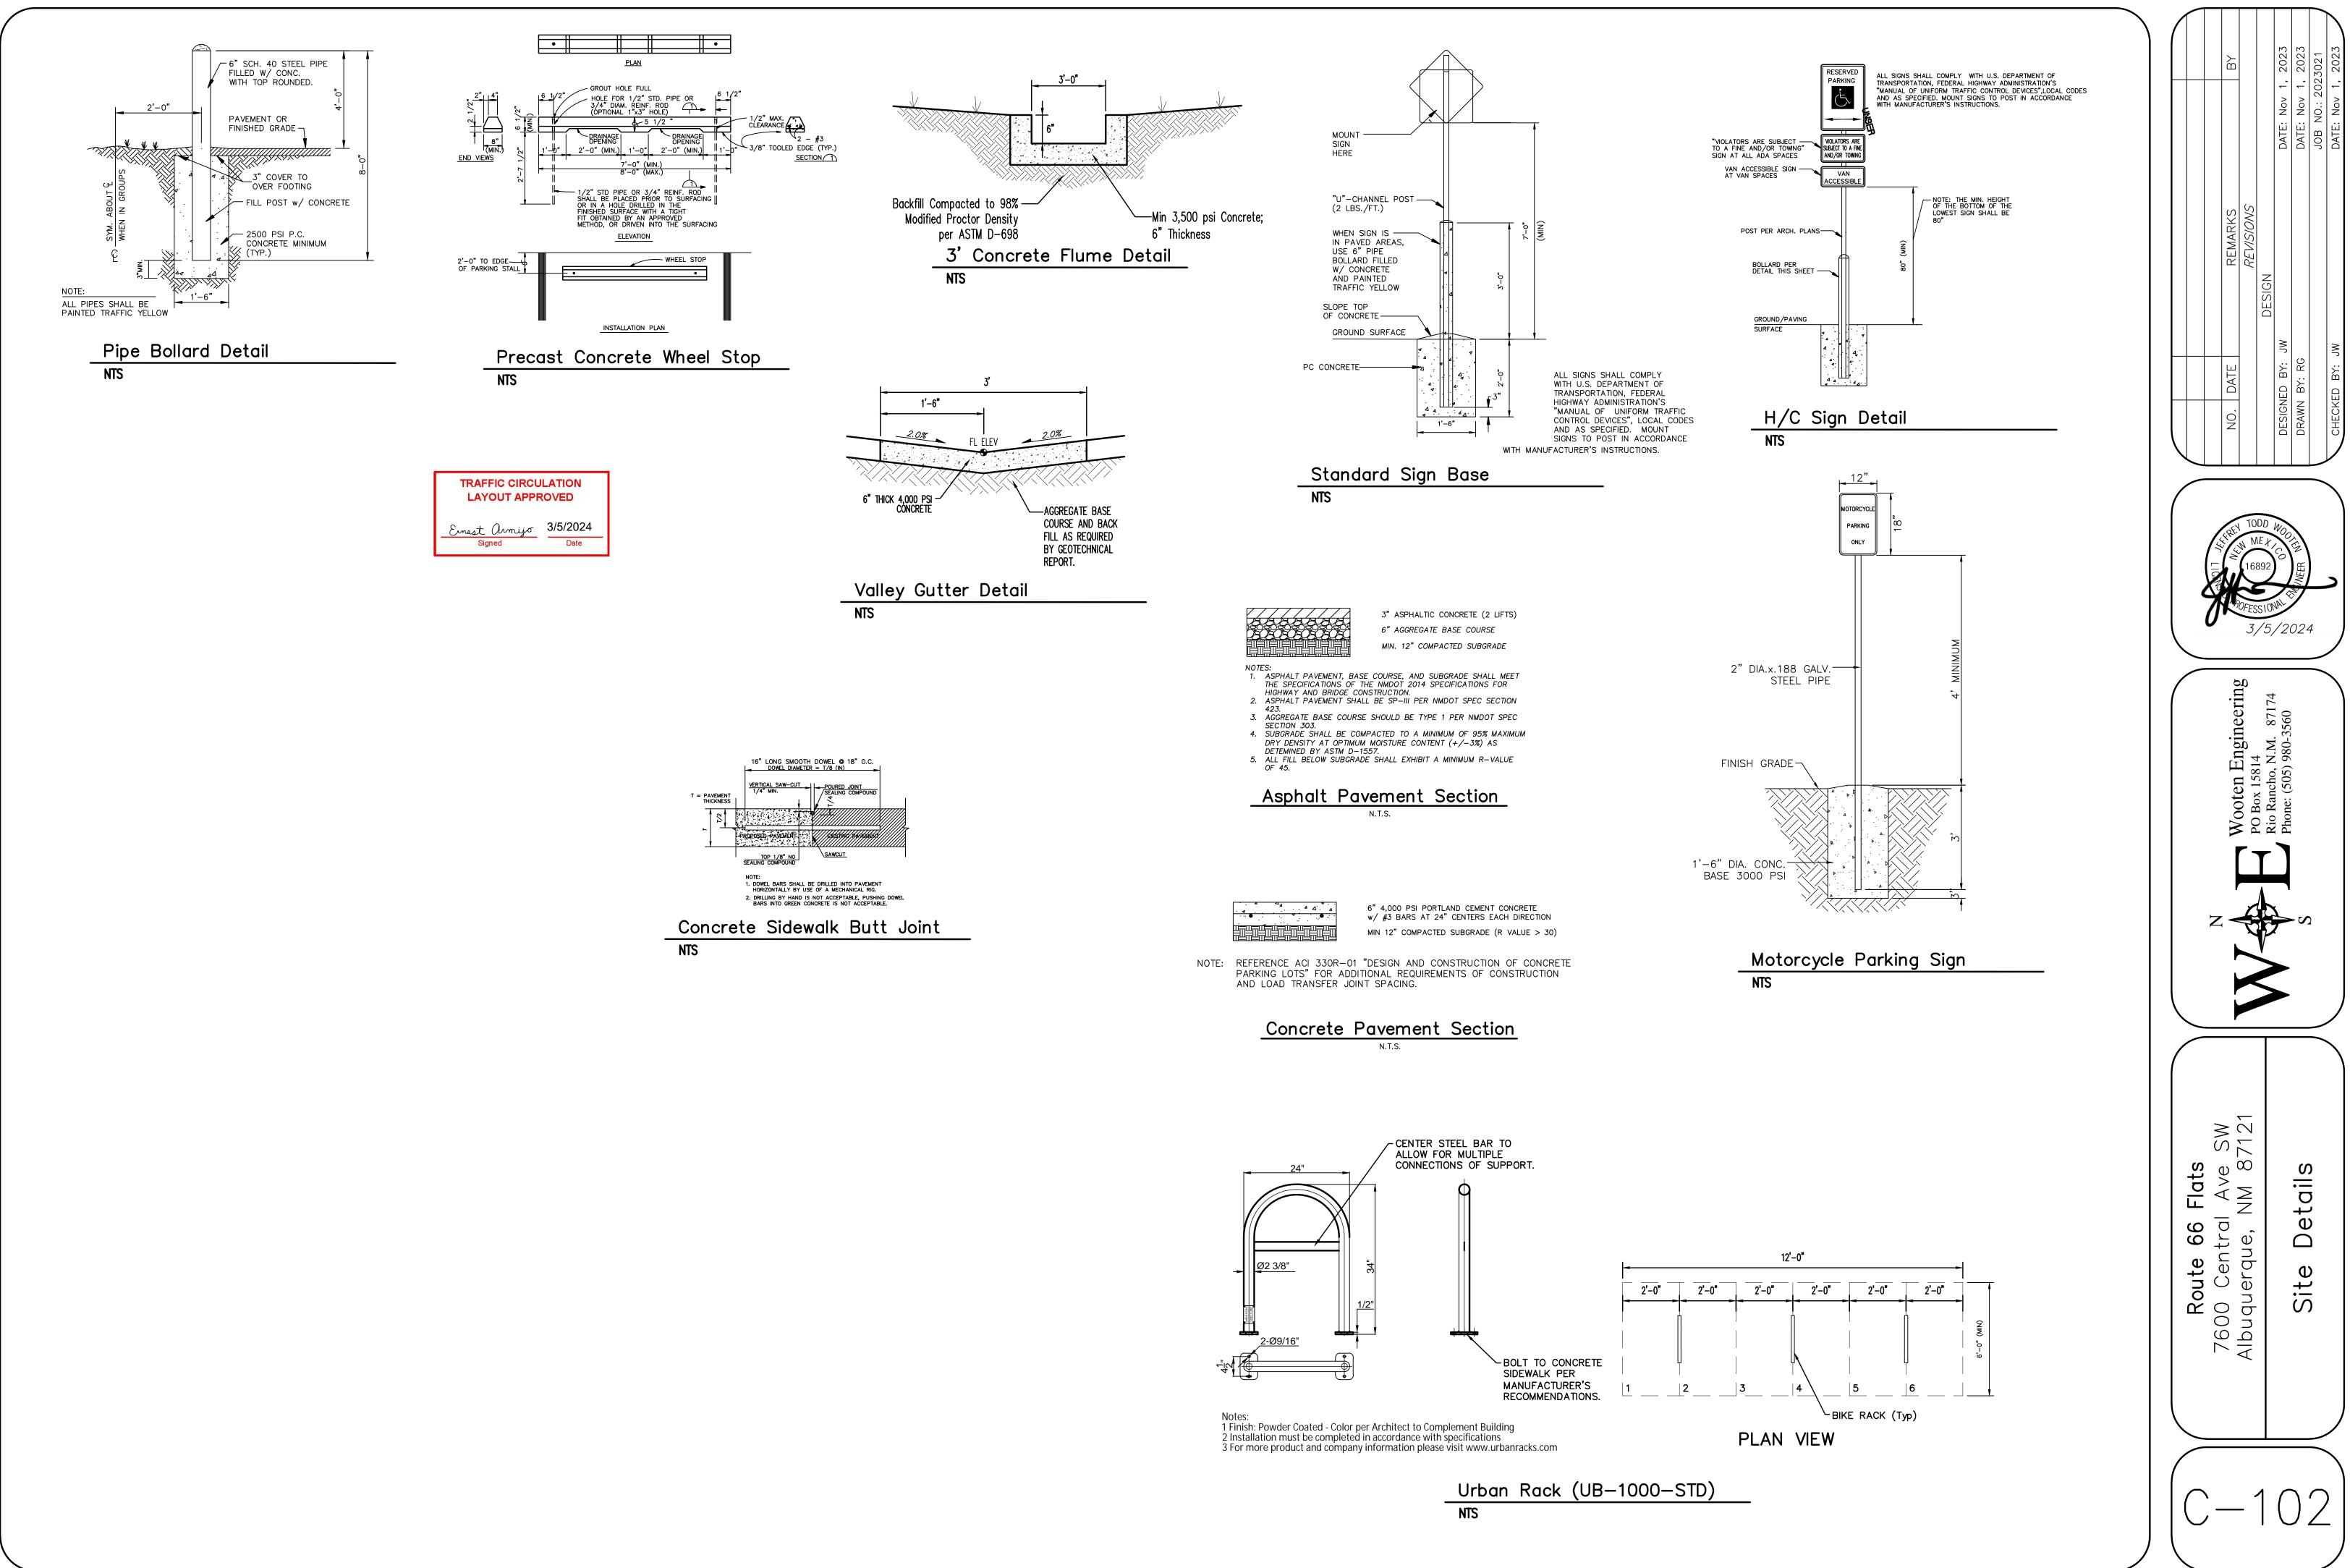



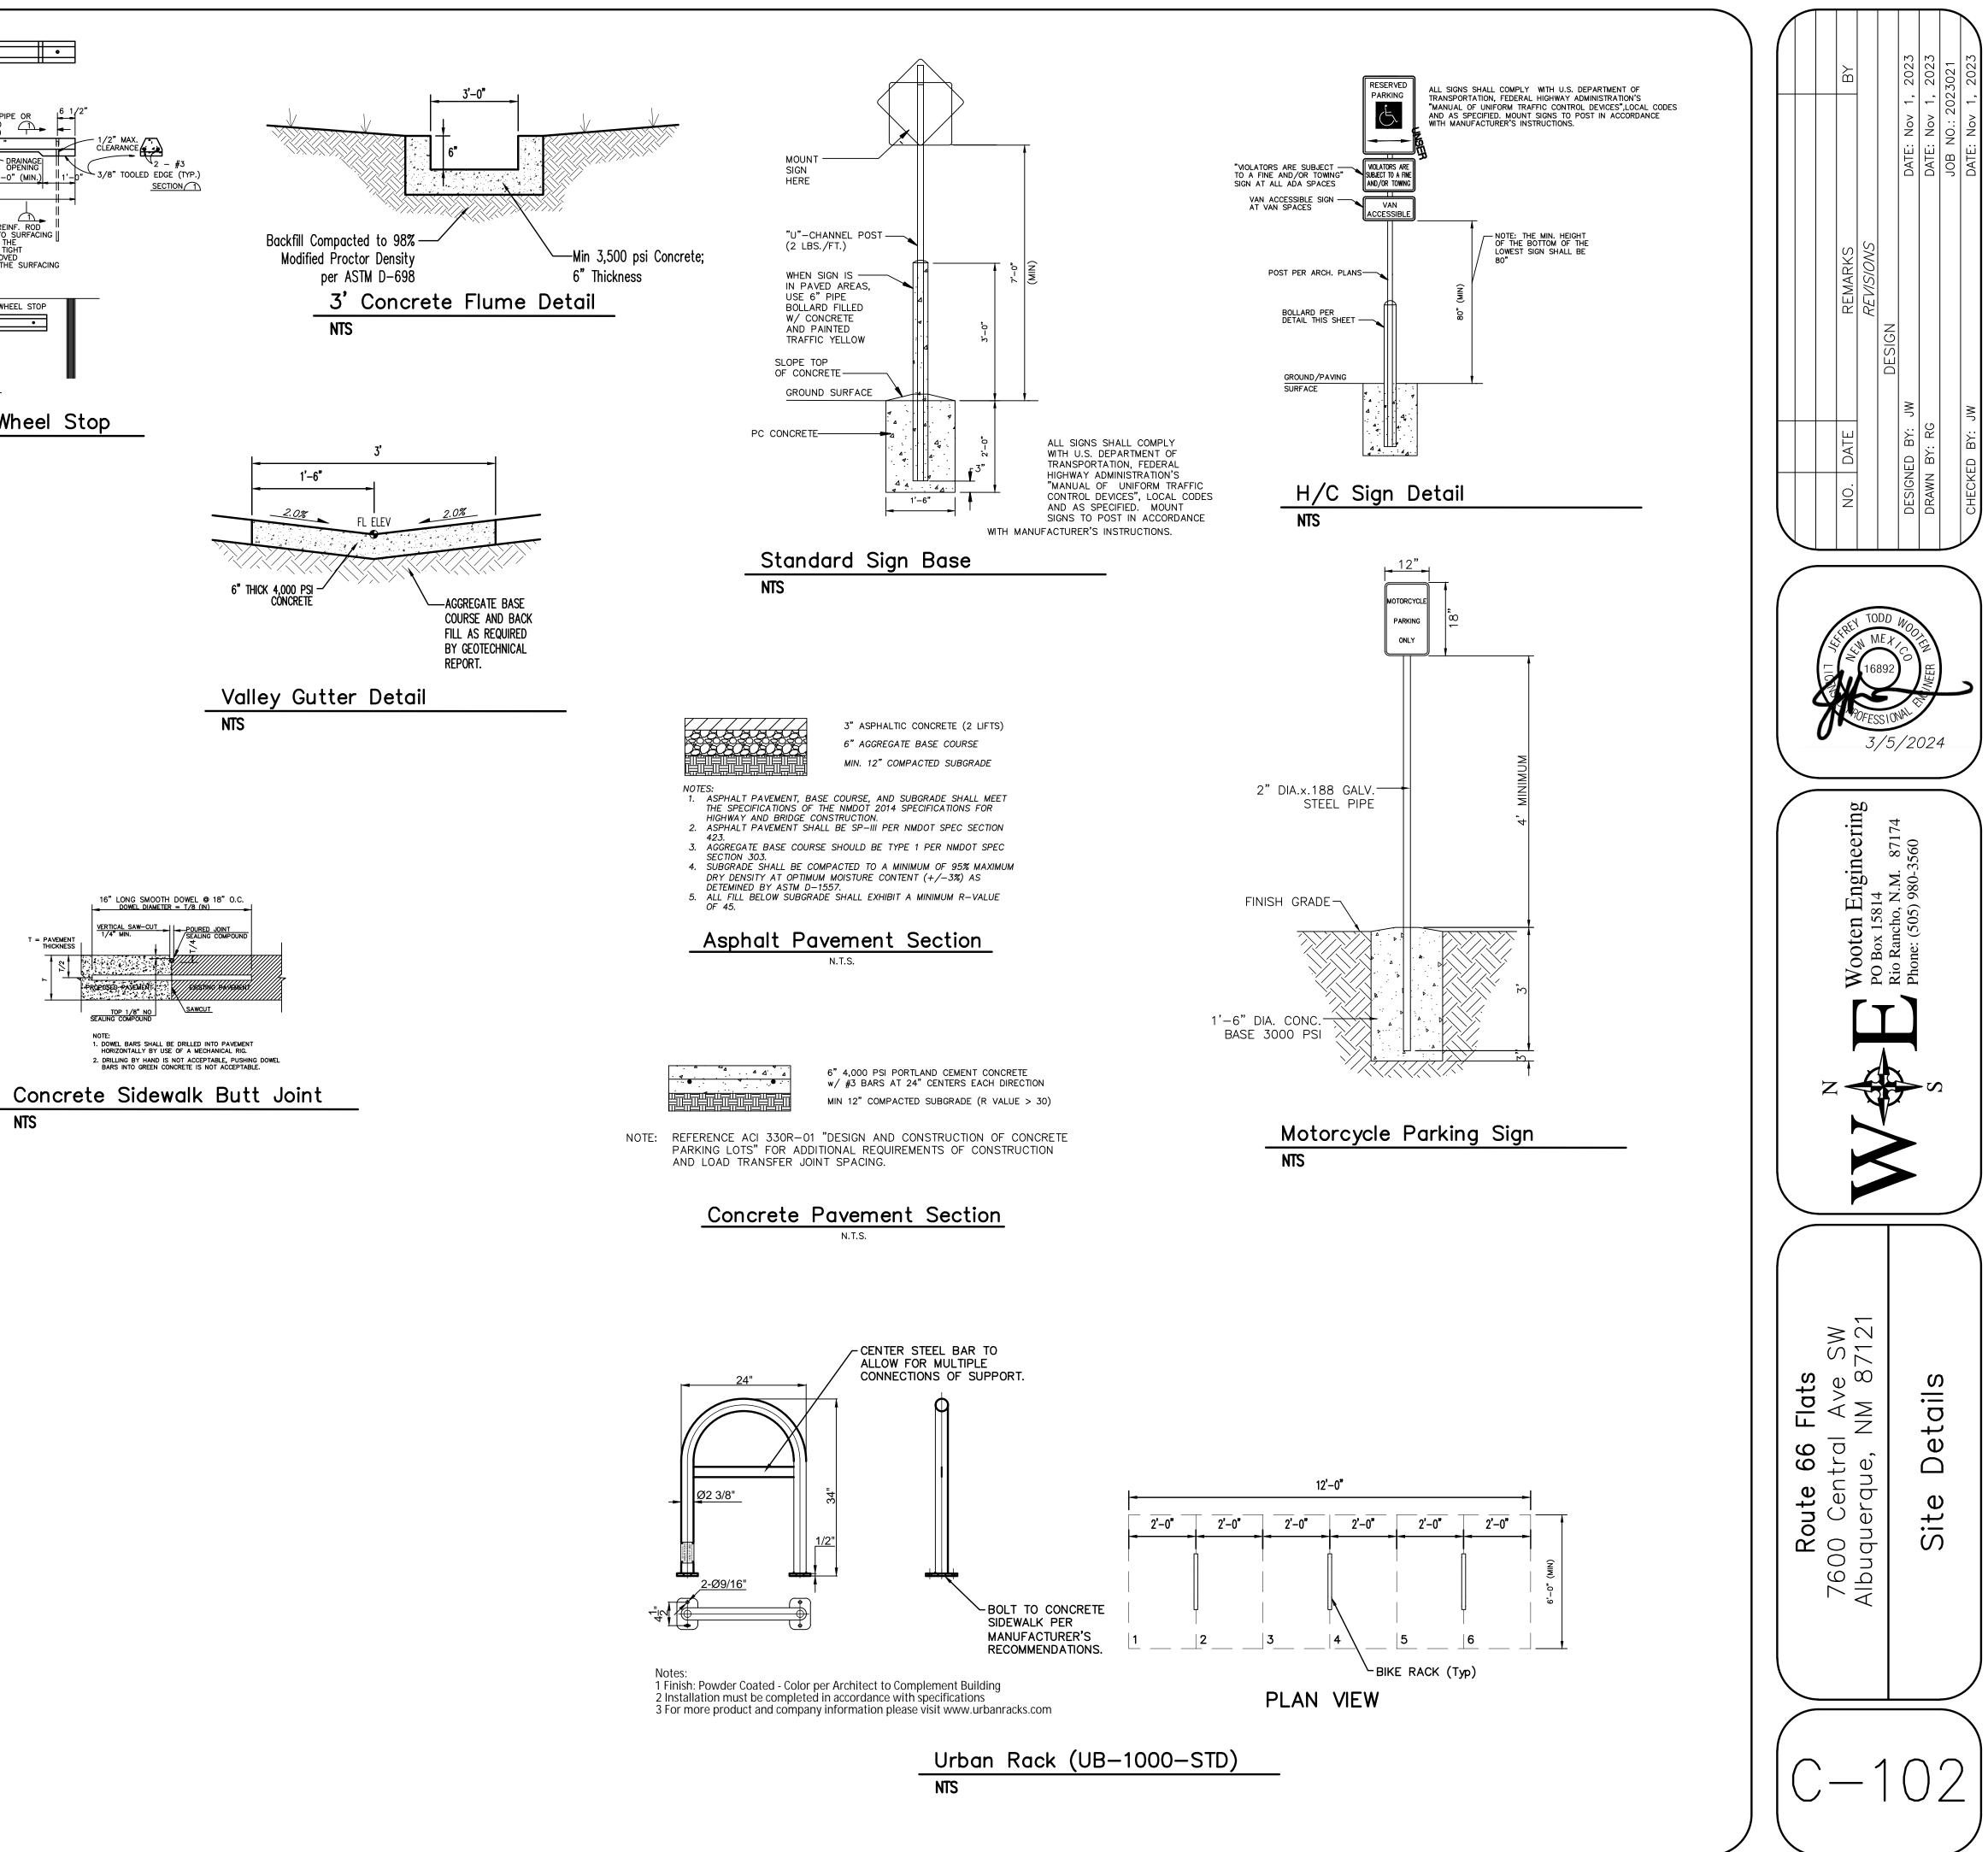

Jrban	Rack	(OR-
ITS		