




Inspections Plus, Inc.

Engineer Stamp



1/9/17

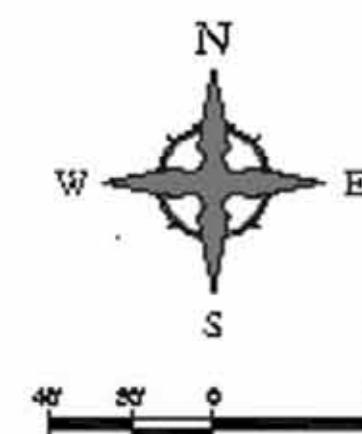

VICINITY MAP - Zone Atlas K-12

Remove structure and stabilize with crushed asphalt

- Note:
- When doing work in the City ROW (sidewalk, storm drain, drive pads) avoid dirt from getting into the street. If dirt is present in the street, the street should be swept every few days or the same day if rain is imminent.
 - If stock piling dirt in the street and rain is forecasted, place wattles along the down slope side of the pile.

Legend

Erosion Sediment Control Plan

- Project Perimeter & Disturbed Area
- Silt Fence
- Pre Flow & Post Flow
- Outfall
- Posting Sign
- Staging Area
- Stabilized Construction Entrance
- Trash Receptacle
- Chemical Toilet
- Concrete Washout
- Sediment Barrier / Saw Cut or Curb & Gutter
- Stock Pile Area
- Retention Pond
- Wattle
- Proposed inlet with protection
- Existing inlet with protection
- Mulch Socks

West Central Plaza Addition

Receiving Waters and Critical Habitat: Rio Grande is located 0.36 miles to the NorthEast.

Impairments: E. coli, Dissolved Oxygen, PCBs in Fish Tissue, Water Temperature

Grade: Before and After 0.5%

