


- GENERAL NOTES**
1. WHEN DOING WORK IN THE CITY ROW (SIDEWALKS, DRIVE PADS, UTILITIES) PREVENT DIRT FROM GETTING INTO THE STREET. IF DIRT IS PRESENT IN THE STREET, THE STREET SHOULD BE SWEEPED EVERY FEW DAYS OR THE SAME DAY IF RAIN IS IMMINENT. ANY TEMPORARY DIRT PILE SHALL BE PLACED ON THE UPSTREAM SIDE OF THE TRENCH.
  2. ALL SOIL DISTURBED DURING UTILITY TRENCHING SHOULD BE PLACED ON THE UPSTREAM SIDE OF THE STREET CUT AND THE AREA SWEEPED AFTER THE WORK IS COMPLETED.
  3. HAY BALES ARE NOT TO BE USED.
  4. SAND BAGS OR GRAVEL BAGS ARE NOT TO BE USED.
  5. CONTRACTOR TO CONTACT ONE-CALL AT (505) 260-1990, PRIOR TO BEGINNING CONSTRUCTION.
  6. HOME DEPOT SPECIFICATIONS SHALL BE USED FOR ANY WORK ADJACENT TO CARVE OUT PARCEL.
  7. MAXIMUM POLE SPACING FOR SILT FENCE SHALL BE 10 FEET EXCEPT AT OUTFALL LOCATIONS WHERE MAXIMUM POLE SPACING SHALL BE 6 FEET.

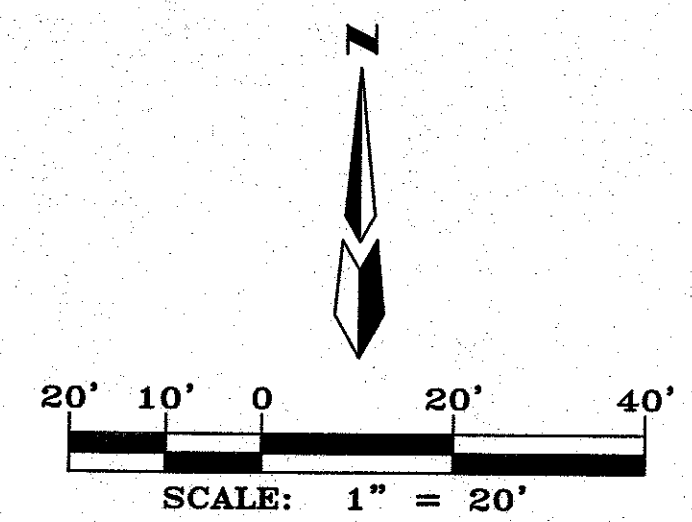

		MARK GOODWIN & ASSOCIATES, P.A. CONSULTING ENGINEERS P.O. BOX 90606 ALBUQUERQUE, NEW MEXICO 87199 OFFICE (505) 828-2200, FAX (505) 797-9539	
<b>CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT</b>			
TITLE: <b>TACO CABANA @ COTTONWOOD EROSION PLAN</b>			
DESIGN REVIEW COMMITTEE	CITY ENGINEER APPROVAL	MO./DAY/YR.	MO./DAY/YR.
LAST DESIGN UPDATE			
CITY PROJECT NO.		ZONE MAP NO. <b>B-13-Z</b>	SHEET <b>5 of 6</b>

CONTRACTOR		AS BUILT INFORMATION	
WORK ORDER NO.	DATE	CONTRACTOR	DATE
INSPECTOR'S ACCEPTANCE BY	DATE	INSPECTOR'S ACCEPTANCE BY	DATE
VERIFICATION BY	DATE	VERIFICATION BY	DATE
DRAWINGS BY	DATE	DRAWINGS BY	DATE
MICRO-FILM INFORMATION		MICRO-FILM INFORMATION	
RECORDED BY	DATE	RECORDED BY	DATE
NO.		NO.	

CONTRACTOR: **Albany Corp stamped 10-813 2004**  
From the intersection of Coors Blvd By-Pass & Ellison Drive NW travel SE 0.4 miles to the station on the left. The station is in the median, 2 feet east of the west curb.  
Geographic Position in feet (NAD83)  
N.M. State Plane Coordinates (Central Zone)  
N=1528304.616, E=1517724.365  
Elevation in feet (NAVD83) = 5074.478  
Doc-00141227