CITY OF ALBUQUERQUE



Timothy M. Keller, Mayor

February 21, 2018

Genny Donart, P.E. Isaacson & Arfman, P.A. 128 Monroe St. N.E Albuquerque, NM, 87108

RE: Broadstone Northpoint Townhomes

9100 San Mateo Blvd NE - Buildings Numbers 3, 6, 21 & 22

Request for Permanent C.O. – Accepted Engineer's Certification Dated 02/13/18

Hydrology File: B18D001C

Dear Ms. Donart:

PO Box 1293

Based on the Certification received 02/20/18 and site visit on 02/20/18, the site is acceptable for a Permanent Certificate of Occupancy by Hydrology for Buildings Numbers 3, 6, 21 & 22.

Albuquerque

If you have any questions, please contact me at 924-3995 or rbrissette@cabq.gov.

NM 87103

Sincerely,

www.cabq.gov

Renée C. Brissette, P.E. CFM Senior Engineer, Hydrology

Renée C Brissette

Planning Department



City of Albuquerque


Bldg 3 2016-00028 Bldg 6 2016-00025 Bldg 21 2016-00604 Bldg 22 2016-00603

Planning Department

Development & Building Services Division

DRAINAGE AND TRANSPORTATION INFORMATION SHEET (REV 09/2015)

Project Title:		Building Permit #:	City Drainage #:
DRB#:	EPC#:		Work Order#:
Legal Description:			7
City Address:			
Engineering Firm:			Contact:
Address:			
Phone#:	Fax#:		E-mail:
Owner:			Contact:
Address:			
Phone#:	Fax#:		E-mail:
Architect:			Contact:
Address:			
Phone#:	Fax#:		E-mail:
Other Contact:			Contact:
Address:			
Phone#:	Fax#:		E-mail:
DEPARTMENT: X HYDROLOGY/ DRAINAG TRAFFIC/ TRANSPORTAT MS4/ EROSION & SEDIME	TION	BUILDING PE	APPROVAL/ACCEPTANCE SOUGHT: ERMIT APPROVAL E OF OCCUPANCY Bldgs 3, 6, 21, & 22
TYPE OF SUBMITTAL:		DDEL IMINIA D	V DI AT ADDDOVAL
X ENGINEER ARCHITECT C	ERTIFICATION		Y PLAT APPROVAL OR SUB'D APPROVAL
			OR BLDG. PERMIT APPROVAL
CONCEPTUAL G & D PLA	N	FINAL PLAT	
GRADING PLAN		SIA/ RELEAS	E OF FINANCIAL GUARANTEE
DRAINAGE MASTER PLAI	N	FOUNDATION	N PERMIT APPROVAL
DRAINAGE REPORT		GRADING PE	ERMIT APPROVAL
CLOMR/LOMR		SO-19 APPRO	OVAL
TRACEIC CIRCLII ATION I	AVOLIT (TOL)	PAVING PER	
TRAFFIC CIRCULATION I			AD CERTIFICATION
TRAFFIC IMPACT STUDY		WORK ORDER	
EDUCION & SEDIMENT CO	ONTROL TEAN (ESC)	CLOMR/LOM	R
EROSION & SEDIMENT C			
		PRE-DESIGN N	MEETING
EROSION & SEDIMENT COLUMN			MEETING CIFY)

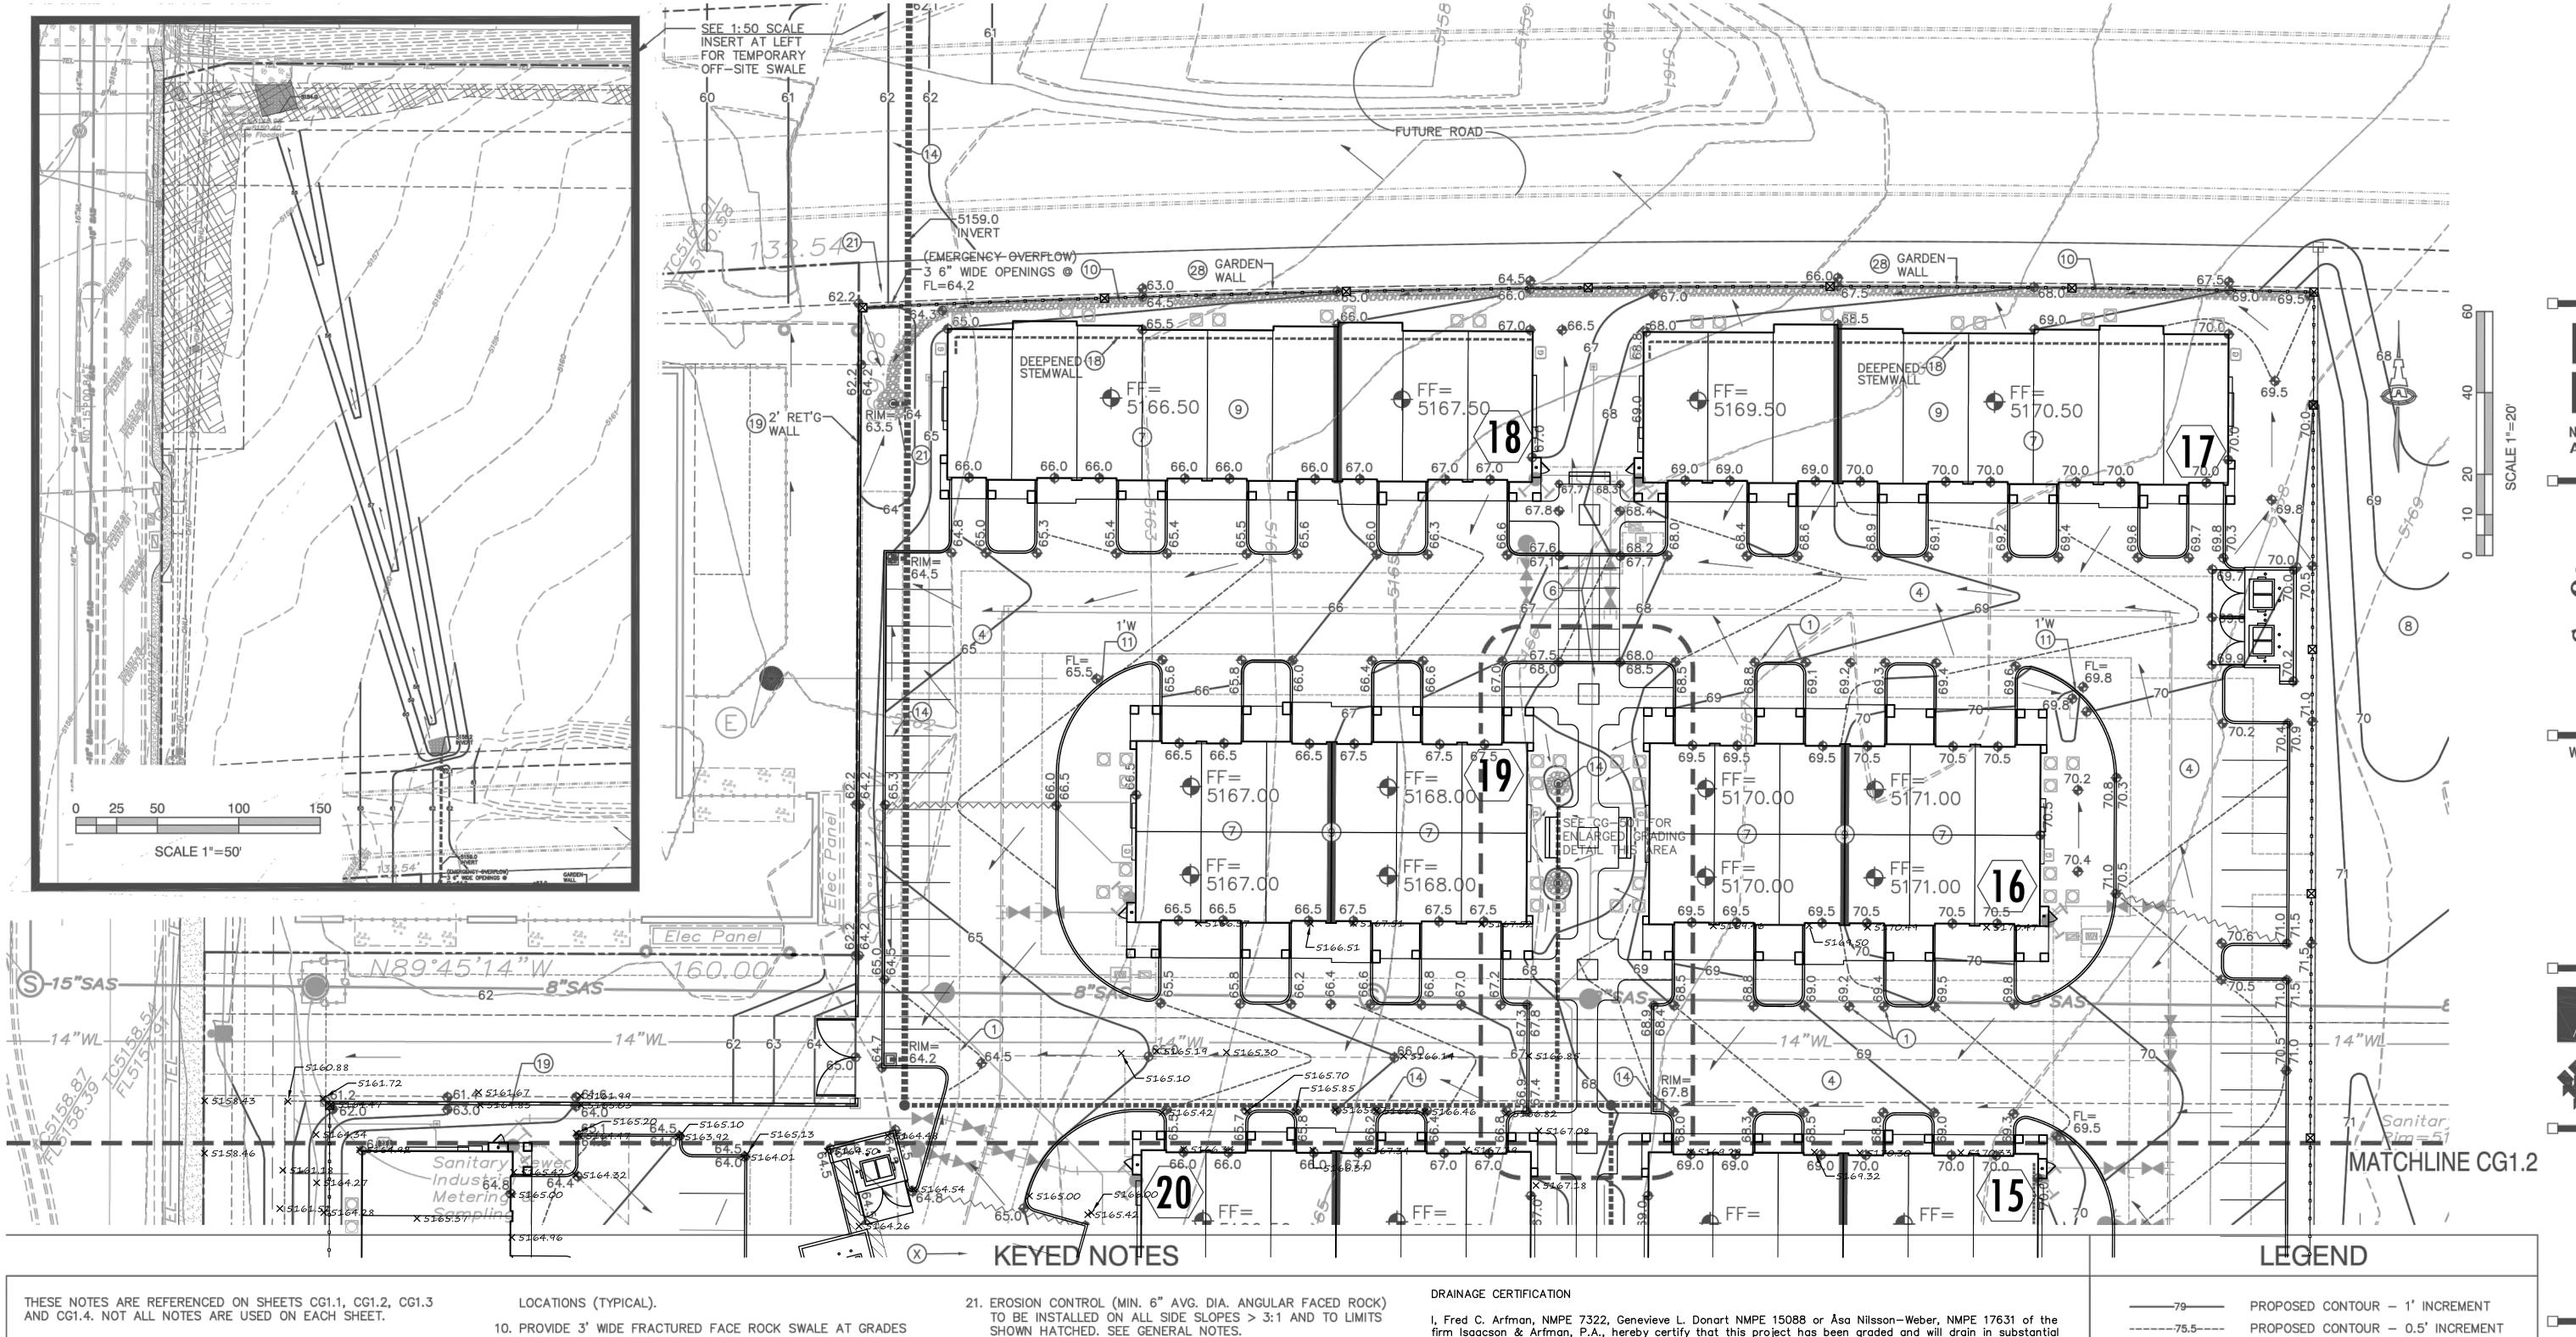

- SPOT ELEVATIONS WITHIN GUTTER AREA REPRESENT FLOWLINE UNLESS NOTED. ADD 0.5' TYPICAL FOR TOP OF CURB / TOP OF ADJACENT WALK ELEVATIONS.
- 2. SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION WITHIN R.O.W. INCLUDING NEW ACCESS DRIVES WITH CONCRETE VALLEY GUTTER, HANDICAP RAMPS, PUBLIC SIDEWALKS, ETC. GRADES SHOWN FOR INFORMATION ONLY.
- SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION OF PUBLIC STORM SEWER SYSTEM WITHIN PUBLIC DRAINAGE EASEMENT THIS AREA.
- 4. CONSTRUCT PAVING, CURBS, WALKS AT ELEVATIONS SHOWN. SEE PAVING PLAN, PAVING DETAILS AND ARCHITECTURAL SITE DETAILS FOR ADDITIONAL INFORMATION. NOTE THAT PAVEMENT SLOPES AND CROSS-SLOPES VARY THROUGHOUT TO ACHIEVE GRADES NECESSARY FOR ADA COMPLIANT PEDESTRIAN ACCESS; POSITIVE DRAINAGE; STREET STORMWATER CAPACITIES; PIPE COVERAGE; ETC. CONSTRUCT TO ELEVATIONS SHOWN.
- 5. SLOPES WITHIN HANDICAP PARKING AREAS TO BE ADA COMPLIANT. MAX. SLOPE = 2% IN ANY DIRECTION.
- 6. CONSTRUCT ADA COMPLAINT ACCESS RAMP. 1:12 MAX. SLOPE, 2% MAX. CROSS-SLOPE.
- 7. F.F. ELEVATION WITHIN UNITS WITH GARAGES REFERENCES TOP OF CONCRETE STEP AT BACK OF GARAGE. GRADE AT GARAGE DOOR SHOWN 6" BELOW F.F. TO ACCOMMODATE 4" STEP AND PAD SLOPE. TYPICAL.
- 8. OFF-SITE GRADING THIS AREA TO PROVIDE FOR TEMPORARY DESILTATION PONDS AND BERMS AS REQUIRED TO ROUTE OFF-SITE FLOW AROUND DEVELOPMENT.
- 9. BUILDING ROOF DISCHARGE TO BE RELEASED TO ALL SIDES. PROVIDE CONCRETE SPLASH BLOCK (O.E) AT DOWNSPOUT


- SHOWN. SEE CG5.1 FOR ADDITIONAL INFORMATION.
- 11. PROVIDE OPENING IN CURB TO PASS FLOW (SEE PLAN FOR BOTTOM WIDTH). INSTALL 3'X3' ROCK EROSION PROTECTION (DEPRESS TO PREVENT BLOCKING OF FLOW) WITHIN LANDSCAPE AREA. SEE DETAIL SHEET CG5.1.
- 12. CONSTRUCT 18" WIDE (BOTTOM WIDTH) COVERED SIDEWALK CULVERT PER C.O.A. STD. DWG. 2236. SEE DETAIL SHEET CG5.1 FOR ADDITIONAL CONSTRUCTION INFORMATION.
- 13. INSTALL TWO 4" DIA. PVC PIPE DRAINS @ 2% SLOPE THROUGH SIDEWALK, GRADE LANDSCAPE TO DIRECT FLOW TO OPENING. SEE DETAIL SHEET CG5.1.
- 14. CONSTRUCT PRIVATE STORM DRAIN SYSTEM. SEE SHEET CG5.2 AND CG5.3 FOR SIZES / SLOPES / INLET INFORMATION / MATERIALS.
- 15. NOT USED.
- 16. POOL AREA GRADES SHOWN FOR GENERAL INFORMATION ONLY. POOL CONTRACTOR TO PROVIDE FINAL DESIGN GRADES / DECK DRAINS ETC.
- 17. CONSTRUCT RETAINING STEMWALL TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 18. CONSTRUCT DEEPENED STEMWALL THIS AREA TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 19. CONSTRUCT SITE RETAINING WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA. SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS. STRUCTURAL / WEEPHOLE DESIGN BY
- 20. CONSTRUCT 6" STEP(S) PER PLAN. SEE ARCHITECTURAL.

- 22. COORDINATE LANDSCAPING FEATURE GRADES I.E. MOW CURBS, PLAYFIELD, PLAYGROUND, PUTTING GREEN, ETC. WITH LANDSCAPE ARCHITECT WHILE MAINTAINING CLEAR DRAINAGE PATHS SHOWN.
- 23. CONSTRUCT CONCRETE ALLEY GUTTER AT FLOWLINE ELEVATIONS SHOWN. SEE PAVING PLAN.
- 24. NOT USED
- 25. CONSTRUCT ESTATE CURB THIS AREA TO PASS SHEETFLOW TO LANDSCAPING AND STORM DRAIN INLETS. SEE PAVING PLAN.
- 26. CONSTRUCT STORM DRAIN OUTLET WITH END SECTION. SEE CG5.1 FOR DETAIL.
- 27. CONSTRUCT STORM DRAIN PRIOR TO RETAINING WALL PLACEMENT.
- 28. CONSTRUCT SITE GARDEN WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA (MAX. 1.5' RETAINING). SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS.

firm Isaacson & Arfman, P.A., hereby certify that this project has been graded and will drain in substantial compliance with and in accordance with the design intent of the approved plan dated August 24, 2016; Grading And Drainage Plan CG1.1—CG1.4. The record information edited onto the original design document has been obtained by Russ P. Hugg, NMPS 9750, of the firm Surv-Tek, Inc. I further certify that I or someone under my direct supervision have personally visited the project site at various times as documented below and have determined by visual inspection that the survey data provided is representative of actual site conditions and is true and correct to the best of my knowledge and belief. This certification is submitted in support of a request for Permanent Certification of Occupancy for those individual buildings listed below.

The record information presented hereon is not necessarily complete and intended only to verify substantial compliance of the grading and drainage aspects of this project. Those relying on this record document are advised to obtain independent verification of its accuracy before using it for any other purpose.



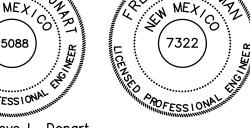

Genevieve L. Donart

Fred C. Arfman NMPE 7322

PROPOSED SPOT ELEVATION

FINISH FLOOR ELEVATION

FL=

ROCK EROSION CONTROL PROPOSED STORM DRAIN (SEE CG-501) FLOWLINE ELEVATION

INVERT ELEVATION RETAINING WALL

FLOW ARROW

GRADE BREAK / SLOPE TRANSITION *======= DEEPENED/RETAINING BUILDING STEMWALL

FINISH FLOOR GRADE TRANSITION

BUILDING NUMBER

Albuquerque, New Mexico



World H Q @ ORB Arch.com



Contractor must verify all dimensions at project before proceeding with this work. Do not reproduce these drawings and specifications without the expressed written permission of the Architect. The drawings and specifications are instruments of service and shall remain the property of the Architect whether the project for which they are made is executed or not. These drawings and specifications shall not be used by anyone on any other projects, for additions to this project, or for completion of this project by others except by the expressed written permission of the Architect.

© ORB Architecture, LLC 2015

R	E	V	5	S	O	Ν	S
\wedge							
$\overline{\wedge}$							
$\overline{\wedge}$							
$\overline{\wedge}$							
$\overline{\wedge}$							
$\overline{\wedge}$							

SECOND CITY SUBMITTAL

DATE: AUGUST 24, 2016

GRADING AND DRAINAGE PLAN - 1 OF 4

HASE / UILDING NO	CERTIFICATION	DATE	PHASE / BUILDING NO	CERTIFICATION	DATE	PHASE / BUILDING NO	CERTIFICATION	DATE	PHASE / BUILDING NO	CERTIFICATION	DATE
H 1/ LDGS 1 & 2	Genesiave DD	10/24/17									
PH 1/ BLDGS 4,20 624	General S	11/21/1									
H 1/ BLDGS 3, 6, 21 222	Danasticka L. Da	02/13/18	· .								

Albuquerque, New Mexico

of Rich

World HQ@ORBArch.com





THESE NOTES ARE REFERENCED ON SHEETS CG1.1, CG1.2, CG1.3 AND CG1.4. NOT ALL NOTES ARE USED ON EACH SHEET.

- SPOT ELEVATIONS WITHIN GUTTER AREA REPRESENT FLOWLINE UNLESS NOTED. ADD 0.5' TYPICAL FOR TOP OF CURB / TOP OF ADJACENT WALK ELEVATIONS.
- 2. SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION WITHIN R.O.W. INCLUDING NEW ACCESS DRIVES WITH CONCRETE VALLEY GUTTER, HANDICAP RAMPS, PUBLIC SIDEWALKS, ETC. GRADES SHOWN FOR INFORMATION ONLY.
- SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION OF PUBLIC STORM SEWER SYSTEM WITHIN PUBLIC DRAINAGE EASEMENT THIS AREA.
- 4. CONSTRUCT PAVING, CURBS, WALKS AT ELEVATIONS SHOWN. SEE PAVING PLAN, PAVING DETAILS AND ARCHITECTURAL SITE DETAILS FOR ADDITIONAL INFORMATION. NOTE THAT PAVEMENT SLOPES AND CROSS-SLOPES VARY THROUGHOUT TO ACHIEVE GRADES NECESSARY FOR ADA COMPLIANT PEDESTRIAN ACCESS; POSITIVE DRAINAGE; STREET STORMWATER CAPACITIES; PIPE COVERAGE; ETC. CONSTRUCT TO ELEVATIONS SHOWN.
- 5. SLOPES WITHIN HANDICAP PARKING AREAS TO BE ADA COMPLIANT. MAX. SLOPE = 2% IN ANY DIRECTION.
- 6. CONSTRUCT ADA COMPLAINT ACCESS RAMP. 1:12 MAX. SLOPE, 2% MAX. CROSS-SLOPE.
- 7. F.F. ELEVATION WITHIN UNITS WITH GARAGES REFERENCES TOP OF CONCRETE STEP AT BACK OF GARAGE. GRADE AT GARAGE DOOR SHOWN 6" BELOW F.F. TO ACCOMMODATE 4" STEP AND PAD SLOPE, TYPICAL.
- 8. OFF-SITE GRADING THIS AREA TO PROVIDE FOR TEMPORARY DESILTATION PONDS AND BERMS AS REQUIRED TO ROUTE OFF-SITE FLOW AROUND DEVELOPMENT.
- 9. BUILDING ROOF DISCHARGE TO BE RELEASED TO ALL SIDES. PROVIDE CONCRETE SPLASH BLOCK (O.E) AT DOWNSPOUT

- LOCATIONS (TYPICAL).
- 10. PROVIDE 3' WIDE FRACTURED FACE ROCK SWALE AT GRADES SHOWN. SEE CG5.1 FOR ADDITIONAL INFORMATION..
- 11. PROVIDE OPENING IN CURB TO PASS FLOW (SEE PLAN FOR BOTTOM WIDTH). INSTALL 3'X3' ROCK EROSION PROTECTION (DEPRESS TO PREVENT BLOCKING OF FLOW) WITHIN LANDSCAPE AREA. SEE DETAIL SHEET CG5.1.
- 12. CONSTRUCT 18" WIDE (BOTTOM WIDTH) COVERED SIDEWALK CULVERT PER C.O.A. STD. DWG. 2236. SEE DETAIL SHEET CG5.1 FOR ADDITIONAL CONSTRUCTION INFORMATION.
- 13. INSTALL TWO 4" DIA. PVC PIPE DRAINS @ 2% SLOPE THROUGH SIDEWALK, GRADE LANDSCAPE TO DIRECT FLOW TO OPENING. SEE DETAIL SHEET CG5.1.
- 14. CONSTRUCT PRIVATE STORM DRAIN SYSTEM. SEE SHEET CG5.2 AND CG5.3 FOR SIZES / SLOPES / INLET INFORMATION / MATERIALS.
- 15. NOT USED.
- 16. POOL AREA GRADES SHOWN FOR GENERAL INFORMATION ONLY. POOL CONTRACTOR TO PROVIDE FINAL DESIGN GRADES / DECK DRAINS ETC.
- 17. CONSTRUCT RETAINING STEMWALL TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 18. CONSTRUCT DEEPENED STEMWALL THIS AREA TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 19. CONSTRUCT SITE RETAINING WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA. SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS. STRUCTURAL / WEEPHOLE DESIGN BY
- 20. CONSTRUCT 6" STEP(S) PER PLAN. SEE ARCHITECTURAL.

- 21. EROSION CONTROL (MIN. 6" AVG. DIA. ANGULAR FACED ROCK) TO BE INSTALLED ON ALL SIDE SLOPES > 3:1 AND TO LIMITS SHOWN HATCHED. SEE GENERAL NOTES.
- 22. COORDINATE LANDSCAPING FEATURE GRADES I.E. MOW CURBS, PLAYFIELD, PLAYGROUND, PUTTING GREEN, ETC. WITH LANDSCAPE ARCHITECT WHILE MAINTAINING CLEAR DRAINAGE PATHS SHOWN.
- 23. CONSTRUCT CONCRETE ALLEY GUTTER AT FLOWLINE ELEVATIONS SHOWN. SEE PAVING PLAN.
- 24. NOT USED
- 25. CONSTRUCT ESTATE CURB THIS AREA TO PASS SHEETFLOW TO LANDSCAPING AND STORM DRAIN INLETS. SEE PAVING PLAN.
- 26. CONSTRUCT STORM DRAIN OUTLET WITH END SECTION. SEE CG5.1 FOR DETAIL.
- 27. CONSTRUCT STORM DRAIN PRIOR TO RETAINING WALL PLACEMENT.
- 28. CONSTRUCT SITE GARDEN WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA (MAX. 1.5' RETAINING). SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS.

PROPOSED CONTOUR - 1' INCREMENT PROPOSED CONTOUR - 0.5' INCREMENT

PROPOSED SPOT ELEVATION FLOW ARROW

FINISH FLOOR ELEVATION ROCK EROSION CONTROL

PROPOSED STORM DRAIN (SEE CG-501) FLOWLINE ELEVATION

INVERT ELEVATION RETAINING WALL

DEEPENED/RETAINING BUILDING STEMWALL



FL =

INV=

BUILDING NUMBER

FINISH FLOOR GRADE TRANSITION

Contractor must verify all dimensions at project before proceeding with this work. Do not reproduce these drawings and specifications without the expressed written permission of the Architect. The drawings and specifications are instruments of service and shall remain the property of the Architect whether the project for which they are made is executed or not. These drawings and specifications shall not be used by anyone on any other projects, for additions to this project, or for completion of this project by others except by the expressed written permission of the Architect.

_	© ORB Architecture, LLC 2015										
	R	E	V		S	ī	o	N	S		
	\wedge										
	$\overline{\triangle}$										

\triangle		
\wedge		
$\overline{\wedge}$		_
	SECOND CITY SUBMITTAL	

DATE: AUGUST 24, 2016

GRADING AND DRAINAGE PLAN - 2 OF 4



World HQ@ORBArch.com



RESIDENTIAL COMPANY

THESE NOTES ARE REFERENCED ON SHEETS CG1.1, CG1.2, CG1.3 AND CG1.4. NOT ALL NOTES ARE USED ON EACH SHEET.

- SPOT ELEVATIONS WITHIN GUTTER AREA REPRESENT FLOWLINE UNLESS NOTED. ADD 0.5' TYPICAL FOR TOP OF CURB / TOP OF ADJACENT WALK ELEVATIONS.
- 2. SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION WITHIN R.O.W. INCLUDING NEW ACCESS DRIVES WITH CONCRETE VALLEY GUTTER. HANDICAP RAMPS, PUBLIC SIDEWALKS, ETC. GRADES SHOWN FOR INFORMATION ONLY.
- SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION OF PUBLIC STORM SEWER SYSTEM WITHIN PUBLIC DRAINAGE EASEMENT THIS AREA.
- 4. CONSTRUCT PAVING, CURBS, WALKS AT ELEVATIONS SHOWN. SEE PAVING PLAN, PAVING DETAILS AND ARCHITECTURAL SITE DETAILS FOR ADDITIONAL INFORMATION. NOTE THAT PAVEMENT SLOPES AND CROSS-SLOPES VARY THROUGHOUT TO ACHIEVE GRADES NECESSARY FOR ADA COMPLIANT PEDESTRIAN ACCESS; POSITIVE DRAINAGE; STREET STORMWATER CAPACITIES; PIPE COVERAGE; ETC. CONSTRUCT TO ELEVATIONS SHOWN.
- 5. SLOPES WITHIN HANDICAP PARKING AREAS TO BE ADA COMPLIANT. MAX. SLOPE = 2% IN ANY DIRECTION.
- 6. CONSTRUCT ADA COMPLAINT ACCESS RAMP. 1:12 MAX. SLOPE, 2% MAX. CROSS-SLOPE.
- 7. F.F. ELEVATION WITHIN UNITS WITH GARAGES REFERENCES TOP OF CONCRETE STEP AT BACK OF GARAGE. GRADE AT GARAGE DOOR SHOWN 6" BELOW F.F. TO ACCOMMODATE 4" STEP AND PAD SLOPE. TYPICAL.
- 8. OFF-SITE GRADING THIS AREA TO PROVIDE FOR TEMPORARY DESILTATION PONDS AND BERMS AS REQUIRED TO ROUTE OFF-SITE FLOW AROUND DEVELOPMENT.
- 9. BUILDING ROOF DISCHARGE TO BE RELEASED TO ALL SIDES. PROVIDE CONCRETE SPLASH BLOCK (O.E) AT DOWNSPOUT

LOCATIONS (TYPICAL).

- 10. PROVIDE 3' WIDE FRACTURED FACE ROCK SWALE AT GRADES SHOWN. SEE CG5.1 FOR ADDITIONAL INFORMATION..
- 11. PROVIDE OPENING IN CURB TO PASS FLOW (SEE PLAN FOR BOTTOM WIDTH). INSTALL 3'X3' ROCK EROSION PROTECTION (DEPRESS TO PREVENT BLOCKING OF FLOW) WITHIN LANDSCAPE AREA. SEE DETAIL SHEET CG5.1.
- 12. CONSTRUCT 18" WIDE (BOTTOM WIDTH) COVERED SIDEWALK CULVERT PER C.O.A. STD. DWG. 2236. SEE DETAIL SHEET CG5.1 FOR ADDITIONAL CONSTRUCTION INFORMATION.
- 13. INSTALL TWO 4" DIA. PVC PIPE DRAINS @ 2% SLOPE THROUGH SIDEWALK, GRADE LANDSCAPE TO DIRECT FLOW TO OPENING. SEE DETAIL SHEET CG5.1.
- 14. CONSTRUCT PRIVATE STORM DRAIN SYSTEM. SEE SHEET CG5.2 AND CG5.3 FOR SIZES / SLOPES / INLET INFORMATION / MATERIALS.
- 15. NOT USED.
- 16. POOL AREA GRADES SHOWN FOR GENERAL INFORMATION ONLY. POOL CONTRACTOR TO PROVIDE FINAL DESIGN GRADES / DECK DRAINS ETC.
- 17. CONSTRUCT RETAINING STEMWALL TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 18. CONSTRUCT DEEPENED STEMWALL THIS AREA TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 19. CONSTRUCT SITE RETAINING WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA. SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS. STRUCTURAL / WEEPHOLE DESIGN BY
- 20. CONSTRUCT 6" STEP(S) PER PLAN. SEE ARCHITECTURAL.

- 21. EROSION CONTROL (MIN. 6" AVG. DIA. ANGULAR FACED ROCK) TO BE INSTALLED ON ALL SIDE SLOPES > 3:1 AND TO LIMITS SHOWN HATCHED. SEE GENERAL NOTES.
- 22. COORDINATE LANDSCAPING FEATURE GRADES I.E. MOW CURBS, PLAYFIELD, PLAYGROUND, PUTTING GREEN, ETC. WITH LANDSCAPE ARCHITECT WHILE MAINTAINING CLEAR DRAINAGE PATHS SHOWN.
- 23. CONSTRUCT CONCRETE ALLEY GUTTER AT FLOWLINE ELEVATIONS SHOWN. SEE PAVING PLAN.
- 24. NOT USED
- 25. CONSTRUCT ESTATE CURB THIS AREA TO PASS SHEETFLOW TO LANDSCAPING AND STORM DRAIN INLETS. SEE PAVING PLAN.
- 26. CONSTRUCT STORM DRAIN OUTLET WITH END SECTION. SEE CG5.1 FOR DETAIL.
- 27. CONSTRUCT STORM DRAIN PRIOR TO RETAINING WALL PLACEMENT.
- 28. CONSTRUCT SITE GARDEN WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA (MAX. 1.5' RETAINING). SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS.

PROPOSED CONTOUR - 1' INCREMENT PROPOSED CONTOUR - 0.5' INCREMENT PROPOSED SPOT ELEVATION

FINISH FLOOR ELEVATION

FLOW ARROW

ROCK EROSION CONTROL PROPOSED STORM DRAIN (SEE CG-501) FLOWLINE ELEVATION FL =INVERT ELEVATION INV=

RETAINING WALL DEEPENED/RETAINING BUILDING STEMWALL



BUILDING NUMBER

FINISH FLOOR GRADE TRANSITION

Contractor must verify all dimensions at project before proceeding with this work. Do not reproduce these drawings and specifications without the expressed written permission of the Architect. The drawings and specifications are instruments of service and shall remain the property of the Architect whether the project for which they are made is executed or not. These drawings and specifications shall not be used by anyone on any other

projects, for additions to this project, or for completion of this project by others except by the expressed written permission of the Architect. © ORB Architecture, LLC 2015

R	E	V	j.	S	ı	O	N	S
\triangle								
\triangle								
\wedge								
$\overline{\wedge}$								
$\overline{\wedge}$								
$\overline{\triangle}$								
	SE	CONI	D C	ITY	SUE	MIT	ΓΑΙ	

DATE: AUGUST 24, 2016

GRADING AND DRAINAGE PLAN - 3 OF 4

Albuquerque, New Mexico



World HQ@ORBArch.com





THESE NOTES ARE REFERENCED ON SHEETS CG1.1, CG1.2, CG1.3 AND CG1.4. NOT ALL NOTES ARE USED ON EACH SHEET.

- SPOT ELEVATIONS WITHIN GUTTER AREA REPRESENT FLOWLINE UNLESS NOTED. ADD 0.5' TYPICAL FOR TOP OF CURB / TOP OF ADJACENT WALK ELEVATIONS.
- 2. SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION WITHIN R.O.W. INCLUDING NEW ACCESS DRIVES WITH CONCRETE VALLEY GUTTER. HANDICAP RAMPS, PUBLIC SIDEWALKS, ETC. GRADES SHOWN FOR INFORMATION ONLY.
- SEE PUBLIC WORK ORDER DRAWINGS FOR CONSTRUCTION OF PUBLIC STORM SEWER SYSTEM WITHIN PUBLIC DRAINAGE EASEMENT THIS AREA.
- 4. CONSTRUCT PAVING, CURBS, WALKS AT ELEVATIONS SHOWN. SEE PAVING PLAN, PAVING DETAILS AND ARCHITECTURAL SITE DETAILS FOR ADDITIONAL INFORMATION. NOTE THAT PAVEMENT SLOPES AND CROSS-SLOPES VARY THROUGHOUT TO ACHIEVE GRADES NECESSARY FOR ADA COMPLIANT PEDESTRIAN ACCESS; POSITIVE DRAINAGE; STREET STORMWATER CAPACITIES; PIPE COVERAGE; ETC. CONSTRUCT TO ELEVATIONS SHOWN.
- 5. SLOPES WITHIN HANDICAP PARKING AREAS TO BE ADA COMPLIANT. MAX. SLOPE = 2% IN ANY DIRECTION.
- 6. CONSTRUCT ADA COMPLAINT ACCESS RAMP. 1:12 MAX. SLOPE, 2% MAX. CROSS-SLOPE.
- 7. F.F. ELEVATION WITHIN UNITS WITH GARAGES REFERENCES TOP OF CONCRETE STEP AT BACK OF GARAGE. GRADE AT GARAGE DOOR SHOWN 6" BELOW F.F. TO ACCOMMODATE 4" STEP AND PAD SLOPE. TYPICAL.
- 8. OFF-SITE GRADING THIS AREA TO PROVIDE FOR TEMPORARY DESILTATION PONDS AND BERMS AS REQUIRED TO ROUTE OFF-SITE FLOW AROUND DEVELOPMENT.
- 9. BUILDING ROOF DISCHARGE TO BE RELEASED TO ALL SIDES. PROVIDE CONCRETE SPLASH BLOCK (O.E) AT DOWNSPOUT

- LOCATIONS (TYPICAL).
- 10. PROVIDE 3' WIDE FRACTURED FACE ROCK SWALE AT GRADES SHOWN. SEE CG5.1 FOR ADDITIONAL INFORMATION..
- 11. PROVIDE OPENING IN CURB TO PASS FLOW (SEE PLAN FOR BOTTOM WIDTH). INSTALL 3'X3' ROCK EROSION PROTECTION (DEPRESS TO PREVENT BLOCKING OF FLOW) WITHIN LANDSCAPE AREA. SEE DETAIL SHEET CG5.1.
- 12. CONSTRUCT 18" WIDE (BOTTOM WIDTH) COVERED SIDEWALK CULVERT PER C.O.A. STD. DWG. 2236. SEE DETAIL SHEET CG5.1 FOR ADDITIONAL CONSTRUCTION INFORMATION.
- 13. INSTALL TWO 4" DIA. PVC PIPE DRAINS @ 2% SLOPE THROUGH SIDEWALK, GRADE LANDSCAPE TO DIRECT FLOW TO OPENING. SEE DETAIL SHEET CG5.1.
- 14. CONSTRUCT PRIVATE STORM DRAIN SYSTEM. SEE SHEET CG5.2 AND CG5.3 FOR SIZES / SLOPES / INLET INFORMATION / MATERIALS.
- 15. NOT USED.
- 16. POOL AREA GRADES SHOWN FOR GENERAL INFORMATION ONLY. POOL CONTRACTOR TO PROVIDE FINAL DESIGN GRADES / DECK DRAINS ETC.
- 17. CONSTRUCT RETAINING STEMWALL TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 18. CONSTRUCT DEEPENED STEMWALL THIS AREA TO ACHIEVE EXTERIOR GRADES SHOWN. SEE ARCHITECTURAL.
- 19. CONSTRUCT SITE RETAINING WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA. SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS. STRUCTURAL / WEEPHOLE DESIGN BY
- 20. CONSTRUCT 6" STEP(S) PER PLAN. SEE ARCHITECTURAL.

- 21. EROSION CONTROL (MIN. 6" AVG. DIA. ANGULAR FACED ROCK) TO BE INSTALLED ON ALL SIDE SLOPES > 3:1 AND TO LIMITS SHOWN HATCHED. SEE GENERAL NOTES.
- 22. COORDINATE LANDSCAPING FEATURE GRADES I.E. MOW CURBS, PLAYFIELD, PLAYGROUND, PUTTING GREEN, ETC. WITH LANDSCAPE ARCHITECT WHILE MAINTAINING CLEAR DRAINAGE PATHS SHOWN.
- 23. CONSTRUCT CONCRETE ALLEY GUTTER AT FLOWLINE ELEVATIONS SHOWN. SEE PAVING PLAN.
- 24. NOT USED
- 25. CONSTRUCT ESTATE CURB THIS AREA TO PASS SHEETFLOW TO LANDSCAPING AND STORM DRAIN INLETS. SEE PAVING PLAN.
- 26. CONSTRUCT STORM DRAIN OUTLET WITH END SECTION. SEE CG5.1 FOR DETAIL.
- 27. CONSTRUCT STORM DRAIN PRIOR TO RETAINING WALL
- PLACEMENT.
- 28. CONSTRUCT SITE GARDEN WALL TO ACHIEVE GRADE DIFFERENCE THIS AREA (MAX. 1.5' RETAINING). SEE ARCHITECTURAL PLAN FOR EXTENTS AND DETAILS.

LEGEND

PROPOSED CONTOUR - 1' INCREMENT

PROPOSED CONTOUR - 0.5' INCREMENT PROPOSED SPOT ELEVATION FLOW ARROW

FINISH FLOOR ELEVATION

FL =INV=

ROCK EROSION CONTROL PROPOSED STORM DRAIN (SEE CG-501) FLOWLINE ELEVATION

INVERT ELEVATION RETAINING WALL

DEEPENED/RETAINING BUILDING STEMWALL



BUILDING NUMBER

FINISH FLOOR GRADE TRANSITION

Contractor must verify all dimensions at project before proceeding with this work. Do not reproduce these drawings and specifications without the expressed written permission of the Architect. The drawings and specifications are instruments of service and shall remain the property of the Architect whether the project for which they are made is executed or not. These drawings and specifications shall not be used by anyone on any other projects, for additions to this project, or for completion of this project by others except by the expressed written permission of the Architect.

© ORB Architecture, LLC 2015

_									
ı	R	E	V		S		O	Ν	S
	\wedge								
_	$\overline{\wedge}$								
/	$\overline{\wedge}$								
/	$\overline{\wedge}$								
/	$\overline{\wedge}$								
_	$\overline{\wedge}$								
_		SE	CON	D C	ITY	SUE	MIT.	ΓAL	

ORB # 15-212 DATE: AUGUST 24, 2016

GRADING AND DRAINAGE PLAN - 4 OF 4