


A north arrow pointing upwards, with a circle containing the letter 'N' at the center. Below the arrow is a graphic scale bar with markings at 20, 10, 0, 20, 30, and 40. Below the scale bar, the text reads: SCALE: 1"=20' and CONTOUR INTERVAL = 1'.

38.00 FG	PROPOSED SPOT ELEVATIONS (FINISHED GRADE)		GRADE BREAK—HIGH POINT
MATCH (95.19)	MATCH EXISTING ELEVATIONS		SWALE
TCON	TOP OF CONCRETE		STORM DRAIN LINE
FL	FLOW LINE, CURB		
INV	INVERT		
FG	FINISH GRADE		PROPOSED MAJOR CONTOUR
TBC	TOP OF BASE COURSE		PROPOSED MINOR CONTOUR
TC	TOP OF CURB		EXISTING MAJOR CONTOUR
TG	TOP OF GRATE		EXISTING MINOR CONTOUR
TA	TOP OF ASPHALT		
	FLOW ARROW		

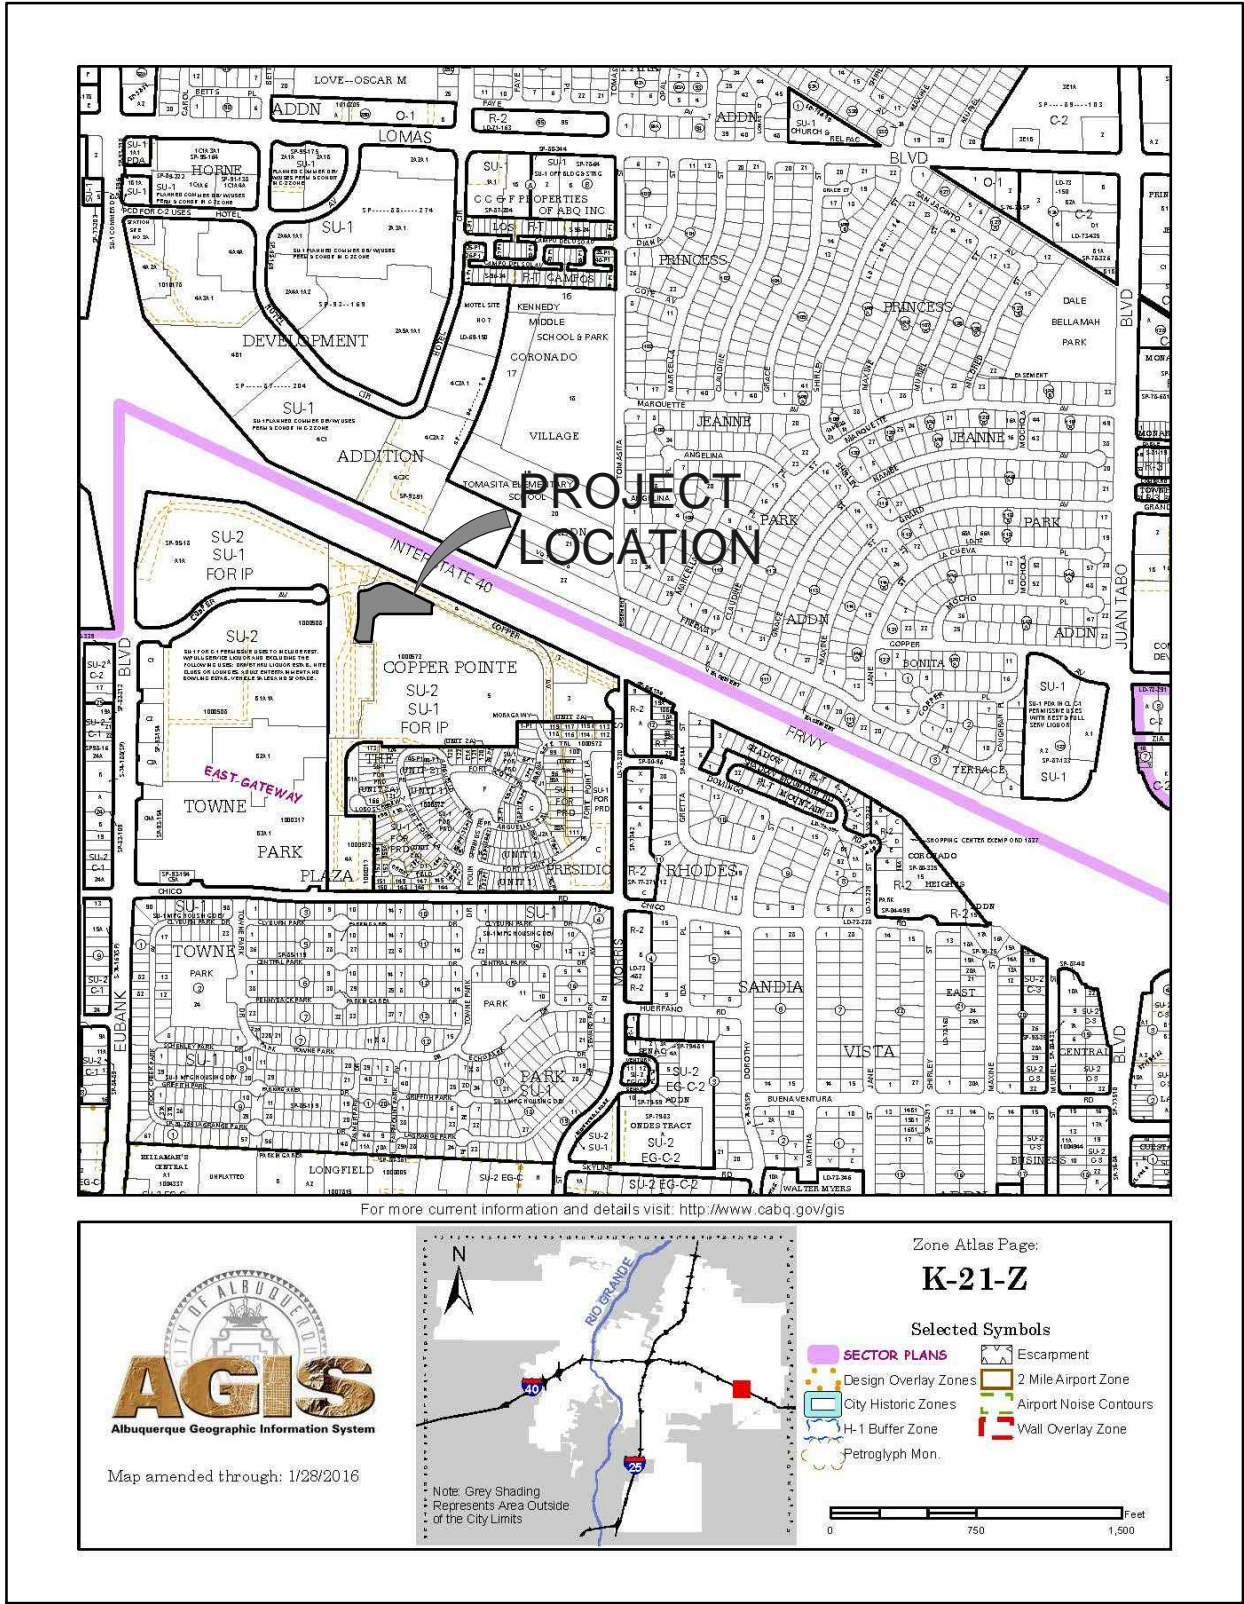

GENERAL NOTES

1. THE CONTRACTOR IS TO REFERENCE THE NMSHD STANDARD SERIAL DRAWINGS FROM SHEETS: 602-02-1/1, 603-01-1/7, 603-01-2/7, 603-01-3/7, 603-01-4/7, 603-01-5/7, 603-01-6/7, AND 603-01-7/7.
2. IF DIRT IS PRESENT IN THE STREET, THE STREET SHOULD BE SWEEP EVERY FEW DAYS OR THE SAME DAY IF RAIN IS IMMINENT.
3. WHEN CUTTING THE STREET (SC) FOR UTILITIES DIRT SHOULD BE PLACED ON THE UPHILL SIDE OF THE STREET CUT AND THE AREA SWEEP AFTER THE WORK IS COMPLETE.
3. ON STREETS WHERE THE LONGITUDINAL SLOPE IS STEEPER THAN 2.5%, WATTLES OR J-HOOK SILT FENCE SHOULD BE PLACED IN THE FRONT YARD SWALE.
4. WHEN INSTALLING UTILITIES BEHIND THE CURB, THE EXCAVATED DIRT SHOULD BE NOT BE PLACED IN THE STREET.
5. WHEN DOING WORK IN THE CITY ROW (e.g. SIDEWALK, DRIVE PADS, UTILITIES, ETC...) PREVENT DIRT FROM GETTING INTO STREET. IF DIRT IS PRESENT IN THE STREET, THE STREET SHOULD BE SWEEP EVERY FEW DAYS OR THE SAME DAY IF RAIN IS IMMINENT.

(SF)	SILT FENCE STD. SERIAL DWGS.: 603-01-3/7
(IP)	INLET PROTECTION STD. SERIAL DWGS.: 603-01-4/7
(CP)	CULVERT PROTECTION STD. SERIAL DWGS.: 603-01-4/7
(OTP)	OFFSITE TRACKING PROTECTION STD. SERIAL DWGS.: 603-01-7/7