

EROSION CONTROL MEASURES:

THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR MANAGEMENT OF STORM RUNOFF DURING CONSTRUCTION. HE SHALL ENSURE THAT THE FOLLOWING MEASURES ARE TAKEN:

- ADJACENT PROPERTY SHALL BE PROTECTED AT ALL TIMES BY CONSTRUCTION OF BERMS, DIKES, SWALES, PONDS, AND OTHER TEMPORARY GRADING AS REQUIRED TO PREVENT STORM RUNOFF FROM LEAVING THE SUBJECT SITE AND ENTERING ADJACENT PROPERTIES.
- ADJACENT PUBLIC RIGHT-OF-WAYS SHALL BE PROTECTED AT ALL TIMES FROM STORM WATER RUNOFF FROM THE SUBJECT SITE. NO SEDIMENT BEARING WATER SHALL BE PERMITTED TO ENTER PUBLIC STREET RIGHT-OF-WAYS.
- THE CONTRACTOR SHALL IMMEDIATELY AND THOROUGHLY REMOVE ANY AND ALL SEDIMENT FROM PUBLIC STREETS THAT HAS BEEN ERODED FROM THE SUBJECT SITE AND DEPOSITED THEREON.

CONSTRUCTION NOTES:


- TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE AT 260-1990 FOR THE ACTUAL FIELD LOCATION OF THE EXISTING SURFACE OF SUB-SURFACE UTILITIES.
- PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATION(S) OF ALL POTENTIAL OBSTRUCTIONS. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM OF DELAY.
- ALL WORK ON THIS PROJECT SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL LAWS, RULES AND REGULATIONS CONCERNING CONSTRUCTION SAFETY AND HEALTH.
- ALL CONSTRUCTION WITHIN PUBLIC STREET RIGHT-OF-WAY(S) SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE CITY OF ALBUQUERQUE/BERNALILLO COUNTY STANDARDS AND PROCEDURES.

LEGEND:


TOP OF CURB ELEVATION = 70'-40.06
CURB FLOWLINE ELEVATION = 6'-50.55
EXISTING SPOT ELEVATION = 4'-30.5
EXISTING CONTOUR ELEVATION = 38.0
PROPOSED SPOT ELEVATION = 4'-37.25
PROPOSED CONTOUR ELEVATION = 38.0
PROPOSED OR EXISTING CONCRETE SURFACE = 3'-37.25
EXISTING FENCE LINE = 3'-37.25

GENERAL NOTES:

- NO PERIMETER BOUNDARY CORNERS HAVE BEEN FIELD ESTABLISHED PER THIS SURVEY OF THE SUBJECT PROPERTY.
- NO SEARCH HAS BEEN MADE FOR EASEMENTS OF RECORD OTHER THAN SHOWN HEREON.

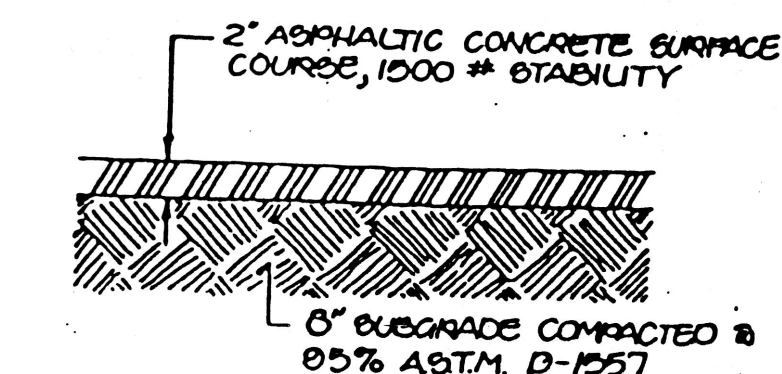

TYPICAL PAVEMENT SECTION
SCALE: 1" = 1'-0"

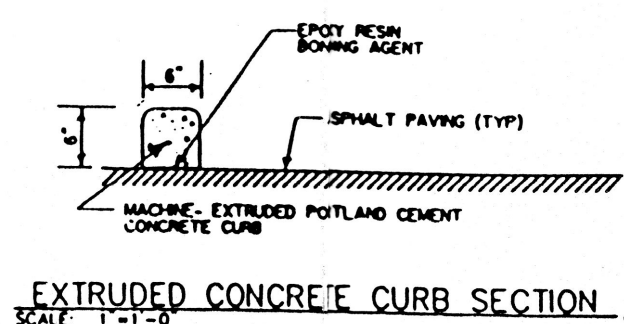


EXTENDED CONCRETE CURB SECTION
SCALE: 1" = 1'-0"

NOTE: UTILITY ELEVATIONS OF RECORD ARE NOT SHOWN ON THE PLAN HEREON.

JUAN TABO BLVD. N.E.

Where does flow go?

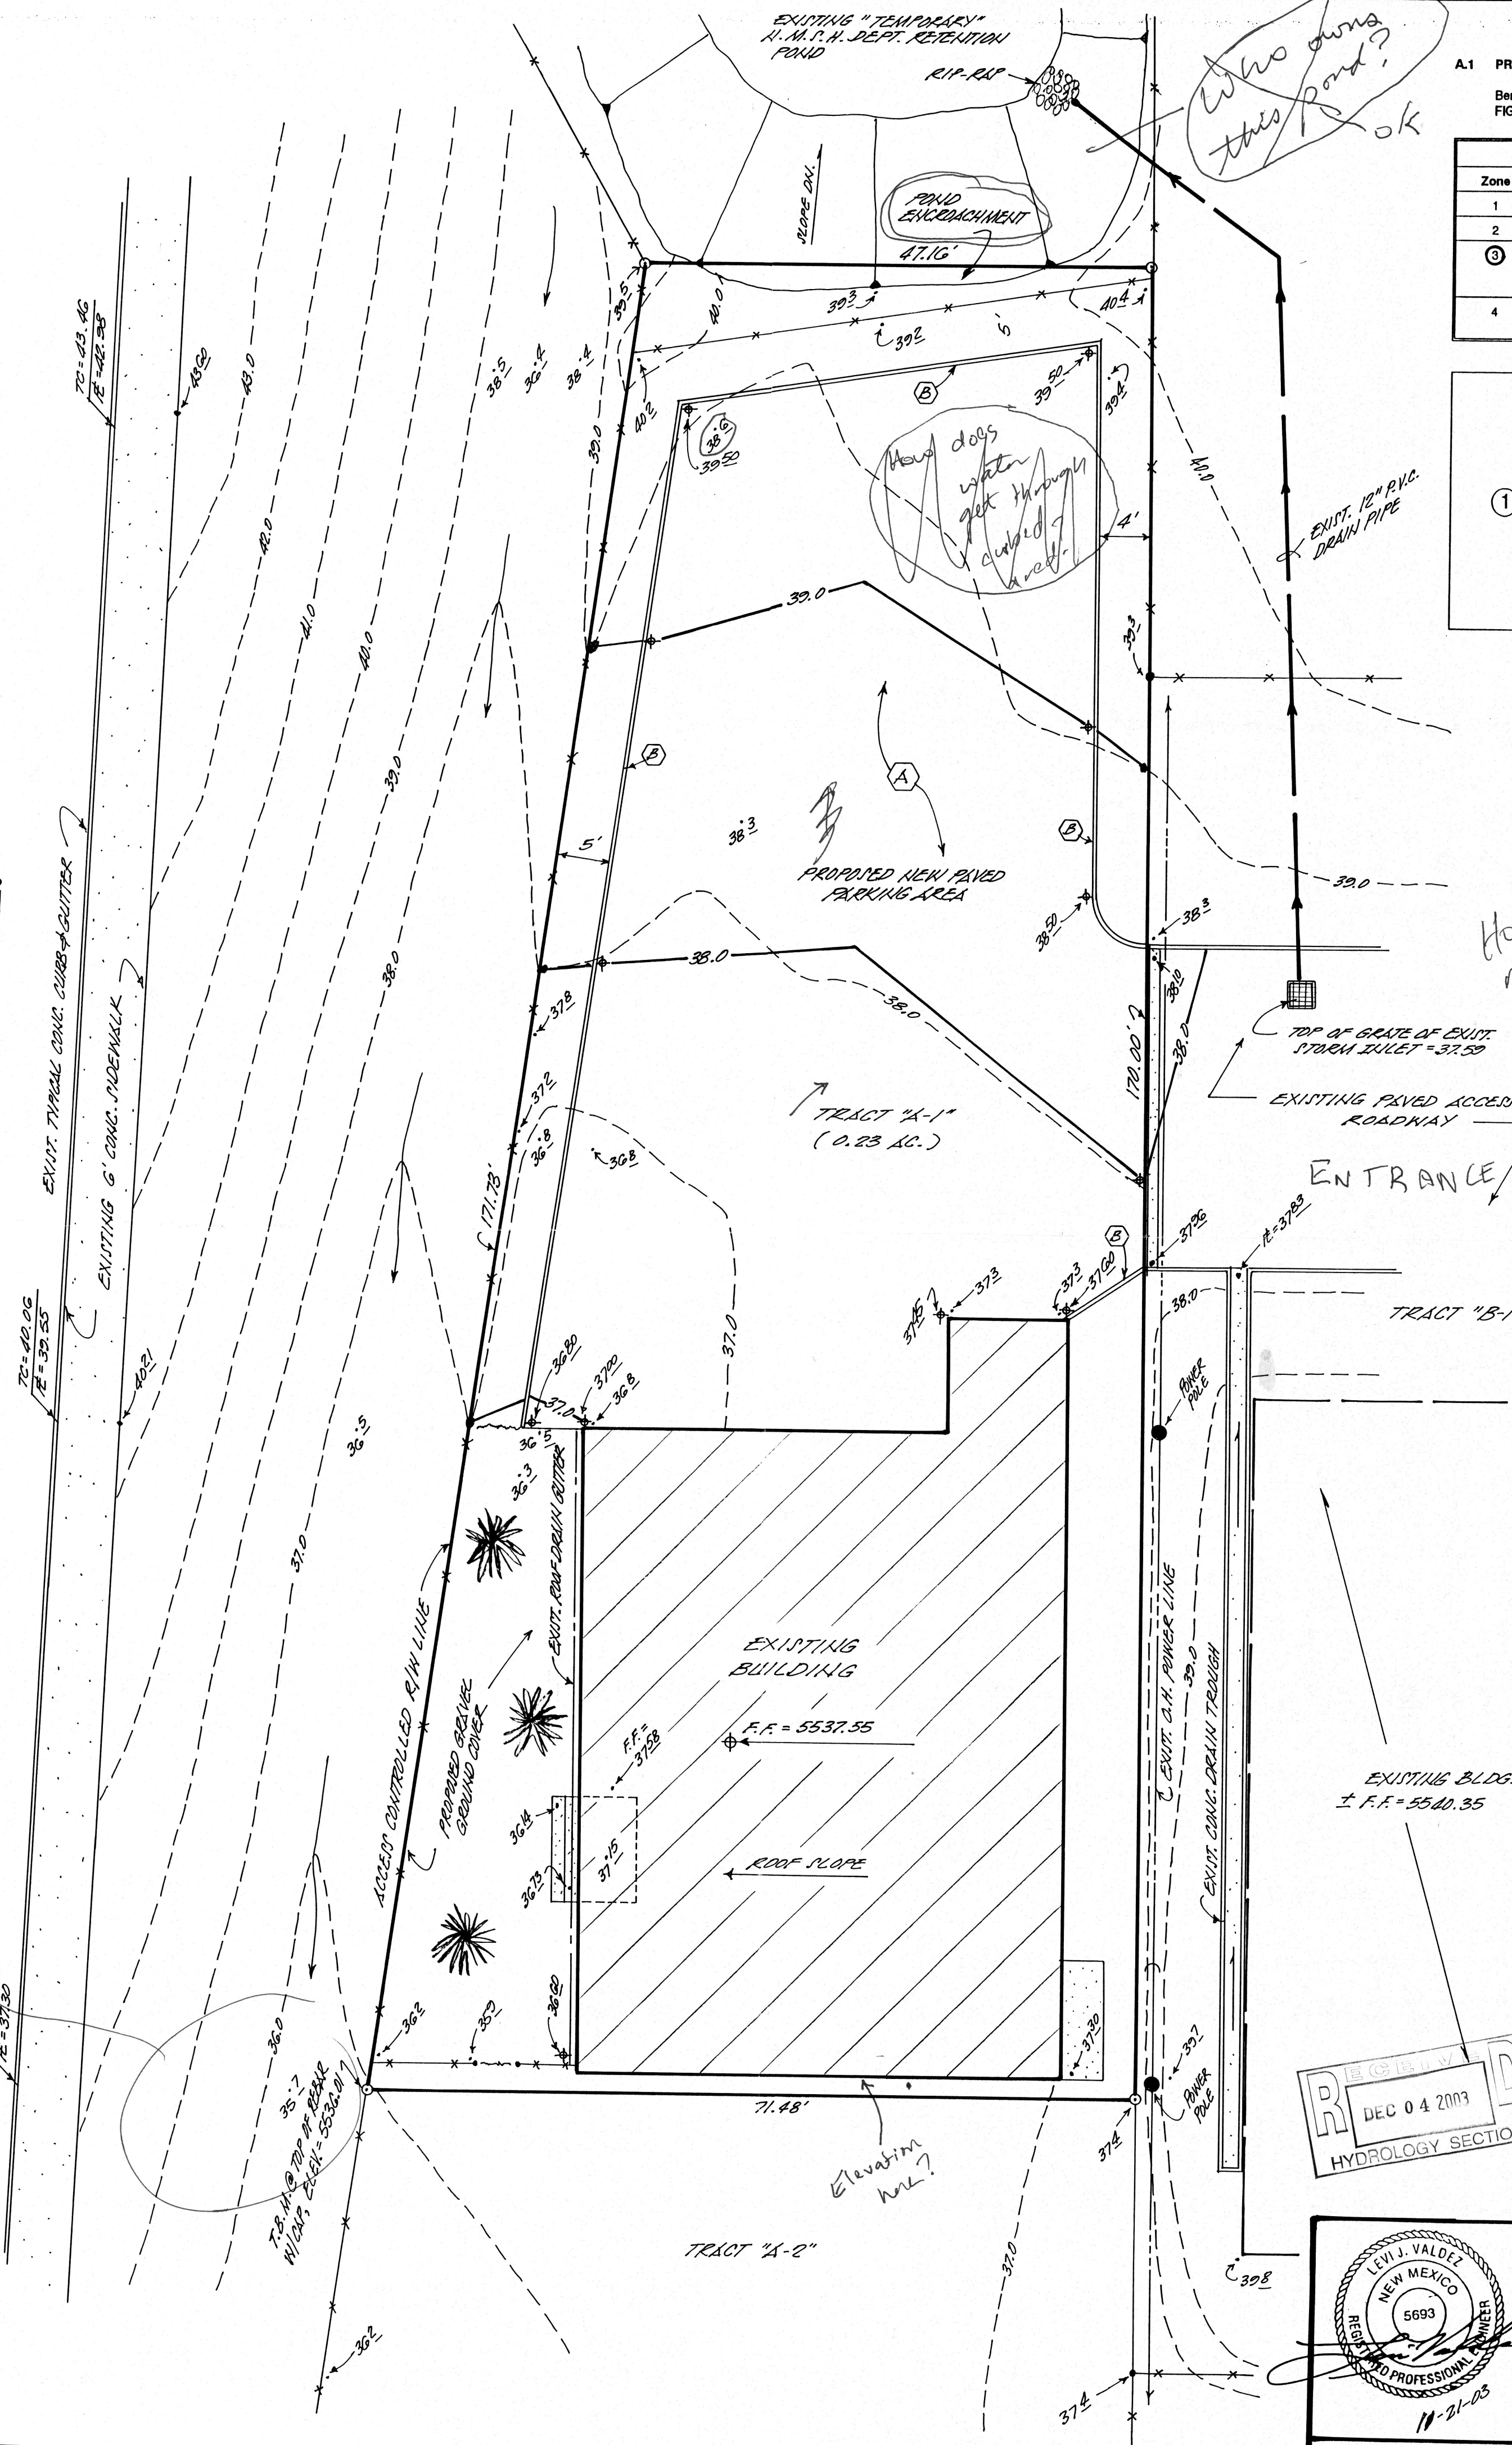


A.1 PRECIPITATION ZONES

Bernalillo County's four precipitation zones are indicated in TABLE A-1 and on FIGURE A-1.

Zone	Location
1	West of the Rio Grande
2	Between the Rio Grande and San Mateo
3	Between San Mateo and Eubank, North of Interstate 40; and between San Mateo and the East boundary of Range 4 East, South of Interstate 40
4	East of Eubank, North of Interstate 40; and East of the East boundary of Range 4 East, South of Interstate 40

FIGURE A-1

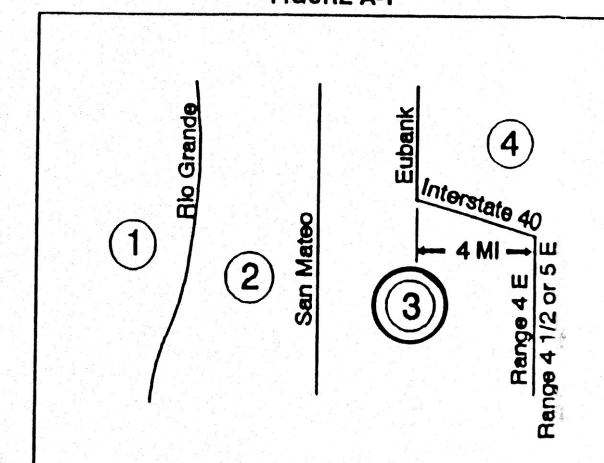

Where a watershed extends across a zone boundary, use the zone which contains the largest portion of the watershed.

DPM SECTION 22.2 - HYDROLOGY
January, 1993 Page A-4

Treatment	Land Condition
A	Soil uncompacted by human activity with 0 to 10 percent slopes. Native grasses, weeds and shrubs in typical densities with minimal disturbance to grading, groundcover and infiltration capacity. Croplands. Unirrigated areas.
B	Irrigated lawns, parks and golf courses with 0 to 10 percent slopes. Native grasses, weeds and shrubs, and soil uncompacted by human activity with slopes greater than 10 percent and less than 20 percent.
C	Soil compacted by human activity. Minimal vegetation. Unpaved parking, roads, trails. Most vacant lots. Gravel or rock on plastic (desert landscaping). Irrigated lawns and parks with slopes greater than 10 percent. Native grasses, weeds and shrubs, and soil uncompacted by human activity with slopes at 20 percent or greater. Native grass, weed and shrub areas with clay or clay loam soils and other soils of very low permeability as classified by SCS Hydrologic Soil Group D.
D	Impervious areas, pavement and roofs.

Most watersheds contain a mix of F-E-D treatments. To determine proportional treatments, measure respective subareas. In lieu of specific measurement for treatment D, the area percentages in TABLE A-5 may be employed.

DRAINAGE COMMENTS AND CALCULATIONS:

AS SHOWN ON THE VICINITY MAP HEREON, THE SUBJECT SITE IS LOCATED APPROXIMATELY 500' NORTH OF THE INTERSECTION OF JUAN TABO BLVD. N.E. AND HOPI ROAD N.E., ON THE EAST SIDE OF JUAN TABO BLVD. AND SOUTH OF INTERSTATE HIGHWAY 40, IN THE CITY OF ALBUQUERQUE, BERNALILLO COUNTY, NEW MEXICO, (ZONE ATLAS MAP 'K-22-Z').

THE SUBJECT SITE, 1, IS NOT LOCATED WITHIN A DESIGNATED FLOODPLAIN (RE: F.E.M.A. PANEL 359 OF 825). 2) PRESENTLY CONTRIBUTES TO THE OFFSITE FLOWS OF THE PROPERTY LYING IMMEDIATELY SOUTH OF AND ADJACENT TO THE SUBJECT SITE. 3) DOES NOT ACCEPT OFFSITE FLOWS FROM ADJACENT PROPERTIES. 4) AT THIS TIME IS TO HAVE A PROPOSED PAVED PARKING AREA FOR THE EXISTING BUILDING IMPROVEMENTS.

THE ABOVE REFERENCED F.E.M.A. MAP SHOWS A ZONE 'AO' (1' DEPTH) FLOODING CONDITION DOWNSTREAM AT THE INTERSECTION OF SAID JUAN TABO BLVD. N.E. AND BUENA VENTURA ROAD N.E.; THE MINIMAL INCREASE OF FLOWS CREATED BY THE NEW PAVED PARKING AREA WILL HAVE NO ADVERSE AFFECT TO SAID CONDITION.

CALCULATIONS:

PER SECTION 22.2, HYDROLOGY OF THE DEVELOPMENT PROCESS MANUAL, VOL. 2, DESIGN CRITERIA FOR THE CITY OF ALBUQUERQUE, BERNALILLO COUNTY, DATED JANUARY 1993.

SITE AREA: 0.23 ACRE
PRECIPITATION ZONE: THREE (3)
PEAK INTENSITY: IN/HR. AT T_c = TWELVE (12) MINUTES, 100-YR/6 HR. = 5.38
LAND TREATMENT METHOD FOR THE CALCULATION OF Q_p , TABLES A-8 & A-9
LAND TREATMENT FACTORS: TABLE A-4

EXISTING CONDITIONS:

TREATMENT	AREA/ACRES	FACTOR	CFS
C	0.17	X 3.45	= 0.59
D	0.06	X 5.02	= 0.30

$Q_p = 0.89$ CFS

PROPOSED DEVELOPED CONDITIONS:

TREATMENT	AREA/ACRES	FACTOR	CFS
C	0.07	X 3.45	= 0.24
D	0.16	X 5.02	= 0.80

$Q_p = 1.04$ CFS

1.04 CFS - 0.89 CFS = 0.15 CFS (INCREASE)

Zone	A	B	C	D
1	1.29 [0.00, 0.24]	2.03 [0.03, 0.76]	2.87 [0.47, 1.49]	4.37 [1.69, 2.89]
2	1.56 [0.00, 0.38]	2.28 [0.08, 0.95]	3.14 [0.60, 1.71]	4.70 [1.86, 3.14]
3	1.87 [0.00, 0.58]	2.60 [0.21, 1.19]	3.45 [0.78, 2.00]	5.02 [2.04, 3.39]
4	2.20 [0.05, 0.87]	2.92 [0.38, 1.45]	3.73 [1.00, 2.28]	5.25 [2.17, 3.57]



Zone	Intensity [2-YR, 10-YR]
1	4.70 [1.84, 3.14]
2	5.05 [2.04, 3.41]
3	5.38 [2.21, 3.65]
4	5.61 [2.34, 3.83]

LEGAL DESCRIPTION:

TRACT "A-1", IN BLOCKS 3 & 4, LA CUESTA SUBDIVISION, ALBUQUERQUE, BERNALILLO COUNTY, NEW MEXICO.

BENCH MARK REFERENCE:

ACS STATION "9-K21", M.S.L.D. ELEVATION = 5530.096; PROJECT T.B.M. AS SHOWN ON THE PLAN HEREON.

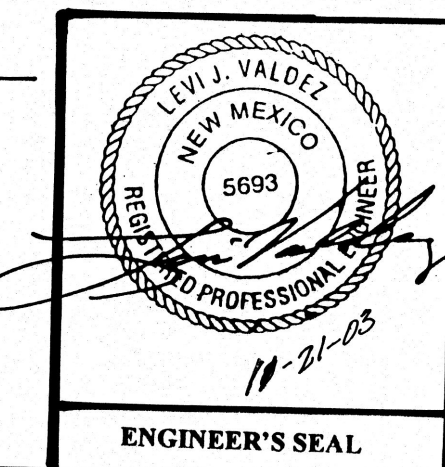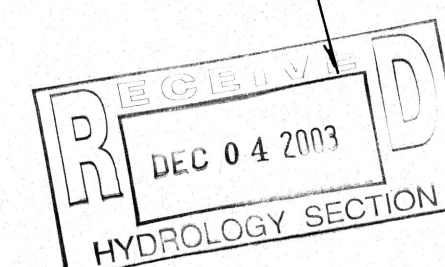

A PROPOSED PAVING PLAN
FOR
528 JUAN TABO BLVD. N.E.
ALBUQUERQUE, NEW MEXICO
OCTOBER, 2003