

Zone Atlas Page

GRAPHIC SCALE IN FEET

5 0 5 10

EROSION CONTROL MEASURES:

THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR MANAGEMENT OF STORM RUNOFF DURING CONSTRUCTION; HE SHALL ENSURE THAT THE FOLLOWING MEASURES ARE TAKEN:

- 1) ADJACENT PROPERTY SHALL BE PROTECTED AT ALL TIMES BY CONSTRUCTION OF BERMS, DIKES, SWALES, PONDS, AND OTHER TEMPORARY GRADING AS REOUIRED TO PREVENT STORM RUNOFF FROM LEAVING THE SUBJECT SITE AND ENTERING ADJACENT PROPERTIES.
- 2) ADJACENT PUBLIC RIGHT-OF-WAYS SHALL BE PROTECTED AT ALL TIMES FROM STORM WATER RUNOFF FROM THE SUBJECT SITE. NO SEDIMENT BEARING WATER SHALL BE PERMITTED TO ENTER PUBLIC STREET RIGHT-OF-WAYS.
- 3) THE CONTRACTOR SHALL IMMEDIATELY AND THOROUGHLY REMOVE ANY AND ALL SEDIMENT FROM PUBLIC STREETS THAT HAS BEEN ERODED FROM THE SUBJECT SITE AND DEPOSITED THEREON.

CONSTRUCTION NOTES:

- 1) TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE AT 260-1990 FOR THE ACTUAL FIELD LOCATION OF THE EXISTING SURFACE OF SUB-SURFACE UTILITIES.
- 2) PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATION(S) OF ALL POTENTIAL OBSTRUCTIONS: SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM OF
- 3) ALL WORK ON THIS PROJECT SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL LAWS, RULES AND REGULATIONS CONCERNING CONSTRUCTION SAFETY AND HEALTH.
- 4) ALL CONSTRUCTION WITHIN PUBLIC STREET RIGHT-OF-WAY(S) SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE CITY OF ALBUQUERQUE/BERNALILLO COUNTY STANDARDS AND PROCEDURES.

LEGEND:

TOP OF CURB ELEVATION = TC = 28.69

CURB FLOWLINE ELEVATION = 28.04

EXISTING SPOT ELEVATION = . ~ 29/

EXISTING CONTOUR ELEVATION = - 29.0 - _ _

PROPOSED SPOT ELEVATION = + 2955 PROPOSED CONTOUR ELEVATION = 29.0

PROPOSED OR EXISTING CONCRETE SURFACE =


EXISTING FENCE LINE = XXX A PROVIDE C.M. U. WALL FOR 5.5' HIGH WOOD FENCE

B) - PROVIDE 4"P.V.C. DRAINPIPE LINDER CONC. SLAB

C) - PER REPLAT PROVIDE A' WIDE SURFACE DRAWAGE EASEMENT, 2' ON EACH SIDE OF LOT LINE () - PROVIDE 8" X 3' X 2' MIN. (VAR.) PER C.D.A. DING. * 2415B

GENERAL NOTES:

1) NO PERIMETER BOUNDARY CORNERS HAVE BEEN FIELD ESTABLISHED PER THIS SURVEY OF THE SUBJECT PROPERTY.

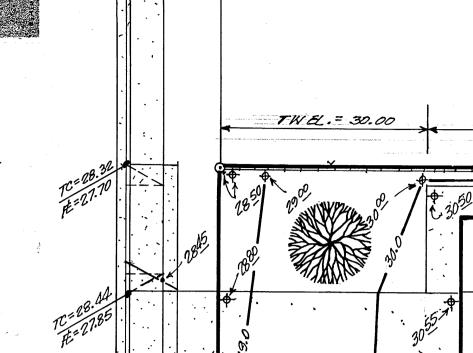

2) NO SEARCH HAS BEEN MADE FOR EASEMENTS OF RECORD OTHER THAN TKI ELEX = 30.50 TKI ELEY. = 31.00

F.F. = 5331.00

+ F.F. = 5331.25


+ F.F. = 5331.25

+ F.F. = 5331.50

+ F.F. = 5331.50

135.00'

(TYP.)

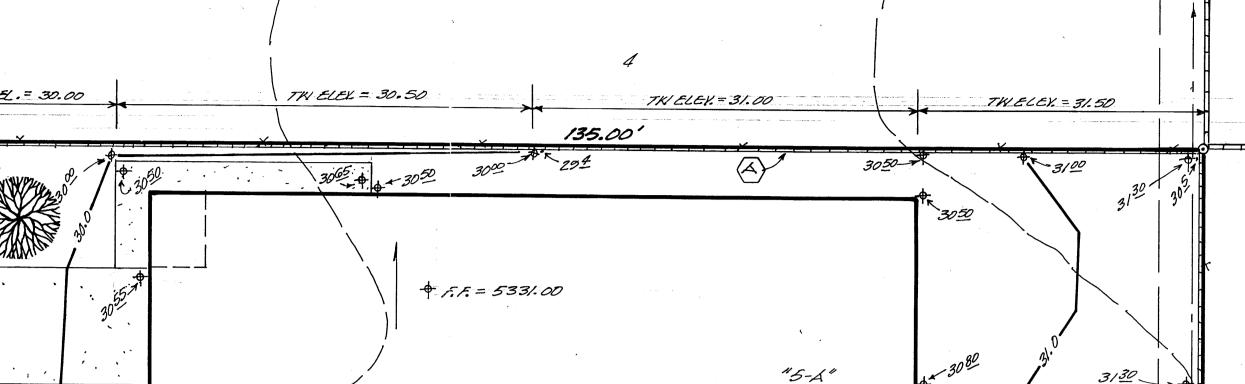

15-B11

- SKILLE K

"G-B"

~ SWALE 1

"7-1"

"7-8"

-3/00

3/25

EXISTING G'HIGH C.M.U. KILL .

3/30

A.1 PRECIPITATION ZONES

20

Bernalillo County's four precipitation zones are indicated in TABLE A-1 and on FIGURE A-1.

TABLE A-1. PRECIPITATION ZONES			
ZONE	LOCATION		
1	West of the Rio Grande		
2	Between the Rio Grande and San Mateo		
3	Between San Mateo and Eubank, North of Interstate 40; and between San Mateo and the East boundary of Range 4 East; South of Interstate 40		
4	East of Eubank, North of Interstate 40; and East of the East boundary of Range 4 East, South of Interstate 40		

TABLE A-10. PEAK INTESITY (IN/HR at te=0.2 hour				
Zone		Intensity	100-YR (2-YR, 10-YR)	
1 ,		4.70 (1.84, 3.14)		
2		5.05 (2.04, 3.41)		
3		5.38 (2.21, 3.65)		
4		5.61 (2.34, 3.83)		

			e e e e e e e e e e e e e e e e e e e			
TABL	E A-9. PE.	AK DISCH	IARGE (cf	s/acre)		
Zone		Treatment 100-YR (2-YR, 10-TR)				
	A	В	C	D		
1	1.29	2.03	2.87	4.37		
	(0.00, 0.24)	(0.33, 0.76)	(0.47, 1.49)	(1.69, 2.89)		
2	1.56	2.28	3.14	4.70		
	(0.00, 0.38)	(0.08, 0.95)	(0.60, 1.71)	1.86, 3.14)		
3	1.87	2.60	3.45	5.02		
	(0.00, 0.58)	(0.21, 1.19)	(0.78, 2.009)	(2.04, 3.39)		
4	2.20	2.92	3.73	5.25		
	(0.05, 0.87)	(0.38, 1.45)	(1.00, 2.26)	(2.17, 3.57)		

TABLE A-4. LAND TREATMENTS

than 10 percent and less than 20 percent. Soil uncompacted by human activity. Minimal

slopes. Native grasses, weeds and shrubs in typical densities with minimal disturbance to grading, proundcover and infiltration capacity. Croplands

Irrigated lawns, parks and golf courses with 0 to 10 percent slopes. Native grasses, weeds and shrubs, and soil uncompacted by human activity with slopes greater


vegetation. Unpaved parking, roads, trails. Most vacant lots. Gravel or rock on plastic (desert landscaping). Irrigated lawns and parks with slopes greater than 10

percent. Native grasses, weeds, and shrubs, and soil uncompacted by human activity with slopes at 20 percent or greater. Native grass, weed and shrub areas with clay

or clay loam soils and other soils of very low permeabili as classified by SCS Hydrologic Soil Group D.

Impervious areas, pavement and roofs.

reatments, measure respective subareas. In lieu of specific measurement for

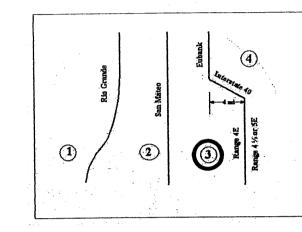

As shown on the Vicinity Map hereon, the subject site is located on the east side of Chama Street S.E., between Bell Avenue S.E. and Trumbull Avenue S.E., In the city of Albuquerque, New Mexico, (Zone Atlas Map 'L-19-Z').

The subject site, 1.) Is itself located within a F.E.M.A designated Zone X, and is adjacent to a Street S.E. right of way, (Re:F.E.M.A. Panel 354 of 825), 2.) Is a vacant in-fill site, 3.) Does not contribute to the offsite flows of adjacent properties, 4.) Does not accept offsite flows from adjacent properties, 5.) Will not have a adverse impact to downstream properties with the free - discharge of developed flows.

CALCULATIONS:

Per Section 22.2, Hydrology of the Development Process Manual, Vol.2., Design Criteria for the City of Albuquerque, New Mexico.

Site Area: 0.46 Acre Precipitation Zone: Three(3)

Peak Intensity: IN./HR. at Tc = Twelve (12) Min., 100-Yr.-6Hr. = 5.38, Land Treatment Factors,

EXISTING CONDITION:

EATMENT	AREA/ACRES		AREA/ACRES FACTORS		CF	
С	0.46	Х	3.45) =	1.59	

"Qp" = 1.59 CFS

PROPOSED DEVELOPED CONDITIONS:

REATMENT	AREA/ACRES		FACTO	FACTORS		CFS	
С	0.19	X	3.45	=	0.66		
D	0.27	X	5.02	=	1.36		

"Qp" = 2.02 CFS ***INCREASE=0.43 CFS


BENCH MARK REFERENCE:

EXISTING HOUSE F.F. = 5330.8

ACS Station "6-L18", M.S.L.D. elevation = 5327.676; Project T.B.M. as shown on plan hereon.

LEGAL DESCRIPTION:

Presently Lots Five (5), Six (6) and Seven (7), in Block Twelve (12), Emil Mann Addition, Albuquerque, New Mexico; being replatted into Lots "5A", "5B", "6A", "6B", "7A" & "7B", Block Twelve (12), Emil Mann Addition.

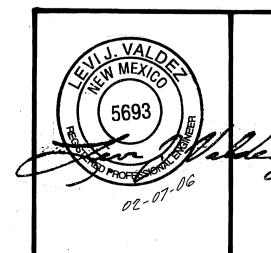

A PROPOSED **GRADING AND DRAINAGE PLAN FOR**

CHAMA STREET S.E. TOWNHOUSES ALBUQUERQUE, NEW MEXICO VE

FEBRUARY, 2006

HYDROLOGY SECTION

ENGINEER'S SEAL