

Richard J. Berry, Mayor

November 21, 2017

Mark Goodwin, P.E.
Mark Goodwin & Associates
PO Box 90606
Albuquerque, NM, 87199

RE: Juan Tabo Hills Estates
Drainage Report- Onsite Drainage Analysis, Volume 1 of 3, Addendum 1 (HGL)
Stamp Date: 3/8/2017
Hydrology File- M21D018; DRB# 1005278; CoA Project# 654887

Dear Mr. Goodwin:

Based on the information provided in your submittal received 3/16/17, the Drainage Report is approved for Work Order for construction of the subdivision public improvements (CPN# 654887) with the following understanding:

1. The HGL's provided in appendices 3-8 do not match. This appears to be the result of water surface disconnects caused by inverts of the stemlines entering the trunkline above the trunkline HGL. Hydrology has reviewed these discrepancies and does not believe they create and adverse impact on system function or public safety.
2. SDMH-29, at the Cougar Run Hammerhead, will require a pressure manhole and the submittal for this manhole will be provided at time of the Pre-Con meeting.
3. Use of the pipeful velocity as the 100-year velocity is unacceptable. Hydrology understands that the velocity profile changes within each pipe element; therefore the lowest modeled velocity will be stated on plans.
4. As-built drawings for CPN#688854 (Sandia Sunset stormdrain trunk) will need to be updated to reflect the updated velocities and flows.
5. Per the City Engineer, 1 1/2" clear space between reinforcement and form work is insufficient and needs to be increased to 2"-3". This applies to sheet 73.
6. This approval letter supersedes the disapproval letter dated 4/7/2017.

Addendum 2 of the Drainage Report- Onsite Drainage Analysis, Volume 1 of 3, contains no drainage calculations and is disapproved. Since the submittal of this Drainage Report on 3/16/17, the following actions have been taken:

- FEMA has approved the CLOMR
- The ESC has been submitted and approved
- The Floodplain Permit has been submitted and approved
- USACE has concurred that the project (within their jurisdiction) is allowed to proceed

CITY OF ALBUQUERQUE



Richard J. Berry, Mayor

- The Grading and Drainage Plan has been approved for Preliminary Plat and Grading Permit.
- The Work Order for the Sandia Sunset stormdrain trunk (CPN#688854) has been approved for construction and is under construction.
- The Work Order for the bank protection (CPN# 654886) is at DRC but the final design elements are still being worked out with AMAFCA.
- The Work Order for the subdivision public improvements (CPN# 654887) is at DRC, but has not been approved by Hydrology, DRC Chair, or City Engineer.

If you have any questions, you can contact me at 924-3695 or dpeterson@cabq.gov.

Sincerely,

Dana Peterson, P.E.
Senior Engineer, Planning Dept.
Development Review Services

PO Box 1293

Albuquerque

NM 87103

www.cabq.gov

CITY OF ALBUQUERQUE



Richard J. Berry, Mayor

April 7, 2017

James D. Hughes, P.E.
Mark Goodwin & Associates
PO Box 90606
Albuquerque, NM, 87199

RE: Juan Tabo Hills Estates
Drainage Report- Onsite Drainage Analysis, Volume 1 of 3, Addendum 1 (HGL)
Stamp Date: 3/8/2017
Hydrology File- M21D018; DRB# 1005278; CoA Project# 654887

Dear Mr. Hughes:

Based upon the information provided in your submittal received 3/16/17, the Drainage Report cannot be approved for Work Order for construction of the subdivision public improvements as shown in Project# 654887 until the following comments are addressed:

1. The outfall structure from the storm water quality pond into the Tijeras Arroyo needs to be designed and reflected in this report. This outfall will need to include a water quality feature to trap floatables in the pond and comply with AMAFCA's requirements to be protective of the shotcrete scour wall. The current design, as stated in section 4.1 does not explain how floatables are trapped. Plans for this structure may be included in the Work order Set for either Project# 654886 or 654887.
2. Include clarifying language that the berm for the storm water quality pond does not meet the NMOSE's minimum height and storage criteria to be considered a jurisdictional dam.
3. In Section 5, the HGL is stated to be belowground everywhere, however the plans appear to have two areas where the HGL daylights:
 - a. The first is at the hammerhead at the south terminus of Cougar Run (SDMH-29). Surcharging here will require a pressure manhole and confirmation that the lowest adjacent house remains 1 foot above the HGL.
 - b. The second area is in the open space between Blue Ribbon and Sandia Sunset. Several grates appear to surcharge (Inlets 68, 73, and 72). These should be tack welded to prevent theft; this will also resolve surcharging concerns.

Please verify the HGL against the proposed grades as shown in plans and update Section 5 and the design accordingly.

CITY OF ALBUQUERQUE



Richard J. Berry, Mayor

4. The HGL's, velocities, and storm drain slopes (Appendixes 2-11) do not match those reported on the work order plans (Project# 654887). This was noted along the main trunk under Sandia Sunset, but is also apparent in other areas. Resolve these discrepancies to reflect the correct design.

Since the submittal of this Drainage Report on 3/16/17, the following actions have been taken:

- FEMA has approved the CLOMR
- The ESC has been submitted and approved
- The Floodplain Permit has been submitted and approved
- USACE has concurred that the project (within their jurisdiction) is allowed to proceed
- The Grading and Drainage Plan has been approved for Preliminary Plat and Grading Permit.
- Work Order Sets for the bank protection features (Project# 654886) and the subdivision public improvements (Project# 654887) are in DRC, but are not yet approved.

Please inform Mr. Rudy Rael at 924-3977 prior to commencing work in the floodplain. If you have any questions, you can contact me at 924-3695.

PO Box 1293

Albuquerque

Sincerely,

New Mexico 87103

Dana Peterson, P.E.
Senior Engineer, Planning Dept.
Development Review Services

www.cabq.gov



City of Albuquerque

Planning Department

Development & Building Services Division

DRAINAGE AND TRANSPORTATION INFORMATION SHEET (REV 09/2015)

Project Title: _____ **Building Permit #:** _____ **City Drainage #:** _____

DRB#: _____ **EPC#:** _____ **Work Order#:** _____

Legal Description: _____

City Address: _____

Engineering Firm: _____ **Contact:** _____

Address: _____

Phone#: _____ **Fax#:** _____ **E-mail:** _____

Owner: _____ **Contact:** _____

Address: _____

Phone#: _____ **Fax#:** _____ **E-mail:** _____

Architect: _____ **Contact:** _____

Address: _____

Phone#: _____ **Fax#:** _____ **E-mail:** _____

Other Contact: _____ **Contact:** _____

Address: _____

Phone#: _____ **Fax#:** _____ **E-mail:** _____

Check all that Apply:

DEPARTMENT:

- ☐ HYDROLOGY/ DRAINAGE
☐ TRAFFIC/ TRANSPORTATION
☐ MS4/ EROSION & SEDIMENT CONTROL

TYPE OF SUBMITTAL:

- ☐ ENGINEER/ ARCHITECT CERTIFICATION
- ☐ CONCEPTUAL G & D PLAN
☐ GRADING PLAN
☐ DRAINAGE MASTER PLAN
☐ DRAINAGE REPORT
☐ CLOMR/LOMR
- ☐ TRAFFIC CIRCULATION LAYOUT (TCL)
☐ TRAFFIC IMPACT STUDY (TIS)
☐ EROSION & SEDIMENT CONTROL PLAN (ESC)
- ☐ OTHER (SPECIFY) _____

CHECK TYPE OF APPROVAL/ACCEPTANCE SOUGHT:

- ☐ BUILDING PERMIT APPROVAL
☐ CERTIFICATE OF OCCUPANCY
- ☐ PRELIMINARY PLAT APPROVAL
☐ SITE PLAN FOR SUB'D APPROVAL
☐ SITE PLAN FOR BLDG. PERMIT APPROVAL
☐ FINAL PLAT APPROVAL
☐ SIA/ RELEASE OF FINANCIAL GUARANTEE
☐ FOUNDATION PERMIT APPROVAL
☐ GRADING PERMIT APPROVAL
☐ SO-19 APPROVAL
☐ PAVING PERMIT APPROVAL
☐ GRADING/ PAD CERTIFICATION
☐ WORK ORDER APPROVAL
☐ CLOMR/LOMR
- ☐ PRE-DESIGN MEETING
☐ OTHER (SPECIFY) _____

IS THIS A RESUBMITTAL?: ☐ Yes ☐ No

DATE SUBMITTED: _____ **By:** _____

COA STAFF: _____ ELECTRONIC SUBMITTAL RECEIVED: _____

**Juan Tabo Hills Estates
Onsite Drainage Analysis Report
Volume 1 of 3
Addendum 1 (HGL)**



Prepared For:

Eastside Development Inc.LC
P.O. Box 9470
Albuquerque, NM 87119
(505) 899-6768

Prepared By:

Mark Goodwin & Associates, PA
PO BOX 90606
Albuquerque, NM 87199
(505) 828-2200

Contents

Appendencies	2
1. Purpose & Scope of Report.....	3
2. Other Reports and Approvals.....	3
3. Vicinity Map & Legal Description	4
4. Storm Drain Changes	5
4.1 Cougar Run Outfall	5
4.2 Sandia Sunset Outfall & Junction Box.....	5
5. HGL Calculations	6
6. Rip-Rap Design.....	6
7. Sump Inlet Calculations	6

Appendencies

1. Inlet Control Nomograph
2. Rocky Top Drive HGL
3. Galant Fox HGL
4. Blue Ribbon HGL
5. Silver Dollar HGL
6. Hubbard HGL
7. Duke City HGL (North of Sandia Sunset Ave)
8. Duke City HGL (South of Sandia Sunset Ave)
9. Tract K HGL (JB to SWQ Pond)
10. Running Bear Ave HGL
11. Manzano Vista HGL
12. Map - HGL Cross Section Plan
13. P&P Sheets
14. Rip Rap

1. Purpose & Scope of Report

The purpose of this addendum is to provide detailed hydraulic design calculations of the storm drain for the Infrastructure Plan approval of the Juan Tabo Hills Estates subdivision. The Juan Tabo Hills Estates Onsite Drainage Report Volume 1 of 3 with engineer's stamp dated 2-10-2016 was approved by City Hydrology in a letter written on Feb. 24, 2016. At that time the preliminary storm drain pipe sizes were based on Manning's equation and the pipe slope. The final storm drain pipe sizes as determined by the calculations in this addendum are based on detailed hydraulic analysis. The HGL is shown on the construction plan and profile sheets as it has been calculated using the WSPGW software. See Volume 1 for hydrology, street, and inlet design calculations. The capacities of streets and interception of inlets on grade were included in Volume 1 and have not changed. This addendum also provides the depth of ponding calculations for sump inlets.

2. Other Reports and Approvals

The Juan Tabo Hills Estates project site covers an area of 78 acres. The site was annexed into the City of Albuquerque (COA) in 2007. The Preliminary Plat was approved by the City of Albuquerque Development Review Board on Feb. 24, 2016 and was granted a one year extension by the DRB on Jan 25, 2017. The approved preliminary plat shows the proposed development of about 350 single family residential lots with all public streets and several HOA tracts for landscaping and trails. An Amended G&D plan with engineer's stamp dated Jan. 26, 2017 shows the same streets and storm drain but shows fewer lots. The city hydrology department approved the Amended G&D Plan in a letter that was written on Feb 23, 2017 with the condition that these detailed calculations be provided prior to construction plan approval.

Due to the nature of this site, the project also requires bank protection of the Tijeras Arroyo, a CLOMR and a 404 Permit. These are addressed in separate volumes of this Drainage Analysis Report as listed below:

- *Volume 2: Bank Protection.* This volume addresses the bank protection to prevent lateral migration of the Tijeras Arroyo. A one sheet Preliminary Tijeras Arroyo Bank Protection plan with engineer's stamp dated 3-24-2016 was distributed at the time of preliminary plat approval and contains the scour depth calculations and other design parameters used for the final design of the shotcrete bank protection.
- *Volume 3: CLOMR.* This volume addresses the fill to remove the FEMA floodplain from within the development. The CLOMR was written by FEMA on Nov. 14, 2016 Case No. 16-06-2447R.
- A Pre-Construction Notification was turned into the USACE and the NMED on June 21, 2016 for use of NWPs 7 and 13 (Outfall Structures and Bank Stabilization) as authorized under sections 404 and 401 of the Clean Water Act. The USACE letter dated July 22, 2016 verified that the activities are authorized and assigned Action No. SPA-2012-00299-ABQ.

3. Vicinity Map & Legal Description

Figure 1 below shows the location of the project site. The site is located on Zone Atlas Map M-21.

Legal Description: *Tract of land situated within Sections 33 and 34, Township 10 North, Range 4 East, New Mexico Principal Meridian, City of Albuquerque, Bernalillo County, New Mexico being all of TRACT A, JUAN TABO HILLS WEST, as the same is shown and designated on said plat filed for record in the office of the County Clerk of Bernalillo County, New Mexico on June 14, 2007 in Book 2007C, Page 161 and TRACT 1-A-1, JUAN TABO HILLS, UNIT 2, as the same is shown and designated on said plat filed for record in the office of County Clerk of Bernalillo County, New Mexico on February 20, 2008 in Book 2008C, Page 30.*

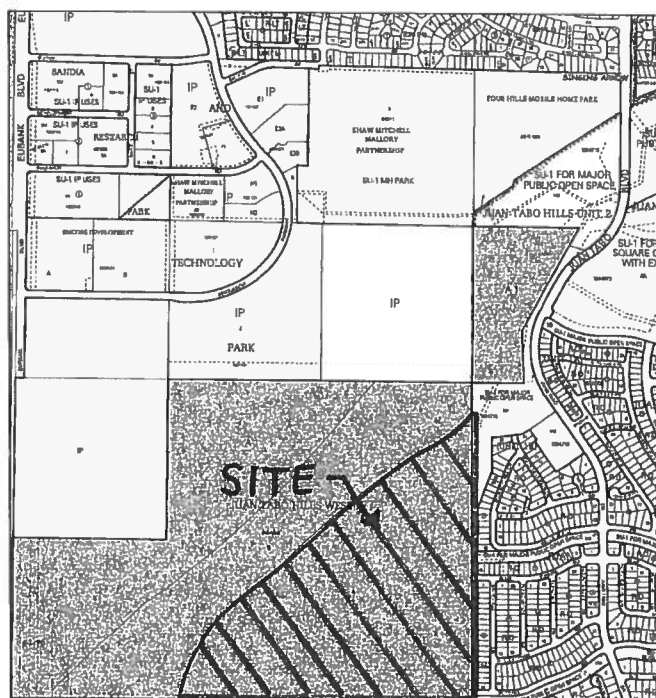


Figure 1: Vicinity Map

4. Storm Drain Changes

The storm drains were changed in three places because of these more detailed design considerations.

1. The outfall pipe from the SWQ pond at the south end of the project changed from 48" to 72" RCP.
2. The outfall pipe just north of Sandia Sunset Ave. changed from a single 96" to double 84" RCP.
3. The storm drain in Rocky Top Drive has been moved farther away from the trunk SAS in response to DRC comments from ABCWUA.

4.1 Cougar Run Outfall

Originally it looked like there was a lot of fall from Cougar Run to the Tijeras Arroyo so it had been anticipated that the first flush volume would be split at SD-MH 31 and discharged into the SWQ pond and then when the pond filled up the pond backwater would cause the peak 100-year flow to bypass the first flush diversion and continue in the 48" pipe to the Tijeras Arroyo outfall. There is not as much fall as originally thought so now all the flow, both first flush and 100-year peak flow rate, will go into the pond in the 48" storm drain from SD-MH 31 and it will pond to the SWQ elevation = 5391.25. A 10' x 10' outlet box will provide a 36' long weir with a crest elevation = 5391.30 and the peak 100-year stage in the pond is determined by the weir equation as follows.

$$Q = 3.0 \times 36' \times h^{3/2}$$

$$\text{Where } Q_{100} = 198.21 \text{ cfs}$$

$$H = 1.50'$$

So, the peak 100-year stage is 5392.80.

It is customary to provide an emergency overflow spillway sized to discharge the 100-year peak rate of flow entering the pond, and since this 10' x 10' box is sized for that flow rate, an additional spillway is not provided. The Dam top elevation is 5395.00 thus allowing 2.2' of freeboard.

The hydraulic capacity of the 72" pipe is checked using "Headwater Depth for Concrete Pipe Culverts with Inlet Control" nomograph (See Appendix 1) to make sure that it does not cause a headwater elevation higher than the weir equation above.

From the nomograph HW/D = 0.93 for "Groove end with headwall"

$$\text{so HW} = 6' \times 0.93 = 5.58'$$

Where the invert of the pipe out of the box is 5385.0, the HGL at the upstream end of the 72" RCP is 5390.58, well below the weir crest. So, the 72" RCP is more than adequate to handle the 100-year peak rate of flow.

4.2 Sandia Sunset Outfall & Junction Box

The Junction Box on the 84" storm drain located north of Sandia Sunset is designed to divert the First Flush flow rate of 35.37 cfs south in the 30" RCP without overtopping the weir/wall inside the box. The top of wall elevation was set equal to the Headwater elevation as determined by the "Headwater Depth for Concrete Pipe Culverts with Inlet Control" nomograph (See Appendix 1)

From the nomograph HW/D = 1.4 for "Groove end with headwall"

$$\text{so HW} = 2.5' \times 1.40 = 3.50'$$

Where the invert of the 30" RCP is 5405.50, the headwater elevation is 5409.00 and the top of the wall elevation is 5409.10. The wall is 30.5' long and forms a weir that is modeled in the WSPGW software. The reason that the outfall had to be changed to double 84" RCPs is that there is not enough fall through the Junction box to reaccelerate the flow after the incoming

velocity of 30 fps is slowed down by the weir to 7 fps. The pipe flow velocity of 1060.85 cfs is 21 fps in a 96" RCP and 14 fps in the double 84" RCP, a difference of about 4' velocity head, and there is not enough fall to accommodate that loss.

The 30" RCP diversion pipe cannot handle much more flow than the 35.37 cfs First Flush flow rate so that is the flow used in the HGL calculations for the storm drain between the Junction Box and the SWQ pond. The nomograph in appendix 1 was used to check the maximum flow that could be expected in the 30" RCP based on the 100-year HGL of the Sandia Sunset storm drain (5416.59) and inlet control at the 30" RCP the maximum flow would be 85 cfs, but the more limiting condition is backwater in the downstream pipe as given by manning's and the pipe slope as 72 cfs.

5. HGL Calculations

The hydraulic grade line is shown on profile view of the construction plan and profile sheets in Appendix 13, where it may be easily observed that the HGL is below finished grade everywhere. The WSPGW output files are in Appendixes 2 thru 11, and a map showing the stations used in the WSPGW models is in appendix 12.

6. Rip-Rap Design


Plate 3.18-3 in Appendix 13 is used to determine Rip-rap size. Two rip-rap stilling basins are to be constructed at the outlet of the two pipe penetrations. The length and width of the basins is typically equal to 4 times the pipe diameter and the depression of the basins is equal to half the pipe diameter.

Location	Q ₁₀₀ (cfs)	D (in)	W & L (ft)	B (ft)	D ₅₀ (ft)	Rip-rap Type
Sandia Sunset Ave	530 x 2	84	28	3.5	1.5	H
Cougar Run St	190	72	16	2	1.5	H

7. Sump Inlet Calculations

The following table summarizes the sump inlet calculations. All the sump inlets are provided with an emergency overflow, either by overtopping a street water block or by overtopping the curb and draining thru the HOA park to the arroyo. So, the inlets are sized to pass the peak 100-year flow rate while containing the ponding water in the right of way. Note that the lowest right of way elevation is typically 0.2' or more above the top of curb.

Inlet #	Street Name	Type	Grate Area (SF)	Grate Perimeter (FT)	Q100 (CFS)	Orifice depth ⁽¹⁾ (FT)	Weir Depth ⁽²⁾ (FT)	Top of Curb Elevation	100-YR Water Surface Elev. at Sump ⁽³⁾⁺⁽⁴⁾	Overflow Crest Elevation	Emergency Overflow Depth	Emergency Overflow Elevation	Lowest Adjacent Pad Elevation
45	Rocky Top	Double 'A' DG, ST	17.38	14.80	26.13	0.10	0.70	5423.39	5423.55	5423.61	0.49	5424.10	5434.10
46	Rocky Top	Double 'A' DG, ST	17.38	14.80	26.13	0.10	0.70	5423.39	5423.55	5423.61			
13	Sandia Sunset	Single 'A'	8.69	11.50	0.48	0.00	0.06	5412.83	5412.35	5412.39	0.66	5413.05	5416.90
12	Sandia Sunset	Double 'A' DG, DT	17.38	18.50	26.50	0.10	0.61	5412.29	5412.36	5412.39			
S7	Rock Squirrel	Single 'A'	8.69	11.50	14.00	0.11	0.55	5409.49	5409.50	5409.70	0.40	5410.10	5412.60
S6	Rock Squirrel	5'x5' NMDOT	18.88	15.00	23.70	0.07	0.65	5409.38	5409.49	5409.70			
7	Lobo Trot	Single 'A'	8.69	11.50	6.58	0.02	0.33	5412.87	5412.66	5412.68	0.52	5413.20	5413.43
8	Lobo Trot	Single 'A'	8.69	11.50	6.58	0.02	0.33	5412.71	5412.50	5412.68			
68	Sandia Sunset	10'x5' NMDOT	37.76	25.00	17.05	0.01	0.37	5450.97	5450.80	5451.07	0.45	5451.52	5452.19
1	Silver Dollar	Single 'A'	8.69	11.50	12.62	0.09	0.51	5450.90	5450.87	5450.95	0.67	5451.62	5452.80
2	Silver Dollar	Single 'A'	8.69	11.50	13.00	0.10	0.52	5450.88	5450.86	5450.95			
3	Hubbard	Single 'A'	8.69	11.50	8.20	0.04	0.38	5444.11	5443.95	5444.15	0.59	5444.74	5445.80
4	Hubbard	Single 'A'	8.69	11.50	11.80	0.08	0.49	5444.01	5443.96	5444.15			
16a	Duke City	Single 'A'	8.69	11.50	0.00	0.00	0.00	5435.24	5434.70	5435.05	0.75	5435.80	5436.40
17	Duke City	Double 'A' DG, DT	17.38	18.50	27.22	0.11	0.62	5434.54	5434.62	5434.65			
18	Duke City	Double 'A' DG, DT	17.38	18.50	17.80	0.05	0.47	5433.04	5432.97	N/A	N/A	N/A	5434.40
19	Duke City	Double 'A' DG, DT	17.38	18.50	17.80	0.05	0.47	5433.05	5432.98	N/A	N/A	N/A	
23	Cougar Run	Double 'A' DG, DT	17.38	18.50	19.61	0.05	0.50	5396.82	5396.78	5396.82	0.53	5397.35	5499.40
23	Cougar Run	Double 'A' DG, DT	17.38	18.50	19.61	0.05	0.50	5396.82	5396.78	5396.82			
30	Cougar Run	5'x5' NMDOT	18.88	20.00	19.61	0.05	0.47	5396.82	5396.75	5396.82			
1)	Orifice Equation	$Q = 0.6 A (2gh)^{0.5}$	so	$h=(Q/.6/A)^2/2/g$									
2)	Weir Equation	$Q = 3 L h^{3/2}$	so	$h=(Q/3/L)^{2/3}$									
3)	The orifice equation is used in accordance with FHA HEC-22, and the height is added to the center of the grate elevation which is 0.72' below the top of curb elevation.												
4)	The weir equation uses the length and height at the lip of gutter. The lip of gutter elevation is 0.54' below the top of curb and the effective length is = 2 x (Width of Grate) + (Length of curb opening)												
5)	The Area is calculated by "Hydraulic Tool Box 4.2" in accordance with Federal Highway Administration HEC-22 3rd eddition, Rev Aug., 2013 The effective length is more conservatively calculated.												
6)	Inlets 45, 46, S6, S7, 23, 24 & 30 have emergency overflow paths over the top of curb and thru the adjacent HOA Tract to the Tijeras Arroyo. Depth is calculated as a 50' wide weir with 3.0 coefficient.												
7)	The 100 year flow rate at inlets 18 and 19 is doubled because the inlets do not have an overflow path.												
8)	The rest of the sump inlets have emergency overflow path thru the waterblock at the adjacent intersection and continue down the public street. Critical depth is assumed.												

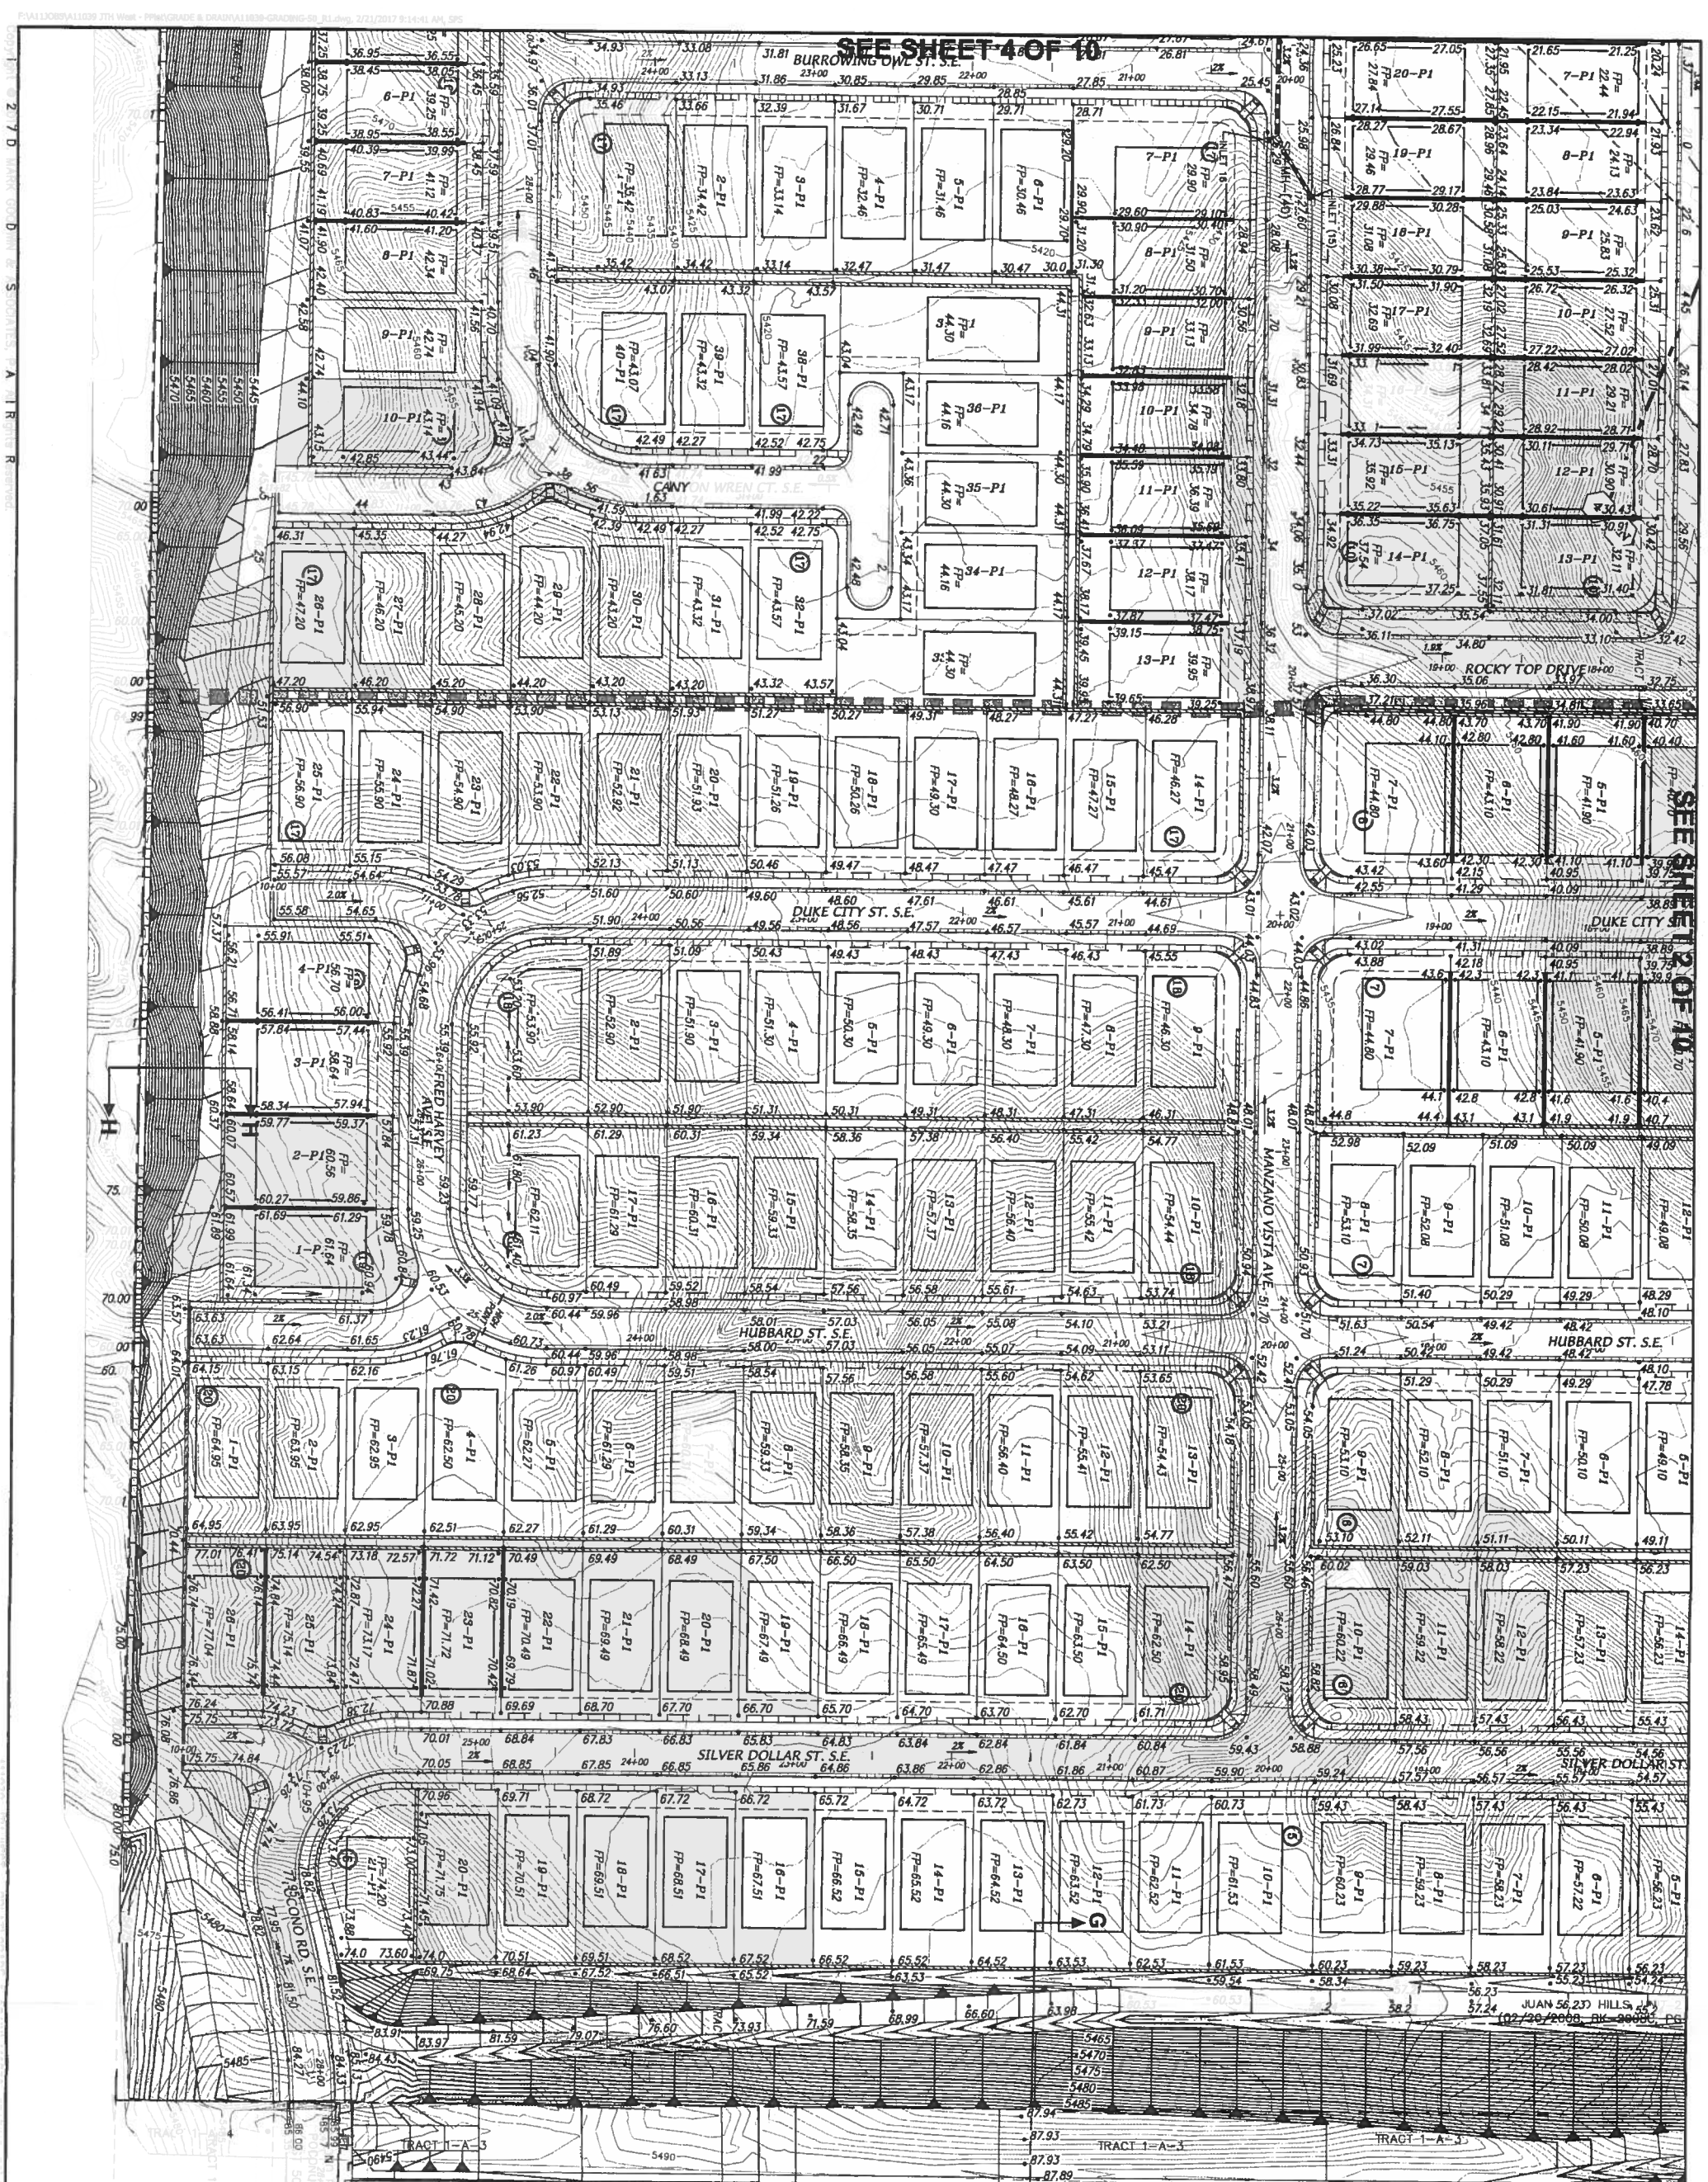

270

MARK GOODWIN & ASSOCIATES, P.A.

GRADING & DRAINAGE PLAN

SCALE: 1" = 50'

50' 25' 0' 50' 100'

NO. DATE REMARKS BY

DESIGNED BY JDH DATE 01/17

DRAWN BY ACH DATE 01/17

CITY PROJECT NO. M-21-2

SHEET 3 OF 10

ENGINEER'S SEAL

SURVEY INFORMATION

FIELD NOTES

NO. BY DATE

STATION "5-M22" IS LOCATED 8.7 MI. SE. OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE. 77.9' SE OF POWER POLE #327 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22".

BENCH MARKS

AS BUILT INFORMATION

CONTRACTOR


WORK STAKED BY

INSPECTOR'S ACCEPTANCE BY

FIELD VERIFICATION BY

DRAWINGS CORRECTED BY

MICRO-FILM INFORMATION

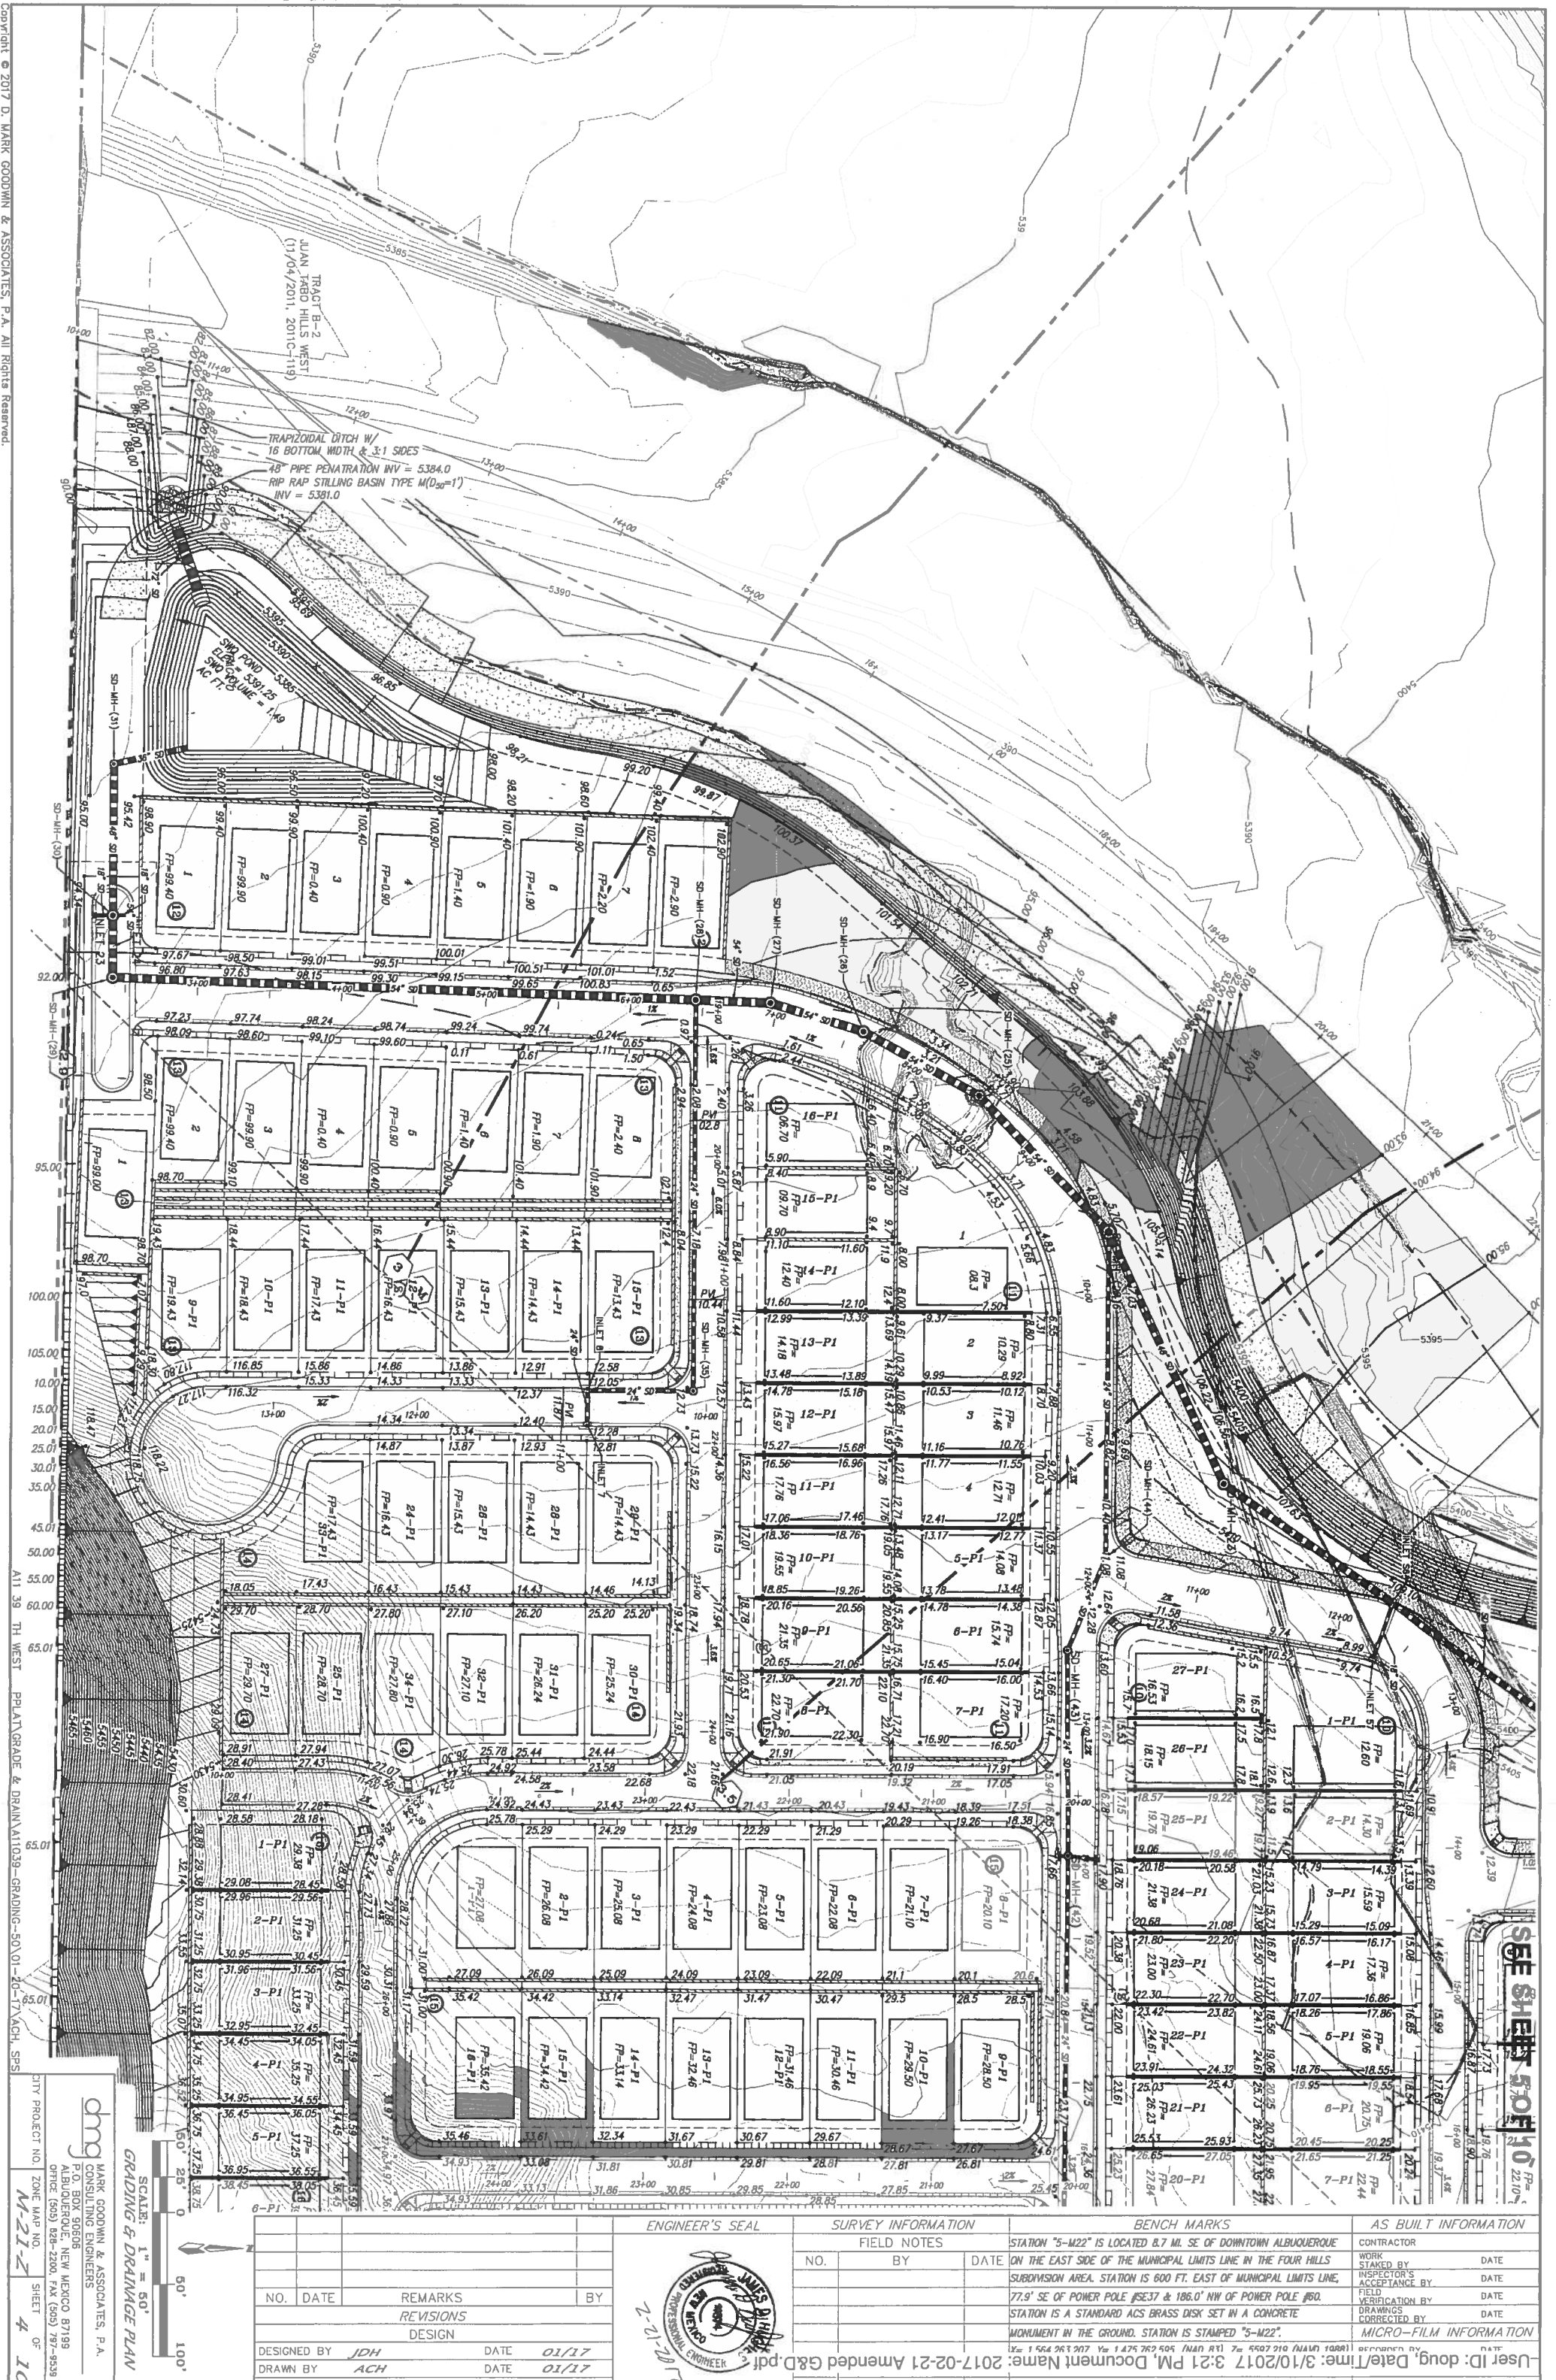


AT 39 TH WEST PLAT GRADE & DRAIN A11039-GRADING-50.01-20-17ACH, SP5


dmg
MARK GOODMAN & ASSOCIATES, P.A.
P.O. BOX 90606
ALBUQUERQUE, NEW MEXICO 87199
OFFICE (505) 828-2200, FAX (505) 797-9539

CITY PROJECT NO. **M-21-7**
ZONE MAP NO. **4**
SHEET OF **10**

SCALE: 1" = 50'
GRAVING & DRAINAGE PLAN




NO.	DATE	REMARKS	BY
REVISIONS			
DESIGN			
DESIGNED BY	JDH	DATE	01/17
DRAWN BY	ACH	DATE	01/17
CHECKED BY	DME	DATE	01/17



SURVEY INFORMATION			BENCH MARKS	AS BUILT INFORMATION
FIELD NOTES			STATION "5-M22" IS LOCATED 8.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #537 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22".	CONTRACTOR
NO.	BY	DATE		WORK
				STAMPED BY
				INSPECTOR'S
				ACCEPTANCE BY
				FIELD
				VERIFICATION BY
				DRAWINGS
				CORRECTED BY
				MICRO-FILM INFORMATION
				RECORDED BY
				DATE

SEE SHEET 50.10

SEE SHEET 5 OF 10

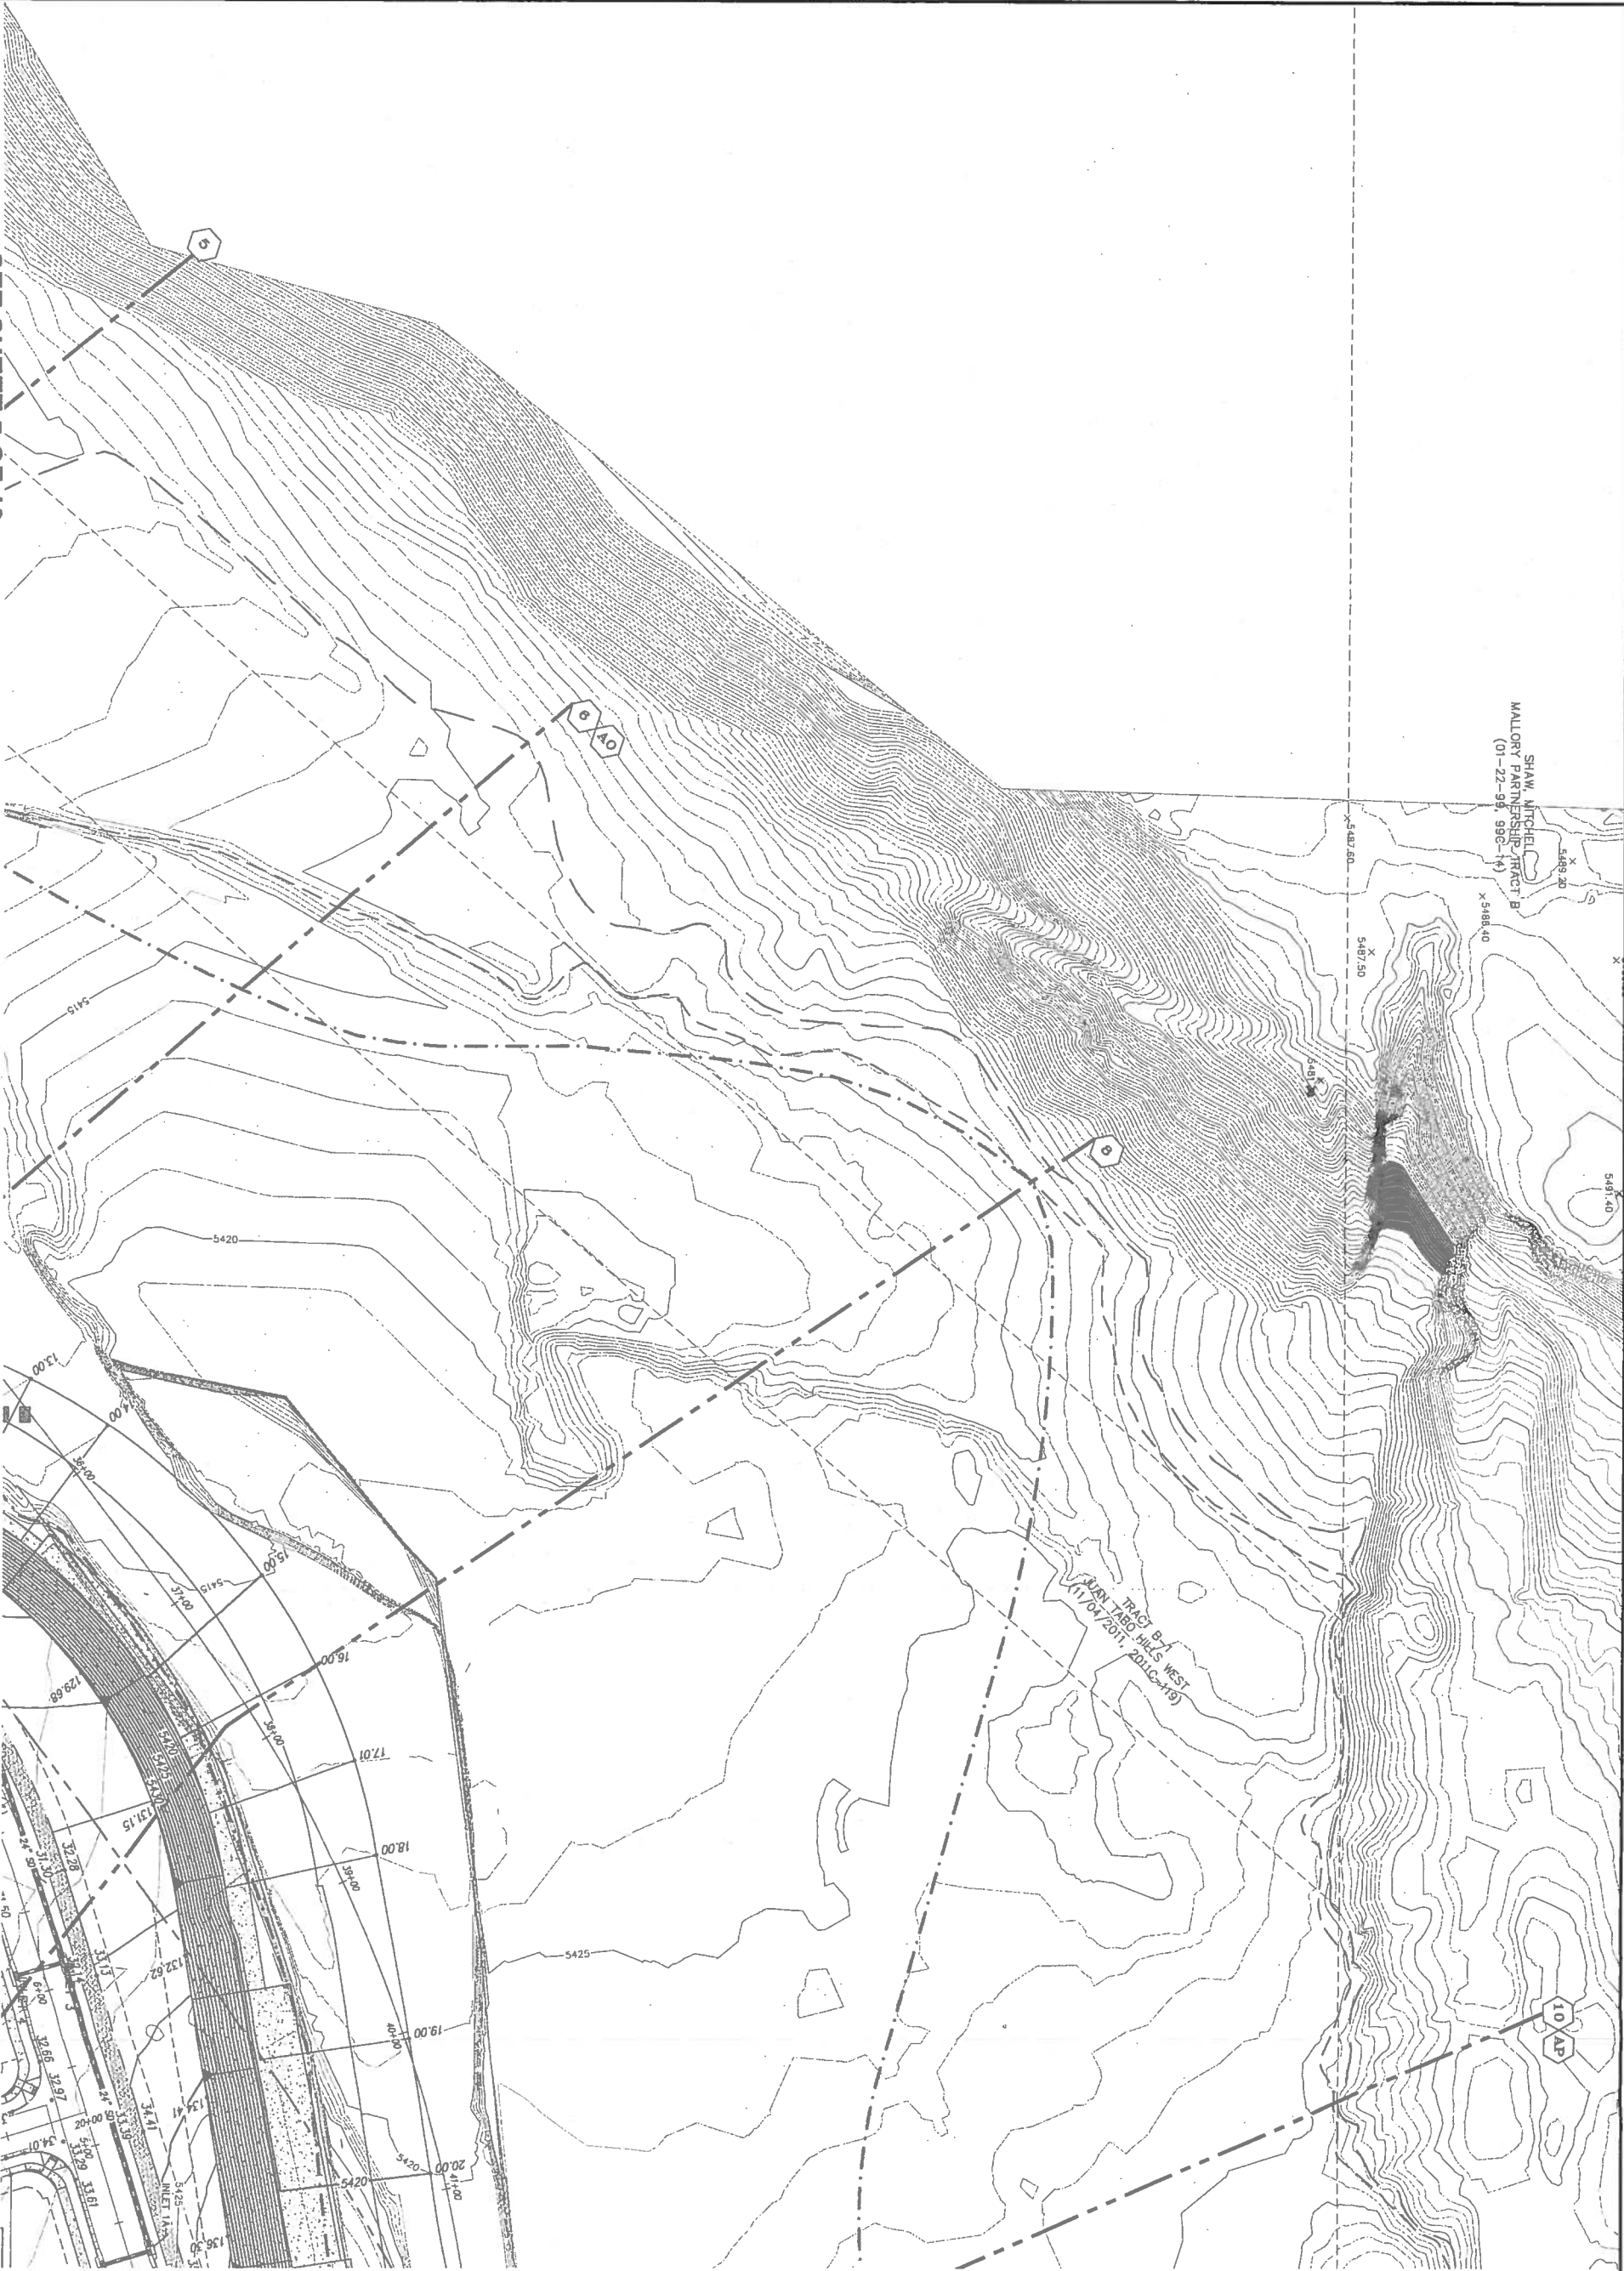

SEE SHEET 1 OF 10

GRADING & DRAINAGE PLAN


MARK GOODWIN & ASSOCIATES, P.A.
P.O. BOX 90606
ALBUQUERQUE, NEW MEXICO 87119
OFFICE (505) 828-2200, FAX (505) 787-9539

CITY PROJECT NO. **M-21-2** ZONE MAP NO. **6** SHEET OF **10**

SCALE: 1" = 50'

50' 25' 0' 50' 100'

NO.	DATE	REMARKS	BY
REVISIONS			
DESIGN			
DESIGNED BY	JDH	DATE	01/17
DRAWN BY	ACH	DATE	01/17
CHECKED BY	DWG	DATE	01/17



SURVEY INFORMATION		
FIELD NOTES		
NO.	BY	DATE

BENCH MARKS	
STATION "5-M22" IS LOCATED 8.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #537 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22".	
X= 1,564,263.207, Y= 1,475,767.585 (NAD 83) 7= 5597 219 (NAD 1983)	

AS BUILT INFORMATION	
CONTRACTOR	
WORK STAKED BY	
INSPECTOR'S ACCEPTANCE BY	
FIELD VERIFICATION BY	
DRAWINGS CORRECTED BY	
MICRO-FILM INFORMATION	
RECORDED BY	
DATE	

Table 1: HYDROLOGY SUMMARY TABLE											
AHYMO BASIN ID	Location	AREA				Ground Cover (%)				Q ₁₀₀ (cfs)	
		(Ac)	(Sq mi)	A	B	C	D	Increment	Water Quality Volume (Ac-Ft)	Sub Total	
100	Four Hills	86.10	0.13822	8	18	35	36.7	329.22	1.3218	1.3218	
101	Juan Tabo Hills	86.80	0.10439	0	19	39	42	292.50	1.0756	1.0756	
200	Four Hills	5.00	0.01408	0	20	40	40	37.61	0.1380	1.4588	
201	DeWard	76.30	0.01823	100	0	0	0	27.64	0.0000	0.0000	
203	Juan Tabo Hills	42.50	0.06641	0	22	45	33	172.59	0.5376	1.5131	
300	Juan Tabo Hills	22.30	0.03464	0	14	29	57	89.75	0.4873	2.1004	
400	JTH Estates	77.70	0.12141	0	9	41	50	343.81	1.4853	1.4853	
TOTALS		383.70	0.50					1291.82		5.05	


LEGEND

--- AHYMO BASIN BOUNDARY

--- SUB-BASIN BOUNDARY

--- NEW RCP STORM DRAIN

400 AHYMO BASIN NUMBER



ENGINEER'S SEAL		SURVEY INFORMATION		BENCH MARKS		AS BUILT INFORMATION	
REMARKS		FIELD NOTES		STATION "5-M22" IS LOCATED 8.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #SE37 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22".		CONTRACTOR	
DESIGNED BY		NO.		DATE		WORK STAKED BY	
DATE		BY		DATE		INSPECTOR'S ACCEPTANCE BY	
REVISIONS		NO.		DATE		FIELD VERIFICATION BY	
DESIGN		NO.		DATE		DRAWINGS CORRECTED BY	
MICRO-FILM INFORMATION		NO.		DATE		NO.	

JUAN TABO HILLS ESTATE

DRAINAGE BASIN MAP

MARK GOODMAN & ASSOCIATES, P.A.

500 BOX 95605

ALBUQUERQUE, NEW MEXICO 87199

OFFICE (505) 828-2200, FAX (505) 797-9555

CITY PROJECT NO. ZONE MAP NO. SHEET OF

M-21-2 7 10


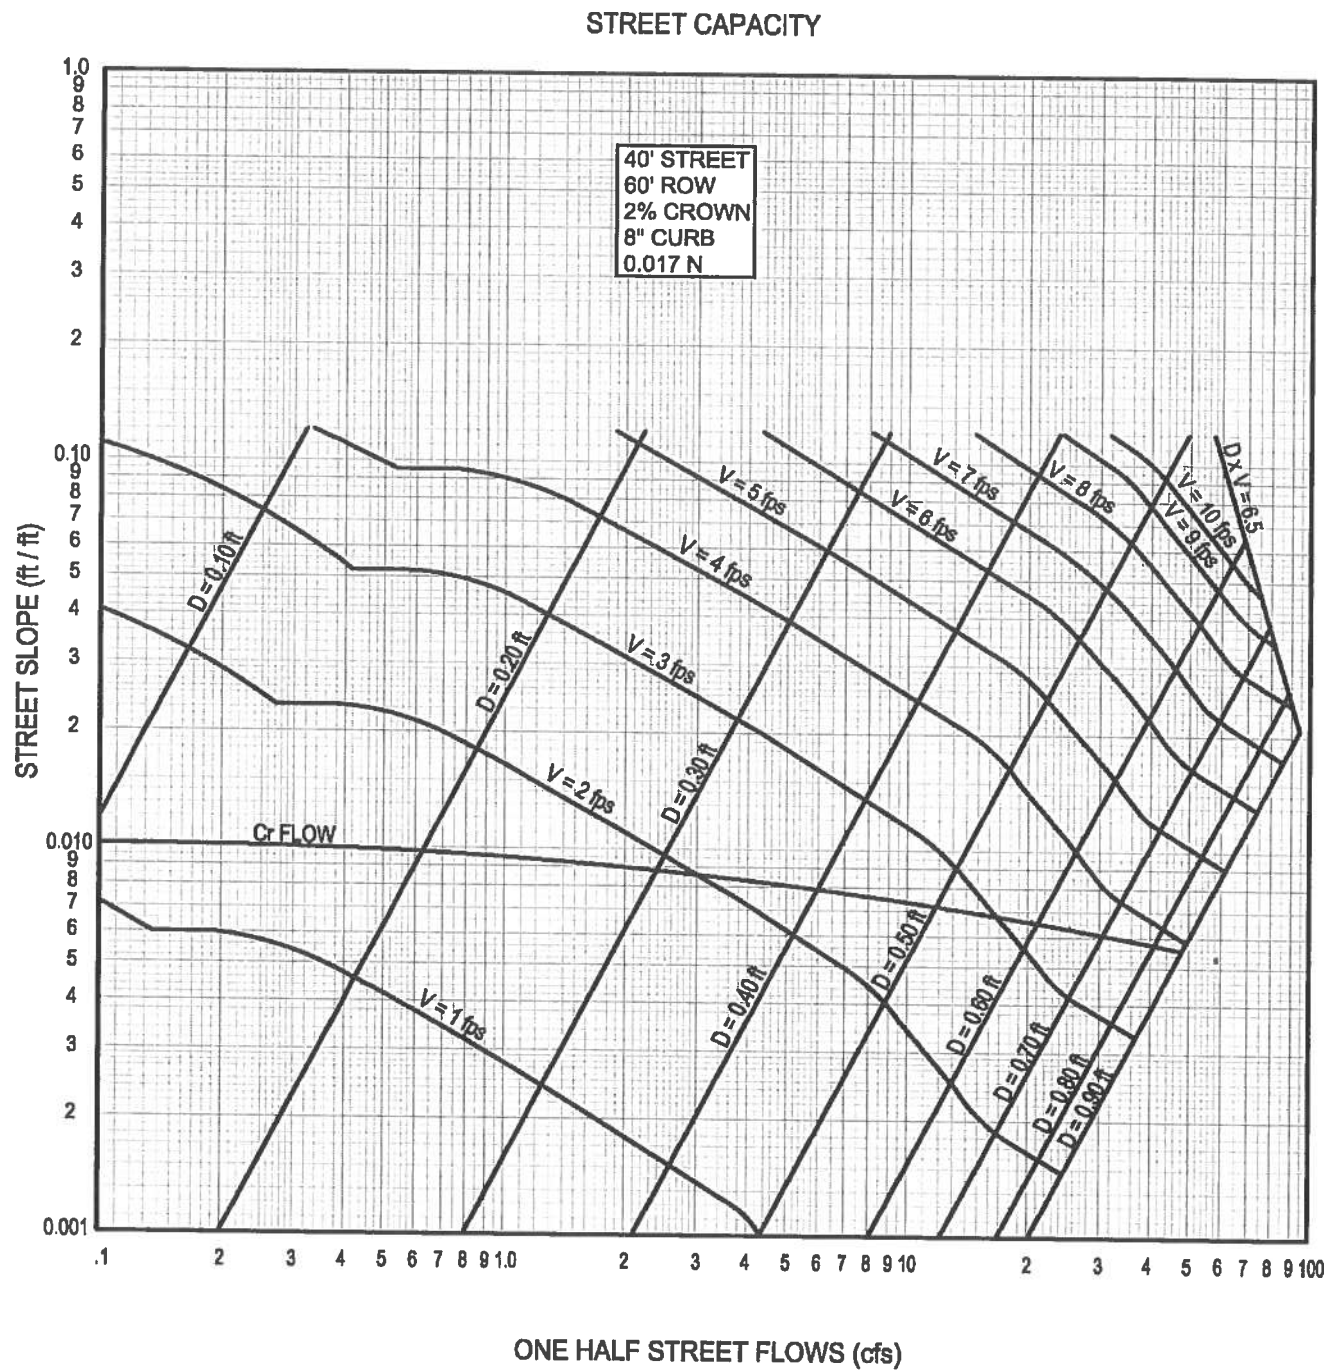


PLATE 22.3 D-3

CHART 1

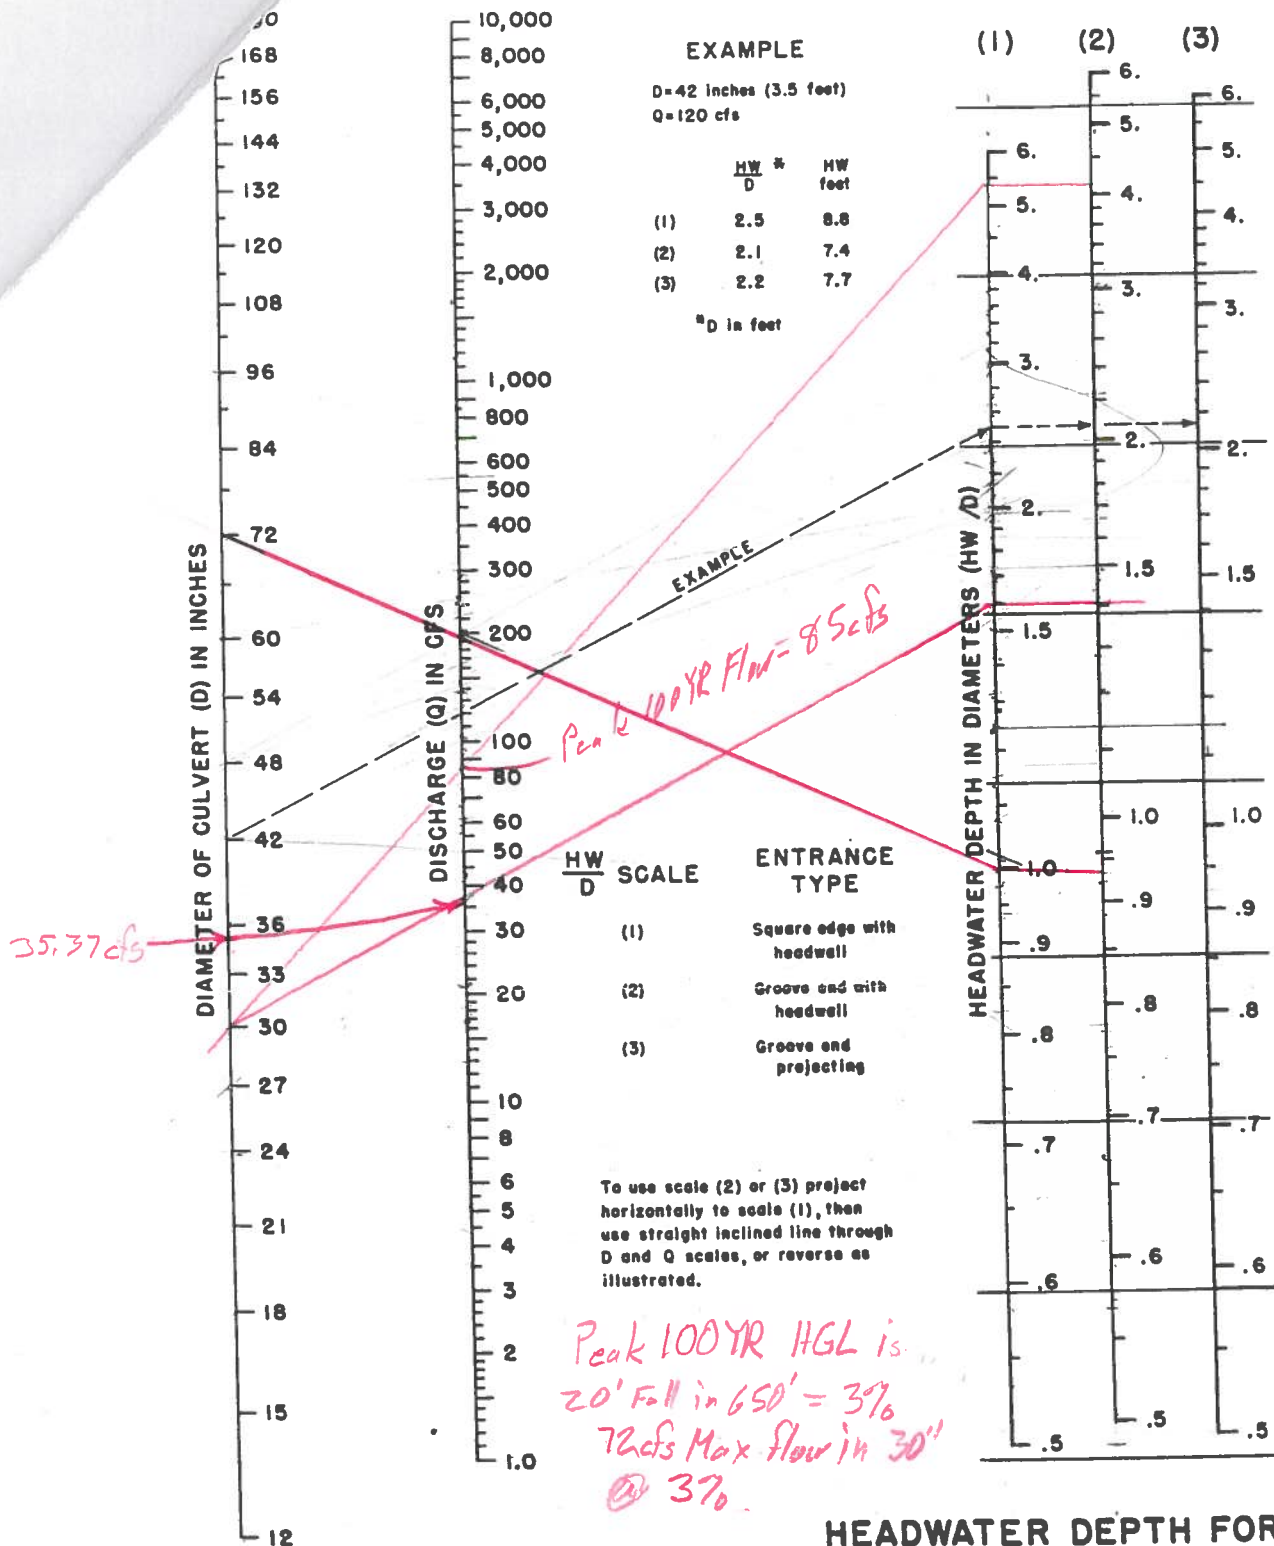

HEADWATER DEPTH FOR CONCRETE PIPE CULVERTS WITH INLET CONTROL

HEADWATER SCALES 283
 REVISED MAY 1964

BUREAU OF PUBLIC ROADS JAN. 1963


PROJECT _____

SUBJECT _____

BY _____ DATE _____

CHECKED _____ DATE _____

SHEET _____ OF _____

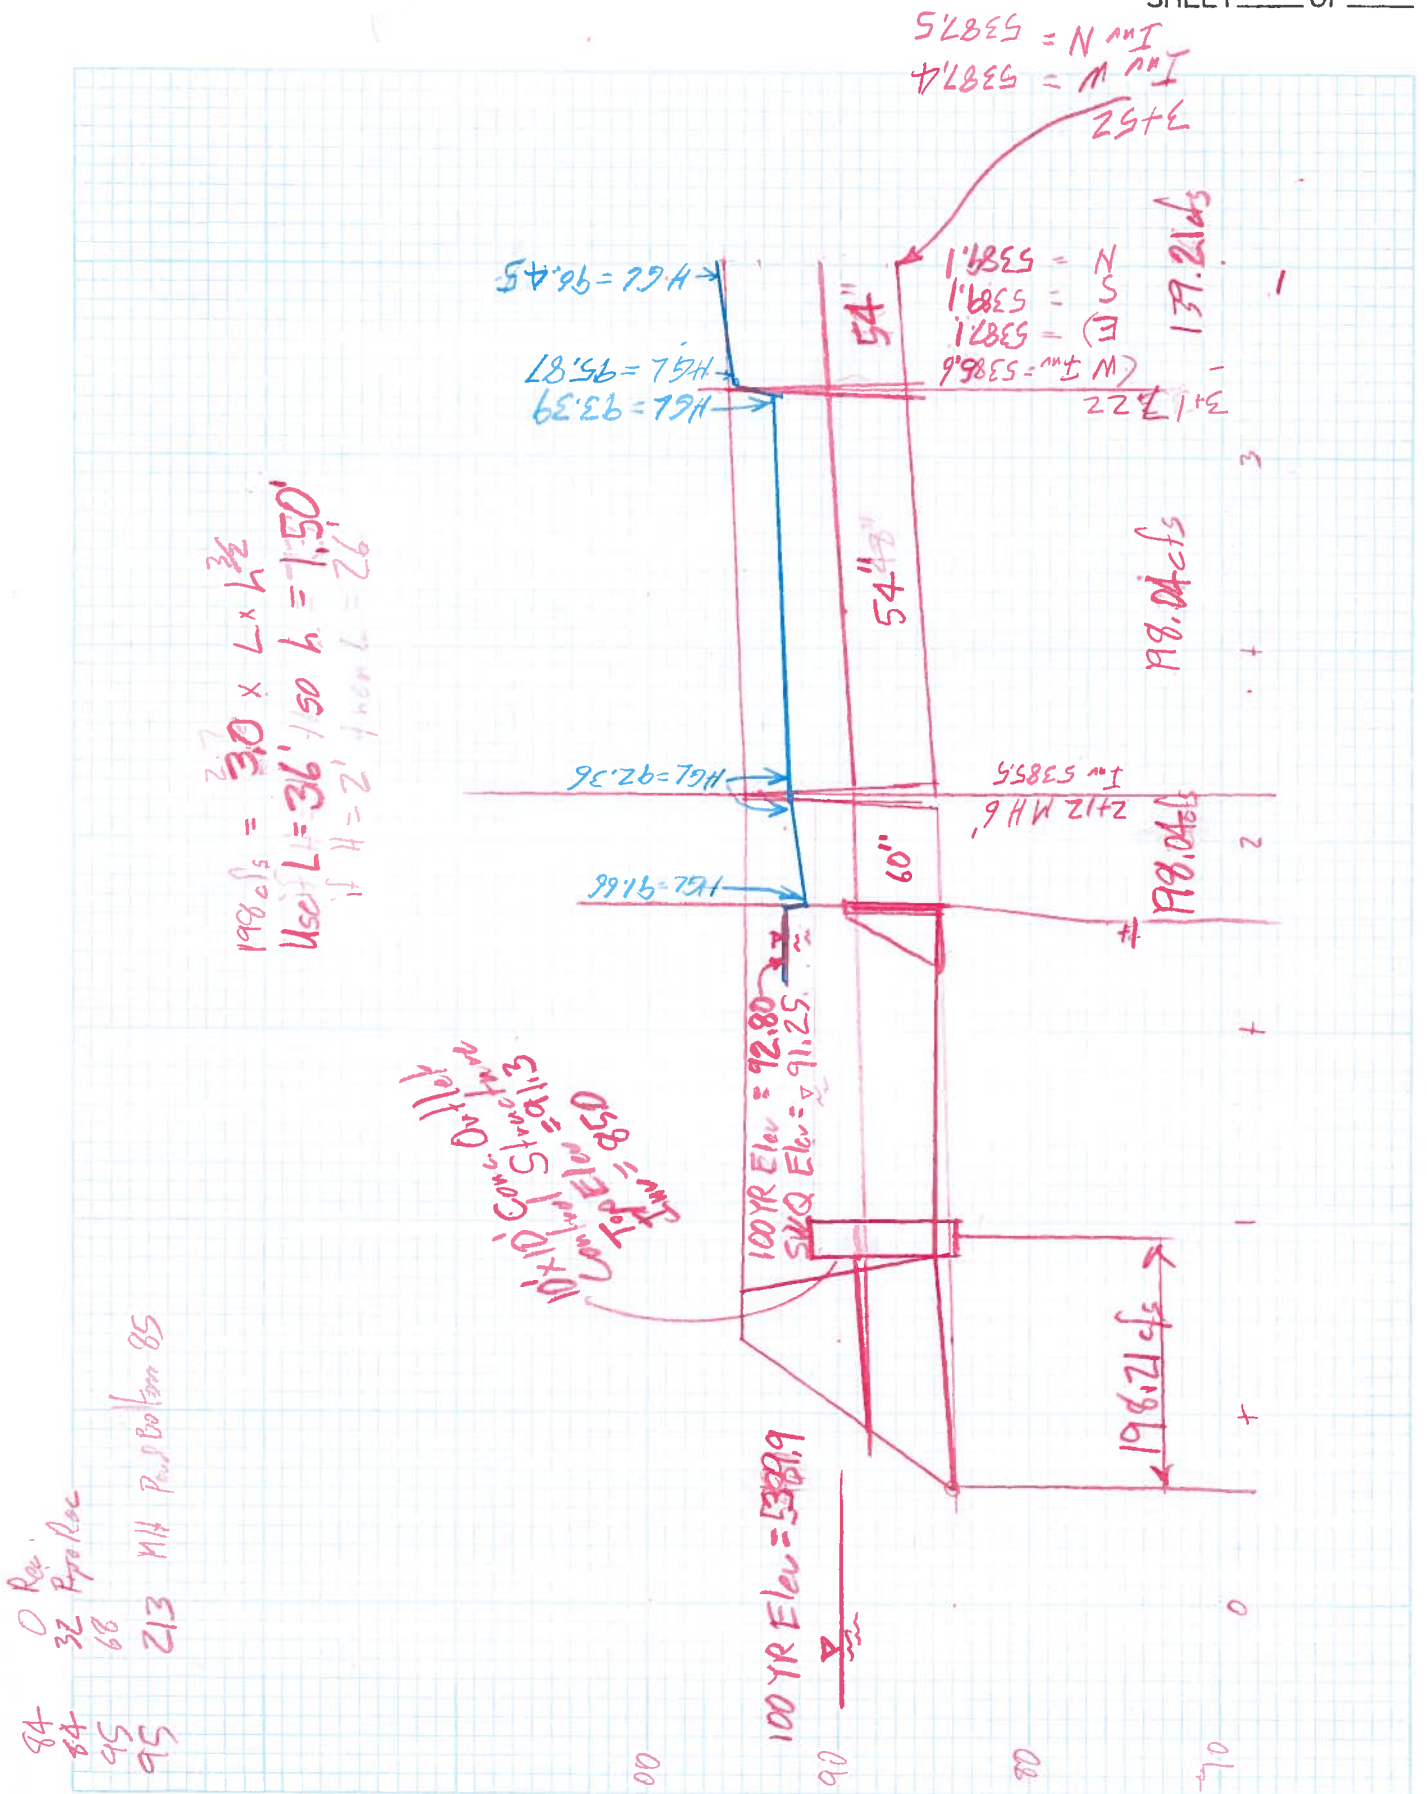




D. Mark Goodwin & Associates, P.A.
Consulting Engineers

P.O. BOX 90606, ALBUQUERQUE NM 87199
(505) 828-2200 FAX 797-9539

PROJECT Juan Tabo Hills Estates
SUBJECT Junction / Water Quality Box
BY Doug Hughes DATE 5/18/2016
CHECKED _____ DATE _____
SHEET _____ OF _____

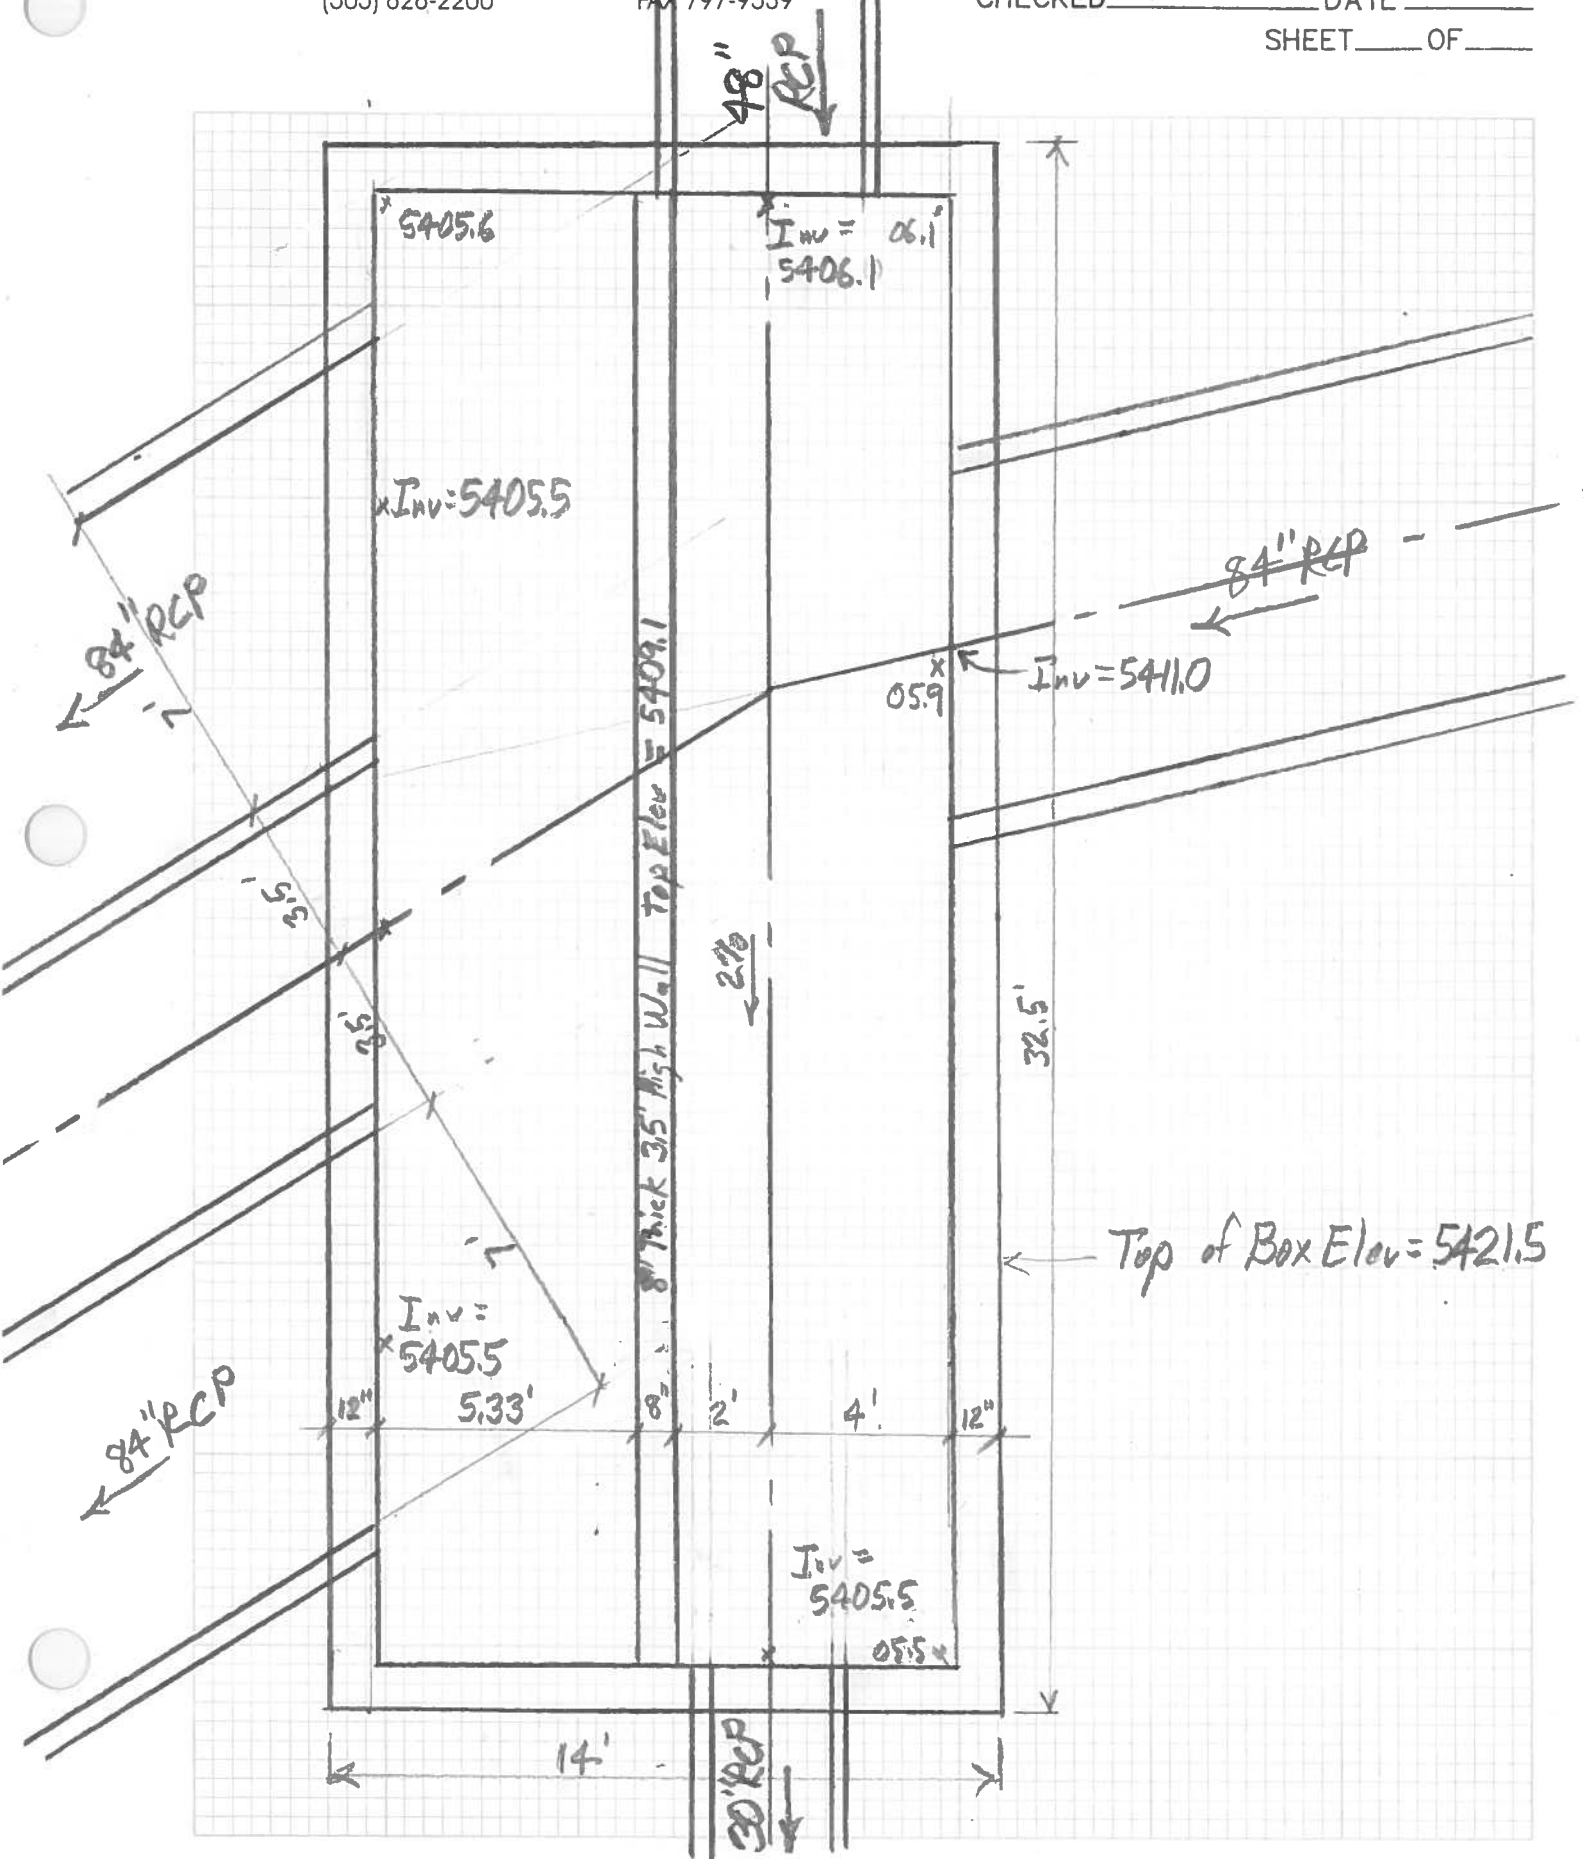

FILE: rocky.WSW

W S P G W - CIVILDESIGN Version 14.05

Program Package Serial Number: 1454

WATER SURFACE PROFILE LISTING

PAGE 1

Date: 3-13-2017 Time: 9:44:34

Rocky Top Drive

*****															*****														
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip															
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch															
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****															
2254.000	5406.100	10.490	5416.590	80.06	11.33	1.99	5418.58	.00	2.77	.00	3.000	.000	.00	1 .0															
212.000	.0373	-	-	-	-	.0144	3.05	10.49	.00	1.71	.013	.00	.00	PIPE															
2466.000	5414.000	5.644	5419.645	80.06	11.33	1.99	5421.64	.00	2.77	.00	3.000	.000	.00	1 .0															
JUNCT STR	.1250	-	-	-	-	.0095	.04	.00	.00	-	.013	.00	.00	PIPE															
2470.000	5414.500	6.676	5421.176	27.80	5.66	.50	5421.67	.00	1.80	.00	2.500	.000	.00	1 .0															
156.214	.0314	-	-	-	-	.0046	.72	6.68	.00	1.07	.013	.00	.00	PIPE															
2626.214	5419.399	2.551	5421.949	27.80	5.66	.50	5422.45	.00	1.80	.00	2.500	.000	.00	1 .0															
HYDRAULIC JUMP	-	-	-	-	-	-	-	-	-	-	-	-	-	-															
2626.214	5419.399	1.224	5420.623	27.80	11.64	2.10	5422.73	.00	1.80	2.50	2.500	.000	.00	1 .0															
2.130	.0314	-	-	-	-	.0195	.04	1.22	2.10	1.07	.013	.00	.00	PIPE															
2628.344	5419.466	1.232	5420.698	27.80	11.54	2.07	5422.76	.00	1.80	2.50	2.500	.000	.00	1 .0															
10.656	.0314	-	-	-	-	.0181	.19	1.23	2.07	1.07	.013	.00	.00	PIPE															
2639.000	5419.800	1.279	5421.080	27.80	11.00	1.88	5422.96	.00	1.80	2.50	2.500	.000	.00	1 .0															
35.345	.0167	-	-	-	-	.0171	.61	1.28	1.93	1.29	.013	.00	.00	PIPE															
2674.345	5420.389	1.273	5421.662	27.80	11.06	1.90	5423.56	.00	1.80	2.50	2.500	.000	.00	1 .0															
81.862	.0167	-	-	-	-	.0184	1.51	1.27	1.94	1.29	.013	.00	.00	PIPE															
2756.207	5421.753	1.226	5422.979	27.80	11.60	2.09	5425.07	.00	1.80	2.50	2.500	.000	.00	1 .0															
38.793	.0167	-	-	-	-	.0209	.81	1.23	2.09	1.29	.013	.00	.00	PIPE															

FILE: galfox.WSW

W S P G W - CIVILDESIGN Version 14.05

PAGE 1

Program Package Serial Number: 1454

Date: 2-24-2017 Time:10:46:43

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Galent Fox Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-Ft	Base Wt or I.D.	No Wth Prs/pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1671.000	5403.000	7.500	5410.500	1060.85	3.21	.16	5410.66	.00	2.62	44.00	30.000	44.000	.00 0 .0
TRANS STR	.1000							7.50	.21		.045	.00	.00 RECTANG
1690.000	5404.900	2.126	5407.026	1060.85	20.79	6.71	5413.74	.00	3.93	24.00	30.000	24.000	.00 0 .0
TRANS STR	.1001					.0107	.01	2.13	2.51		.013	.00	.00 RECTANG
Outfall to Tijeras													
1691.000	5405.000	5.987	5410.987	1060.85	15.13	3.56	5414.54	.00	5.99	4.93	7.000	.000	.00 2 .0
84.791	.0056					.0062	.53	5.99	.71	7.00	.013	.00	.00 PIPE
1775.791	5405.471	6.367	5411.838	1060.85	14.43	3.23	5415.07	.00	5.99	4.01	7.000	.000	.00 2 .0
5.209	.0056					.0060	.03	6.37	.59	7.00	.013	.00	.00 PIPE
1781.000	5405.500	6.375	5411.875	1060.85	14.42	3.23	5415.10	.00	5.99	3.99	7.000	.000	.00 2 .0
TRANS STR	.0000					.0031	.01	6.38	.59		.013	.00	.00 PIPE
VB out													
1785.000	5405.500	10.047	5415.547	1060.85	4.40	.30	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
Inv.						.0002	.00	10.05	.24	.39	.013	.00	.00 RECTANG
.125	3.5000												
1785.125	5405.938	9.579	5415.517	1060.85	4.61	.33	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.118	3.5000					.0002	.00	9.58	.26	.39	.013	.00	.00 RECTANG
1785.243	5406.350	9.134	5415.484	1060.85	4.84	.36	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.111	3.5000					.0002	.00	9.13	.28	.39	.013	.00	.00 RECTANG
1785.354	5406.739	8.709	5415.447	1060.85	5.08	.40	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.104	3.5000					.0002	.00	8.71	.30	.39	.013	.00	.00 RECTANG

Program Package Serial Number: 1454

Date: 2-24-2017 Time:10:46:43

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Galent Fox Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
1785.458	5407.104	8.303	5415.407	1060.85	5.32	.44	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.098	3.5000					.0003	.00	8.30	.33	.39	.013	.00	.00	RECTANG
1785.556	5407.446	7.917	5415.363	1060.85	5.58	.48	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.091	3.5000					.0003	.00	7.92	.35	.39	.013	.00	.00	RECTANG
1785.648	5407.766	7.548	5415.314	1060.85	5.86	.53	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.085	3.5000					.0004	.00	7.55	.38	.39	.013	.00	.00	RECTANG
1785.733	5408.064	7.197	5415.261	1060.85	6.14	.59	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.079	3.5000					.0004	.00	7.20	.40	.39	.013	.00	.00	RECTANG
1785.812	5408.340	6.862	5415.203	1060.85	6.44	.64	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.073	3.5000					.0005	.00	6.86	.43	.39	.013	.00	.00	RECTANG
1785.885	5408.595	6.543	5415.138	1060.85	6.76	.71	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.067	3.5000					.0005	.00	6.54	.47	.39	.013	.00	.00	RECTANG
1785.951	5408.829	6.238	5415.067	1060.85	7.09	.78	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.049	3.5000					.0006	.00	6.24	.50	.39	.013	.00	.00	RECTANG
1786.000	5409.000	6.007	5415.007	1060.85	7.36	.84	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.065	-3.3999					.0006	.00	6.01	.53	.00	.013	.00	.00	RECTANG
1786.065	5408.778	6.308	5415.085	1060.85	7.01	.76	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.072	-3.3999					.0005	.00	6.31	.49	.00	.013	.00	.00	RECTANG

Program Package Serial Number: 1454

Date: 2-24-2017 Time:10:46:43

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Galent Fox Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT or I.D.	Base Wt ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall ZR	Type Ch
1786.137	5408.533	6.623	5415.156	1060.85	6.67	.69	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.078	-3.3999					.0005	.00	6.62	.46	.00	.013	.00	RECTANG
1786.216	5408.267	6.954	5415.221	1060.85	6.36	.63	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.085	-3.3999					.0004	.00	6.95	.42	.00	.013	.00	RECTANG
1786.301	5407.977	7.302	5415.279	1060.85	6.05	.57	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.092	-3.3999					.0003	.00	7.30	.39	.00	.013	.00	RECTANG
1786.393	5407.665	7.667	5415.332	1060.85	5.77	.52	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.099	-3.3999					.0003	.00	7.67	.37	.00	.013	.00	RECTANG
1786.491	5407.330	8.050	5415.380	1060.85	5.49	.47	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.105	-3.3999					.0003	.00	8.05	.34	.00	.013	.00	RECTANG
1786.597	5406.971	8.453	5415.424	1060.85	5.23	.42	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.113	-3.3999					.0002	.00	8.45	.32	.00	.013	.00	RECTANG
1786.710	5406.587	8.876	5415.463	1060.85	4.98	.39	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.120	-3.3999					.0002	.00	8.88	.29	.00	.013	.00	RECTANG
1786.830	5406.180	9.319	5415.499	1060.85	4.74	.35	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.127	-3.3999					.0002	.00	9.32	.27	.00	.013	.00	RECTANG
1786.957	5405.746	9.785	5415.531	1060.85	4.52	.32	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.043	-3.3999					.0002	.00	9.79	.25	.00	.013	.00	RECTANG

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Galent Fox Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
2433.000	5427.200	5.395	5432.595	918.56	28.86	12.93	5445.53	.00	6.83	5.89	7.000	.000	1 .0
237.000	.0224					.0238	5.64	5.39	2.19	5.51	.013	.00	PIPE
2670.000	5432.500	5.308	5437.808	918.56	29.34	13.37	5451.17	.00	6.83	5.99	7.000	.000	1 .0
JUNCT STR	.0250					.0256	.20	5.31	2.26		.013	.00	PIPE
2678.000	5432.700	4.971	5437.671	892.94	30.55	14.49	5452.17	.00	6.81	6.35	7.000	.000	1 .0
134.000	.0194					.0285	3.81	4.97	2.51	5.76	.013	.00	PIPE
2812.000	5435.300	4.764	5440.063	892.94	32.02	15.92	5455.98	.00	6.81	6.53	7.000	.000	1 .0
JUNCT STR	.0250					.0328	.13	4.76	2.73		.013	.00	PIPE
2816.000	5435.400	4.330	5439.730	848.57	33.94	17.89	5457.62	.00	6.77	6.80	7.000	.000	1 .0
13.399	.0971					.0345	.46	4.33	3.12	3.19	.013	.00	PIPE
2829.399	5436.701	4.431	5441.132	848.57	33.04	16.95	5458.08	.00	6.77	6.75	7.000	.000	1 .0
20.601	.0971					.0314	.65	4.43	2.98	3.19	.013	.00	PIPE
2850.000	5438.701	4.619	5443.320	848.57	31.50	15.41	5458.73	.00	6.77	6.63	7.000	.000	1 .0
MA 9	.0936					.0291	.16	4.62	2.75	3.23	.013	.00	PIPE
2855.381	5439.204	4.673	5443.877	848.57	31.09	15.01	5458.88	.00	6.77	6.60	7.000	.000	1 .0
17.433	.0936					.0270	.47	4.67	2.69	3.23	.013	.00	PIPE
2872.814	5440.835	4.877	5445.712	848.57	29.64	13.64	5459.35	.00	6.77	6.44	7.000	.000	1 .0
14.670	.0936					.0241	.35	4.88	2.48	3.23	.013	.00	PIPE

Date: 2-24-2017 Time: 10:46:43

W S P G W - CIVILDESIGN Version 14.05
Program Package Serial Number: 1454
WATER SURFACE PROFILE LISTING

**Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Galent Fox Ave.**

[illegible]

44-47

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT or I.D.	Base Wt	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1671.000	5403.000	7.500	5410.500	1060.86	3.21	.16	5410.66	.00	2.62	44.00	30.000	44.000	.00	0 .0
TRANS STR	.1000													
1690.000	5404.900	2.126	5407.026	1060.86	20.79	6.71	5413.74	.00	3.93	24.00	30.000	24.000	.00	0 .0
TRANS STR	1001													
1691.000	5405.000	5.986	5410.986	1060.86	15.14	3.56	5414.54	.00	5.99	4.93	7.000	.000	.00	2 .0
84.126	.0056					.0062	.52	5.99	.71	7.00	.013	.00	.00	PIPE
1775.126	5405.467	6.366	5411.833	1060.86	14.43	3.23	5415.07	.00	5.99	4.02	7.000	.000	.00	2 .0
5.874	.0056					.0060	.04	6.37	.59	7.00	.013	.00	.00	PIPE
1781.000	5405.500	6.376	5411.875	1060.86	14.42	3.23	5415.10	.00	5.99	3.99	7.000	.000	.00	2 .0
TRANS STR	.0000					.0031	.01	6.38	.59		.013	.00	.00	PIPE
1785.000	5405.500	10.048	5415.548	1060.86	4.40	.30	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.125	3.5000					.0002	.00	10.05	.24	.39	.013	.00	.00	RECTANG
1785.125	5405.938	9.580	5415.518	1060.86	4.61	.33	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.118	3.5000					.0002	.00	9.58	.26	.39	.013	.00	.00	RECTANG
1785.243	5406.350	9.134	5415.484	1060.86	4.84	.36	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.111	3.5000					.0002	.00	9.13	.28	.39	.013	.00	.00	RECTANG
1785.354	5406.739	8.709	5415.448	1060.86	5.08	.40	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.104	3.5000					.0002	.00	8.71	.30	.39	.013	.00	.00	RECTANG

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
1785.458	5407.104	8.304	5415.408	1060.86	5.32	.44	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.098	3.5000					.0003	.00	8.30	.33	.39	.013	.00	.00	RECTANG
1785.556	5407.446	7.917	5415.364	1060.86	5.58	.48	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.091	3.5000					.0003	.00	7.92	.35	.39	.013	.00	.00	RECTANG
1785.648	5407.767	7.549	5415.315	1060.86	5.86	.53	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.085	3.5000					.0004	.00	7.55	.38	.39	.013	.00	.00	RECTANG
1785.733	5408.065	7.198	5415.263	1060.86	6.14	.59	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.079	3.5000					.0004	.00	7.20	.40	.39	.013	.00	.00	RECTANG
1785.812	5408.341	6.863	5415.204	1060.86	6.44	.64	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.073	3.5000					.0005	.00	6.86	.43	.39	.013	.00	.00	RECTANG
1785.885	5408.596	6.543	5415.140	1060.86	6.76	.71	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.067	3.5000					.0005	.00	6.54	.47	.39	.013	.00	.00	RECTANG
1785.952	5408.830	6.239	5415.069	1060.86	7.09	.78	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.049	3.5000					.0006	.00	6.24	.50	.39	.013	.00	.00	RECTANG
1786.000	5409.000	6.008	5415.008	1060.86	7.36	.84	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
Weir														
.065	-3.3999					.0006	.00	6.01	.53	.00	.013	.00	.00	RECTANG
1786.065	5408.778	6.308	5415.086	1060.86	7.01	.76	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.072	-3.3999					.0005	.00	6.31	.49	.00	.013	.00	.00	RECTANG

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Flow Top Dia.-FT	Height/ or I.D.	Base Wt	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch	
1786.137	5408.533	6.624	5415.157	1060.86	6.67	.69	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.078	-3.3999					.0005	.00	6.62	.46	.00	.013	.00	.00	RECTANG	
1786.216	5408.267	6.955	5415.222	1060.86	6.36	.63	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.085	-3.3999					.0004	.00	6.96	.42	.00	.013	.00	.00	RECTANG	
1786.301	5407.977	7.303	5415.280	1060.86	6.05	.57	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.092	-3.3999					.0003	.00	7.30	.39	.00	.013	.00	.00	RECTANG	
1786.393	5407.665	7.668	5415.333	1060.86	5.76	.52	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.099	-3.3999					.0003	.00	7.67	.37	.00	.013	.00	.00	RECTANG	
1786.491	5407.330	8.051	5415.381	1060.86	5.49	.47	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.106	-3.3999					.0003	.00	8.05	.34	.00	.013	.00	.00	RECTANG	
1786.597	5406.970	8.454	5415.424	1060.86	5.23	.42	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.113	-3.3999					.0002	.00	8.45	.32	.00	.013	.00	.00	RECTANG	
1786.710	5406.587	8.877	5415.463	1060.86	4.98	.39	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.120	-3.3999					.0002	.00	8.88	.29	.00	.013	.00	.00	RECTANG	
1786.830	5406.179	9.321	5415.500	1060.86	4.74	.35	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.127	-3.3999					.0002	.00	9.32	.27	.00	.013	.00	.00	RECTANG	
1786.957	5405.746	9.787	5415.532	1060.86	4.52	.32	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.043	-3.3999					.0002	.00	9.79	.25	.00	.013	.00	.00	RECTANG	

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (Ft)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT or I.D.	Base Wt	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1787.000	5405.600	9.942	5415.542	1060.86	4.45	.31	5415.85	2.36	3.93	24.00	30.000	24.000	.00	0 .0
JUNCT STR	.0000					.0001	.00	12.30	.25		.013	.00	.00	RECTANG
1793.000	5405.600	10.198	5415.798	980.80	4.01	.25	5416.05	.00	3.73	24.00	30.000	24.000	.00	0 .0
TRANS STR	5.3999							10.20	.22		.013	.00	.00	RECTANG
1794.000	5411.000	5.585	5416.585	980.80	27.80	12.00	5428.58	.00	7.23	6.54	7.500	.000	.00	1 .0
62.641	.0163					.0202	1.27	5.59	2.11	6.14	.013	.00	.00	PIPE
1856.641	5412.022	5.516	5417.539	980.80	28.16	12.31	5429.85	.00	7.23	6.62	7.500	.000	.00	1 .0
182.359	.0163					.0218	3.97	5.52	2.16	6.14	.013	.00	.00	PIPE
2039.000	5415.000	5.276	5420.276	980.80	29.53	13.54	5433.82	.00	7.23	6.85	7.500	.000	.00	1 .0
MA-13	.0292					.0219	2.63	5.28	2.36	4.84	.013	.00	.00	PIPE
2159.000	5418.500	5.484	5423.983	980.80	28.34	12.47	5436.45	.00	7.23	6.65	7.500	.000	.00	1 .0
JUNCT STR	.0625					.0225	.18	5.48	2.19		.013	.00	.00	PIPE
MA-12						.0237	1.03	5.43	2.21	4.89	.013	.00	.00	PIPE
2167.000	5419.000	5.429	5424.429	938.56	29.31	13.34	5437.77	.00	6.85	5.84	7.000	.000	.00	1 .0
43.470	.0310					.0237	1.03	5.43	2.21	4.89	.013	.00	.00	PIPE
2210.470	5420.348	5.514	5425.862	938.56	28.86	12.93	5438.79	.00	6.85	5.72	7.000	.000	.00	1 .0
100.961	.0310					.0222	2.24	5.51	2.13	4.89	.013	.00	.00	PIPE
2311.431	5423.479	5.803	5429.282	938.56	27.52	11.76	5441.04	.00	6.85	5.27	7.000	.000	.00	1 .0
68.594	.0310					.0203	1.39	5.80	1.91	4.89	.013	.00	.00	PIPE

Juan Tabo Hills Estates
 Developed 100-YR Flow Rates
 Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SE Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
2380.026	5425.605	6.139	5431.745	938.56	26.23	10.69	5442.43	.00	6.85	4.60	7.000	.000	.00	1 .0
44.974	.0310					.0191	.86	6.14	1.66	4.89	.013	.00	.00	PIPE
2425.000	5427.000	6.574	5433.574	938.56	25.01	9.72	5443.29	.00	6.85	3.35	7.000	.000	.00	1 .0
JUNCT STR	.0250					.0190	.15	6.57	1.32		.013	.00	.00	PIPE
2433.000	5427.200	5.973	5433.173	918.57	26.26	10.71	5443.88	.00	6.83	4.95	7.000	.000	.00	1 .0
148.845	.0224					.0188	2.80	5.97	1.74	5.51	.013	.00	.00	PIPE
2581.845	5430.529	6.295	5436.824	918.57	25.19	9.85	5446.68	.00	6.83	4.21	7.000	.000	.00	1 .0
88.155	.0224					.0183	1.61	6.30	1.51	5.51	.013	.00	.00	PIPE
2670.000	5432.500	6.833	5439.333	918.57	24.02	8.96	5448.29	.00	6.83	2.14	7.000	.000	.00	1 .0
JUNCT STR	.0250					.0190	.15	6.83	1.00		.013	.00	.00	PIPE
2678.000	5432.700	7.872	5440.572	892.95	23.20	8.36	5448.93	.00	6.81	.00	7.000	.000	.00	1 .0
134.000	.0194					.0195	2.62	7.87	.00	5.76	.013	.00	.00	PIPE
2812.000	5435.300	7.890	5443.190	892.95	23.20	8.36	5451.55	.00	6.81	.00	7.000	.000	.00	1 .0
JUNCT STR	.5250					.0150	.06	.00	.00		.013	.00	.00	PIPE
2816.000	5437.400	13.076	5450.476	41.95	8.55	1.13	5451.61	.00	2.17	.00	2.500	.000	.00	1 .0
24.000	.0083					.0105	.25	13.08	.00	2.50	.013	.00	.00	PIPE
2840.000	5437.600	13.183	5450.783	41.95	8.55	1.13	5451.92	.00	2.17	.00	2.500	.000	.00	1 .0
JUNCT STR	.1500					.0100	.04	.00	.00		.013	.00	.00	PIPE

Inlet 73

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
2844.000	5438.200	12.834	5451.034	39.95	8.14	1.03	5452.06	.00	2.13	.00	2.500	.000	.00	1 .0
21.000	.2143					.0095	.20	12.83	.00	.78	.013	.00	.00	PIPE
2855.000	5442.700	8.585	5451.285	39.95	8.14	1.03	5452.31	.00	2.13	.00	2.500	.000	.00	1 .0
JUNCT STR	.1250					.0118	.05	.00	.00		.013	.00	.00	PIPE
2869.000	5443.200	8.857	5452.057	26.95	8.58	1.14	5453.20	.00	1.81	.00	2.000	.000	.00	1 .0
8.534	.2743					.0142	.12	8.86	.00	.65	.013	.00	.00	PIPE
2877.534	5445.541	6.636	5452.177	26.95	8.58	1.14	5453.32	.00	1.81	.00	2.000	.000	.00	1 .0
HYDRAULIC JUMP														
2877.534	5445.541	.666	5446.207	26.95	29.44	13.46	5459.67	.00	1.81	1.89	2.000	.000	.00	1 .0
26.932	.2743					.2353	6.34	.67	7.45	.65	.013	.00	.00	PIPE
2904.465	5452.929	.684	5453.613	26.95	28.33	12.46	5466.08	.00	1.81	1.90	2.000	.000	.00	1 .0
16.961	.2743					.2090	3.54	.68	7.05	.65	.013	.00	.00	PIPE
2921.427	5457.582	.709	5458.291	26.95	27.01	11.33	5469.62	.00	1.81	1.91	2.000	.000	.00	1 .0
11.035	.2743					.1832	2.02	.71	6.59	.65	.013	.00	.00	PIPE
2932.462	5460.609	.734	5461.343	26.95	25.76	10.30	5471.64	.00	1.81	1.93	2.000	.000	.00	1 .0
8.004	.2743					.1607	1.29	.73	6.16	.65	.013	.00	.00	PIPE
2940.466	5462.805	.761	5463.566	26.95	24.56	9.36	5472.93	.00	1.81	1.94	2.000	.000	.00	1 .0
6.182	.2743					.1410	.87	.76	5.76	.65	.013	.00	.00	PIPE

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Dia.-FT	Height/ or I.D.	Base Wt	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SE Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch	
2946.647	5464.500	.788	5465.289	26.95	23.41	8.51	5473.80	.00	1.81	1.95	2.000	.000	.00	1	.0
4.946	.2743					.1237	.61	.79	5.38	.65	.013	.00	.00	PIPE	
2951.593	5465.857	.817	5466.674	26.95	22.32	7.74	5474.41	.00	1.81	1.97	2.000	.000	.00	1	.0
4.065	.2743					.1086	.44	.82	5.02	.65	.013	.00	.00	PIPE	
2955.658	5466.972	.847	5467.819	26.95	21.29	7.04	5474.85	.00	1.81	1.98	2.000	.000	.00	1	.0
3.401	.2743					.0954	.32	.85	4.69	.65	.013	.00	.00	PIPE	
2959.059	5467.905	.878	5468.783	26.95	20.30	6.40	5475.18	.00	1.81	1.99	2.000	.000	.00	1	.0
2.884	.2743					.0838	.24	.88	4.37	.65	.013	.00	.00	PIPE	
2961.943	5468.696	.910	5469.606	26.95	19.35	5.81	5475.42	.00	1.81	1.99	2.000	.000	.00	1	.0
2.465	.2743					.0736	.18	.91	4.08	.65	.013	.00	.00	PIPE	
2964.408	5469.373	.944	5470.317	26.95	18.45	5.29	5475.60	.00	1.81	2.00	2.000	.000	.00	1	.0
2.122	.2743					.0648	.14	.94	3.80	.65	.013	.00	.00	PIPE	
2966.530	5469.955	.980	5470.935	26.95	17.59	4.81	5475.74	.00	1.81	2.00	2.000	.000	.00	1	.0
1.840	.2743					.0570	.10	.98	3.54	.65	.013	.00	.00	PIPE	
2968.370	5470.459	1.017	5471.477	26.95	16.77	4.37	5475.85	.00	1.81	2.00	2.000	.000	.00	1	.0
1.594	.2743					.0503	.08	1.02	3.30	.65	.013	.00	.00	PIPE	
2969.964	5470.896	1.057	5471.954	26.95	15.99	3.97	5475.92	.00	1.81	2.00	2.000	.000	.00	1	.0
1.392	.2743					.0443	.06	1.06	3.07	.65	.013	.00	.00	PIPE	

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
2971.356	5471.278	1.098	5472.376	26.95	15.25	3.61	5475.99	.00	1.81	1.99	2.000	.000	.00	1 .0
1.213	.2743					.0391	.05	1.10	2.85	.65	.013	.00	.00	PIPE
2972.569	5471.611	1.141	5472.752	26.95	14.54	3.28	5476.03	.00	1.81	1.98	2.000	.000	.00	1 .0
1.053	.2743					.0346	.04	1.14	2.65	.65	.013	.00	.00	PIPE
2973.621	5471.899	1.187	5473.086	26.95	13.86	2.98	5476.07	.00	1.81	1.96	2.000	.000	.00	1 .0
.912	.2743					.0306	.03	1.19	2.46	.65	.013	.00	.00	PIPE
2974.533	5472.149	1.236	5473.386	26.95	13.22	2.71	5476.10	.00	1.81	1.94	2.000	.000	.00	1 .0
.791	.2743					.0271	.02	1.24	2.27	.65	.013	.00	.00	PIPE
2975.324	5472.366	1.287	5473.653	26.95	12.60	2.47	5476.12	.00	1.81	1.92	2.000	.000	.00	1 .0
.676	.2743					.0240	.02	1.29	2.10	.65	.013	.00	.00	PIPE
2976.000	5472.552	1.342	5473.894	26.95	12.02	2.24	5476.14	.00	1.81	1.88	2.000	.000	.00	1 .0
.573	.2743					.0214	.01	1.34	1.94	.65	.013	.00	.00	PIPE
2976.573	5472.709	1.401	5474.110	26.95	11.46	2.04	5476.15	.00	1.81	1.83	2.000	.000	.00	1 .0
.475	.2743					.0191	.01	1.40	1.78	.65	.013	.00	.00	PIPE
2977.048	5472.839	1.465	5474.305	26.95	10.92	1.85	5476.16	.00	1.81	1.77	2.000	.000	.00	1 .0
.383	.2743					.0171	.01	1.47	1.63	.65	.013	.00	.00	PIPE
2977.431	5472.944	1.535	5474.479	26.95	10.41	1.68	5476.16	.00	1.81	1.69	2.000	.000	.00	1 .0
.294	.2743					.0154	.00	1.54	1.48	.65	.013	.00	.00	PIPE

Program Package Serial Number: 1454

Date: 3- 7-2017 Time:11:36:38

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Blue Ribbon

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
2977.725	5473.025	1.612	5474.637	26.95	9.93	1.53	5476.17	.00	1.81	1.58	2.000	.000	.00	1 .0
.197	.2743					.0140	.00	1.61	1.34	.65	.013	.00	.00	PIPE
2977.921	5473.079	1.700	5474.779	26.95	9.47	1.39	5476.17	.00	1.81	1.43	2.000	.000	.00	1 .0
.079	.2743					.0129	.00	1.70	1.18	.65	.013	.00	.00	PIPE
2978.000	5473.100	1.807	5474.907	26.95	9.02	1.26	5476.17	2.00	1.81	1.18	2.000	.000	.00	1 .0
JUNCT STR	.1250					.0083	.03	2.00	1.00		.013	.00	.00	PIPE
2982.000	5473.600	3.127	5476.727	14.50	4.62	.33	5477.06	.00	1.37	.00	2.000	.000	.00	1 .0
27.000	.0111					.0041	.11	3.13	.00	1.13	.013	.00	.00	PIPE
3009.000	5473.900	2.955	5476.854	14.50	4.62	.33	5477.19	.00	1.37	.00	2.000	.000	.00	1 .0
JUNCT STR	.0250					.0022	.01	.00	.00		.013	.00	.00	PIPE
3013.000	5474.000	3.680	5477.680	2.05	1.16	.02	5477.70	.00	.54	.00	1.500	.000	.00	1 .0
13.000	.0154					.0004	.00	3.68	.00	.40	.013	.00	.00	PIPE
3026.000	5474.200	3.486	5477.686	2.05	1.16	.02	5477.71	.00	.54	.00	1.500	.000	.00	1 .0
Inlet 69														

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 2:20:13

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Silver Dollar St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Proude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1671.000	5403.000	7.500	5410.500	1060.85	3.21	.16	5410.66	.00	2.62	44.00	30.000	44.000	.00	0 .0
TRANS STR	.1000							7.50	.21		.045	.00	.00	RECTANG
1690.000	5404.900	2.126	5407.026	1060.85	20.79	6.71	5413.74	.00	3.93	24.00	30.000	24.000	.00	0 .0
TRANS STR	.1001					.0107	.01	2.13	2.51		.013	.00	.00	RECTANG
1691.000	5405.000	5.987	5410.987	1060.85	15.13	3.56	5414.54	.00	5.99	4.93	7.000	.000	.00	2 .0
84.791	.0056					.0062	.53	5.99	.71	7.00	.013	.00	.00	PIPE
1775.791	5405.471	6.367	5411.838	1060.85	14.43	3.23	5415.07	.00	5.99	4.01	7.000	.000	.00	2 .0
5.209	.0056					.0060	.03	6.37	.59	7.00	.013	.00	.00	PIPE
1781.000	5405.500	6.375	5411.875	1060.85	14.42	3.23	5415.10	.00	5.99	3.99	7.000	.000	.00	2 .0
TRANS STR	.0000					.0031	.01	6.38	.59		.013	.00	.00	PIPE
1785.000	5405.500	10.047	5415.547	1060.85	4.40	.30	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
Inv	.125					.0002	.00	10.05	.24	.39	.013	.00	.00	RECTANG
1785.125	5405.938	9.579	5415.517	1060.85	4.61	.33	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.118	3.5000					.0002	.00	9.58	.26	.39	.013	.00	.00	RECTANG
1785.243	5406.350	9.134	5415.484	1060.85	4.84	.36	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.111	3.5000					.0002	.00	9.13	.28	.39	.013	.00	.00	RECTANG
1785.354	5406.739	8.709	5415.447	1060.85	5.08	.40	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.104	3.5000					.0002	.00	8.71	.30	.39	.013	.00	.00	RECTANG

FILE: silverd.WSW

W S P G W - CIVILDESIGN Version 14.05

PAGE 2

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 2:20:13

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Silver Dollar St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1785.458	5407.104	8.303	5415.407	1060.85	5.32	.44	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.098	3.5000	-	-	-	-	.0003	.00	8.30	.33	.39	.013	.00	.00	RECTANG
1785.556	5407.446	7.917	5415.363	1060.85	5.58	.48	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.091	3.5000	-	-	-	-	.0003	.00	7.92	.35	.39	.013	.00	.00	RECTANG
1785.648	5407.766	7.548	5415.314	1060.85	5.86	.53	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.085	3.5000	-	-	-	-	.0004	.00	7.55	.38	.39	.013	.00	.00	RECTANG
1785.733	5408.064	7.197	5415.261	1060.85	6.14	.59	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.079	3.5000	-	-	-	-	.0004	.00	7.20	.40	.39	.013	.00	.00	RECTANG
1785.812	5408.340	6.862	5415.203	1060.85	6.44	.64	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.073	3.5000	-	-	-	-	.0005	.00	6.86	.43	.39	.013	.00	.00	RECTANG
1785.885	5408.595	6.543	5415.138	1060.85	6.76	.71	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.067	3.5000	-	-	-	-	.0005	.00	6.54	.47	.39	.013	.00	.00	RECTANG
1785.951	5408.829	6.238	5415.067	1060.85	7.09	.78	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.049	3.5000	-	-	-	-	.0006	.00	6.24	.50	.39	.013	.00	.00	RECTANG
1786.000	5409.000	6.007	5415.007	1060.85	7.36	.84	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
w/eir	-	-	-	-	-	-	-	-	-	-	-	-	-	-
.065	-3.3999	-	-	-	-	.0006	.00	6.01	.53	.00	.013	.00	.00	RECTANG
1786.065	5408.778	6.308	5415.085	1060.85	7.01	.76	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.072	-3.3999	-	-	-	-	.0005	.00	6.31	.49	.00	.013	.00	.00	RECTANG

FILE: silverd.WSW

W S P G W - CIVILDESIGN Version 14.05

PAGE 3

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 2:20:13

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Silver Dollar St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT or I.D.	Base Wt	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave		HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1786.137	5408.533	6.623	5415.156	1060.85	6.67	.69	.0005	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.078	-3.3999						.0005	.00	6.62	.46	.00	.013	.00	.00	RECTANG
1786.216	5408.267	6.954	5415.221	1060.85	6.36	.63		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.085	-3.3999						.0004	.00	6.95	.42	.00	.013	.00	.00	RECTANG
1786.301	5407.977	7.302	5415.279	1060.85	6.05	.57		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.092	-3.3999						.0003	.00	7.30	.39	.00	.013	.00	.00	RECTANG
1786.393	5407.665	7.667	5415.332	1060.85	5.77	.52		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.099	-3.3999						.0003	.00	7.67	.37	.00	.013	.00	.00	RECTANG
1786.491	5407.330	8.050	5415.380	1060.85	5.49	.47		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.105	-3.3999						.0003	.00	8.05	.34	.00	.013	.00	.00	RECTANG
1786.597	5406.971	8.453	5415.424	1060.85	5.23	.42		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.113	-3.3999						.0002	.00	8.45	.32	.00	.013	.00	.00	RECTANG
1786.710	5406.587	8.876	5415.463	1060.85	4.98	.39		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.120	-3.3999						.0002	.00	8.88	.29	.00	.013	.00	.00	RECTANG
1786.830	5406.180	9.319	5415.499	1060.85	4.74	.35		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.127	-3.3999						.0002	.00	9.32	.27	.00	.013	.00	.00	RECTANG
1786.957	5405.746	9.785	5415.531	1060.85	4.52	.32		5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.043	-3.3999						.0002	.00	9.79	.25	.00	.013	.00	.00	RECTANG

FILE: silverd.WSW

W S P G W - CIVILDESIGN Version 14.05

PAGE 4

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 2:20:13

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Silver Dollar St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Dia.	Height/ or I.D.	Base Wt	ZL	No Wth Prs/Pip
L/Elem	Ch Slope							HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall		ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1787.000	5405.600	9.941	5415.542	1060.85	4.45	.31	5415.85	2.36	3.93	24.00	30.000	24.000	.00	0	.0	
JUNCT STR	.0000					.0001	.00	12.30	.25		.013		.00			RECTANG
1793.000	5405.600	10.197	5415.797	980.79	4.01	.25	5416.05	.00	3.73	24.00	30.000	24.000	.00	0	.0	
TRANS STR	5.3999							10.20	.22		.013		.00			RECTANG
DB Pile in																
1794.600	5411.000	5.585	5416.585	980.79	27.80	12.00	5428.58	.00	7.23	6.54	7.500	.000	.00	1	.0	
62.622	.0163					.0202	1.27	5.59	2.11	6.14	.013		.00			PIPE
1856.622	5412.022	5.516	5417.539	980.79	28.16	12.31	5429.85	.00	7.23	6.62	7.500	.000	.00	1	.0	
182.378	.0163					.0218	3.97	5.52	2.16	6.14	.013		.00			PIPE
2039.000	5415.000	5.276	5420.276	980.79	29.53	13.54	5433.82	.00	7.23	6.85	7.500	.000	.00	1	.0	
MH-13																
120.000	.0292					.0219	2.63	5.28	2.36	4.84	.013		.00			PIPE
2159.000	5418.500	5.484	5423.984	980.79	28.34	12.47	5436.45	.00	7.23	6.65	7.500	.000	.00	1	.0	
JUNCT STR	.0625					.0225	.18	5.48	2.19		.013		.00			PIPE
MH-12																
2167.000	5419.000	5.429	5424.428	938.55	29.31	13.34	5437.76	.00	6.85	5.84	7.000	.000	.00	1	.0	
43.486	.0310					.0237	1.03	5.43	2.21	4.89	.013		.00			PIPE
2210.486	5420.348	5.514	5425.862	938.55	28.86	12.93	5438.79	.00	6.85	5.72	7.000	.000	.00	1	.0	
100.953	.0310					.0222	2.24	5.51	2.13	4.89	.013		.00			PIPE
2311.439	5423.479	5.803	5429.282	938.55	27.51	11.76	5441.04	.00	6.85	5.27	7.000	.000	.00	1	.0	
68.590	.0310					.0203	1.39	5.80	1.91	4.89	.013		.00			PIPE

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 2:20:13

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Silver Dollar St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/Dia.-FT or I.D.	Base Wt	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
2380.029	5425.605	6.139	5431.745	938.55	26.23	10.69	5442.43	.00	6.85	4.60	7.000	.000	.00 1 .0
44.971	.0310					.0191	.86	6.14	1.66	4.89	.013	.00	.00 PIPE
2425.000	5427.000	6.574	5433.574	938.55	25.01	9.72	5443.29	.00	6.85	3.35	7.000	.000	.00 1 .0
JUNCT STR	.0250					.0190	.15	6.57	1.32		.013	.00	.00 PIPE
2433.000	5427.200	5.973	5433.173	918.56	26.26	10.71	5443.88	.00	6.83	4.95	7.000	.000	.00 1 .0
148.858	.0224					.0188	2.80	5.97	1.74	5.51	.013	.00	.00 PIPE
2581.858	5430.529	6.295	5436.824	918.56	25.19	9.85	5446.68	.00	6.83	4.21	7.000	.000	.00 1 .0
88.142	.0224					.0183	1.61	6.30	1.51	5.51	.013	.00	.00 PIPE
2670.000	5432.500	6.833	5439.333	918.56	24.02	8.96	5448.29	7.00	6.83	2.14	7.000	.000	.00 1 .0
JUNCT STR	1.2000							7.00	1.00		.013	.00	.00 PIPE
2678.000	5442.100	1.733	5443.833	25.62	8.86	1.22	5445.05	.00	1.78	1.36	2.000	.000	.00 1 .0
48.432	.0118					.0118	.57	1.73	1.07	1.73	.013	.00	.00 PIPE
2726.432	5442.670	1.733	5444.402	25.62	8.86	1.22	5445.62	.00	1.78	1.36	2.000	.000	.00 1 .0
19.568	.0118					.0116	.23	1.73	1.07	1.73	.013	.00	.00 PIPE
2746.000	5442.900	1.777	5444.677	25.62	8.69	1.17	5445.85	2.00	1.78	1.26	2.000	.000	.00 1 .0
JUNCT STR	.1250					.0131	.05	2.00	1.00		.013	.00	.00 PIPE
2750.000	5443.400	3.037	5446.437	12.81	7.25	.82	5447.25	.00	1.34	.00	1.500	.000	.00 1 .0
25.000	.0120					.0149	.37	3.04	.00	1.50	.013	.00	.00 PIPE

Date: 2-24-2017 Time: 2:20:13

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Silver Dollar St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Flow Top	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR		Type Ch
2775.000	5443.700	3.109	5446.809	12.81	7.25	.82	5447.63	.00	1.34	.00	1.500	.000	.00	1	.0

Inlet

Program Package Serial Number: 1454

Date: 2-24-2017 Time:12:15: 4

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Hubbard St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1671.000	5403.000	7.500	5410.500	1060.85	3.21	.16	5410.66	.00	2.62	44.00	30.000	44.000	.00	0 .0
TRANS STR	.1000							7.50	.21		.045	.00	.00	RECTANG
1690.000	5404.900	2.126	5407.026	1060.85	20.79	6.71	5413.74	.00	3.93	24.00	30.000	24.000	.00	0 .0
TRANS STR	.1001					.0107	.01	2.13	2.51		.013	.00	.00	RECTANG
1691.000	5405.000	5.987	5410.987	1060.85	15.13	3.56	5414.54	.00	5.99	4.93	7.000	.000	.00	2 .0
84.791	.0056					.0062	.53	5.99	.71	7.00	.013	.00	.00	PIPE
1775.791	5405.471	6.367	5411.838	1060.85	14.43	3.23	5415.07	.00	5.99	4.01	7.000	.000	.00	2 .0
5.209	.0056					.0060	.03	6.37	.59	7.00	.013	.00	.00	PIPE
1781.000	5405.500	6.375	5411.875	1060.85	14.42	3.23	5415.10	.00	5.99	3.99	7.000	.000	.00	2 .0
TRANS STR	.0000					.0031	.01	6.38	.59		.013	.00	.00	PIPE
1785.000	5405.500	10.047	5415.547	1060.85	4.40	.30	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
Inv	.125					.0002	.00	10.05	.24	.39	.013	.00	.00	RECTANG
1785.125	5405.938	9.579	5415.517	1060.85	4.61	.33	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.118	3.5000					.0002	.00	9.58	.26	.39	.013	.00	.00	RECTANG
1785.243	5406.350	9.134	5415.484	1060.85	4.84	.36	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.111	3.5000					.0002	.00	9.13	.28	.39	.013	.00	.00	RECTANG
1785.354	5406.739	8.709	5415.447	1060.85	5.08	.40	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.104	3.5000					.0002	.00	8.71	.30	.39	.013	.00	.00	RECTANG

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Hubbard St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	No Wth Prs/pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1785.458	5407.104	8.303	5415.407	1060.85	5.32	.44	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.098	3.5000					.0003	.00	8.30	.33	.39	.013	.00	.00 RECTANG
1785.556	5407.446	7.917	5415.363	1060.85	5.58	.48	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.091	3.5000					.0003	.00	7.92	.35	.39	.013	.00	.00 RECTANG
1785.648	5407.766	7.548	5415.314	1060.85	5.86	.53	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.085	3.5000					.0004	.00	7.55	.38	.39	.013	.00	.00 RECTANG
1785.733	5408.064	7.197	5415.261	1060.85	6.14	.59	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.079	3.5000					.0004	.00	7.20	.40	.39	.013	.00	.00 RECTANG
1785.812	5408.340	6.862	5415.203	1060.85	6.44	.64	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.073	3.5000					.0005	.00	6.86	.43	.39	.013	.00	.00 RECTANG
1785.885	5408.595	6.543	5415.138	1060.85	6.76	.71	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.067	3.5000					.0005	.00	6.54	.47	.39	.013	.00	.00 RECTANG
1785.951	5408.829	6.238	5415.067	1060.85	7.09	.78	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.049	3.5000					.0006	.00	6.24	.50	.39	.013	.00	.00 RECTANG
1786.000	5409.000	6.007	5415.007	1060.85	7.36	.84	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.065	-3.3999					.0006	.00	6.01	.53	.00	.013	.00	.00 RECTANG
1786.065	5408.778	6.308	5415.085	1060.85	7.01	.76	5415.85	.00	3.93	24.00	30.000	24.000	.00 0 .0
.072	-3.3999					.0005	.00	6.31	.49	.00	.013	.00	.00 RECTANG

Program Package Serial Number: 1454

Date: 2-24-2017 Time:12:15: 4

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Hubbard St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth
L/Elem	Ch Slope						SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1786.137	5408.533	6.623	5415.156	1060.85	6.67	.69	.0005	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.078	-3.3999							.00	6.62	.46	.00	.013	.00	.00	RECTANG
1786.216	5408.267	6.954	5415.221	1060.85	6.36	.63	.0004	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.085	-3.3999							.00	6.95	.42	.00	.013	.00	.00	RECTANG
1786.301	5407.977	7.302	5415.279	1060.85	6.05	.57	.0003	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.092	-3.3999							.00	7.30	.39	.00	.013	.00	.00	RECTANG
1786.393	5407.665	7.667	5415.332	1060.85	5.77	.52	.0003	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.099	-3.3999							.00	7.67	.37	.00	.013	.00	.00	RECTANG
1786.491	5407.330	8.050	5415.380	1060.85	5.49	.47	.0003	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.105	-3.3999							.00	8.05	.34	.00	.013	.00	.00	RECTANG
1786.597	5406.971	8.453	5415.424	1060.85	5.23	.42	.0002	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.113	-3.3999							.00	8.45	.32	.00	.013	.00	.00	RECTANG
1786.710	5406.587	8.876	5415.463	1060.85	4.98	.39	.0002	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.120	-3.3999							.00	8.88	.29	.00	.013	.00	.00	RECTANG
1786.830	5406.180	9.319	5415.499	1060.85	4.74	.35	.0002	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.127	-3.3999							.00	9.32	.27	.00	.013	.00	.00	RECTANG
1786.957	5405.746	9.785	5415.531	1060.85	4.52	.32	.0002	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0
.043	-3.3999							.00	9.79	.25	.00	.013	.00	.00	RECTANG

Program Package Serial Number: 1454

Date: 2-24-2017 Time:12:15: 4

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Hubbard St.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope						SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1787.000	5405.600	9.941	5415.542	1060.85	4.45	.31	5415.85	2.36	3.93	24.00	30.000	24.000	.00	0	.0
JUNCT STR	.0000					.0001	.00	12.30	.25	.013			.00	RECTANG	
1793.000	5405.600	10.197	5415.797	980.79	4.01	.25	5416.05	.00	3.73	24.00	30.000	24.000	.00	0	.0
TRANS STR	5.3999							10.20	.22	.013			.00	RECTANG	
1794.000	5411.000	5.592	5416.592	980.79	27.76	11.97	5428.56	.00	7.23	6.53	7.500	.000	.00	1	.0
60.344	.0163					.0202	1.22	5.59	2.10	6.14	.013	.00	.00	PIPE	
1854.344	5411.985	5.526	5417.511	980.79	28.11	12.27	5429.78	.00	7.23	6.61	7.500	.000	.00	1	.0
184.656	.0163					.0217	4.00	5.53	2.15	6.14	.013	.00	.00	PIPE	
2039.000	5415.000	5.285	5420.285	980.79	29.48	13.49	5433.78	.00	7.23	6.84	7.500	.000	.00	1	.0
120.000	.0292					.0218	2.61	5.29	2.36	4.84	.013	.00	.00	PIPE	
2159.000	5418.500	5.499	5423.999	980.79	28.25	12.39	5436.39	.00	7.23	6.63	7.500	.000	.00	1	.0
JUNCT STR	.0625					.0223	.18	5.50	2.18	.013			.00	PIPE	
2167.000	5419.000	5.446	5424.446	938.55	29.22	13.25	5437.70	.00	6.85	5.82	7.000	.000	.00	1	.0
81.165	.0310					.0231	1.88	5.45	2.19	4.89	.013	.00	.00	PIPE	
2248.165	5421.517	5.629	5427.146	938.55	28.29	12.43	5439.58	.00	6.85	5.56	7.000	.000	.00	1	.0
85.564	.0310					.0214	1.83	5.63	2.04	4.89	.013	.00	.00	PIPE	
2333.729	5424.170	5.935	5430.105	938.55	26.98	11.30	5441.41	.00	6.85	5.03	7.000	.000	.00	1	.0
58.466	.0310					.0197	1.15	5.94	1.81	4.89	.013	.00	.00	PIPE	

Program Package Serial Number: 1454

Date: 2-24-2017 Time:12:15: 4

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Hubbard St.

[illegible]

WATER SURFACE PROFILE LISTING

Duke City north of Sandia Sunset Ave.

User ID: doug, Date/Time: 2/24/2017 11:35 AM, Document Name: Microsoft Word - duke.OUT

Program Package Serial Number: 1454

Date: 2-24-2017 Time:11:33:51

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Duke City north of Sandia Sunset Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch	
1785.458	5407.104	8.303	5415.407	1060.85	5.32	.44	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.098	3.5000					.0003	.00	8.30	.33	.39	.013	.00	.00	RECTANG	
1785.556	5407.446	7.917	5415.363	1060.85	5.58	.48	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.091	3.5000					.0003	.00	7.92	.35	.39	.013	.00	.00	RECTANG	
1785.648	5407.766	7.548	5415.314	1060.85	5.86	.53	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.085	3.5000					.0004	.00	7.55	.38	.39	.013	.00	.00	RECTANG	
1785.733	5408.064	7.197	5415.261	1060.85	6.14	.59	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.079	3.5000					.0004	.00	7.20	.40	.39	.013	.00	.00	RECTANG	
1785.812	5408.340	6.862	5415.203	1060.85	6.44	.64	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.073	3.5000					.0005	.00	6.86	.43	.39	.013	.00	.00	RECTANG	
1785.885	5408.595	6.543	5415.138	1060.85	6.76	.71	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.067	3.5000					.0005	.00	6.54	.47	.39	.013	.00	.00	RECTANG	
1785.951	5408.829	6.238	5415.067	1060.85	7.09	.78	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.049	3.5000					.0006	.00	6.24	.50	.39	.013	.00	.00	RECTANG	
1786.000	5409.000	6.007	5415.007	1060.85	7.36	.84	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.065	-3.3999					.0006	.00	6.01	.53	.00	.013	.00	.00	RECTANG	
1786.065	5408.778	6.308	5415.085	1060.85	7.01	.76	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0
.072	-3.3999					.0005	.00	6.31	.49	.00	.013	.00	.00	RECTANG	

Juan Tabo Hills Estates															
Developed 100-YR Flow Rates															
Duke City north of Sandia Sunset Ave.															
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Flow Top Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip	
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch	
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	
1786.137	5408.533	6.623	5415.156	1060.85	6.67	.69	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.078	-3.3999					.0005	.00	6.62	.46	.00	.013	.00	.00	RECTANG	
1786.216	5408.267	6.954	5415.221	1060.85	6.36	.63	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.085	-3.3999					.0004	.00	6.95	.42	.00	.013	.00	.00	RECTANG	
1786.301	5407.977	7.302	5415.279	1060.85	6.05	.57	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.092	-3.3999					.0003	.00	7.30	.39	.00	.013	.00	.00	RECTANG	
1786.393	5407.665	7.667	5415.332	1060.85	5.77	.52	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.099	-3.3999					.0003	.00	7.67	.37	.00	.013	.00	.00	RECTANG	
1786.491	5407.330	8.050	5415.380	1060.85	5.49	.47	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.105	-3.3999					.0003	.00	8.05	.34	.00	.013	.00	.00	RECTANG	
1786.597	5406.971	8.453	5415.424	1060.85	5.23	.42	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.113	-3.3999					.0002	.00	8.45	.32	.00	.013	.00	.00	RECTANG	
1786.710	5406.587	8.876	5415.463	1060.85	4.98	.39	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.120	-3.3999					.0002	.00	8.88	.29	.00	.013	.00	.00	RECTANG	
1786.830	5406.180	9.319	5415.499	1060.85	4.74	.35	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.127	-3.3999					.0002	.00	9.32	.27	.00	.013	.00	.00	RECTANG	
1786.957	5405.746	9.785	5415.531	1060.85	4.52	.32	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0	
.043	-3.3999					.0002	.00	9.79	.25	.00	.013	.00	.00	RECTANG	

Date: 2-24-2017 Time: 11:33:51

Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Duke City north of Sandia Sunset Ave.

*****															No Wth
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	Prs/Pip	
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch	
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	
1787.000	5405.600	9.941	5415.542	1060.85	4.45	.31	5415.85	2.36	3.93	24.00	30.000	24.000	.00	0 .0	
JUNCT STR .0000															
1793.000	5405.600	10.197	5415.797	980.79	4.01	.25	5416.05	.00	3.73	24.00	30.000	24.000	.00	0 .0	
TRANS STR 5.3999															
1794.000	5411.000	6.002	5417.002	980.79	25.88	10.40	5427.40	.00	7.23	6.00	7.500	.000	.00	1 .0	
245.000	.0163	-	-	-	-	.0174	4.26	6.00	1.81	6.14	.013	.00	.00	PIPE	
2039.000	5415.000	5.896	5420.896	980.79	26.33	10.76	5431.66	.00	7.23	6.15	7.500	.000	.00	1 .0	
20.340	.0292	-	-	-	-	.0174	.35	5.90	1.89	4.84	.013	.00	.00	PIPE	
2059.340	5415.593	5.994	5421.587	980.79	25.91	10.42	5432.01	.00	7.23	6.01	7.500	.000	.00	1 .0	
48.874	.0292	-	-	-	-	.0163	.80	5.99	1.82	4.84	.013	.00	.00	PIPE	
2108.213	5417.019	6.315	5423.333	980.79	24.70	9.48	5432.81	.00	7.23	5.47	7.500	.000	.00	1 .0	
33.897	.0292	-	-	-	-	.0150	.51	6.32	1.62	4.84	.013	.00	.00	PIPE	
2142.111	5418.007	6.697	5424.705	980.79	23.55	8.61	5433.32	.00	7.23	4.64	7.500	.000	.00	1 .0	
16.889	.0292	-	-	-	-	.0144	.24	6.70	1.39	4.84	.013	.00	.00	PIPE	
2159.000	5418.500	7.231	5425.731	980.79	22.46	7.83	5433.56	7.50	7.23	2.79	7.500	.000	.00	1 .0	
JUNCT STR .5625															
2167.000	5423.000	1.298	5424.297	17.80	8.25	1.06	5425.35	.00	1.52	1.91	2.000	.000	.00	1 .0	
32.065	.0109	-	-	-	-	.0109	.35	1.30	1.37	1.30	.013	.00	.00	PIPE	

Date: 2-24-2017 Time:11:33:51

Juan Tabo Hills Estates
Developed 100-YR Flow Rates
Duke City north of Sandia Sunset Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
2199.065	5423.348	1.298	5424.646	17.80	8.25	1.06	5425.70	.00	1.52	1.91	2.000	.000	.00	1 .0
69.387	.0109					.0105	.73	1.30	1.37	1.30	.013	.00	.00	PIPE
2268.452	5424.103	1.330	5425.433	17.80	8.02	1.00	5426.43	.00	1.52	1.89	2.000	.000	.00	1 .0
25.669	.0109					.0096	.25	1.33	1.30	1.30	.013	.00	.00	PIPE
2294.121	5424.381	1.388	5425.770	17.80	7.65	.91	5426.68	.00	1.52	1.84	2.000	.000	.00	1 .0
8.878	.0109					.0085	.08	1.39	1.20	1.30	.013	.00	.00	PIPE
2302.999	5424.478	1.450	5425.928	17.80	7.29	.83	5426.75	.00	1.52	1.79	2.000	.000	.00	1 .0
2.001	.0109					.0076	.02	1.45	1.10	1.30	.013	.00	.00	PIPE
2305.000	5424.500	1.520	5426.020	17.80	6.95	.75	5426.77	.00	1.52	1.71	2.000	.000	.00	1 .0
JUNCT STR	.1250					.0072	.03	1.52	1.00		.013	.00	.00	PIPE
Inlet 19														
2309.000	5425.000	2.180	5427.180	8.90	5.04	.39	5427.57	.00	1.15	.00	1.500	.000	.00	1 .0
21.000	.0095					.0072	.15	2.18	.00	1.08	.013	.00	.00	PIPE
2330.000	5425.200	2.131	5427.331	8.90	5.04	.39	5427.72	.00	1.15	.00	1.500	.000	.00	1 .0
Inlet 18														

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 10:29:33

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Duke City south of Sandia Sunset Ave.

*****														*****														*****													
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Dia.-FT	Height/ or I.D.	Base Wt	*****																											
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	*****																											
1671.000	5403.000	7.500	5410.500	1060.85	3.21	.16	5410.66	.00	2.62	44.00	30.000	44.000	.00	0	.0	*****																									
TRANS STR .1000															*****																										
1690.000	5404.900	2.126	5407.026	1060.85	20.79	6.71	5413.74	.00	3.93	24.00	30.000	24.000	.00	0	.0	*****																									
TRANS STR .1001															*****																										
Outfall to Tijeras															*****																										
1691.000	5405.000	5.987	5410.987	1060.85	15.13	3.56	5414.54	.00	5.99	4.93	7.000	.000	.00	2	.0	*****																									
84.791 .0056															*****																										
1775.791	5405.471	6.367	5411.838	1060.85	14.43	3.23	5415.07	.00	5.99	4.01	7.000	.000	.00	2	.0	*****																									
5.209 .0056															*****																										
1781.000	5405.500	6.375	5411.875	1060.85	14.42	3.23	5415.10	.00	5.99	3.99	7.000	.000	.00	2	.0	*****																									
TRANS STR .0000															*****																										
JB out															*****																										
1785.000	5405.500	10.047	5415.547	1060.85	4.40	.30	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0	*****																									
.125															*****																										
1785.125	5405.938	9.579	5415.517	1060.85	4.61	.33	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0	*****																									
.118															*****																										
1785.243	5406.350	9.134	5415.484	1060.85	4.84	.36	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0	*****																									
.111															*****																										
1785.354	5406.739	8.709	5415.447	1060.85	5.08	.40	5415.85	.00	3.93	24.00	30.000	24.000	.00	0	.0	*****																									
.104															*****																										

Program Package Serial Number: 1454

Date: 2-24-2017 Time: 10:29:33

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Duke City south of Sandia Sunset Ave.

*****															*****															*****															*****														
Station	Invert Elev	Depth (Ft)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Height Top Dia.-Ft	Base Wt or I.D.	ZL	No Wth Prs/piP																																													
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch																																													
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****																																													
1785.458	5407.104	8.303	5415.407	1060.85	5.32	.44	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.098	3.5000					.0003	.00	8.30	.33	.39	.013	.00	.00	RECTANG																																													
1785.556	5407.446	7.917	5415.363	1060.85	5.58	.48	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.091	3.5000					.0003	.00	7.92	.35	.39	.013	.00	.00	RECTANG																																													
1785.648	5407.766	7.548	5415.314	1060.85	5.86	.53	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.085	3.5000					.0004	.00	7.55	.38	.39	.013	.00	.00	RECTANG																																													
1785.733	5408.064	7.197	5415.261	1060.85	6.14	.59	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.079	3.5000					.0004	.00	7.20	.40	.39	.013	.00	.00	RECTANG																																													
1785.812	5408.340	6.862	5415.203	1060.85	6.44	.64	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.073	3.5000					.0005	.00	6.86	.43	.39	.013	.00	.00	RECTANG																																													
1785.885	5408.595	6.543	5415.138	1060.85	6.76	.71	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.067	3.5000					.0005	.00	6.54	.47	.39	.013	.00	.00	RECTANG																																													
1785.951	5408.829	6.238	5415.067	1060.85	7.09	.78	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.049	3.5000					.0006	.00	6.24	.50	.39	.013	.00	.00	RECTANG																																													
1786.000	5409.000	6.007	5415.007	1060.85	7.36	.84	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.065	-3.3999					.0006	.00	6.01	.53	.00	.013	.00	.00	RECTANG																																													
1786.065	5408.778	6.308	5415.085	1060.85	7.01	.76	5415.85	.00	3.93	24.00	30.000	24.000	.00	0 .0																																													
.072	-3.3999					.0005	.00	6.31	.49	.00	.013	.00	.00	RECTANG																																													

FILE: dukes.WSW

W S P G W - CIVILDESIGN Version 14.05

PAGE 4

Program Package Serial Number: 1454

Date: 2-24-2017 Time:10:29:33

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Duke City south of Sandia Sunset Ave.

*****															*****	
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT	Base Wt or I.D.	ZL	No Wth Prs/Pip		
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch		
*****															*****	
1787.000	5405.600	9.941	5415.542	1060.85	4.45	.31	5415.85	2.36	3.93	24.00	30.000	24.000	.00	0 .0		
JUNCT STR .0000						.0001	.00	12.30	.25		.013	.00	.00	RECTANG		
1793.000	5405.600	10.197	5415.797	980.79	4.01	.25	5416.05	.00	3.73	24.00	30.000	24.000	.00	0 .0		
TRANS STR 5.3999								10.20	.22		.013	.00	.00	RECTANG		
JB Pipe in																
1794.000	5411.000	6.002	5417.002	980.79	25.88	10.40	5427.40	.00	7.23	6.00	7.500	.000	.00	1 .0		
245.000	.0163					.0174	4.26	6.00	1.81	6.14	.013	.00	.00	PIPE		
2039.000	5415.000	5.896	5420.896	980.79	26.33	10.76	5431.66	.00	7.23	6.15	7.500	.000	.00	1 .0		
20.340	.0292					.0174	.35	5.90	1.89	4.84	.013	.00	.00	PIPE		
HH-13																
2059.340	5415.593	5.994	5421.587	980.79	25.91	10.42	5432.01	.00	7.23	6.01	7.500	.000	.00	1 .0		
48.874	.0292					.0163	.80	5.99	1.82	4.84	.013	.00	.00	PIPE		
2108.213	5417.019	6.315	5423.333	980.79	24.70	9.48	5432.81	.00	7.23	5.47	7.500	.000	.00	1 .0		
33.897	.0292					.0150	.51	6.32	1.62	4.84	.013	.00	.00	PIPE		
2142.111	5418.007	6.697	5424.705	980.79	23.55	8.61	5433.32	.00	7.23	4.64	7.500	.000	.00	1 .0		
16.889	.0292					.0144	.24	6.70	1.39	4.84	.013	.00	.00	PIPE		
2159.000	5418.500	7.231	5425.731	980.79	22.46	7.83	5433.56	7.50	7.23	2.79	7.500	.000	.00	1 .0		
JUNCT STR .8750								7.50	1.00		.013	.00	.00	PIPE		
HH-12																
2167.000	5425.500	1.713	5427.213	24.44	8.53	1.13	5428.34	.00	1.75	1.40	2.000	.000	.00	1 .0		
124.700	.0109					.0109	1.36	1.71	1.05	1.71	.013	.00	.00	PIPE		

Program Package Serial Number: 1454

Date: 2-24-2017 Time:10:29:33

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Duke City south of Sandia Sunset Ave.

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Top Width	Height/ Dia.-FT or I.D.	Base Wt	ZL	No Wth
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
2291.700	5426.855	1.713	5428.568	24.44	8.53	1.13	5429.70	.00	1.75	1.40	2.000	.000	.00	1 .0
13.300	.0109					.0107	.14	1.71	1.05	1.71	.013	.00	.00	PIPE
2305.000	5427.000	1.747	5428.747	24.44	8.40	1.09	5429.84	2.00	1.75	1.33	2.000	.000	.00	1 .0
JUNCT STR	.1250					.0121	.05	2.00	1.00		.013	.00	.00	PIPE
2309.000	5427.500	2.898	5430.398	12.22	6.92	.74	5431.14	.00	1.32	.00	1.500	.000	.00	1 .0
21.000	.0095					.0135	.28	2.90	.00	1.50	.013	.00	.00	PIPE
2330.000	5427.700	2.982	5430.682	12.22	6.92	.74	5431.42	.00	1.32	.00	1.500	.000	.00	1 .0
Inlet 17														

Date: 6-10-2016 Time:12:32:19

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

SWQ MH thru Tract K to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Dia.	Base Wt I.D.	No Wt ZL	Prs/Pip
L/Elem	Ch Slope						HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
150.000	5383.000	9.800	5392.800	198.04	.81	.01	5392.81	.00	1.25	25.00	30.000	25.000	.00	0 .0
TRANS STR	.2222					.0053	.05	9.80	.05		.045		.00	.00 RECTANG
159.000	5385.000	7.645	5392.645	198.04	5.18	.42	5393.06	.00	3.65	5.00	30.000	5.000	.00	0 .0
TRANS STR	.0000					.0055	.01	7.65	.33		.013		.00	.00 RECTANG
160.000	5385.000	6.655	5391.655	198.04	12.45	2.41	5394.06	.00	4.02	.00	4.500	.000	.00	1 .0
52.000	.0096					.0101	.53	6.66	.00	3.81	.013		.00	.00 PIPE
212.000	5385.500	6.857	5392.357	198.04	12.45	2.41	5394.77	.00	4.02	.00	4.500	.000	.00	1 .0
MA-31						.0101	1.03	6.86	.00	3.57	.013		.00	.00 PIPE
314.000	5386.600	6.792	5393.392	198.04	12.45	2.41	5395.80	.00	4.02	.00	4.500	.000	.00	1 .0
JUNCT STR	.0833					.0076	.05	6.79	.00		.013		.00	.00 PIPE
MA-30						1.19	5397.06	.00	3.47	.00	4.500	.000	.00	1 .0
320.000	5387.100	8.773	5395.873	139.21	8.75	.0050	.17	8.77	.00	2.89	.013		.00	.00 PIPE
33.000	.0091					.0050	.17	8.77	.00	2.89	.013		.00	.00 PIPE
353.000	5387.400	9.051	5396.451	139.21	8.75	1.19	5397.64	.00	3.47	.00	4.500	.000	.00	1 .0
MA-29						.0050	2.00	9.05	.00	2.89	.013		.00	.00 PIPE
399.000	.0090					.0050	2.00	9.05	.00	2.89	.013		.00	.00 PIPE
752.000	5391.000	7.451	5398.451	139.21	8.75	1.19	5399.64	.00	3.47	.00	4.500	.000	.00	1 .0
JUNCT STR	.0125					.0046	.04	7.45	.00		.013		.00	.00 PIPE
MA-28						.98	5399.89	.00	3.30	.00	4.500	.000	.00	1 .0
760.000	5391.100	7.816	5398.916	126.05	7.93	.0041	.08	7.82	.00	2.62	.013		.00	.00 PIPE
20.000	.0100					.0041	.08	7.82	.00	2.62	.013		.00	.00 PIPE

Date: 7-15-2016 Time: 2: 1:43

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Running Bear Ave to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Dia.-FT	Base Wt I.D.	ZL	No Wth Prs/Pip
L/Elem	Ch Slope				SF Ave		HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
150.000	5383.000	9.800	5392.800	198.04	.81	.01	5392.81	.00	1.25	25.00	30.000	25.000	.00	0 .0
TRANS STR	.2222					.0053	.05	9.80	.05		.045	.00	.00	RECTANG
159.000	5385.000	7.645	5392.645	198.04	5.18	.42	5393.06	.00	3.65	5.00	30.000	5.000	.00	0 .0
TRANS STR	.0000					.0055	.01	7.65	.33		.013	.00	.00	RECTANG
Pipe into SWQ Pond														
160.000	5385.000	6.655	5391.655	198.04	12.45	2.41	5394.06	.00	4.02	.00	4.500	.000	.00	1 .0
52.000	.0096					.0101	.53	6.66	.00	3.81	.013	.00	.00	PIPE
212.000	5385.500	6.857	5392.357	198.04	12.45	2.41	5394.77	.00	4.02	.00	4.500	.000	.00	1 .0
MH-31														
102.000	.0108					.0101	1.03	6.86	.00	3.57	.013	.00	.00	PIPE
314.000	5386.600	6.792	5393.392	198.04	12.45	2.41	5395.80	.00	4.02	.00	4.500	.000	.00	1 .0
JUNCT STR	.0833					.0076	.05	6.79	.00		.013	.00	.00	PIPE
MH-30														
320.000	5387.100	8.773	5395.873	139.21	8.75	1.19	5397.06	.00	3.47	.00	4.500	.000	.00	1 .0
33.000	.0091					.0050	.17	8.77	.00	2.89	.013	.00	.00	PIPE
353.000	5387.400	9.051	5396.451	139.21	8.75	1.19	5397.64	.00	3.47	.00	4.500	.000	.00	1 .0
MH-29														
399.000	.0090					.0050	2.00	9.05	.00	2.89	.013	.00	.00	PIPE
752.000	5391.000	7.451	5398.451	139.21	8.75	1.19	5399.64	.00	3.47	.00	4.500	.000	.00	1 .0
JUNCT STR	.0625					.0042	.03	.00	.00		.013	.00	.00	PIPE
MH-28														
760.000	5391.500	7.901	5399.401	13.16	4.19	.27	5399.67	.00	1.31	.00	2.000	.000	.00	1 .0
149.167	.0422					.0034	.50	7.90	.00	.73	.013	.00	.00	PIPE

Running Bear Ave to SWQ Pond

Date: 7-15-2016 Time: 2: 1:43

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Running Bear Ave to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height	Base Wt	No Wth
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
909.167	5397.801	2.189	5399.990	13.16	4.19	.27	5400.26	.00	1.31	.00	2.000	.000	.00 1 .0
HYDRAULIC JUMP													
909.167	5397.801	.734	5398.535	13.16	12.59	2.46	5401.00	.00	1.31	1.93	2.000	.000	.00 1 .0
39.625	.0422					.0400	1.59	.73	3.01	.73	.013	.00	.00 PIPE
948.792	5399.475	.743	5400.218	13.16	12.39	2.38	5402.60	.00	1.31	1.93	2.000	.000	.00 1 .0
34.607	.0422					.0367	1.27	.74	2.94	.73	.013	.00	.00 PIPE
983.399	5400.937	.769	5401.706	13.16	11.81	2.17	5403.87	.00	1.31	1.95	2.000	.000	.00 1 .0
16.845	.0422					.0322	.54	.77	2.75	.73	.013	.00	.00 PIPE
1000.245	5401.648	.797	5402.445	13.16	11.26	1.97	5404.41	.00	1.31	1.96	2.000	.000	.00 1 .0
10.739	.0422					.0283	.30	.80	2.57	.73	.013	.00	.00 PIPE
1010.984	5402.102	.826	5402.928	13.16	10.74	1.79	5404.72	.00	1.31	1.97	2.000	.000	.00 1 .0
7.619	.0422					.0248	.19	.83	2.40	.73	.013	.00	.00 PIPE
1018.602	5402.423	.856	5403.279	13.16	10.24	1.63	5404.91	.00	1.31	1.98	2.000	.000	.00 1 .0
5.672	.0422					.0218	.12	.86	2.24	.73	.013	.00	.00 PIPE
1024.274	5402.663	.888	5403.551	13.16	9.76	1.48	5405.03	.00	1.31	1.99	2.000	.000	.00 1 .0
4.397	.0422					.0192	.08	.89	2.09	.73	.013	.00	.00 PIPE
1028.672	5402.849	.921	5403.770	13.16	9.31	1.34	5405.11	.00	1.31	1.99	2.000	.000	.00 1 .0
3.437	.0422					.0169	.06	.92	1.95	.73	.013	.00	.00 PIPE

WATER SURFACE PROFILE LISTING

Date: 7-15-2016 Time: 2: 1:43

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Running Bear Ave to SWQ Pond

*****															*****															*****															*****														
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Dia.	Height Ft	Base Wt I.D.	No Wth Prs/Pip																																													
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch																																													
*****															*****															*****															*****														
1032.109	5402.994	.956	5403.950	13.16	8.87	1.22	5405.17	.00	1.31	2.00	2.000	.000	.00	1 .0																																													
2.741	.0422					.0148	.04	.96	1.81	.73	.013	.00	.00	PIPE																																													
1034.850	5403.109	.992	5404.102	13.16	8.46	1.11	5405.21	.00	1.31	2.00	2.000	.000	.00	1 .0																																													
2.150	.0422					.0131	.03	.99	1.69	.73	.013	.00	.00	PIPE																																													
1037.000	5403.201	1.030	5404.231	13.16	8.07	1.01	5405.24	.00	1.31	2.00	2.000	.000	.00	1 .0																																													
HH-35-38.785	.0129					.0115	.45	1.03	1.57	1.02	.013	.00	.00	PIPE																																													
1075.785	5403.700	1.069	5404.769	13.16	7.70	.92	5405.69	.00	1.31	2.00	2.000	.000	.00	1 .0																																													
15.501	.0129					.0102	.16	1.07	1.47	1.02	.013	.00	.00	PIPE																																													
1091.286	5403.899	1.111	5405.010	13.16	7.34	.84	5405.85	.00	1.31	1.99	2.000	.000	.00	1 .0																																													
8.260	.0129					.0090	.07	1.11	1.36	1.02	.013	.00	.00	PIPE																																													
1099.546	5404.005	1.155	5405.160	13.16	7.00	.76	5405.92	.00	1.31	1.98	2.000	.000	.00	1 .0																																													
4.495	.0129					.0079	.04	1.16	1.26	1.02	.013	.00	.00	PIPE																																													
1104.041	5404.063	1.202	5405.265	13.16	6.67	.69	5405.96	.00	1.31	1.96	2.000	.000	.00	1 .0																																													
2.371	.0129					.0070	.02	1.20	1.17	1.02	.013	.00	.00	PIPE																																													
1106.412	5404.093	1.251	5405.344	13.16	6.36	.63	5405.97	.00	1.31	1.94	2.000	.000	.00	1 .0																																													
.588	.0129					.0062	.00	1.25	1.08	1.02	.013	.00	.00	PIPE																																													
1107.000	5404.100	1.305	5405.405	13.16	6.06	.57	5405.98	2.00	1.31	1.90	2.000	.000	.00	1 .0																																													
JUNCT STR	.1250					.0049	.02	2.00	1.00		.013	.00	.00	PIPE																																													

Inlet 8

WATER SURFACE PROFILE LISTING

Date: 7-15-2016 Time: 2: 1:43

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Running Bear Ave to SWQ Pond

[illegible]

Program Package Serial Number: 1454

WATER SURFACE PROFILE LISTING

Date: 7-15-2016 Time: 9:39:56

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Manzano Vista K to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Base Wt	Dia.-FT	I.D.	ZL	Prs/Pip	No Wth
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR		Type Ch	
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
150.000	5383.000	9.800	5392.800	198.04	.81	.01	5392.81	.00	1.25	25.00	30.000	25.000	.00	0	0	.0
TRANS STR	.2222					.0053	.05	9.80	.05		.045	.00	.00		RECTANG	
159.000	5385.000	7.645	5392.645	198.04	5.18	.42	5393.06	.00	3.65	5.00	30.000	5.000	.00	0	0	.0
TRANS STR	.0000					.0055	.01	7.65	.33		.013	.00	.00		RECTANG	
160.000	5385.000	6.655	5391.655	198.04	12.45	2.41	5394.06	.00	4.02	.00	4.500	.000	.00	1	0	.0
52.000	.0096					.0101	.53	6.66	.00	3.81	.013	.00	.00		PIPE	
212.000	5385.500	6.857	5392.357	198.04	12.45	2.41	5394.77	.00	4.02	.00	4.500	.000	.00	1	0	.0
102.000	.0108					.0101	1.03	6.86	.00	3.57	.013	.00	.00		PIPE	
314.000	5386.600	6.792	5393.392	198.04	12.45	2.41	5395.80	.00	4.02	.00	4.500	.000	.00	1	0	.0
JUNCT STR	.0833					.0076	.05	6.79	.00		.013	.00	.00		PIPE	
320.000	5387.100	8.773	5395.873	139.21	8.75	1.19	5397.06	.00	3.47	.00	4.500	.000	.00	1	0	.0
33.000	.0091					.0050	.17	8.77	.00	2.89	.013	.00	.00		PIPE	
353.000	5387.400	9.051	5396.451	139.21	8.75	1.19	5397.64	.00	3.47	.00	4.500	.000	.00	1	0	.0
399.000	.0090					.0050	2.00	9.05	.00	2.89	.013	.00	.00		PIPE	
752.000	5391.000	7.451	5398.451	139.21	8.75	1.19	5399.64	.00	3.47	.00	4.500	.000	.00	1	0	.0
JUNCT STR	.0125					.0046	.04	7.45	.00		.013	.00	.00		PIPE	
160.000	5391.100	7.816	5398.916	126.05	7.93	.98	5399.89	.00	3.30	.00	4.500	.000	.00	1	0	.0
20.000	.0100					.0041	.08	7.82	.00	2.62	.013	.00	.00		PIPE	

Manzano Vista to SWQ Pond

TRANS STR
Pipe into SWQ Pond

MH-31

JUNCT STR
MH-30

MH-29

JUNCT STR
MH-28

Date: 7-15-2016 Time: 9:39:56

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Manzano Vista K to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Dia.	Base Wt I.D.	No Wth ZL	Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
780.000	5391.300	7.795	5399.095	126.05	7.93	.98	5400.07	.00	3.30	.00	4.500	.000	.00	1 .0
<i>MH 27</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-
97.000	.0113					.0041	.40	7.80	.00	2.52	.013	.00	.00	PIPE
877.000	5392.400	7.191	5399.591	126.05	7.93	.98	5400.57	.00	3.30	.00	4.500	.000	.00	1 .0
<i>MH 26</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-
92.000	.0109					.0041	.38	7.19	.00	2.55	.013	.00	.00	PIPE
969.000	5393.400	6.666	5400.066	126.05	7.93	.98	5401.04	.00	3.30	.00	4.500	.000	.00	1 .0
<i>MH 25</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-
128.000	.0047					.0041	.53	6.67	.00	3.45	.013	.00	.00	PIPE
1097.000	5394.000	6.592	5400.592	126.05	7.93	.98	5401.57	.00	3.30	.00	4.500	.000	.00	1 .0
JUNCT STR	.3333					.0087	.05	.00	.00		.013	.00	.00	PIPE
<i>MH 24</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1103.000	5396.000	4.691	5400.691	26.00	8.28	1.06	5401.75	.00	1.79	.00	2.000	.000	.00	1 .0
90.772	.0351					.0132	1.20	4.69	.00	1.13	.013	.00	.00	PIPE
1193.772	5399.187	2.773	5401.959	26.00	8.28	1.06	5403.02	.00	1.79	.00	2.000	.000	.00	1 .0
HYDRAULIC JUMP	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1193.772	5399.187	1.142	5400.329	26.00	14.02	3.05	5403.38	.00	1.79	1.98	2.000	.000	.00	1 .0
25.739	.0351					.0341	.88	1.14	2.55	1.13	.013	.00	.00	PIPE
1219.511	5400.091	1.142	5401.233	26.00	14.02	3.05	5404.29	.00	1.79	1.98	2.000	.000	.00	1 .0
77.969	.0351					.0321	2.51	1.14	2.55	1.13	.013	.00	.00	PIPE
1297.480	5402.828	1.188	5404.016	26.00	13.37	2.77	5406.79	.00	1.79	1.96	2.000	.000	.00	1 .0
30.520	.0351					.0284	.87	1.19	2.37	1.13	.013	.00	.00	PIPE

Date: 7-15-2016 Time: 9:39:56

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Manzano Vista K to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Dia.	Base Wt/I.D.	No Wth Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1328.000	5403.900	1.237	5405.137	26.00	12.75	2.52	5407.66	.00	1.79	1.94	2.000	.000	.00 1 .0
MH 44													
69.000	.0261	-	-	-	-	.0276	1.91	1.24	2.19	1.25	.013	.00	.00 PIPE
1397.000	5405.700	1.210	5406.911	26.00	13.08	2.66	5409.57	.00	1.79	1.96	2.000	.000	.00 1 .0
MH 43													
41.350	.0296	-	-	-	-	.0279	1.15	1.21	2.29	1.20	.013	.00	.00 PIPE
1438.350	5406.924	1.227	5408.151	26.00	12.86	2.57	5410.72	.00	1.79	1.95	2.000	.000	.00 1 .0
47.572	.0296	-	-	-	-	.0258	1.23	1.23	2.22	1.20	.013	.00	.00 PIPE
1485.922	5408.333	1.278	5409.611	26.00	12.26	2.33	5411.95	.00	1.79	1.92	2.000	.000	.00 1 .0
23.481	.0296	-	-	-	-	.0229	.54	1.28	2.06	1.20	.013	.00	.00 PIPE
1509.403	5409.028	1.332	5410.360	26.00	11.69	2.12	5412.48	.00	1.79	1.89	2.000	.000	.00 1 .0
14.456	.0296	-	-	-	-	.0203	.29	1.33	1.90	1.20	.013	.00	.00 PIPE
1523.859	5409.456	1.391	5410.847	26.00	11.15	1.93	5412.78	.00	1.79	1.84	2.000	.000	.00 1 .0
9.892	.0296	-	-	-	-	.0181	.18	1.39	1.75	1.20	.013	.00	.00 PIPE
1533.751	5409.749	1.453	5411.202	26.00	10.63	1.75	5412.96	.00	1.79	1.78	2.000	.000	.00 1 .0
6.766	.0296	-	-	-	-	.0162	.11	1.45	1.60	1.20	.013	.00	.00 PIPE
1540.517	5409.949	1.522	5411.471	26.00	10.13	1.59	5413.07	.00	1.79	1.71	2.000	.000	.00 1 .0
4.665	.0296	-	-	-	-	.0146	.07	1.52	1.46	1.20	.013	.00	.00 PIPE
1545.182	5410.087	1.597	5411.684	26.00	9.66	1.45	5413.13	.00	1.79	1.60	2.000	.000	.00 1 .0
2.798	.0296	-	-	-	-	.0132	.04	1.60	1.31	1.20	.013	.00	.00 PIPE

WATER SURFACE PROFILE LISTING

Date: 7-15-2016 Time: 9:39:56

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Manzano Vista K to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height/Dia.	Base Wt I.D.	No Wth ZL	Prs/Pip
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1547.980	5410.170	1.683	5411.853	26.00	9.21	1.32	5413.17	.00	1.79	1.46	2.000	.000	.00	1 .0
1.020	.0296					.0122	.01	1.68	1.17	1.20	.013	.00	.00	PIPE
1549.000	5410.200	1.786	5411.986	26.00	8.78	1.20	5413.18	.00	1.79	1.24	2.000	.000	.00	1 .0
JUNCT STR	.0249					.0072	.03	1.79	1.00		.013	.00	.00	PIPE
1553.000	5410.300	3.588	5413.888	11.80	3.76	.22	5414.11	.00	1.23	.00	2.000	.000	.00	1 .0
51.017	.0338					.0027	.14	3.59	.00	.73	.013	.00	.00	PIPE
1604.017	5412.026	2.000	5414.026	11.80	3.76	.22	5414.25	.00	1.23	.00	2.000	.000	.00	1 .0
.264	.0338					.0027	.00	2.00	.00	.73	.013	.00	.00	PIPE
1604.281	5412.035	2.000	5414.035	11.80	3.76	.22	5414.25	.00	1.23	.00	2.000	.000	.00	1 .0
HYDRAULIC JUMP														
1604.281	5412.035	.729	5412.764	11.80	11.40	2.02	5414.78	.00	1.23	1.92	2.000	.000	.00	1 .0
14.075	.0338					.0339	.48	.73	2.74	.73	.013	.00	.00	PIPE
1618.356	5412.511	.729	5413.240	11.80	11.40	2.02	5415.26	.00	1.23	1.92	2.000	.000	.00	1 .0
77.119	.0338					.0335	2.58	.73	2.74	.73	.013	.00	.00	PIPE
1695.475	5415.121	.732	5415.853	11.80	11.32	1.99	5417.84	.00	1.23	1.93	2.000	.000	.00	1 .0
56.436	.0338					.0311	1.76	.73	2.71	.73	.013	.00	.00	PIPE
1751.911	5417.031	.758	5417.789	11.80	10.79	1.81	5419.60	.00	1.23	1.94	2.000	.000	.00	1 .0
20.791	.0338					.0273	.57	.76	2.53	.73	.013	.00	.00	PIPE

Date: 7-15-2016 Time: 9:39:56

WATER SURFACE PROFILE LISTING

Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Manzano Vista K to SWQ Pond

Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height	Base Wt	No Wth
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
1814.656	5419.154	1.095	5420.250	11.80	6.70	.70	5420.95	.00	1.23	1.99	2.000	.000	.00
.776	.0338	-	-	-	-	.0076	.01	1.10	1.26	.73	.013	.00	.00
1815.432	5419.181	1.138	5420.319	11.80	6.39	.63	5420.95	.00	1.23	1.98	2.000	.000	.00
.428	.0338	-	-	-	-	.0067	.00	1.14	1.17	.73	.013	.00	.00
1815.860	5419.195	1.184	5420.379	11.80	6.09	.58	5420.96	.00	1.23	1.97	2.000	.000	.00
.140	.0338	-	-	-	-	.0059	.00	1.18	1.08	.73	.013	.00	.00
1816.000	5419.200	1.234	5420.434	11.80	5.80	.52	5420.96	.00	1.23	1.94	2.000	.000	.00
JUNCT STR	.1250	-	-	-	-	.0043	.02	1.23	1.00	-	.013	.00	.00
1820.000	5419.700	1.548	5421.248	5.90	3.34	.17	5421.42	.00	.94	.00	1.500	.000	.00
2.091	.0263	-	-	-	-	.0031	.01	1.55	.00	.61	.013	.00	.00
1822.091	5419.755	1.500	5421.255	5.90	3.34	.17	5421.43	.00	.94	.00	1.500	.000	.00
5.198	.0263	-	-	-	-	.0029	.02	1.50	.00	.61	.013	.00	.00
1827.288	5419.892	1.360	5421.252	5.90	3.50	.19	5421.44	.00	.94	.87	1.500	.000	.00
1.474	.0263	-	-	-	-	.0029	.00	1.36	.44	.61	.013	.00	.00
1828.762	5419.931	1.280	5421.211	5.90	3.67	.21	5421.42	.00	.94	1.06	1.500	.000	.00
HYDRAULIC JUMP		-	-	-	-	-	-	-	-	-	-	-	-
1828.762	5419.931	.641	5420.572	5.90	8.19	1.04	5421.61	.00	.94	1.48	1.500	.000	.00
6.038	.0263	-	-	-	-	.0205	.12	.64	2.07	.61	.013	.00	.00

Program Package Serial Number: 1454

WATER SURFACE PROFILE LISTING

Date: 7-15-2016 Time: 9:39:56


Juan Tabo Hills Estates

Developed 100-YR Flow Rates

Manzano Vista K to SWQ Pond

*****																	*****	
Station	Invert Elev	Depth (FT)	Water Elev	Q (CFS)	Vel (FPS)	Vel Head	Energy Grd.El.	Super Elev	Critical Depth	Flow Width	Top Height	Base Wt	Dia.-FT	I.D.	ZL	No Wth		
L/Elem	Ch Slope					SF Ave	HF	SE Dpth	Froude N	Norm Dp	"N"	X-Fall	ZR	Type Ch		*****		
1858.000	5420.700	.938	5421.638	5.90	5.08	.40	5422.04	.00	.94	1.45	1.500	.000	.00	1	.0			
Inlet 75																		

July 15



<p>CITY OF ALBUQUERQUE</p> <p>PUBLIC WORKS DEPARTMENT</p> <p>JUAN TABO HILLS ESTATES</p> <p>HGL CROSS SECTION PLAN</p>								<p>LEGEND</p>							
<p>TITLE:</p>								<p>DESIGN REVIEW COMMITTEE</p>							
<p>CITY ENGINEER APPROVAL</p>								<p>LAST DESIGN UPDATE</p>							
<p>MARK GOODMAN & ASSOCIATES, P.A.</p> <p>dmg CONSULTING ENGINEERS</p> <p>P.O. BOX 90606 ALBUQUERQUE, NEW MEXICO 87199 OFFICE (505) 828-2200, FAX (505) 797-8539</p>								<p>on R.d.</p> <p>Gabriel Fox</p>							
<p>CERTIFICATE OF SUBSTANTIAL COMPLIANCE</p>								<p>ENGINEER'S SEAL</p>							
<p>SURVEY INFORMATION</p>								<p>BENCH MARKS</p>							
<p>FIELD NOTES</p>								<p>AS BUILT INFORMATION</p>							
<p>NO.</p>								<p>CONTRACTOR</p>							
<p>BY</p>								<p>WORK STAKED BY</p>							
<p>DATE</p>								<p>INSPECTOR'S ACCEPTANCE BY</p>							
<p>ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS</p>								<p>FIELD VERIFICATION BY</p>							
<p>SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE,</p>								<p>DRAWINGS</p>							
<p>77.9' SE OF POWER POLE #E37 & 106.0' NW OF POWER POLE #B0.</p>								<p>RECORDS</p>							
<p>STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE</p>								<p>USER ID: doug, Date/Time: 3/13/2017 9:14 AM, Document Name: 2017-03-13 HGL stationing plan.pdf</p>							
<p>DESIGNED BY</p>								<p>RECORDED BY</p>							
<p>DATE</p>								<p>DATE</p>							

THE SUBJECT PROPERTY IS LOCATED NEAR A FORMER LANDFILL. DUE TO THE SUBJECT PROPERTY BEING NEAR A FORMER LANDFILL, CERTAIN PRECAUTIONARY MEASURES MAY NEED TO BE TAKEN TO ENSURE WORKER WITH EXPOSURE IN LANDFILLS AND LANDFILL SITE ISSUES (AS REQUIRED BY THE MOST CURRENT VERSION OF THE INTERNAL GUIDELINES FOR DEVELOPMENT WITHIN CITY DESIGNATED LANDFILL (BUFFER ZONES)) SHALL BE CONSULTED PRIOR TO DEVELOPMENT OF THE SITE.

DRB NO.
1004073

THE SUBJECT PROPERTY IS LOCATED NEAR A FORMER LANDFILL. DUE TO THE SUBJECT PROPERTY BEING NEAR A FORMER LANDFILL CERTAIN PRECAUTIONARY MEASURES MAY NEED TO BE TAKEN TO ENSURE THE HEALTH AND SAFETY OF THE PUBLIC. RECOMMENDATIONS MADE BY A PROFESSIONAL ENGINEER WITH EXPERISE IN LANDFILLS AND LANDFILL GAS ISSUES (AS REQUIRED BY THE MOST CURRENT VERSION OF THE INTERIM GUIDELINES FOR DEVELOPMENT WITHIN CITY DESIGNATED LANDFILL BUFFER ZONES) SHALL BE CONSULTED PRIOR TO DEVELOPMENT OF THE SITE.

14. ELECTRICIAN SERVICE (EAS) WILL BE PLACED ACCORDING TO SECTION 170 OF THE CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 1986 EDITION, AS AMENDED.

15. PRIVATE STREET REQUIRED STREET NAME, SIGN, STOP SIGNS, AND ANY NECESSARY STRIPING (DEVELOPER'S RESPONSIBILITY).

16. CONTRACTOR SHALL ASSUME RESPONSIBILITY FOR ANY DAMAGE TO EXISTING PAVEMENT, PAVERMENT MARKINGS, CURB & GUTTER, SIDEWALK, LANDSCAPE PLANTS, AND SIDEWALK DRAINAGE. THE CITY OF ALBUQUERQUE STANDARDS, AT HIS OWN EXPENSE, SHALL REPAIR OR REPLACE PER CITY OF ALBUQUERQUE STANDARDS.

THE FOLLOWING NOTES ALSO APPLY WHEN CHECKED

☒ ALL UTILITIES AND UTILITY SERVICE LINES SHALL BE INSTALLED PRIOR TO PAVING.


☒ BACKFILL COMPACTION SHALL BE ACCORDING TO SPECIFIED STREET USE.


☐ TACK COAT REQUIREMENTS SHALL BE DETERMINED BY THE ENGINEER.

☒ SIDEWALK AND WHEELCHAIR RAMPS WITHIN THE CURB RETURN SHALL BE CONSTRUCTED WHEREVER A NEW CURB RETURN IS CONSTRUCTED.

☐ IF CURB IS DEPRESSSED FOR A DRIVEWAY, THE DRIVEWAY SHALL BE CONSTRUCTED PRIOR TO ACCEPTANCE OF CURB AND GUTTER.

☒ ALL STORM DRAINAGE FACILITIES SHALL BE COMPLETED PRIOR TO FINAL ACCEPTANCE.

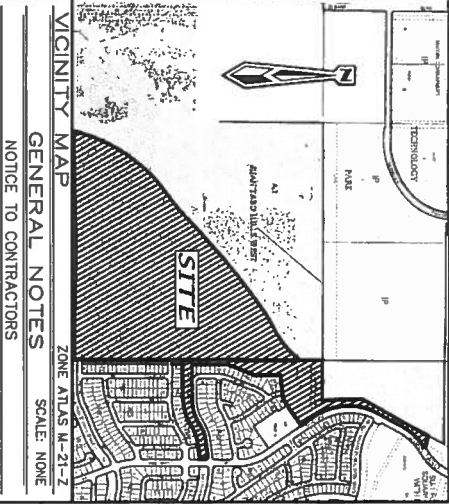[illegible]

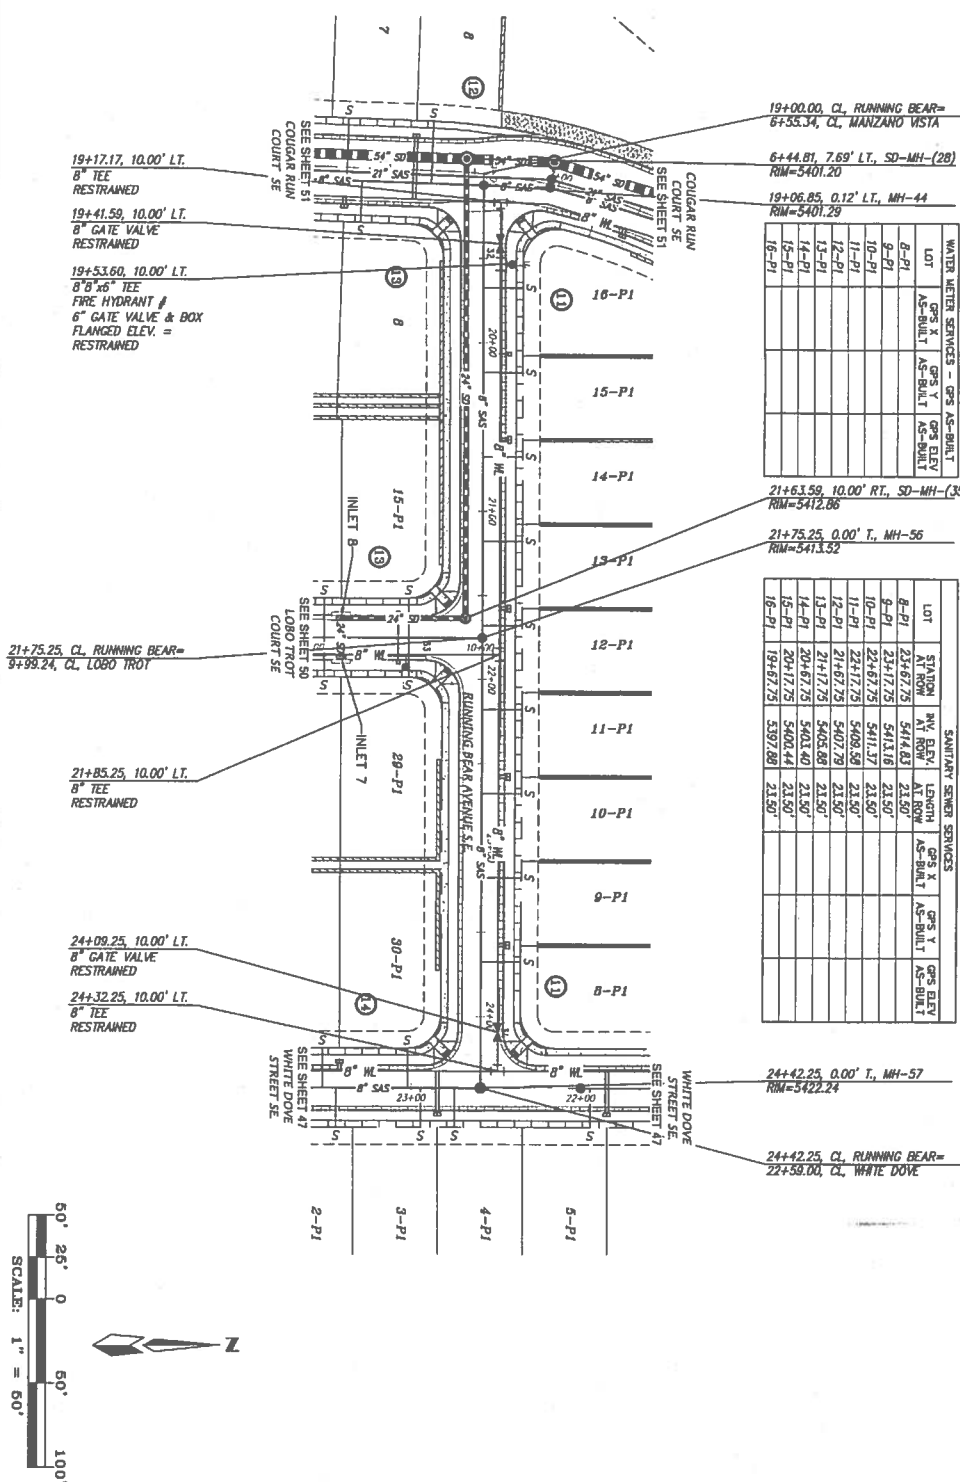

WATER METER SERVICES - GPS AS-BUILT			
LOT	GPS X AS-BUILT	GPS Y AS-BUILT	GPS ELEV AS-BUILT
8-P1			
9-P1			
10-P1			
11-P1			
12-P1			
13-P1			
14-P1			
15-P1			
16-P1			

SANTARYN SEWER SERVICES							
LOT	STATION	N.W. ELEV. AT ROW	LENGTH AT ROW	GTS W AS-BUILT	GTS E AS-BUILT	GTS ELEV AS-BUILT	
A-1	23+67.75	541.63	2.50'				
B-1	23+71.75	541.31	2.50'				
C-1	23+75.75	541.16	2.50'				
D-1	22+67.75	540.98	2.50'				
E-1	22+71.75	540.79	2.50'				
F-1	21+67.75	540.63	2.50'				
G-1	21+71.75	540.48	2.50'				
H-1	20+67.75	540.31	2.50'				
I-1	20+71.75	540.24	2.50'				
J-1	19+67.75	539.86	2.50'				

24+42.25, 0.00' T., MH-57
RIM=5422.24

24+42.25, CL, RUNNING BEAR=
22+59.00, CL, WHITE DOVE

NOTES	
1. THE PROJECT SITE LIES WITHIN THE 2000' ZONE FOR PLAS BETWEEN ELEVATIONS 5005.7' AND 5142.7'	
2. ALL FIVE HIDEWAYS ARE AROUND STD. DING 2340 AND 4' BURY UNLESS OTHERWISE SPECIFIED.	
3. ALL WETTER BODS ADJACENT TO UNADJACENT CLASH SHALL HAVE DUCTILE IRON WETTER BOD COVER & 10' PER AROUND STD. DING 2340. ALL OTHER WETTER BODS SHALL HAVE 12" PER AROUND STD. DING 2340. WATER SERVICE PER AROUND STD. DING 2340.	
4. ALL FIVE HIDEWAYS TO HAVE A 6" CAST WALK & ROLL PER AROUND STD. DING 2340.	

BUILT INFORMATION	
FOR	DATE
Y'S	DATE
CK BY	DATE
ON BY	DATE
D BY	DATE

RO-FILM INFORMATION	
BY	DATE

[illegible]


GATE VALVE - OPS AS-BUILT			
GATE VALVE #	OPS X AS-BUILT	OPS Y AS-BUILT	OPS ELEV AS-BUILT
17			
18			
20			
22			
23			



ENGINEER'S SEAL

7-15-2017



CERTIFICATE OF SUBSTANTIAL COMPLIANCE	
MARK GOODMAN & ASSOCIATES, P.A. P.O. BOX 90806 NEW MEXICO 87199 OFFICE (505) 828-7200, FAX (505) 787-9539	
dm	
CONSULTING ENGINEERS	
NO. DATE REMARKS BY	
REVISIONS	
DESIGN	
DESIGNED BY	JDH
DATE	02/17
DRAWN BY	SPS
DATE	02/17
CHECKED BY	DMG
DATE	02/17

																					
<p align="center">CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT</p>																					
<p>TITLE:</p>																					
<p align="center"><i>JUAN TABO HILLS ESTATES RUNNING BEAR UTILITY PLAN & PROFILE</i></p>																					
<p>DESIGN REVIEW COMMITTEE</p>	<p>CITY ENGINEER APPROVAL</p>																				
<p>CITY PROJECT NO.</p>	<p>LAST DESIGN UPDATE</p>																				
<p><i>654887</i></p>	<table border="1"> <tr> <td>NO.</td> <td>DAY/M.</td> </tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </table>	NO.	DAY/M.																		
NO.	DAY/M.																				
<p>ZONE MAP NO.</p>	<p>SHEET</p>																				
<p><i>M-21</i></p>	<p><i>49 OF 75</i></p>																				

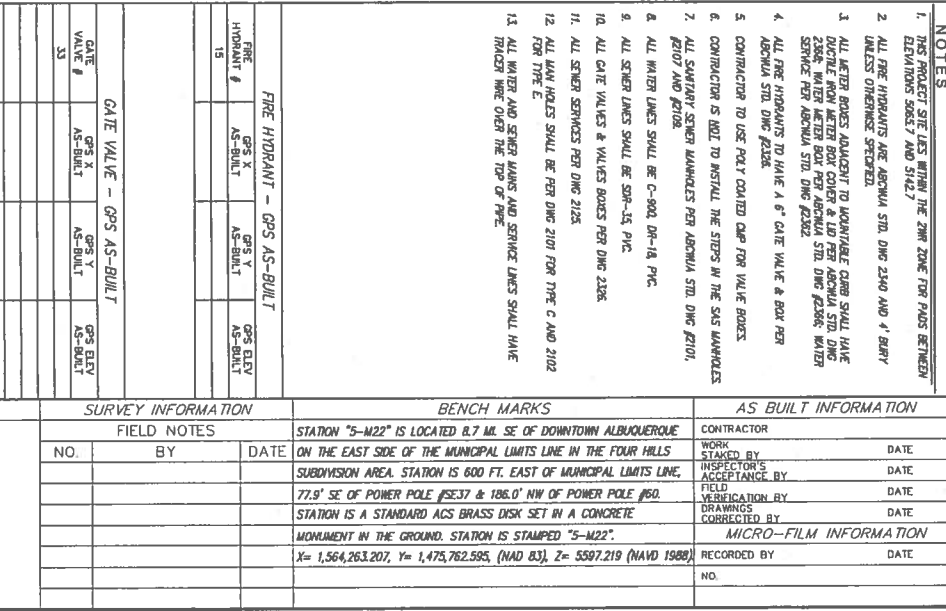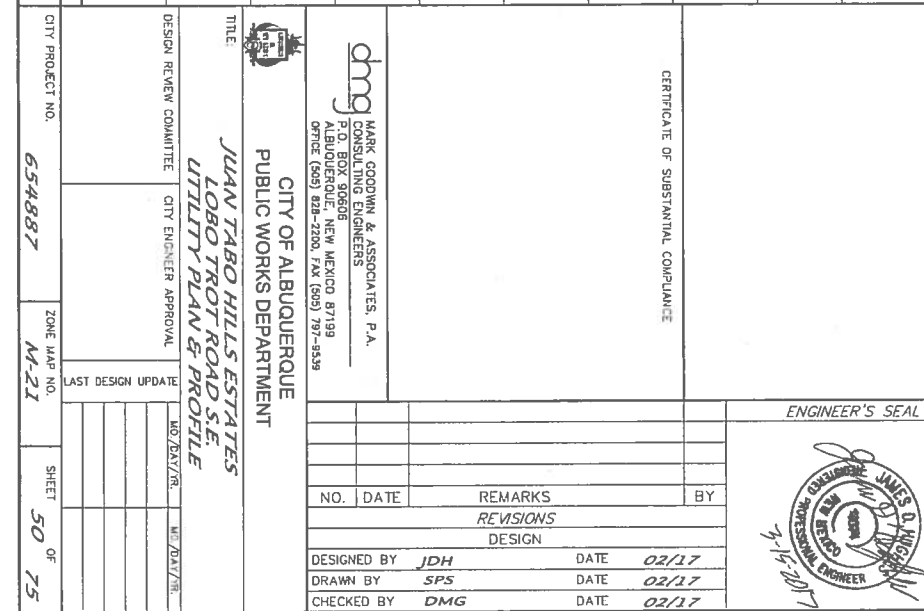


1. THE PROPOSED SITE LIES WITHIN THE 200' ZONE FOR POSTS BETWEEN DEBRIS/ROCKS 100' AND 5142'.
2. ALL FIVE HIGHLIGHTS ARE AGRICULT. STD. DNG 2340 AND 4' BURY UNLESS OTHERWISE SPECIFIED.
3. ALL LETTER POSTS ALLOWING TO ADJACENT CAMP SHALL HAVE DOUBLE HOLE LETTER BOX COVER & LID PER AGRICULT. STD. DNG 2348. INTER LETTER BOX PER AGRICULT. STD. DNG 4236R. INTER SERVICE PER AGRICULT. STD. DNG 4232R.
4. ALL FIVE HIGHLIGHTS TO HAVE A 4" WHITE VAULT & BOX PER AGRICULT. STD. DNG 4236R.
5. CONTRACTOR TO USE PACT COATED CAP FOR VAULT BODIES.
6. CONTRACTOR IS NOT TO INSTALL THE STEPS IN THE SAS UNPAVEMENTS.
7. ALL SECURITY SERVICE MARKERS PER AGRICULT. STD. DNG 4210L, 4210D AND 4210R.
8. ALL WATER LINES SHALL BE C-900, DR-14, PVC.
9. ALL WATER LINES SHALL BE 30"-45" P.I.C.
10. ALL GATE VALVES & VALVES DRAIN PER DNG 228R.
11. ALL SERVICE SERVICES PER DNG 212S.
12. ALL MAIN VALVES SHALL BE PER DNG 210A FOR TYPE C AND 210Z FOR TYPE E.
13. ALL WATER AND SERVICE MAINS AND SERVICE LINES SHALL HAVE TRACERS WIRE OFF THE TOP OF PIPE.




AS BUILT INFORMATION	
CONTRACTOR	
WORK	
STAKED BY	DATE
INSPECTOR'S	
ACCEPTANCE BY	DATE
FIELD	
VERIFICATION BY	DATE
DRAWINGS	
CORRECTED BY	DATE
MICRO-FILM INFORMATION	
RECORDED BY	DATE
NO.	

BENCH MARKS
STATION "5-M22" IS LOCATED 0.7 MI. SE OF DOWNTOWN ALBUQUERQUE
ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS
SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS,
77.9' SE OF POWER POLE #1537 & 186.0' NW OF POWER POLE #160.
STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE
MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22".
E. 562,927.907 X. 1,175,300.595. (MAD 81) S. 560,219.040. (MAD 108)

[illegible]



ENGINEER'S SEAL




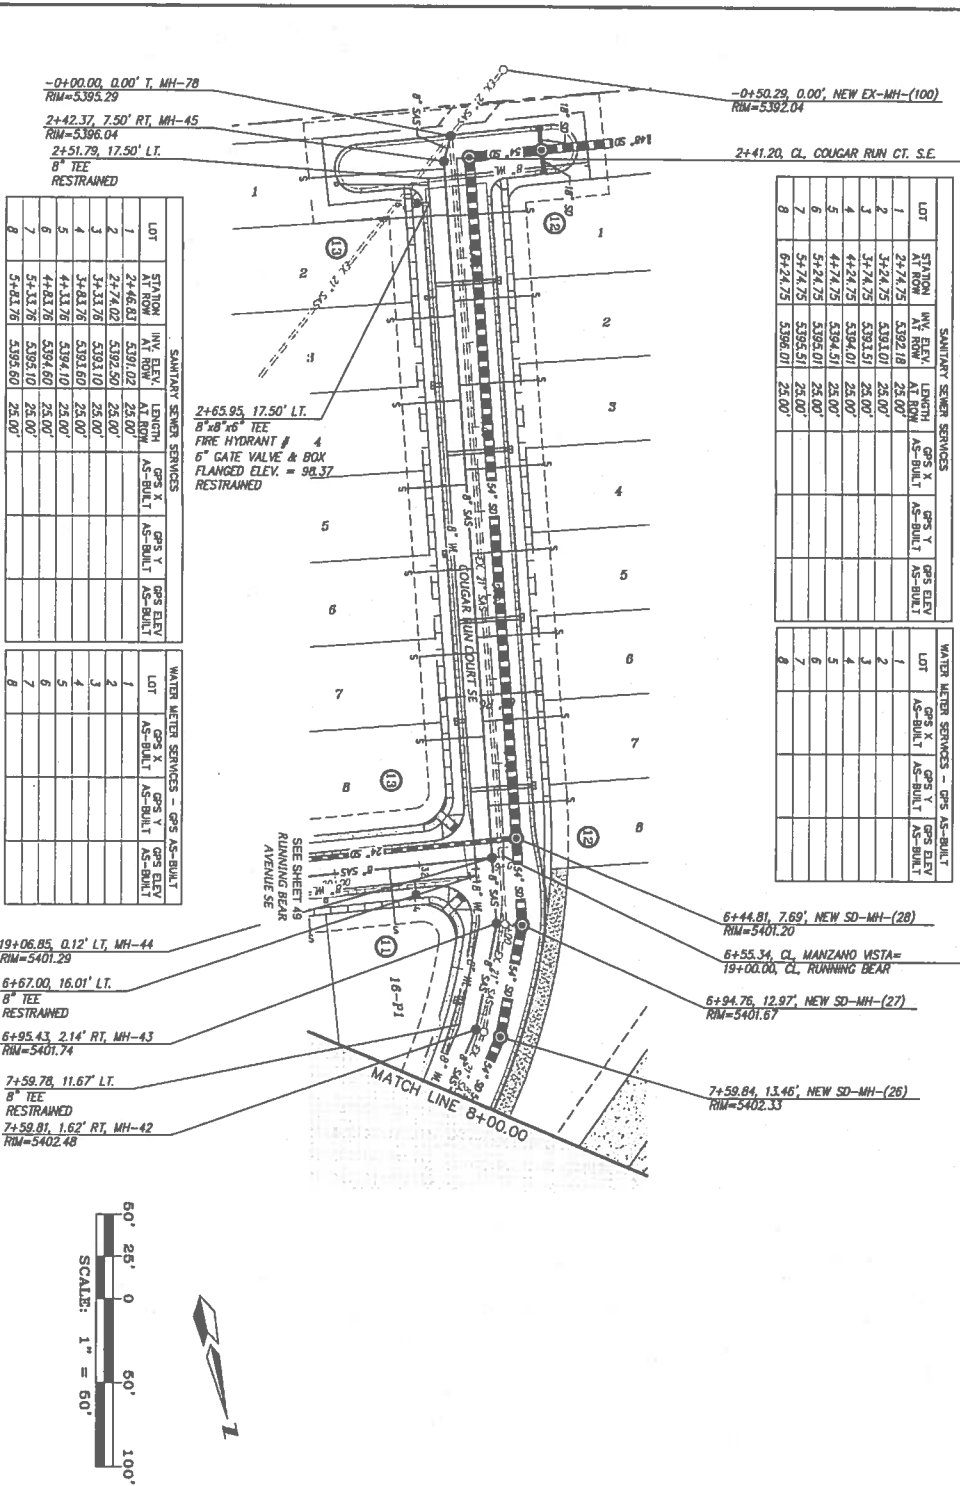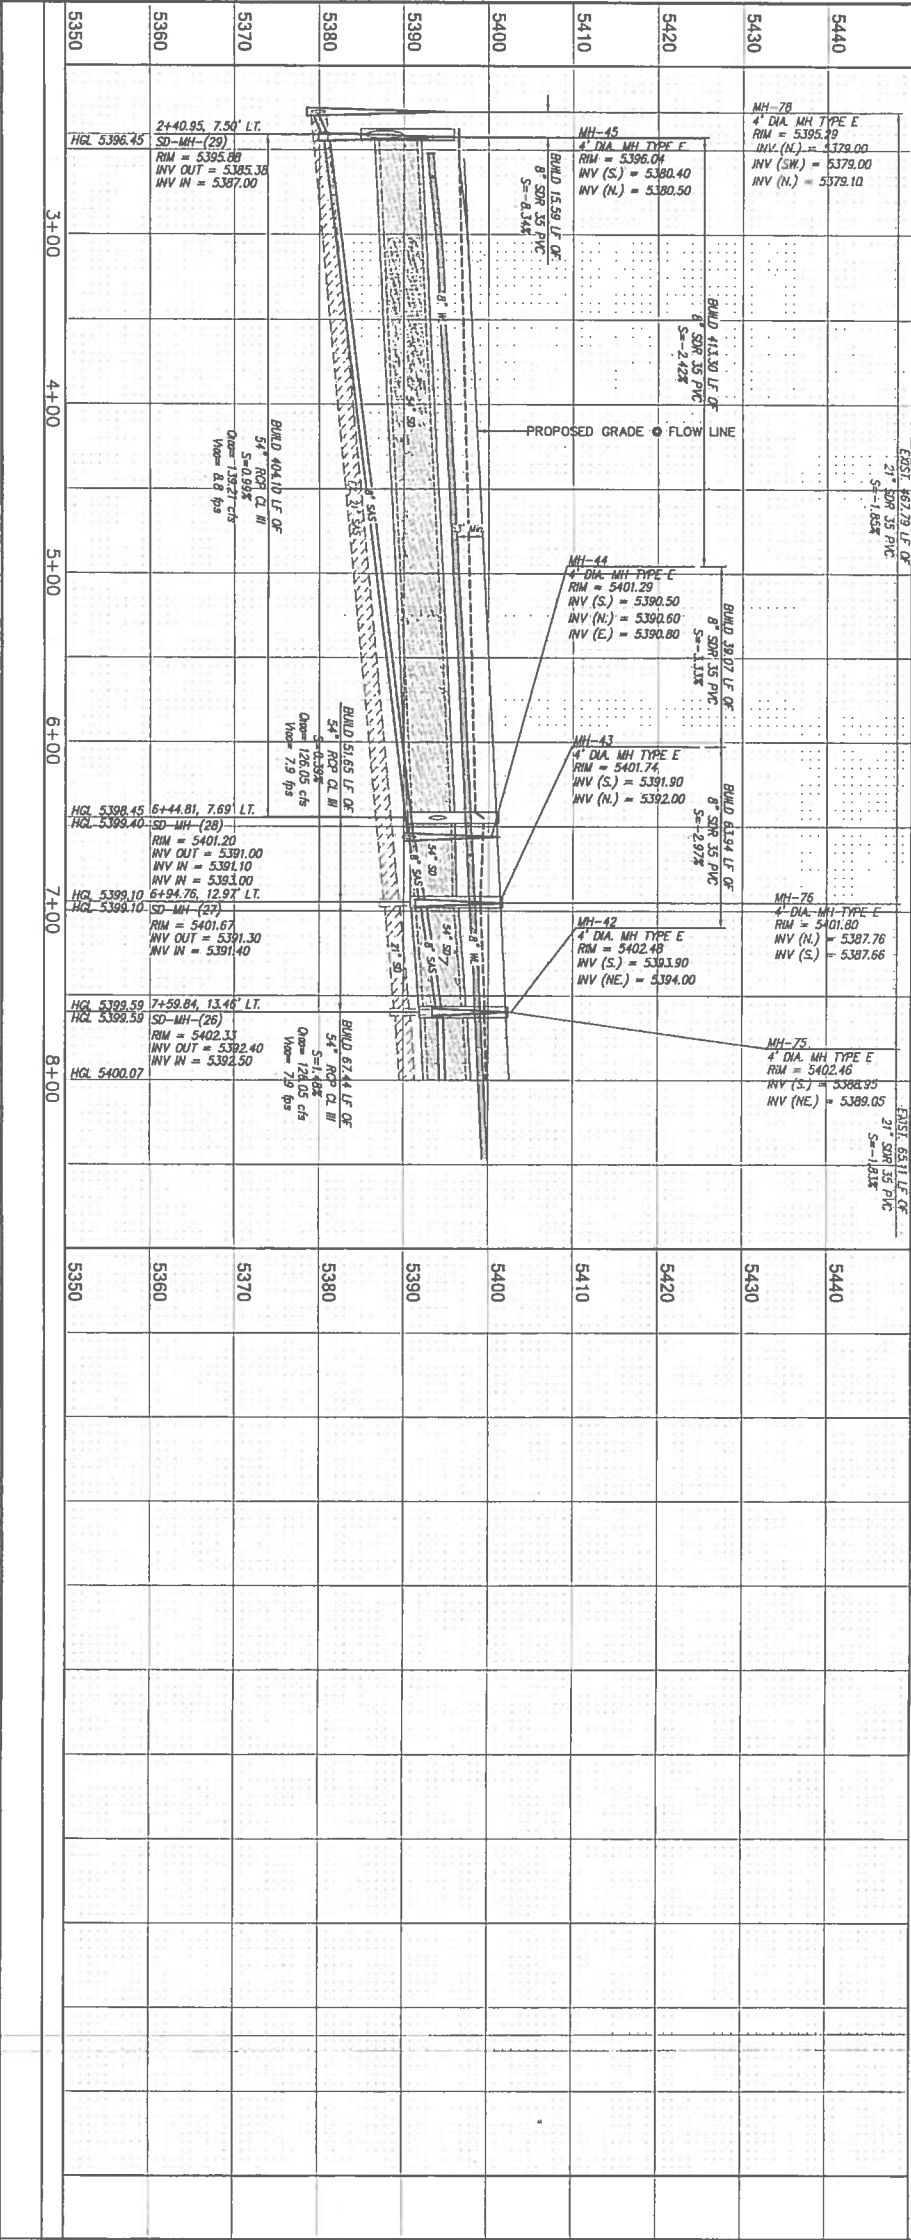

CITY PROJECT NO. 654887		ZONE MAP NO. M-21		SHEET 51 OF 75	
REVISION REVIEW COMMITTEE					
CITY ENGINEER APPROVAL					
LAST DESIGN UPDATE					
NO. DATE					
REMARKS					
DESIGNED BY JDH DATE 02/17					
DRAWN BY SPS DATE 02/17					
CHECKED BY DMG DATE 02/17					
ENGINEER'S SEAL					
SURVEY INFORMATION					
FIELD NOTES					
NO. BY DATE					
BENCH MARKS					
STATION "S-M22" IS LOCATED 8.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #537 & 108.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "S-M22". X= 1,564,263.207, Y= 1,475,762.595 (NAD 83), Z= 5597.219 (NAVD 1988)					
AS BUILT INFORMATION					
CONTRACTOR					
WORK STARTED BY					
INSPECTOR'S ACCEPTANCE BY					
FIELD VERIFICATION BY					
DRAWINGS CORRECTED BY					
MICRO-FILM INFORMATION					
RECORDED BY					
NO.					

1. THE MAIN TRUNK S&S (21"-24") IS TO BE CONSTRUCTED BEFORE THIS PROJECT BEGINS. SEE SEPARATE WORK ORDER CITY PROJECT# 554885.

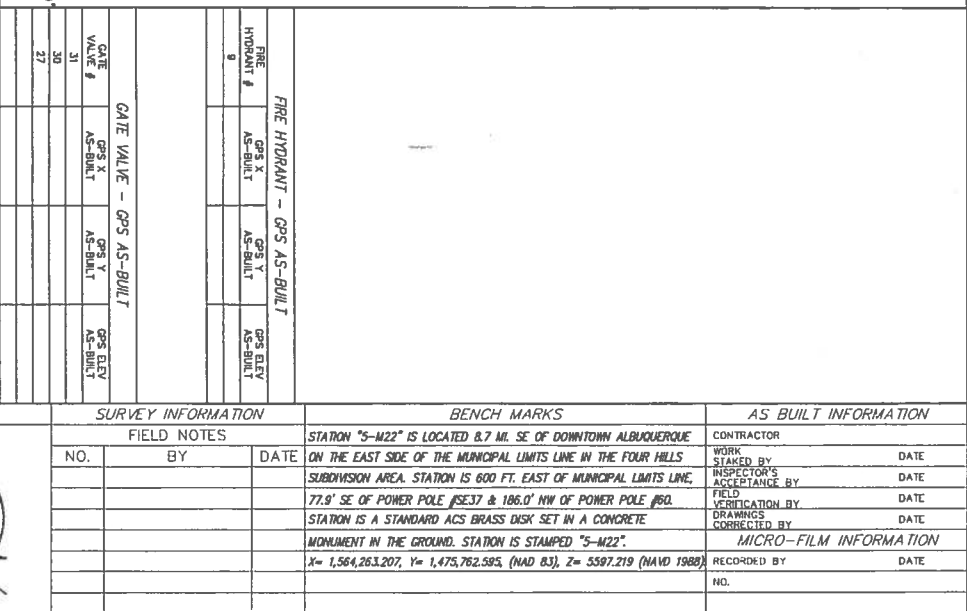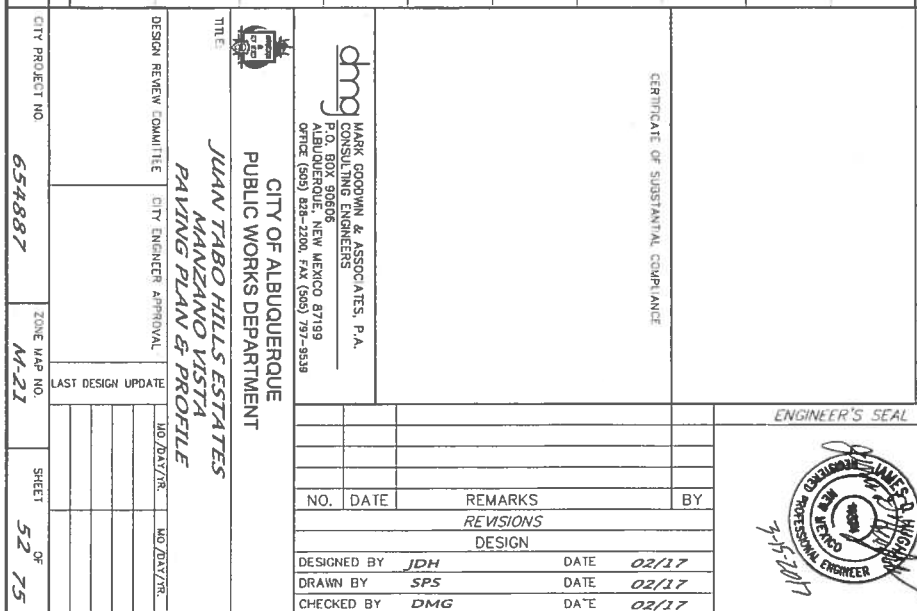

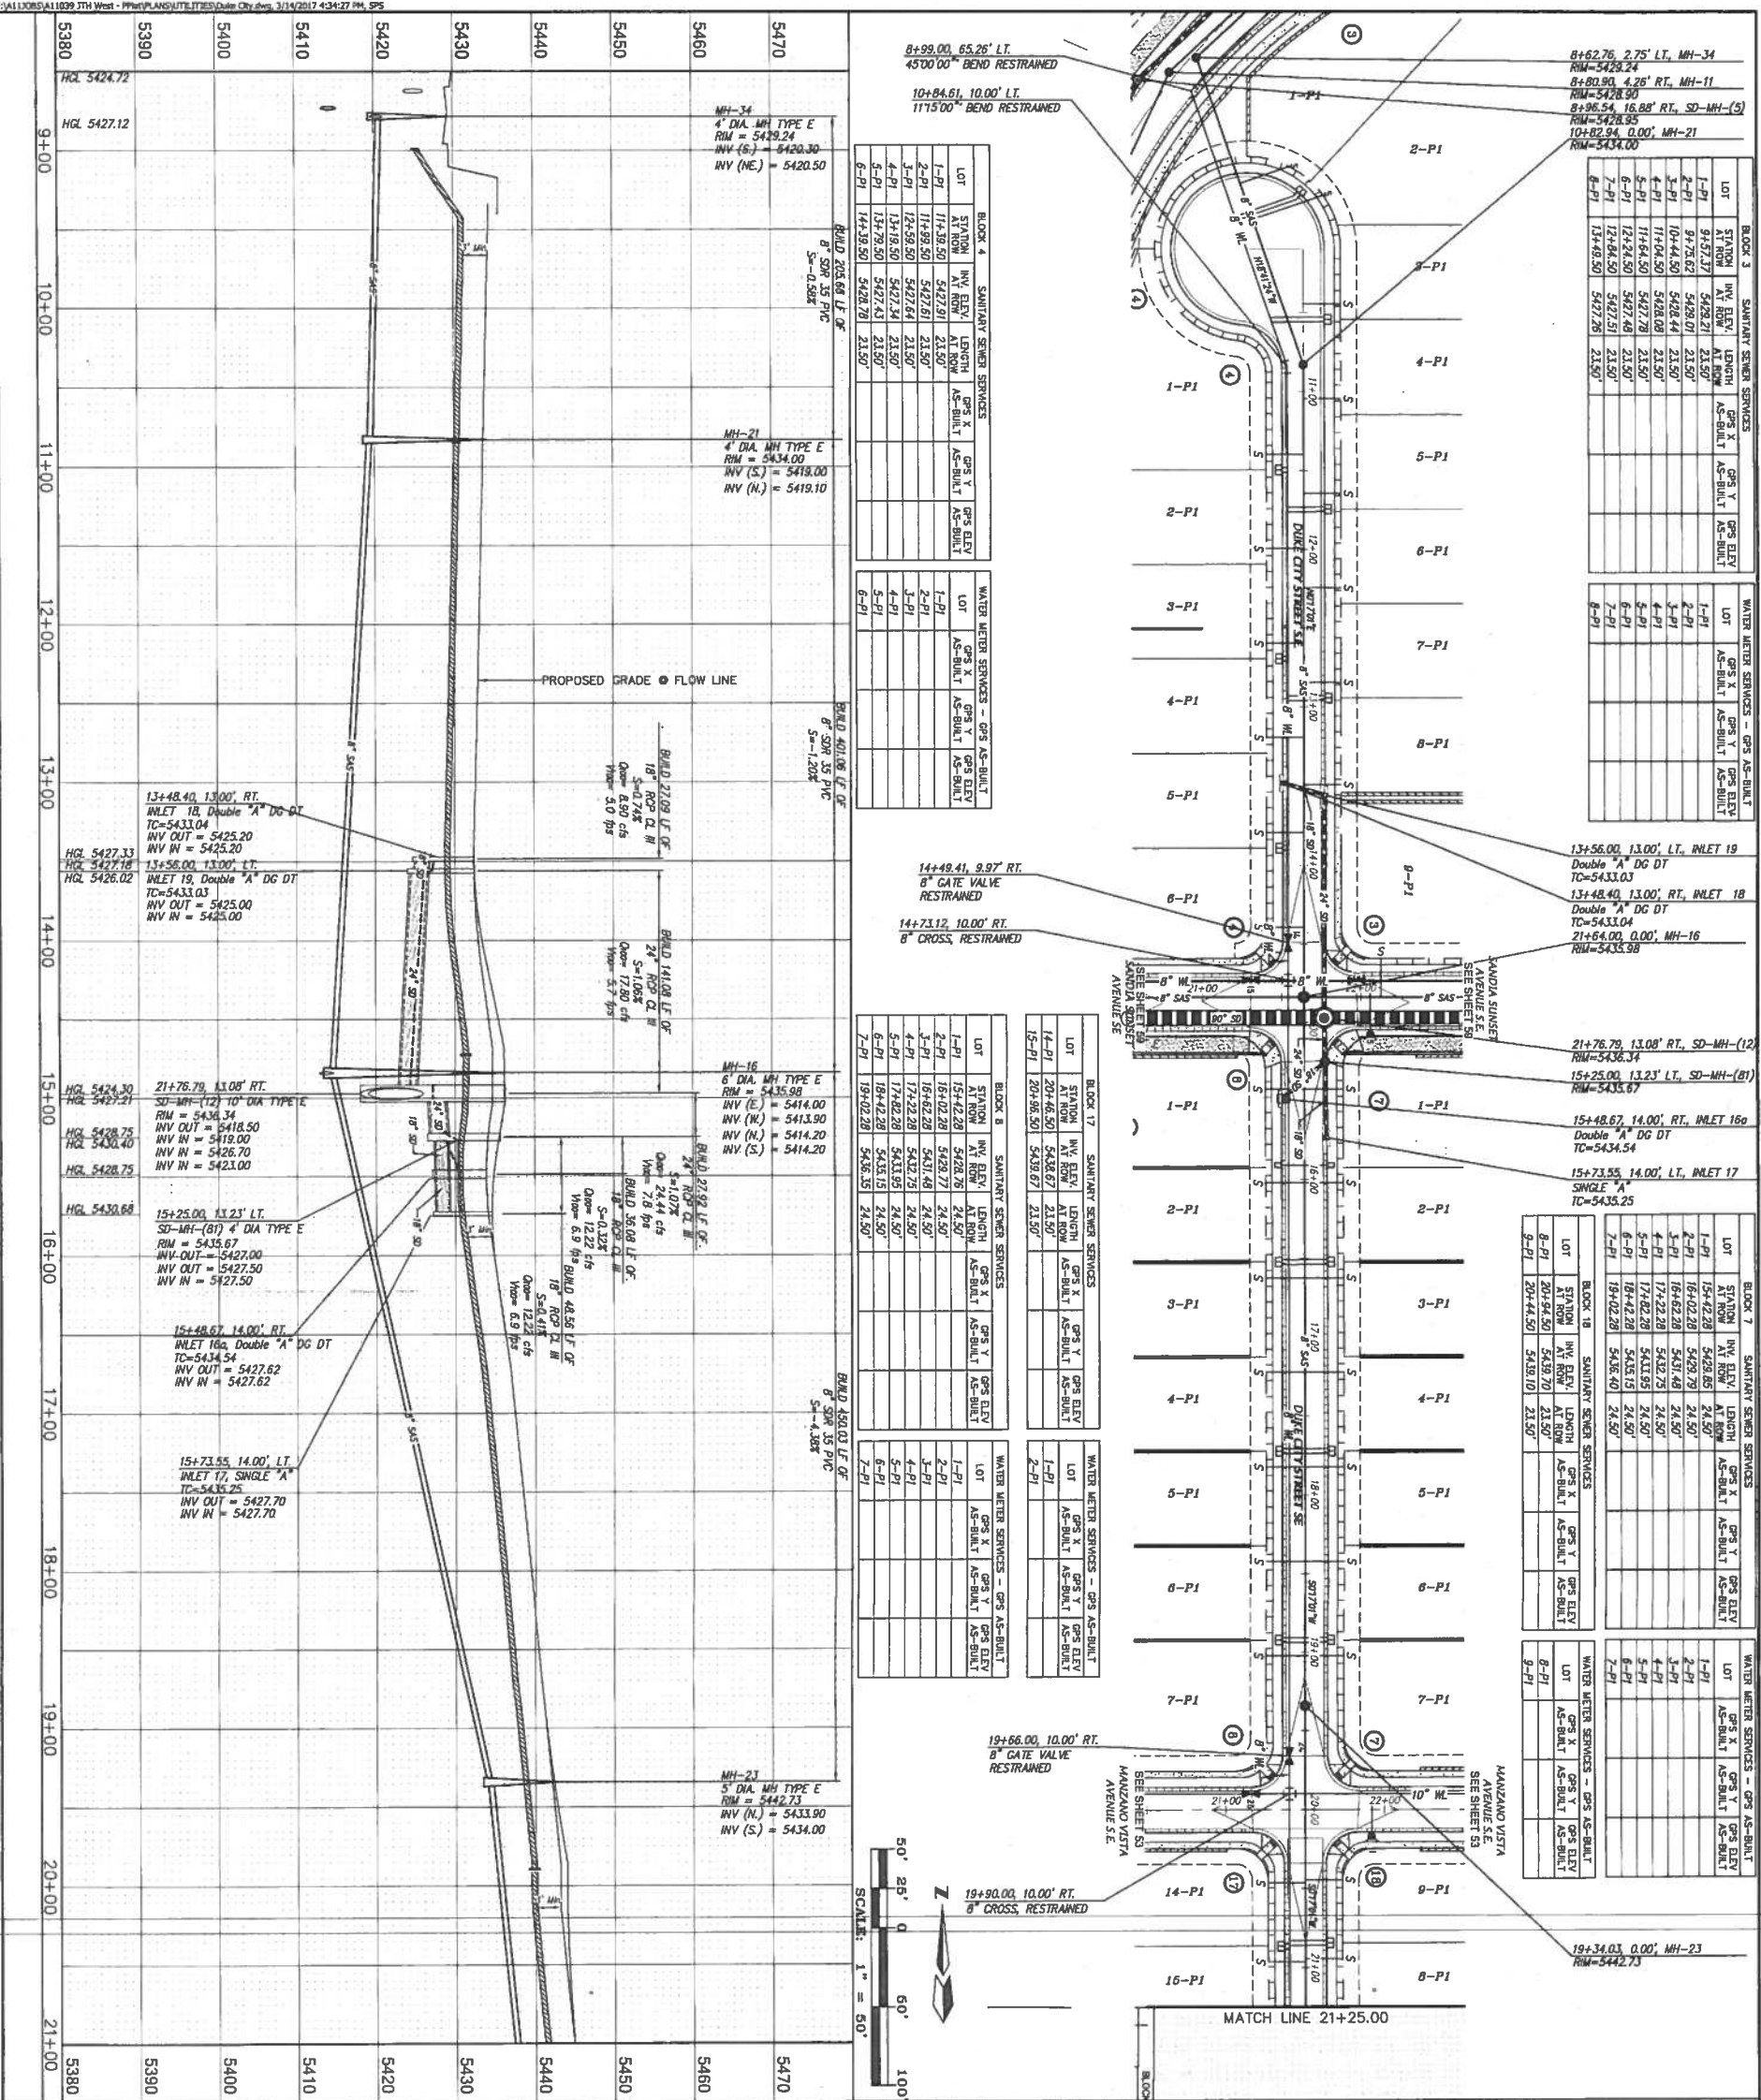

BLOCK 4 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	11+38.50	5422.91	21.50'	8" DIA. MH TYPE E
2-P1	11+38.50	5422.91	21.50'	8" DIA. MH TYPE E
3-P1	11+38.50	5422.91	21.50'	8" DIA. MH TYPE E
4-P1	11+38.50	5422.91	21.50'	8" DIA. MH TYPE E
5-P1	11+38.50	5422.91	21.50'	8" DIA. MH TYPE E
6-P1	11+38.50	5422.91	21.50'	8" DIA. MH TYPE E

BLOCK 17 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 18 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 19 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 20 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 21 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 22 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 23 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 24 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

BLOCK 25 SANITARY SEWER SERVICES				
LOT	STATION	INVERT	LENGTH	PIPE
1-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
2-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
3-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
4-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
5-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E
6-P1	15+42.28	5423.78	21.50'	8" DIA. MH TYPE E

NOTES

1. THE PROPOSED SEWER LINES SHALL BE 24" DIA. FOR PIPES BETWEEN ELEVATIONS 5427.00' AND 5427.70'.
2. ALL FIRE HYDRANTS ARE AGRICOLA STD. DNG 2400 AND 4" BURY UNLESS OTHERWISE SPECIFIED.
3. ALL WATER BODIES ADJACENT TO MUNICIPAL CDBG SHALL HAVE DUCTILE IRON WATER BOX COVER & LID PER AGRICOLA STD. DNG 2400. WATER BODIES SHALL BE 24" DIA. DNG 2400.
4. ALL FIRE HYDRANTS TO HAVE A 6" GATE VALVE & BOX PER AGRICOLA STD. DNG 2400.
5. CONTRACTOR TO USE POLY COATED DCP FOR VALVE BODIES.
6. CONTRACTOR IS NOT TO INSTALL THE STEPS IN THE SAS MANHOLES.
7. ALL SANITARY SEWER MANHOLES PER AGRICOLA STD. DNG 2400.
8. ALL WATER LINES SHALL BE C-900 DR-14 P.C.
9. ALL SINKER LINES SHALL BE SINK-35 P.C.
10. ALL GATE VALVES & VALVE BODIES PER DNG 2400.
11. ALL SINKER SERVICES PER DNG 2400.
12. ALL MAN HOLES SHALL BE PER DNG 2400 FOR TYPE C AND 2400 FOR TYPE E.
13. ALL WATER AND SINKER LINES AND SERVICE LINES SHALL HAVE TRACER WIRE OVER THE TOP OF PIPE.

ENGINEER'S SEAL

SURVEY INFORMATION

NO.	BY	DATE
1	BY	DATE

BENCH MARKS

STATION "5-122" IS LOCATED 8.7' W. OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 800' FT. EAST OF MUNICIPAL LIMITS LINE. 77.9' SE OF POWER POLE #337 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-122".
X= 1,564,263.207, Y= 1,475,762.595, (NAD 83), Z= 5597.219 (NAVD 1988)

AS BUILT INFORMATION

CONTRACTOR	DATE
WORK <td>DATE</td>	DATE
INSPECTOR'S <td>DATE</td>	DATE
ACCEPTANCE BY <td>DATE</td>	DATE
FIELD <td>DATE</td>	DATE
VERIFICATION BY <td>DATE</td>	DATE
DRAWINGS <td>DATE</td>	DATE
CORRECTED BY <td>DATE</td>	DATE

MICRO-FILM INFORMATION

RECORDED BY	DATE
NO. <td></td>	

CITY OF ALBUQUERQUE

PUBLIC WORKS DEPARTMENT

JUAN TABO HILLS ESTATES

DUKE CITY STREET S.E.

UTILITY PLAN & PROFILE

DESIGN REVIEW COMMITTEE

CITY ENGINEER APPROVAL

LAST DESIGN UPDATE

DATE

BY

MARK GOODWIN & ASSOCIATES, P.A.

ALBUQUERQUE, NEW MEXICO 87109

OFFICE (505) 828-2200, FAX (505) 781-8339

DESIGNED BY JDH


DRAWN BY SPS

CHECKED BY DMG



DATE 02/17

DATE 02/17



DATE 02/17

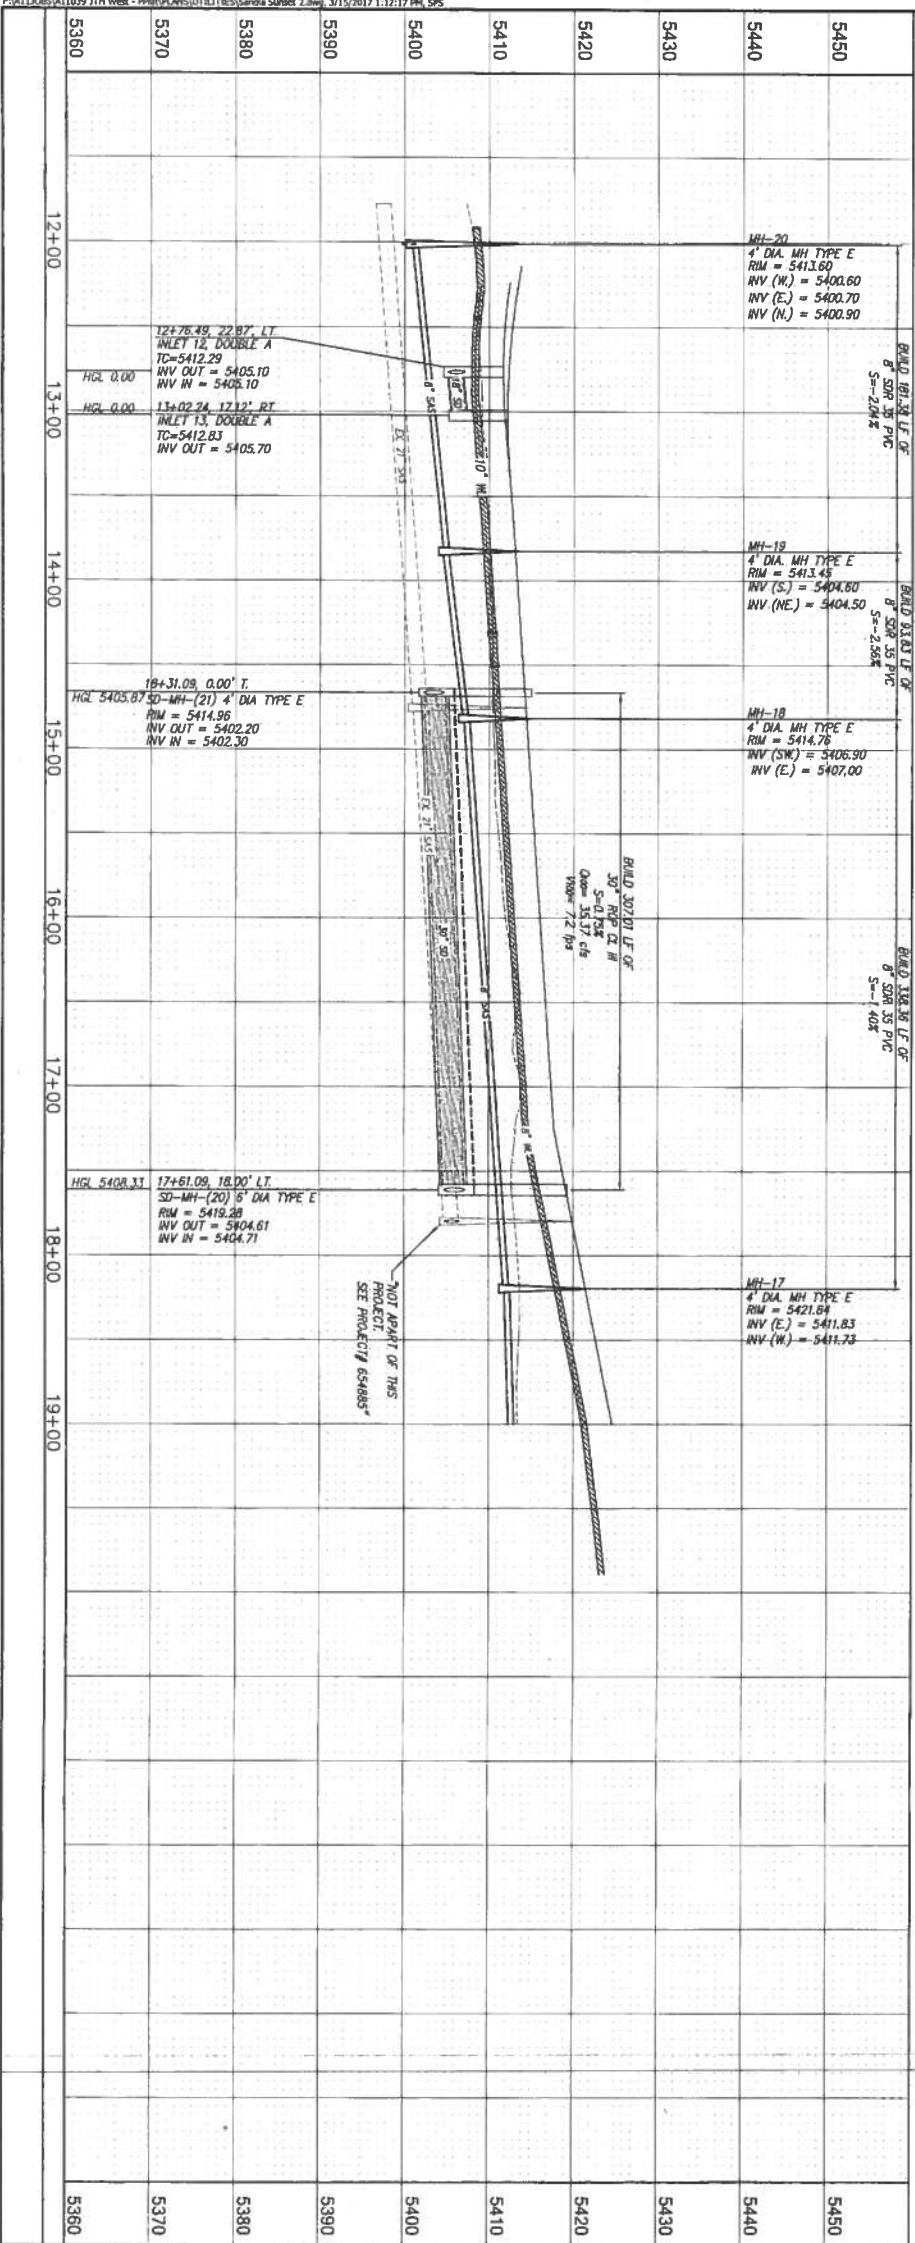

CITY PROJECT NO. 654887		ZONE MAP NO. M-21		SHEET 58 OF 75	
DESIGN REVIEW COMMITTEE CITY ENGINEER APPROVAL					
TITLE: JUAN TABO HILLS ESTATES SANDIA SUNSET AVE SE UTILITY PLAN & PROFILE					
CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT					
DMG MARK GOODWIN & ASSOCIATES, P.A. P.O. BOX 80606 ALBUQUERQUE, NEW MEXICO 87199 OFFICE (505) 828-2200, FAX (505) 797-8639					
DESIGNED BY IDH DATE 02/17					
DRAWN BY SPS DATE 02/17					
CHECKED BY DMG DATE 02/17					
ENGINEER'S SEAL					
SURVEY INFORMATION					
FIELD NOTES					
BENCH MARKS					
AS BUILT INFORMATION					
CONTRACTOR					
WORK STARTED BY					
INSPECTOR'S ACCEPTANCE BY					
FIELD VERIFICATION BY					
DRAWINGS CORRECTED BY					
MICRO-FILM INFORMATION					
RECORDED BY					
NO.					

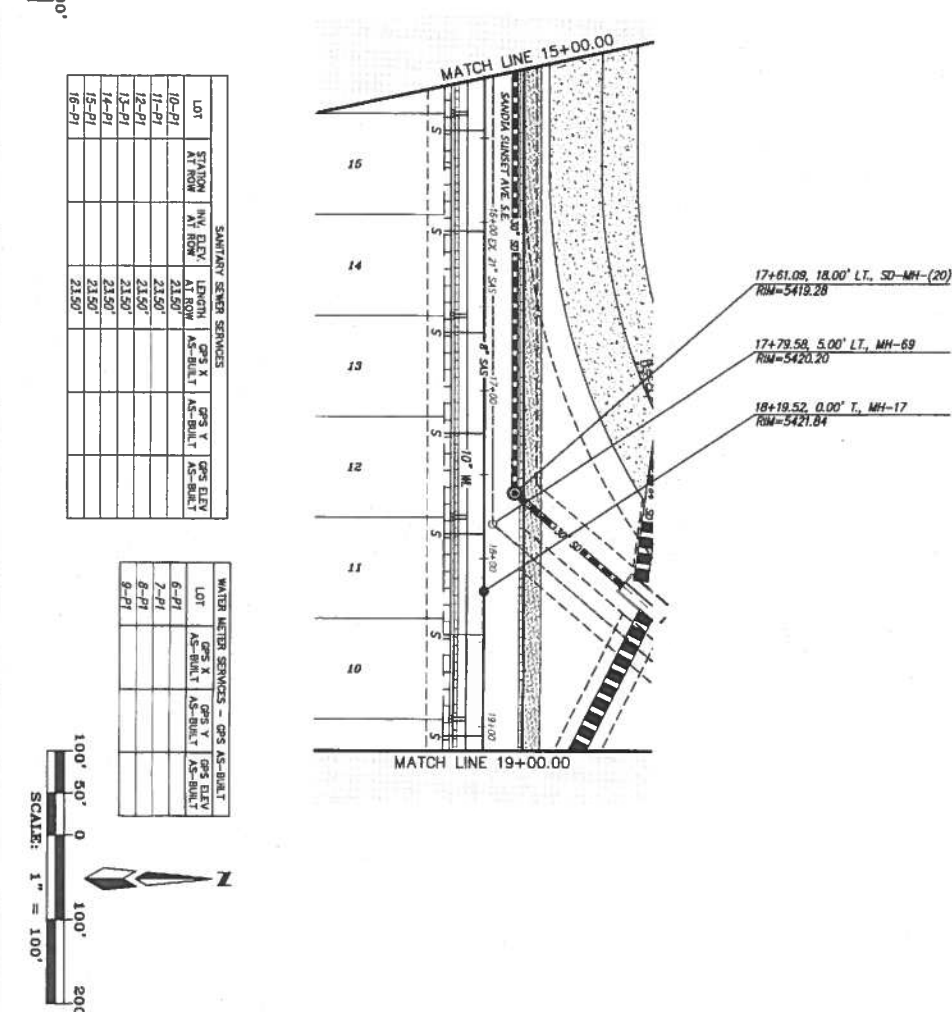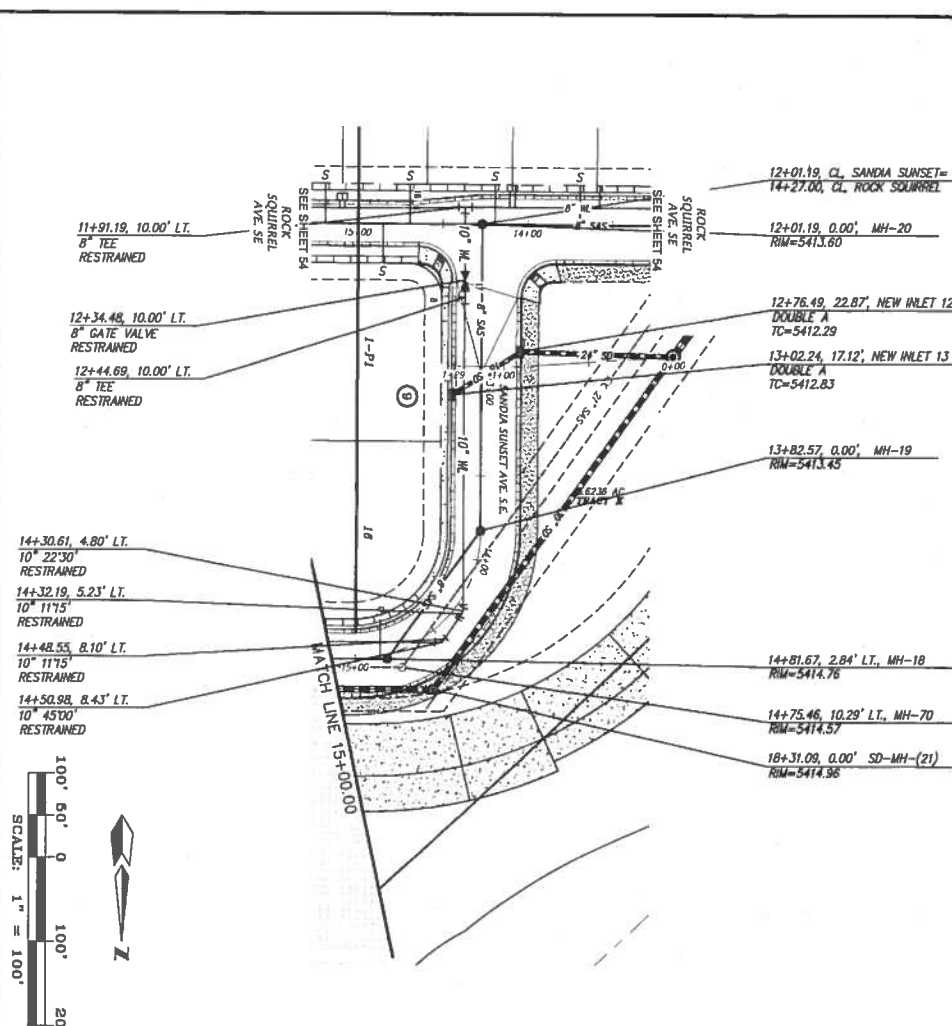

FIRE HYDRANT - GPS AS-BUILT		GPS X		GPS Y		GPS ELEV	
HYDRANT NO.		AS-BUILT		AS-BUILT		AS-BUILT	
11							
DATE		GPS X		GPS Y		GPS ELEV	
VALVE #		AS-BUILT		AS-BUILT		AS-BUILT	
17							
18							
20							
22							
23							



24+31.00, 0.00' I, MH-15
RW=5444.85

24+31.00, CL SANDIA SUNSET=
14+84.00, CL HUBBARD

24+43.75, 13.13' RT.
SD-MH-(11) RW=5444.92

- | FIRE HYDRANT - OPS AS-BUILT | | | |
|-----------------------------|-------------------|-------------------|----------------------|
| FIRE
HYDRANT # | GPS X
AS-BUILT | GPS Y
AS-BUILT | GPS ELEV
AS-BUILT |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
-
- | GATE VALVE - OPS AS-BUILT | | | |
|---------------------------|-------------------|-------------------|----------------------|
| GATE
VALVE # | GPS X
AS-BUILT | GPS Y
AS-BUILT | GPS ELEV
AS-BUILT |
| 11 | | | |
| 13 | | | |

ENGINEER'S SEAL

7-15-2017

JAMES D. HARRIS
PROFESSIONAL ENGINEER
NEW MEXICO

 CITY OF ALBUQUERQUE
PUBLIC WORKS DEPARTMENT

TITLE: *JUAN TABO HILLS ESTATES
SANDIA SUNSET AVE SE
UTILITY PLAN & PROFILE*

DESIGN REVIEW COMMITTEE	CITY ENGINEER APPRO
-------------------------	---------------------

100

1000

Downloaded from <http://ajphaphysocpharm.sagepub.com/> at 11:01 11 November 2014

10


CIR PROJECT NO	ZON
----------------	-----



654887

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

M-2

59	75
----	----

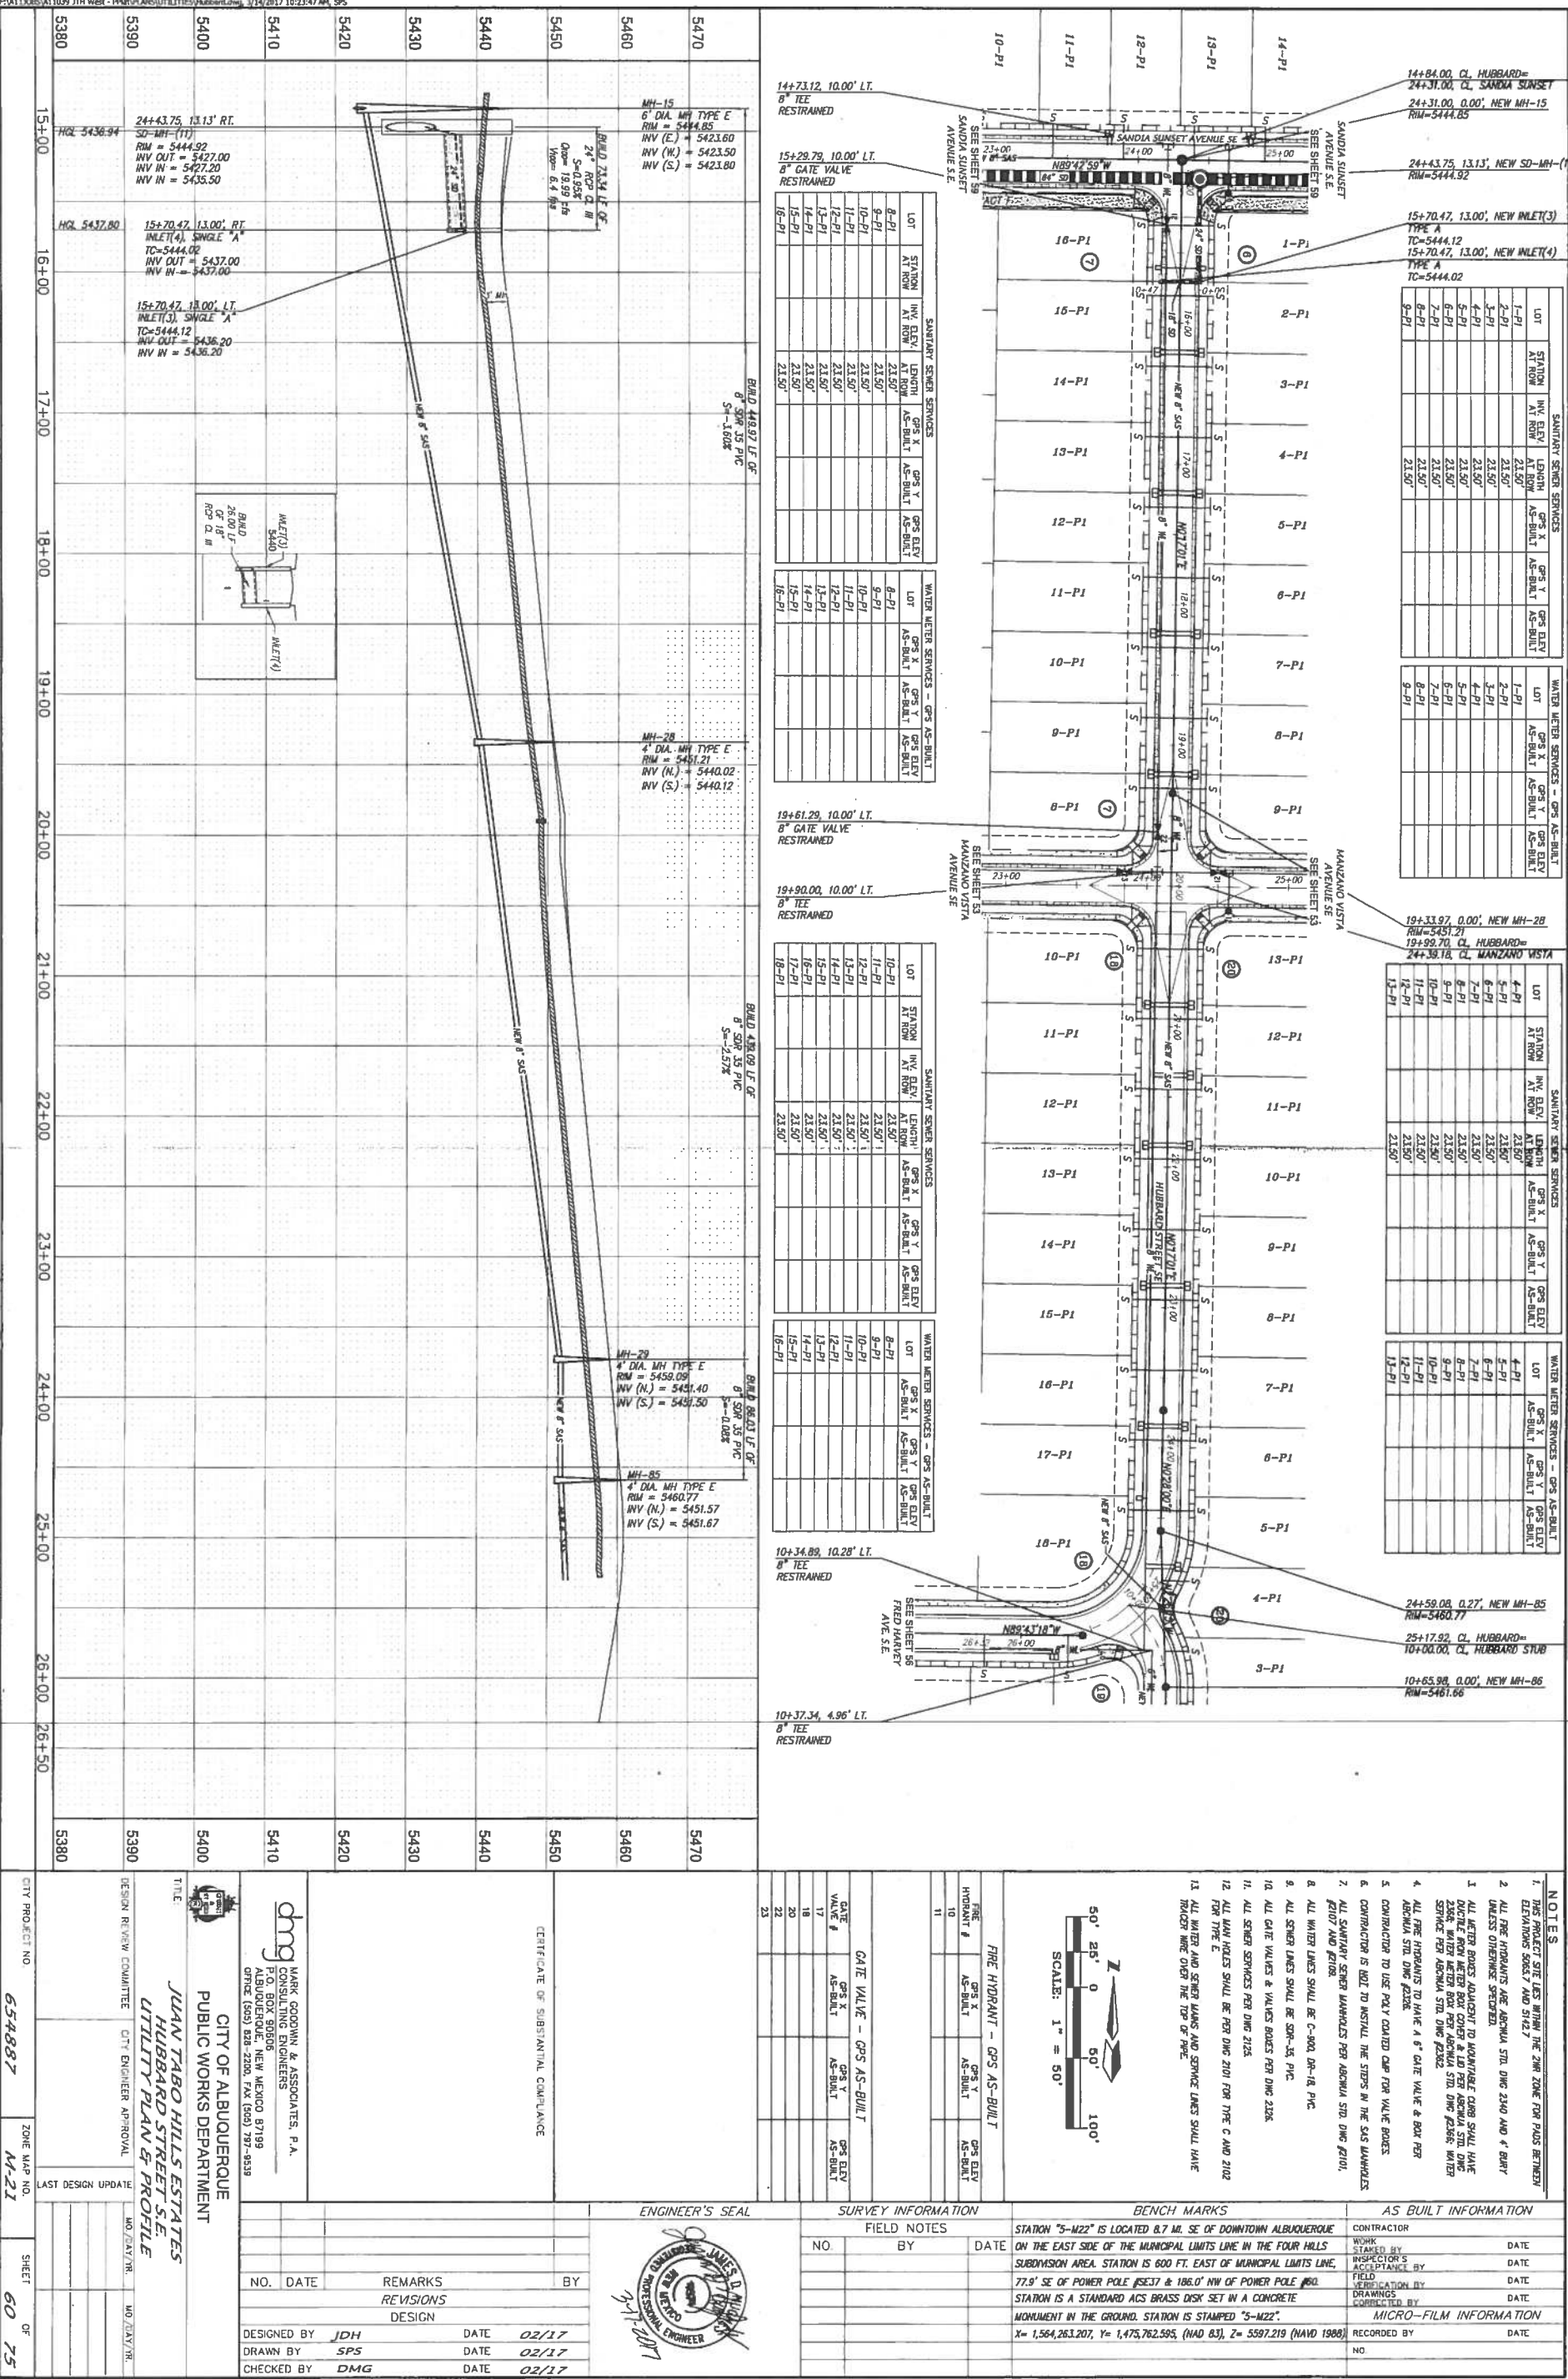

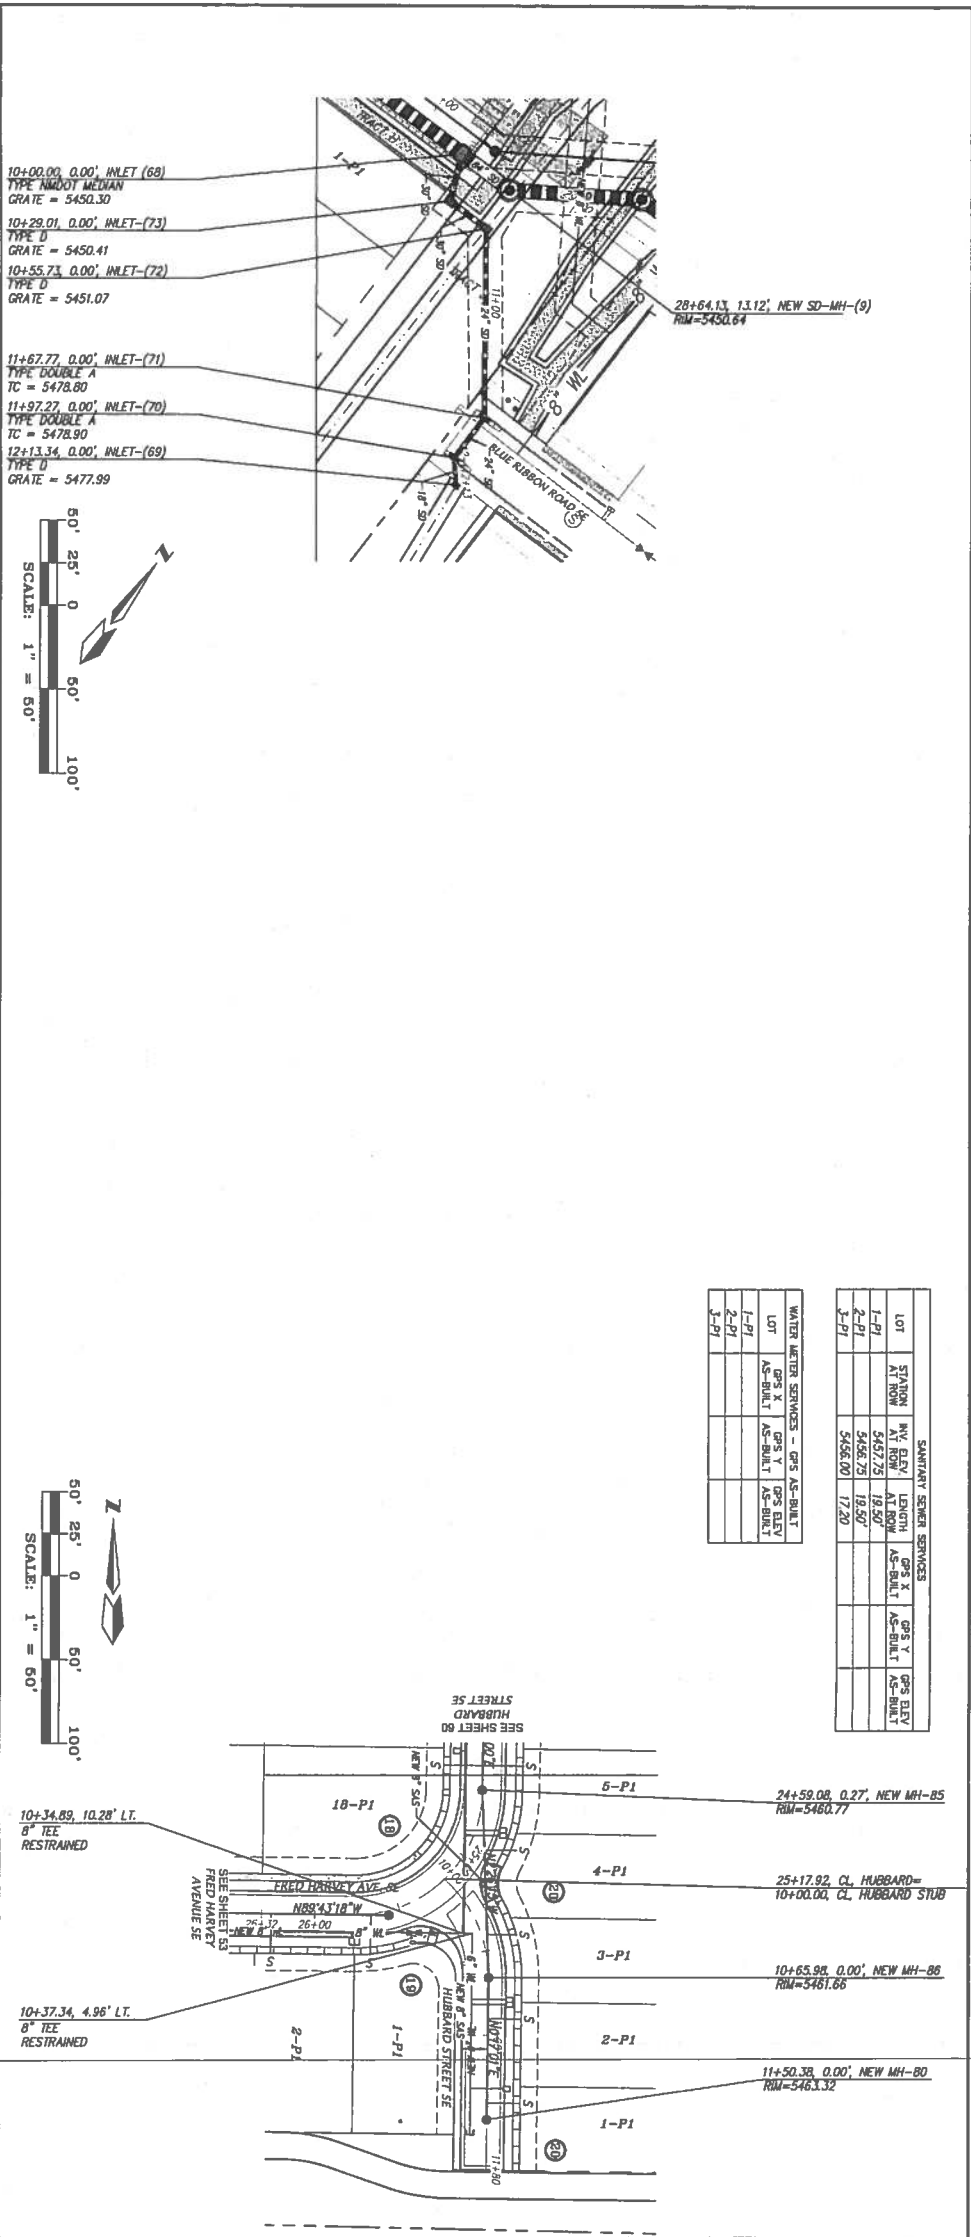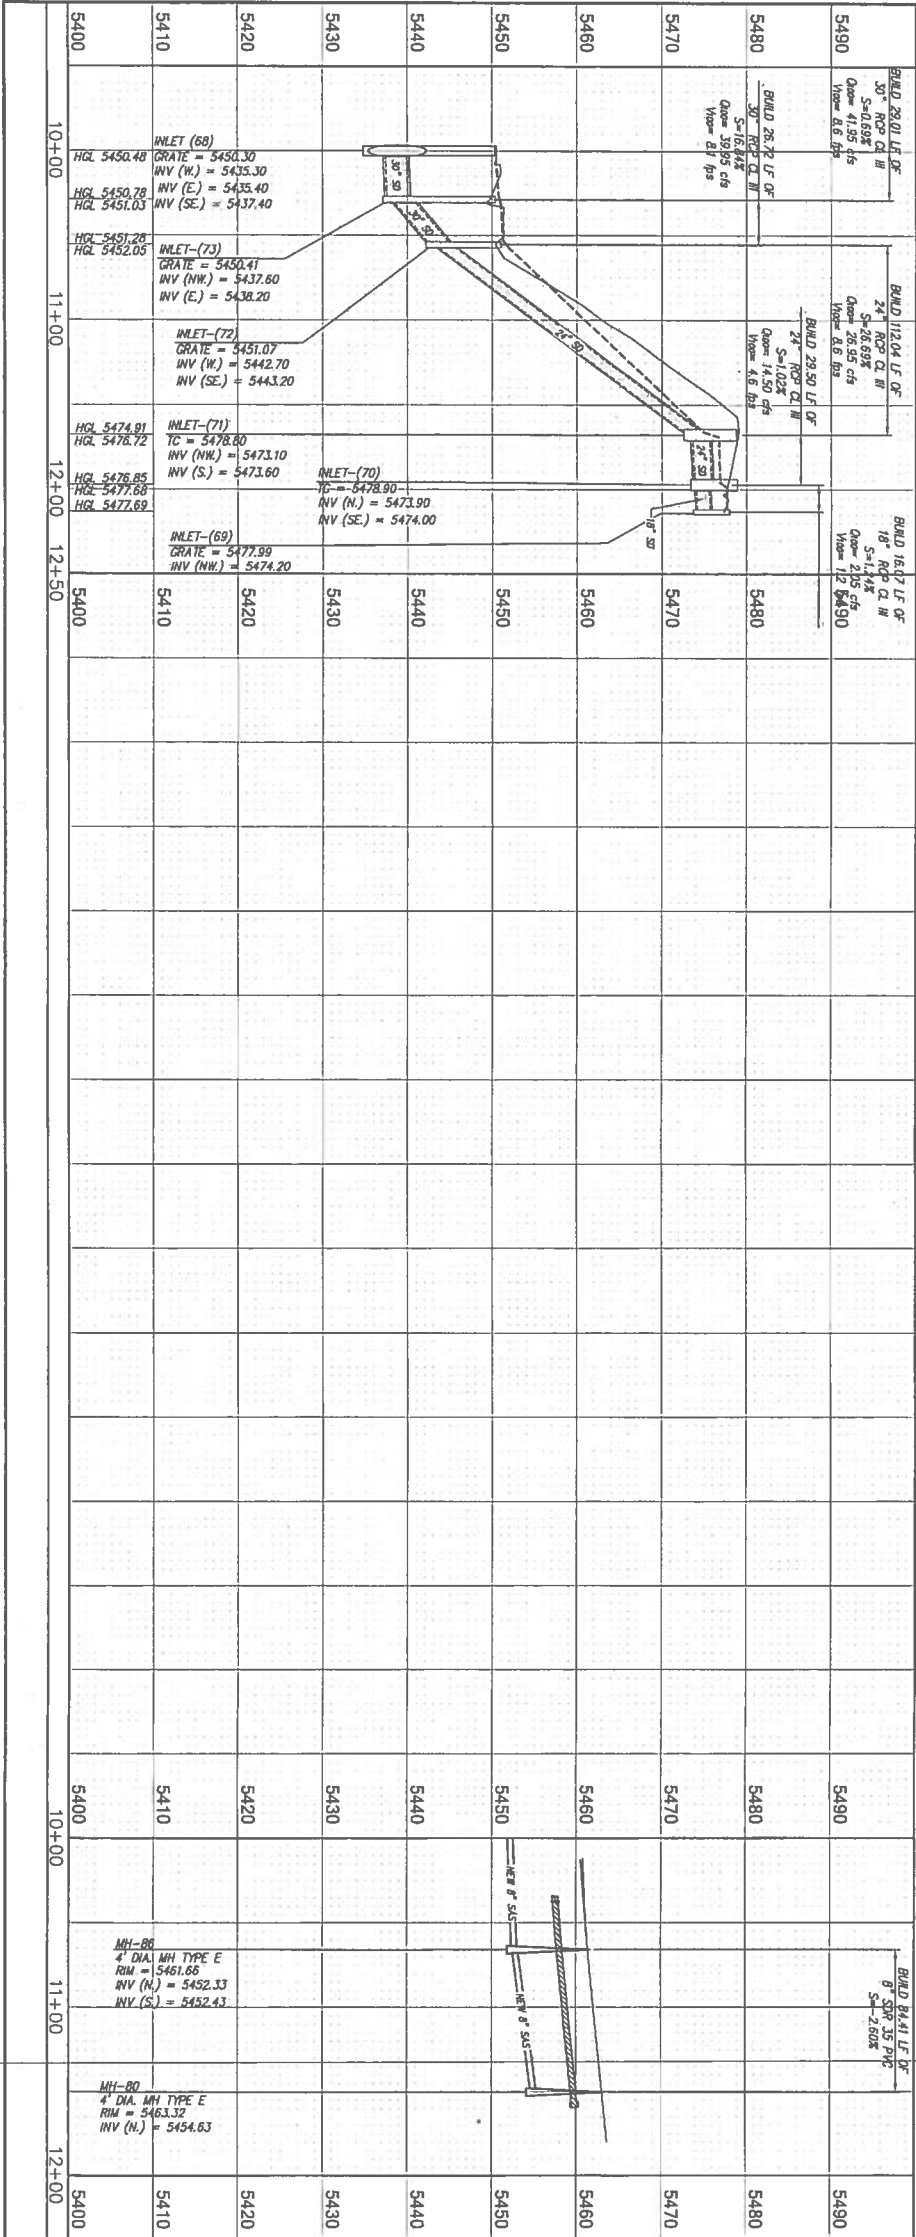

SANITARY SEWER SERVICES					
LOT	STATION	INVERT	AT ROW	GPS X	GPS Y
1-P1	5457.75	19.50	AS-BUILT	AS-BUILT	AS-BUILT
2-P1	5456.75	19.50	AS-BUILT	AS-BUILT	AS-BUILT
3-P1	5456.00	17.20	AS-BUILT	AS-BUILT	AS-BUILT

WATER METER SERVICES - GPS AS-BUILT			
LOT	GPS X	GPS Y	GPS ELEV
1-P1	AS-BUILT	AS-BUILT	AS-BUILT
2-P1	AS-BUILT	AS-BUILT	AS-BUILT
3-P1	AS-BUILT	AS-BUILT	AS-BUILT

NOTES

1. THIS PROJECT SITE LIES WITHIN THE 200' ZONE FOR PLANS BETWEEN ELIMINATING SOCIETY AND STREET.

2. ALL FIRE HYDRANTS ARE AGRICULTURAL STD. DNG 2100 AND 4" BURY UNLESS OTHERWISE SPECIFIED.

3. ALL WATER BOXES ADJACENT TO HUBBARD STREET SHALL HAVE 2386" WATER METER BOX COVER & 10" PER AGRICULTURAL STD. DNG 2100 SERVICE PER AGRICULTURAL STD. DNG 2100.

4. ALL FIRE HYDRANTS TO HAVE A 6" GATE VALVE & BOX PER AGRICULTURAL STD. DNG 2100.

5. CONTRACTOR TO USE POLY COATED CAP FOR VALVE BOXES.

6. CONTRACTOR IS NOT TO INSTALL THE STEPS IN THE SAS MANHOUSES.

7. ALL SANITARY SEWER MANHOUSES PER AGRICULTURAL STD. DNG 2100.

8. ALL WATER LINES SHALL BE C-800, DR-18, PVC.

9. ALL SINKER LINES SHALL BE 500-15, PVC.

10. ALL GATE VALVES & VALVE BOXES PER DNG 2100.

11. ALL SINKER SERVICES PER DNG 2100.

12. ALL MAN HOLES SHALL BE PER DNG 2101 FOR TYPE C AND 2102 FOR TYPE E.

13. ALL WATER AND SINKER MAINS AND SERVICE LINES SHALL HAVE TRACKER WIRE OVER THE TOP OF PIPE.

CITY OF ALBUQUERQUE
PUBLIC WORKS DEPARTMENT

MARK GOODWIN & ASSOCIATES, P.A.
ENGINEERS
ALBUQUERQUE, NEW MEXICO 87199
OFFICE (505) 828-2200, FAX (505) 797-9535

DESIGNED BY JDH DATE 02/17
DRAWN BY SPS DATE 02/17
CHECKED BY DMG DATE 02/17

ENGINEER'S SEAL

SURVEY INFORMATION

FIELD NOTES

DATE

BENCH MARKS

STATION "5-M22" IS LOCATED 8.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #537 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22".
X= 1,561,263.207, Y= 1,475,782.595, (NAD 83), Z= 5597.219 (NAVD 1988)

AS BUILT INFORMATION

CONTRACTOR

WORK STARTED BY

INSPECTOR'S ACCEPTANCE BY

FIELD VERIFICATION BY

DRAWINGS CORRECTED BY

RECORDED BY

DATE



DATE

DATE

DATE

DATE


NO.

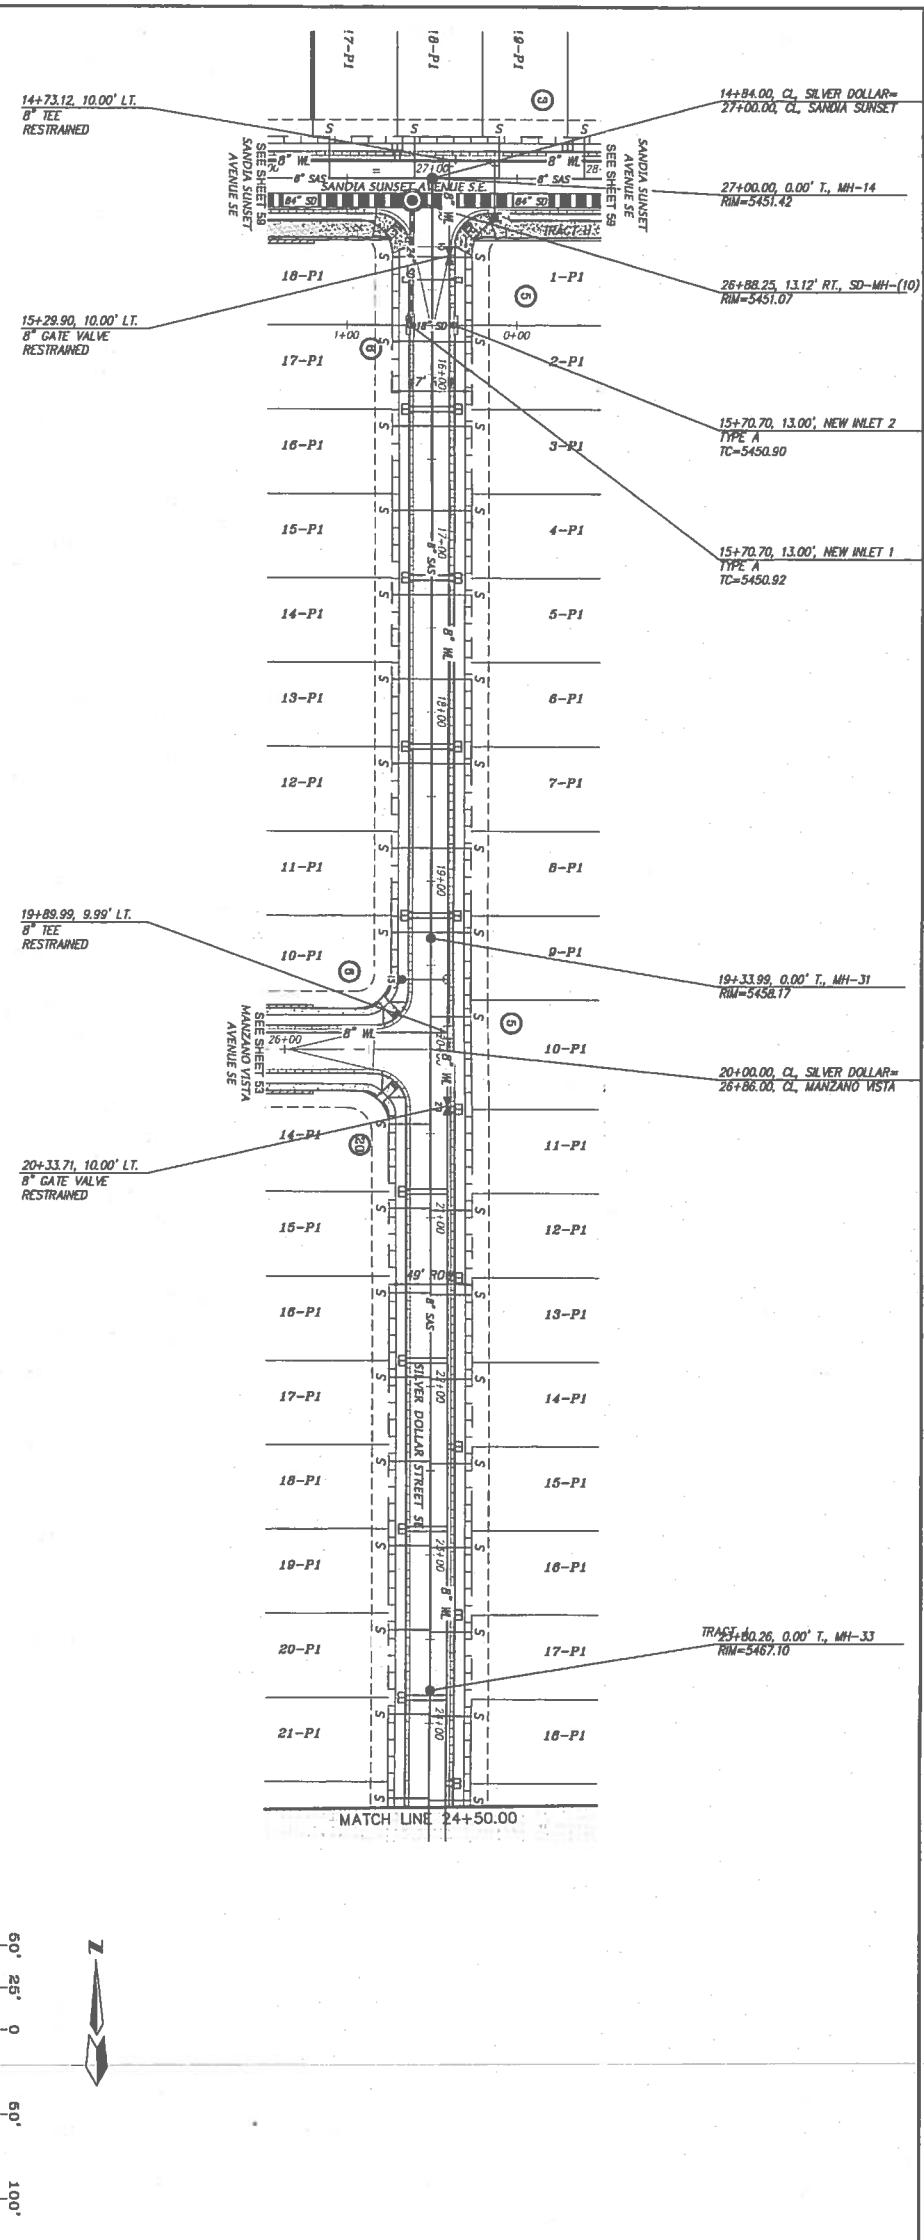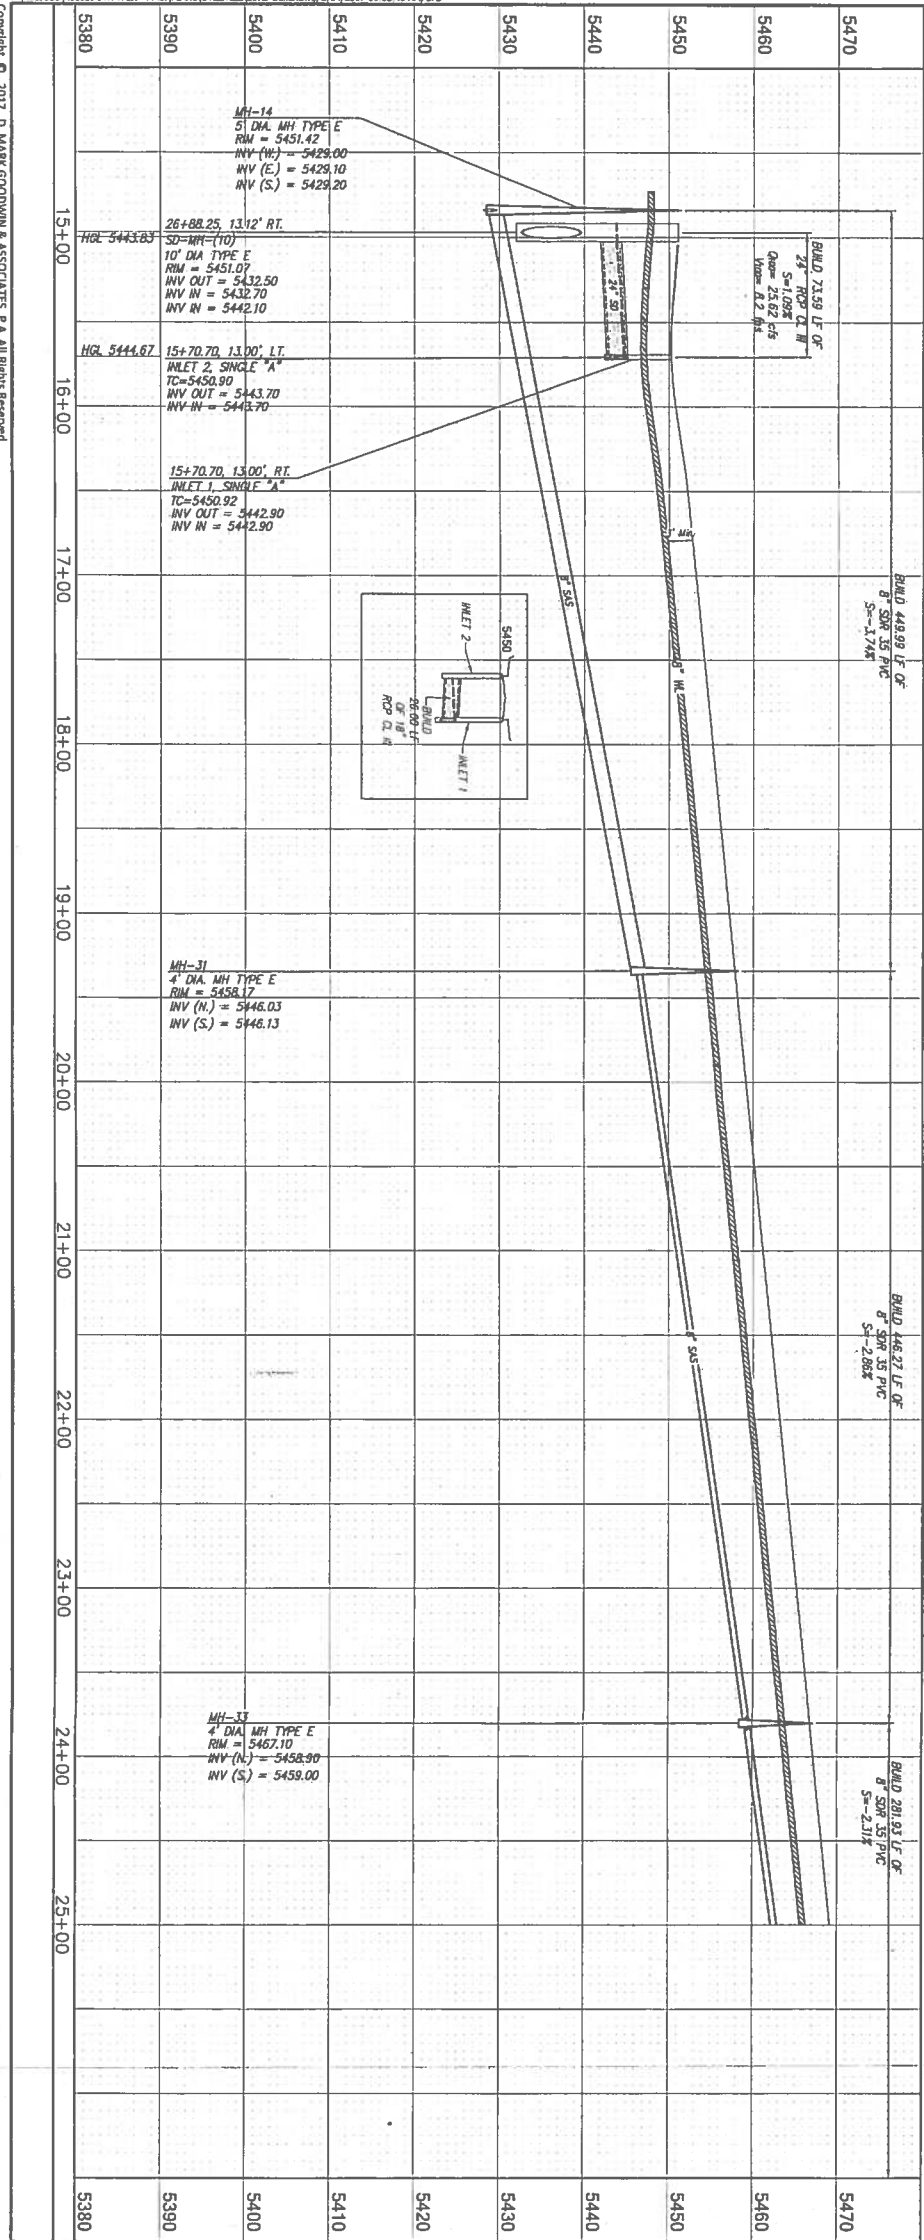

CITY PROJECT NO. 654887		JOB MAP NO. M-21		SHEET 62 OF 75	
CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT JUAN TABO HILLS ESTATES SILVER DOLLAR STREET S.E. UTILITY PLAN & PROFILE					
DESIGN REVIEW COMMITTEE CITY ENGINEER APPROVAL					
LAST DESIGN UPDATE					
NO. DATE REMARKS BY					
DESIGNED BY JDH DATE 02/17					
DRAWN BY SPS DATE 02/17					
CHECKED BY DMG DATE 02/17					
ENGINEER'S SEAL					
SURVEY INFORMATION					
FIELD NOTES					
BENCH MARKS					
AS BUILT INFORMATION					

F:\A11\2065\A11039 3TH West - P\PLAN\A11039\A11039 Top Drive SE.dwg 3/14/2017 2:50:48 PM SPS

Copyright © 2017 D. MARK GOODWIN & ASSOCIATES, P.A. All Rights Reserved.

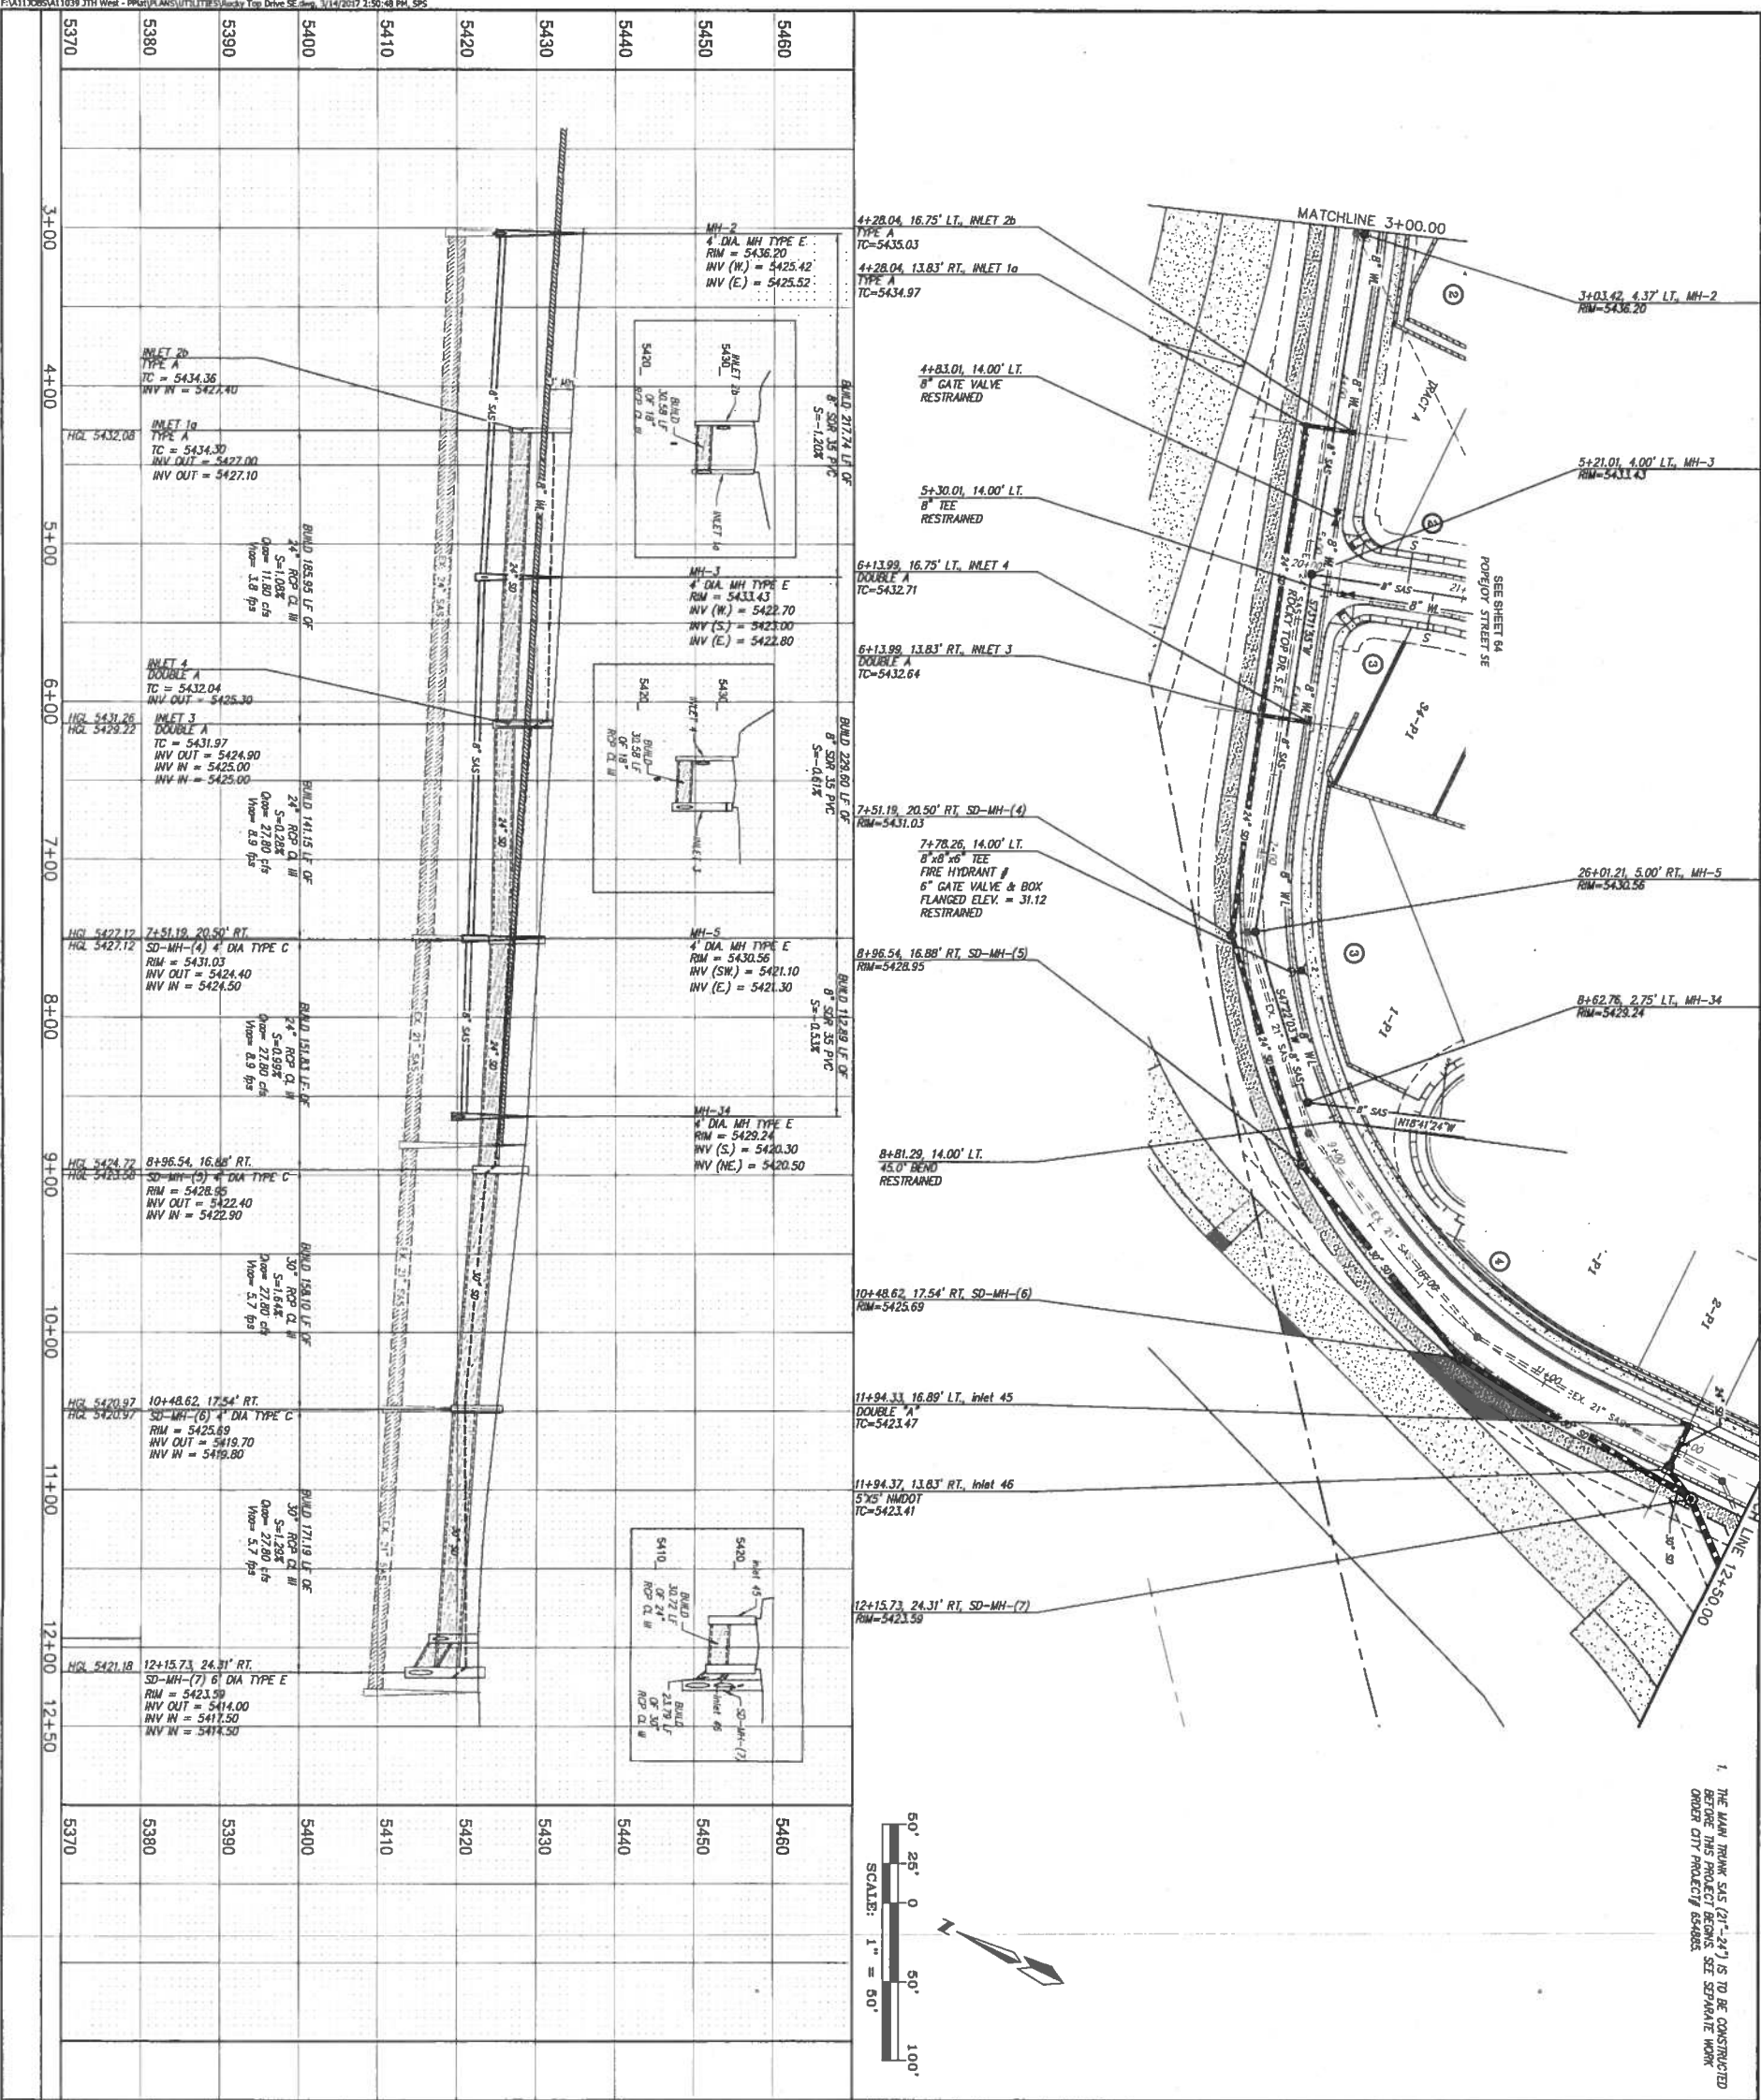

1. THE MAIN TRUNK SAS (21"-24") IS TO BE CONSTRUCTED BEFORE THIS PROJECT BEGINS. SEE SEPARATE WORK ORDER CITY PROJECT 654885.

NOTES

- THIS PROJECT SITE LIES WITHIN THE 200' ZONE FOR PLANS BETWEEN ELEVATIONS 5052.7' AND 5102.7'.
- ALL FIRE HYDRANTS ARE AGENCY STD. DWG 2340 AND 4" BURY UNLESS OTHERWISE SPECIFIED.
- ALL WATER BODIES ADJACENT TO HIGHWAY/STATE ROAD SHALL HAVE 24" DIA. R/W WATER BOX COVER & LID PER AGENCY STD. DWG 2368. WATER BODIES SHALL BE PER AGENCY STD. DWG 2368. WATER SERVICE PER AGENCY STD. DWG 2352.
- ALL FIRE HYDRANTS TO HAVE A 6" GATE VALVE & BOX PER AGENCY STD. DWG 2328.
- CONTRACTOR TO USE PRE-PAID CAST FOR VALVE BODIES.
- CONTRACTOR IS NOT TO INSTALL THE STEPS IN THE SAS MANHOLES.
- ALL SANITARY SEWER MANHOLES PER AGENCY STD. DWG 2310, 2317 AND 2308.
- ALL WATER LINES SHALL BE C-900, DR-18, P.V.C.
- ALL SINKER LINES SHALL BE SPM-35, P.V.C.
- ALL GATE VALVES & VALVE BODIES PER DWG 2328.
- ALL SINKER SERVICES PER DWG 2325.
- ALL MAN HOLES SHALL BE PER DWG 2101 FOR TYPE C AND 2102 FOR TYPE E.
- ALL WATER AND SINKER MAINS AND SERVICE LINES SHALL HAVE RIGID WIRE OVER THE TOP OF PIPE.

FIRE HYDRANT - GPS AS-BUILT

HYDRANT #	GPS X	GPS Y	GPS ELEV
2	AS-BUILT	AS-BUILT	AS-BUILT

GATE VALVE - GPS AS-BUILT




VALVE #	GPS X	GPS Y	GPS ELEV
17	AS-BUILT	AS-BUILT	AS-BUILT
18			
20			
22			
23			

BENCH MARKS		AS BUILT INFORMATION	
STATION "5-M22" IS LOCATED 0.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #5E37 & 106.0' NW OF POWER POLE #6D. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "5-M22". X= 1,564,263.207, Y= 1,473,782.595, (NAD 83), Z= 5597.219 (NAVD 1988)		CONTRACTOR	DATE
		WORK STAMPED BY	DATE
		INSPECTOR'S ACCEPTANCE BY	DATE
		FIELD VERIFICATION BY	DATE
		DRAWINGS CORRECTED BY	DATE
MICRO-FILM INFORMATION		RECORDED BY	
		NO.	DATE





REVISIONS		
NO.	DATE	REMARKS
DESIGNED BY	JDH	DATE 02/17
DRAWN BY	SPS	DATE 02/17
CHECKED BY	DMG	DATE 02/17



CITY PROJECT NO. 654887		ZONE MAP NO. M-21	SHEET 67 OF 75
CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT		JUAN TABO HILLS ESTATES ROCKY TOP DRIVE SE UTILITY PLAN & PROFILE	
DESIGN REVIEW COMMITTEE		CITY ENGINEER APPROVAL	
LAST DESIGN UPDATE			

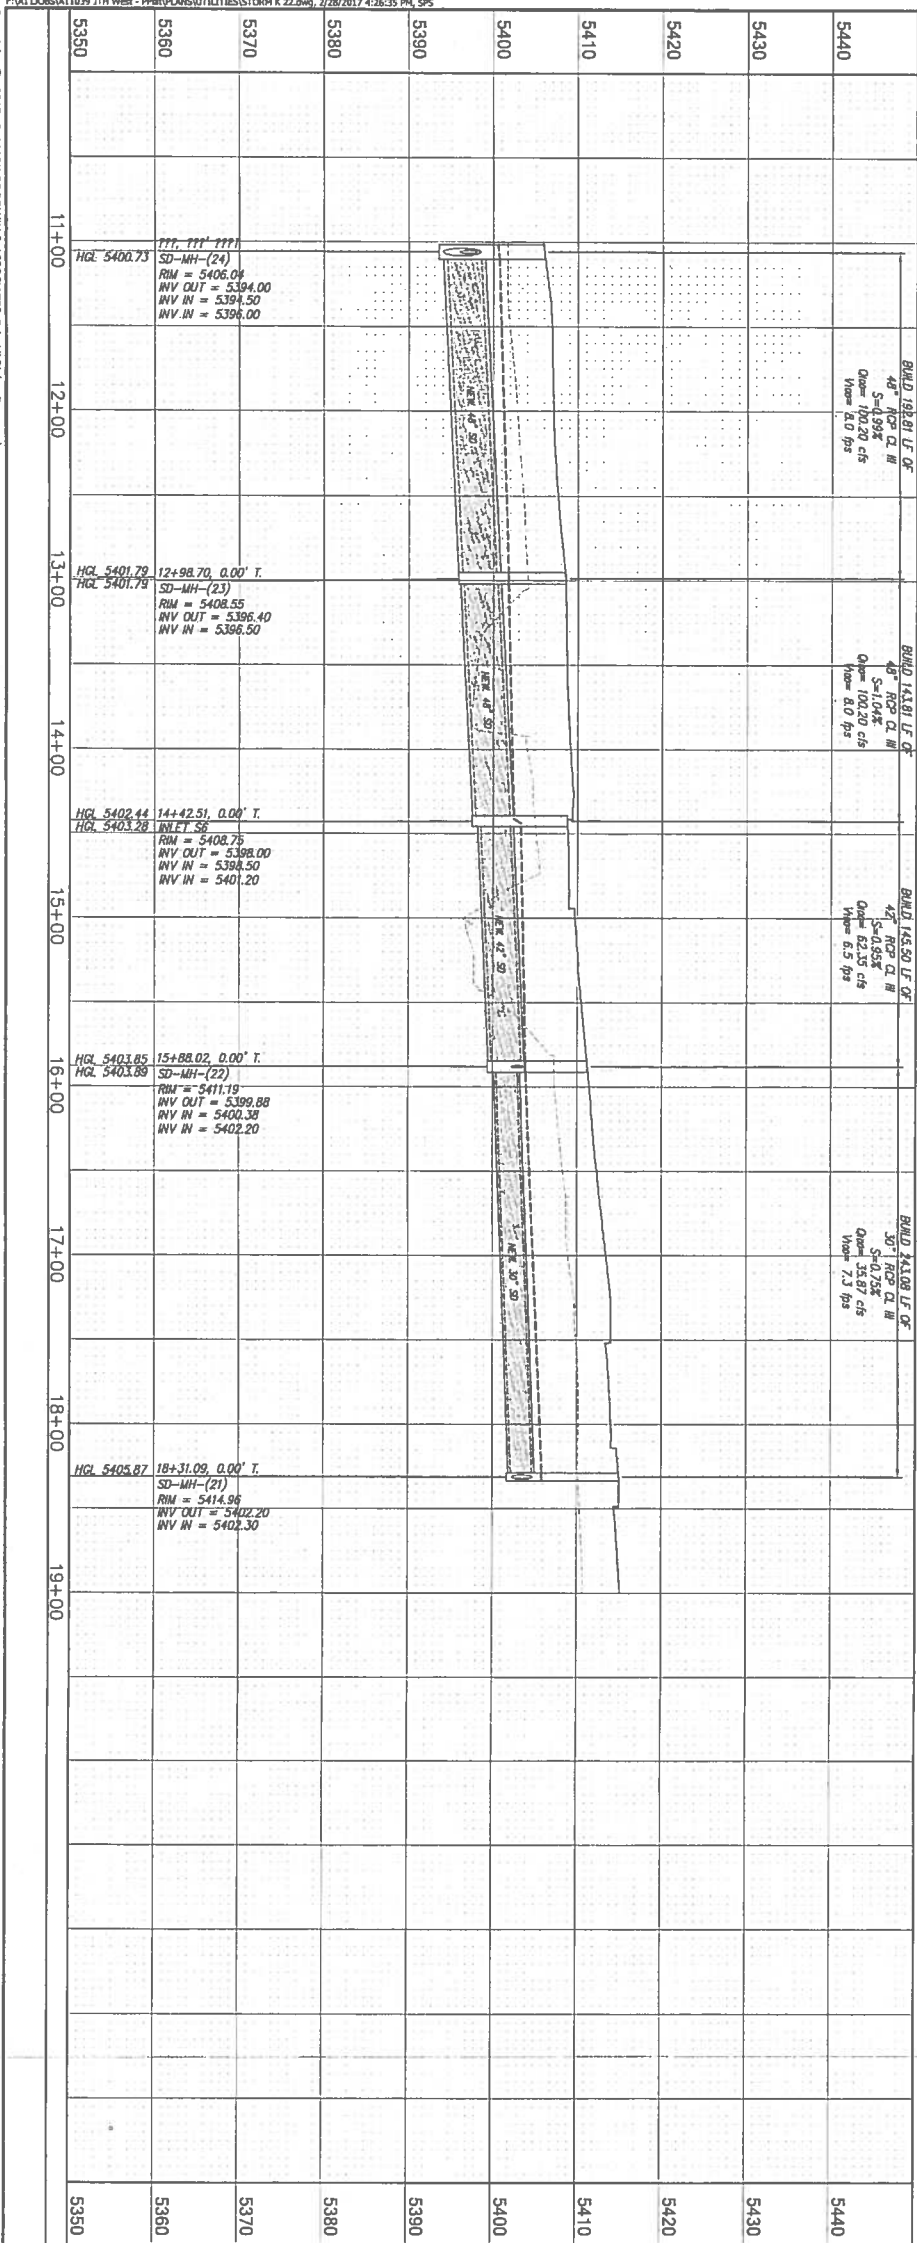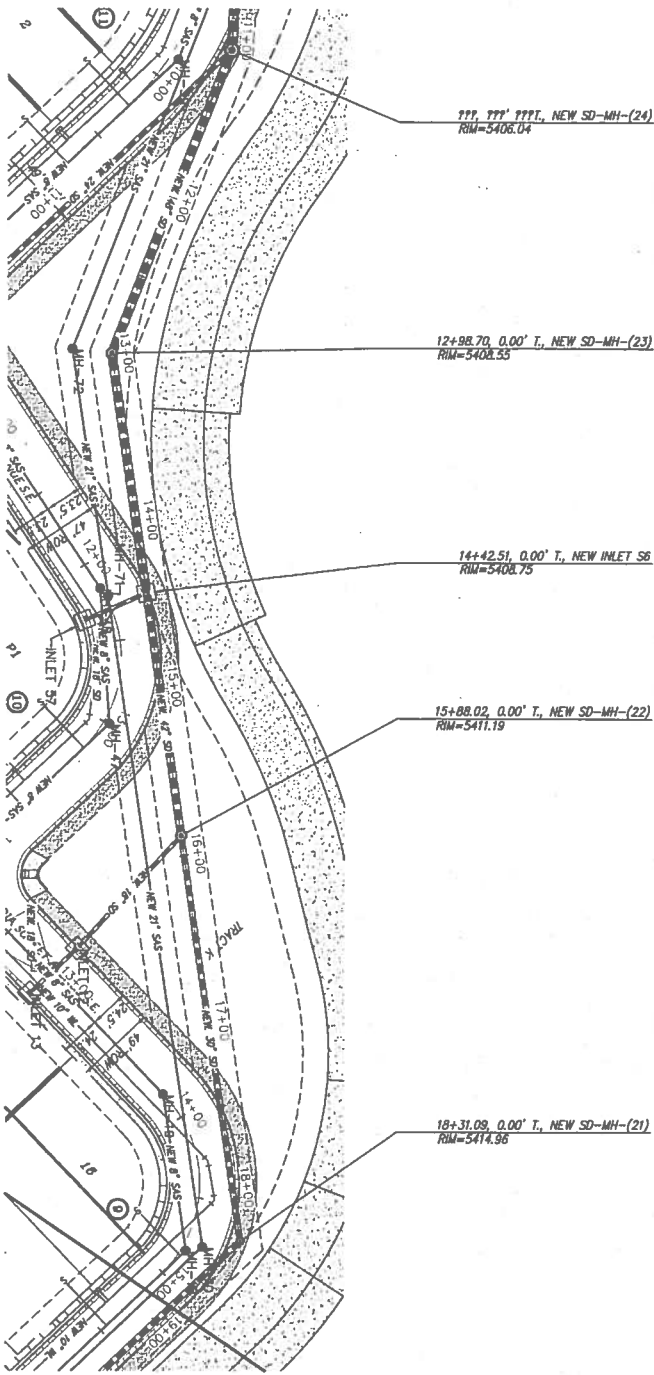

CITY PROJECT NO. 654887		ZONE MAP NO. M-21	SHEET 69 OF 75
CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT JUAN TABO HILLS ESTATES PARK I UTILITY PLAN & PROFILE			
DESIGN REVIEW COMMITTEE CITY ENGINEER APPROVAL			
LAST DESIGN UPDATE			
NO. DATE REMARKS			
DESIGNED BY JDH DATE 02/17			
DRAWN BY SPS DATE 02/17			
CHECKED BY DMG DATE 02/17			
ENGINEER'S SEAL			
SURVEY INFORMATION			
BENCH MARKS			
AS BUILT INFORMATION			

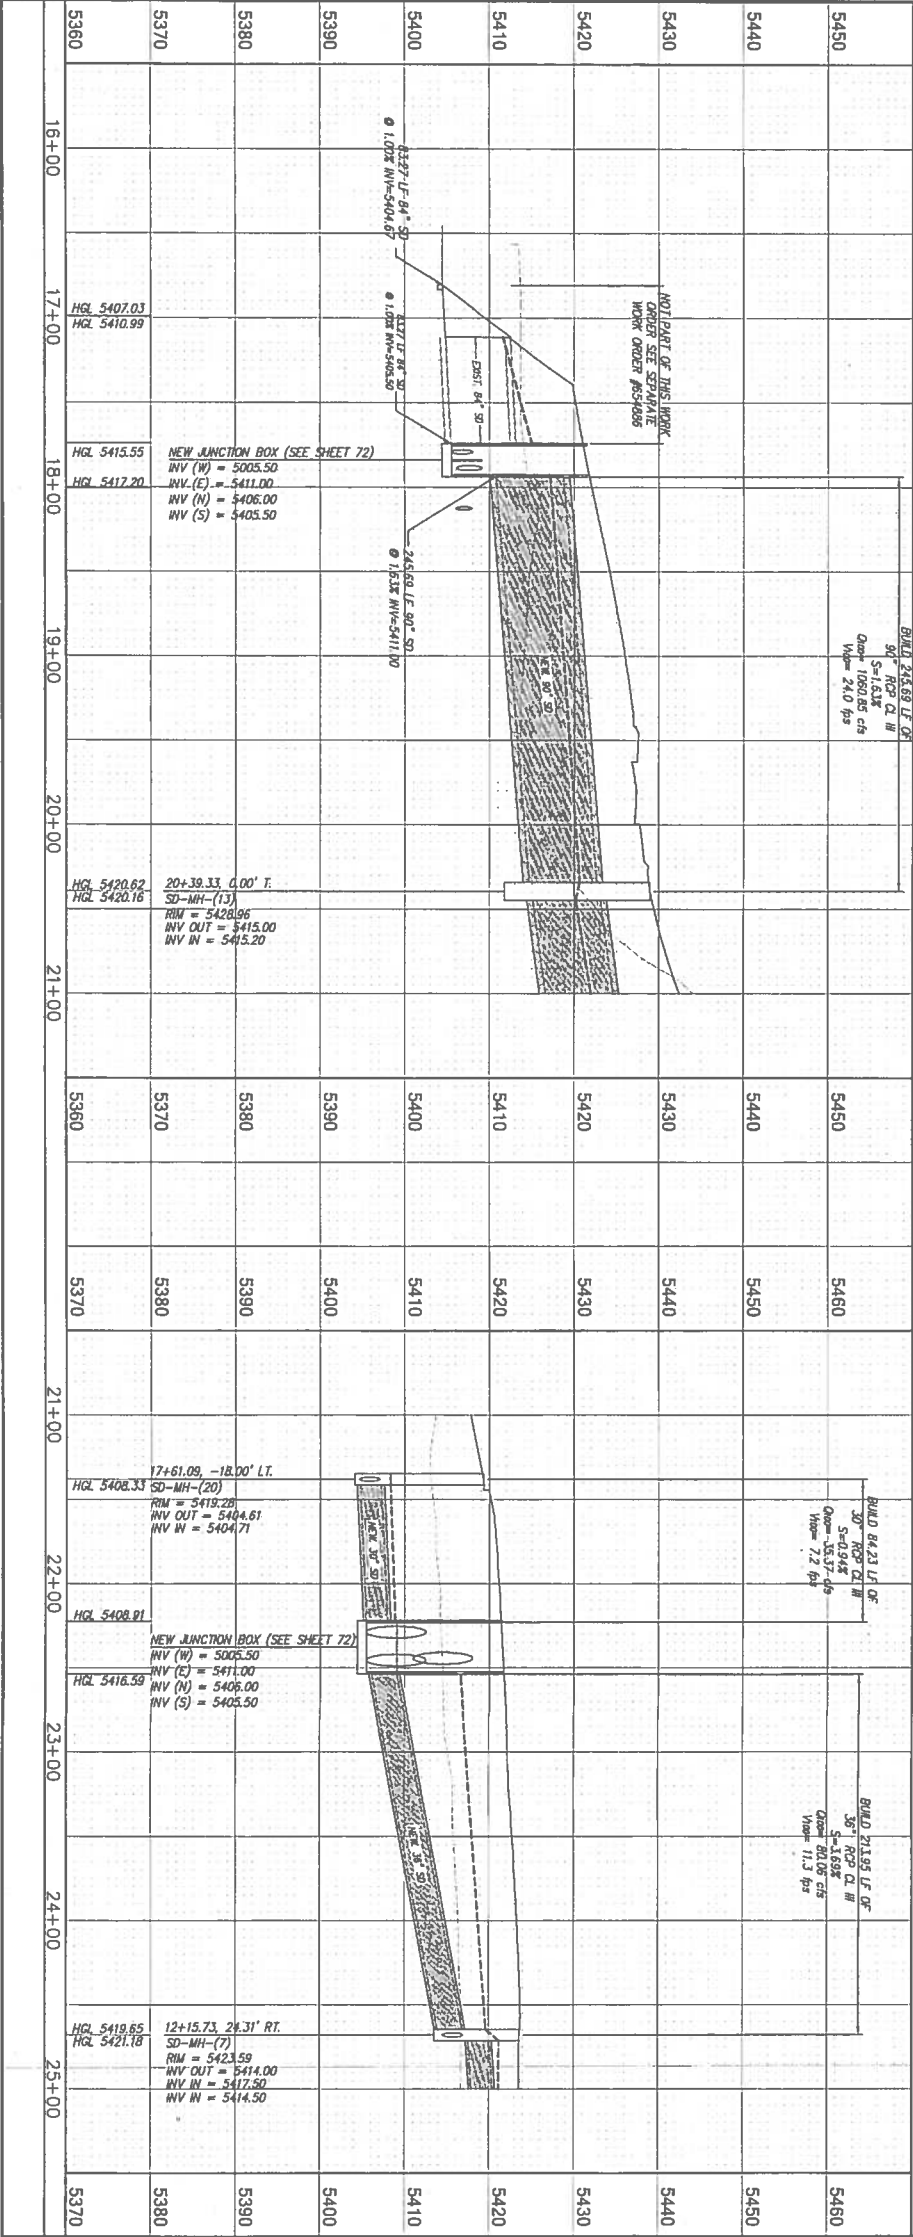


20+39.33 0.00' T. SD-MH-(13)
RIM=5428.96

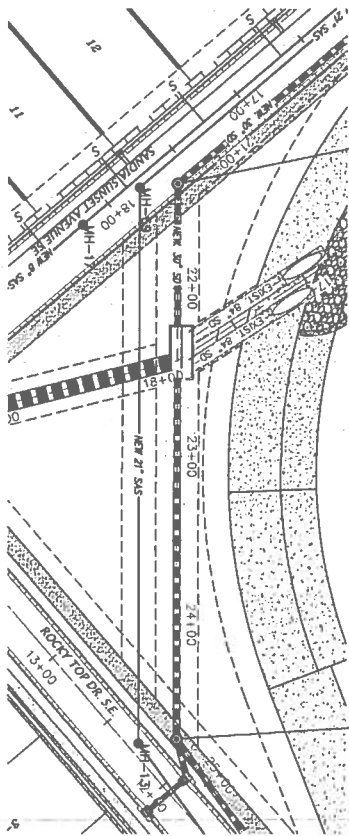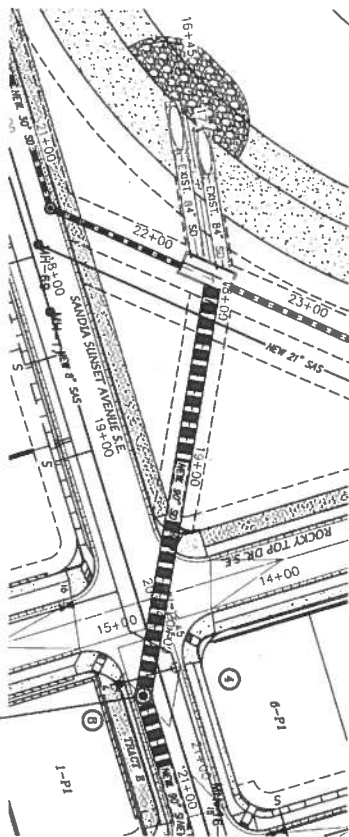

17+61.09, 18.00' LT, NEW SD-MH-(20)
RIM=5419.28

12+15.73, 24.31' RT, NEW SD-MH-(7)
RIM=5423.59





CITY PROJECT NO. 654887		ZONE MAP NO. M-21		SHEET 70 OF 75	
CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT JULIAN TABO HILLS ESTATES PARK 2 UTILITY PLAN & PROFILE					
DESIGN REVIEW COMMITTEE CITY ENGINEER APPROVAL					
LAST DESIGN UPDATE					
ENGINEER'S SEAL					
SURVEY INFORMATION					
FIELD NOTES					
NO. BY DATE					
BENCH MARKS					
STATION "S-M22" IS LOCATED 8.7 MI. SE OF DOWNTOWN ALBUQUERQUE ON THE EAST SIDE OF THE MUNICIPAL LIMITS LINE IN THE FOUR HILLS SUBDIVISION AREA. STATION IS 600 FT. EAST OF MUNICIPAL LIMITS LINE, 77.9' SE OF POWER POLE #37 & 186.0' NW OF POWER POLE #60. STATION IS A STANDARD ACS BRASS DISK SET IN A CONCRETE MONUMENT IN THE GROUND. STATION IS STAMPED "S-M22". X= 1,564,263.207, Y= 1,475,762.595 (NAD 83), Z= 5597.219 (NAVD 1988)					
AS BUILT INFORMATION					
CONTRACTOR					
WORK STARTED BY					
INSPECTOR'S ACCEPTANCE BY					
FIELD VERIFICATION BY					
DRAWINGS CORRECTED BY					
MICRO-FILM INFORMATION					
RECORDED BY					
NO.					

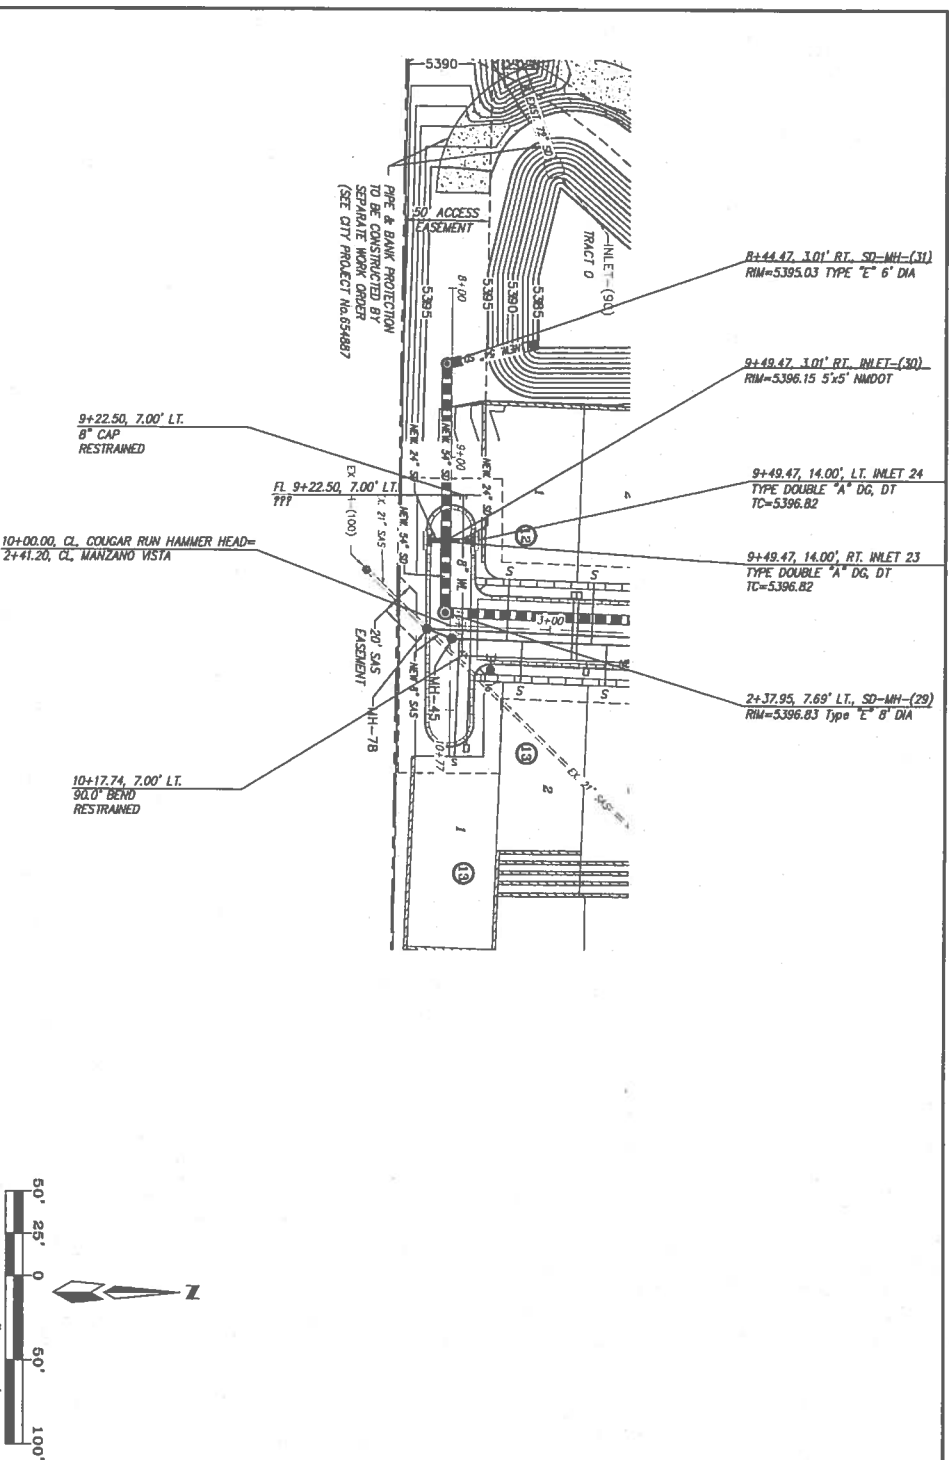

5420	BUILD 54.48 LF OF 54" RCP CL # S=0.55% D=198.04 cfs V=12.5 fps INV=12.5 ft	BUILD 105.00 LF OF 54" RCP CL # S=1.05% D=198.04 cfs V=12.5 fps INV=12.5 ft	BUILD 42.23 LF OF 54" RCP CL # S=0.47% D=198.04 cfs V=12.5 fps INV=12.5 ft	5420																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
------	---	--	---	------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

[illegible]

- KEYED NOTES
- 1 #5 VERT @ 9" o.c. INSIDE FACE.
 - 2 #4 VERT @ 9" o.c. OUTSIDE FACE.
 - 3 2 ADDITIONAL #5 VERT INSIDE FACE.
 - 4 3 ADDITIONAL #5 VERT INSIDE FACE.
 - 5 3 ADDITIONAL #5 VERT INSIDE FACE.
 - 6 3 ADDITIONAL #4 HORIZ EACH FACE.
 - 7 3 ADDITIONAL #4 HORIZ @ 10" o.c. EACH FACE.

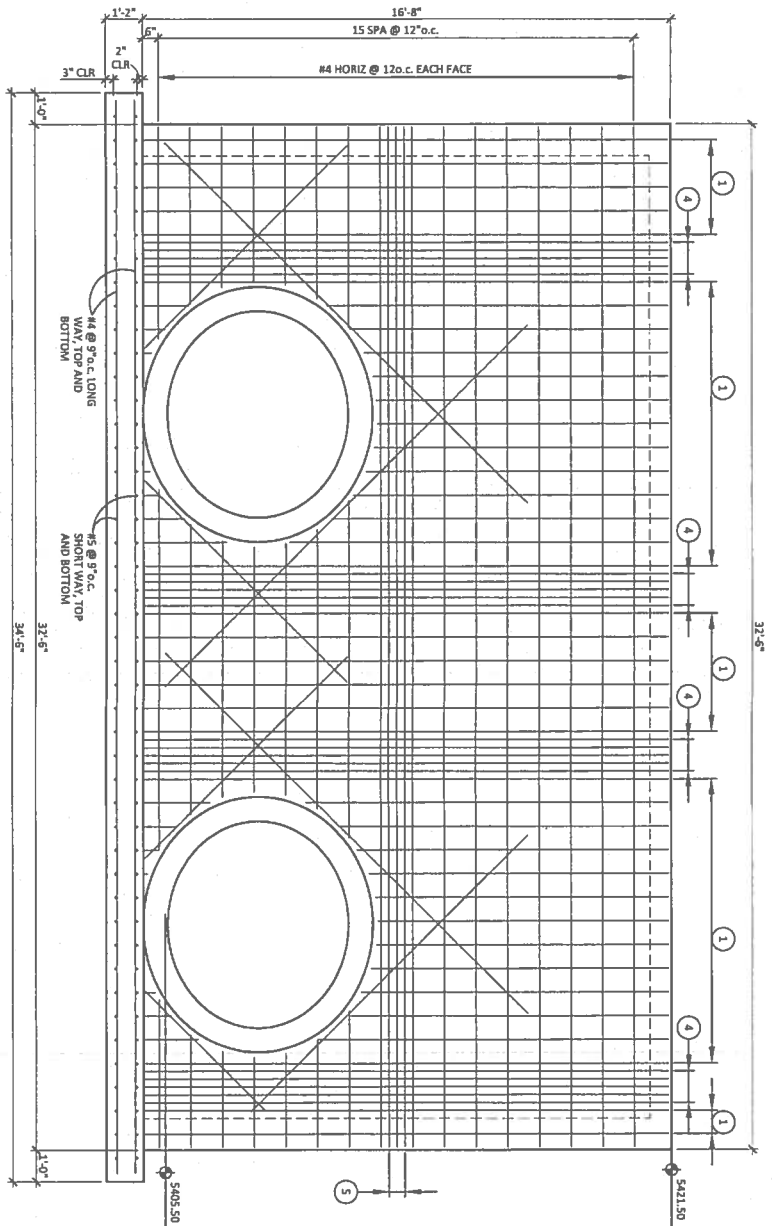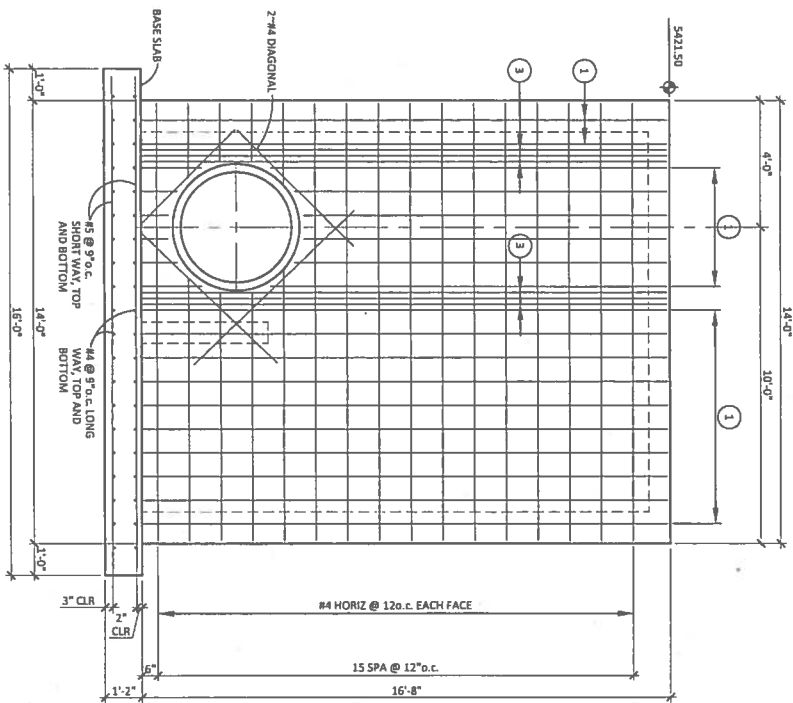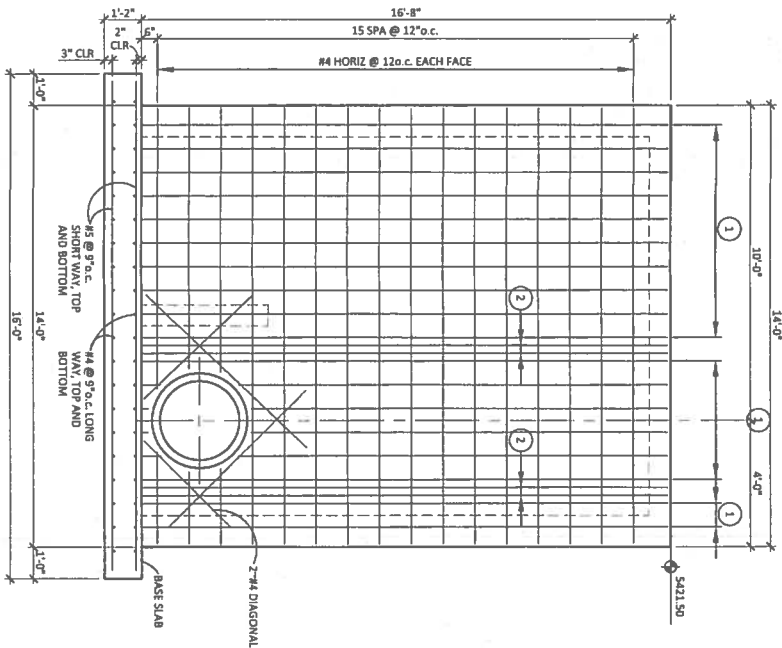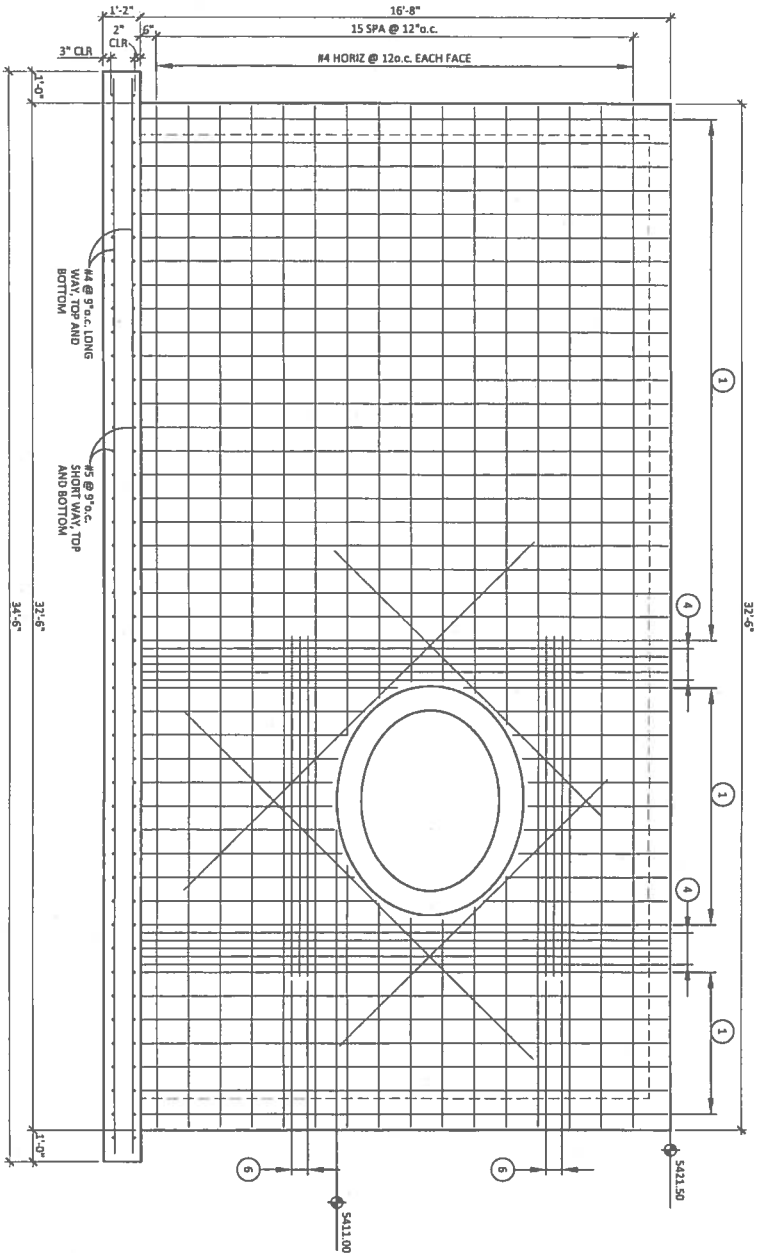

MARK GOODWIN & ASSOCIATES, P.A.
CONSULTING ENGINEERS
P.O. BOX 50606
ALBUQUERQUE, NEW MEXICO 87159
OFFICE (505) 243-1200, FAX (505) 797-9539

CITY OF ALBUQUERQUE
PUBLIC WORKS DEPARTMENT
JUAN TABO HILLS ESTATES
SD-MHS STRUCTURAL DRAWINGS

DESIGN REVIEW COMMITTEE CITY ENGINEER APPROVAL

LAST DESIGN UPDATE

CITY PROJECT NO. 654887 ZONE MAP NO. H-21 SHEET OF 75

DESIGN OF OUTLET PROTECTION FROM A ROUND PIPE FLOWING FULL
MINIMUM TAILWATER CONDITION ($T_w < 0.5$ DIAMETER)

