


P:\20120144\CDP\Plans\General\GRADING\_PLAN.dwg

Tue, 27-Dec-2011 - 2:19:pm

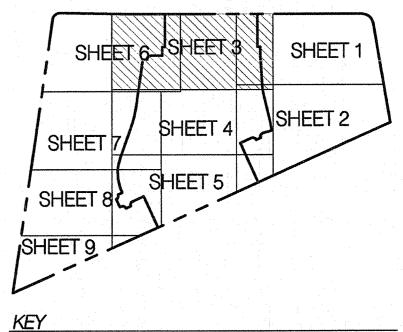

. ALL WORK DETAILED ON THESE PLANS AND PERFORMED UNDER THIS CONTRACT SHALL E CONSTRUCTED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS AND THE PROJECT GEOTECHNICAL REPORT. WHERE APPLICABLE, CITY OF ALBUQUERQUE PUBLIC WORKS STANDARD

2. THE CONTRACTOR SHALL ABIDE BY ALL LOCAL, STATE, AND FEDERAL LAWS, RULES AND REGULATIONS WHICH APPLY TO THE CONSTRUCTION OF THESE IMPROVEMENTS, INCLUDING EPA REQUIREMENTS WITH RESPECT TO STORM WATER DISCHARGE.

VERTICAL LOCATIONS OF ALL POTENTIAL OBSTRUCTIONS INCLUDING ALL UNDERGROUND UTILITIES. SHOULD A CONFLICT EXIST. THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION OBSERVER OF ENGINEER SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM AMOUNT OF DELAY.

4. TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, THE CONTRACTOR SHALL CONTACT LINE LOCATING SERVICE FOR LOCATION OF EXISTING UTILITIES.

5. ALL ELECTRICAL, TELEPHONE, CABLE TV, GAS AND OTHER UTILITY LINES, CABLES, AND BE ALLOWED FOR DELAYS OR INCONVENIENCES CAUSED BY UTILITY COMPANY WORK CREWS. THE CONTRACTOR MAY BE REQUIRED TO RESCHEDULE HIS ACTIVITIES TO ALLOW UTILITY CREWS TO PERFORM THEIR REQUIRED WORK.

ALL EXISTING UTILITY LINES WITHIN THE CONSTRUCTION AREA. ANY DAMAGE TO EXISTING FACILITIES CAUSED BY CONSTRUCTION ACTIVITY SHALL BE REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE AND APPROVED BY THE CONSTRUCTION OBSERVER.

ANY DAMAGE TO ADJACENT PROPERTIES RESULTING FROM THE CONSTRUCTION PROCESS SHALL BE REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE.

MATERIAL WITHIN THE PUBLIC RIGHT-OF-WAY. 9. THE CONTRACTOR SHALL OBTAIN ALL THE NECESSARY PERMITS FOR THE PROJECT PRIOR TO COMMENCING CONSTRUCTION (I.E., BARRICADING, TOPSOIL DISTURBANCE, EXCAVATION

10. ALL PROPERTY CORNERS DESTROYED DURING CONSTRUCTION SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE. ALL PROPERTY CORNERS MUST BE RESET BY A REGISTERED LAND

11. ALL BARRICADES AND CONSTRUCTION SIGNING SHALL CONFORM TO APPLICABLE SECTIONS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" (MUTCD), US DEPARTMENT OF

THE CONTRACTOR SHALL MAINTAIN ALL CONSTRUCTION BARRICADES AND SIGNING AT ALL TIMES. THE CONTRACTOR SHALL VERIFY THE PROPER LOCATION OF ALL BARRICADING AT THE

THE CONTRACTOR SHALL TAKE ALL STEPS NECESSARY TO CONFORM WITH EPA REQUIREMENTS, INCLUDING COMPLIANCE WITH NPDES PHASE 2 REQUIREMENTS.

A. INSTALL 4' DIA. TYPE "E" MANHOLE PER COA STD. DWG. B. RETAINING WALL BY OTHERS. SEE SHEET C2.10 FOR TYPICAL RETAINING WALL NOMENCLATURE. C. INSTALL TYPE "D" SINGLE GRATE INLET, PER COA STD DWG

D. INSTALL PVC MEDIAN CULVERT. SEE PLAN FOR SIZE AND ELEVATIONS. SEE DETAIL SHEET C2.10.

E. 2' CURB CUT PER DETAIL SHEET C2.10.

F. MODIFIED 4' DIA. TYPE "C" MANHOLE/INLET. SEE DETAIL G. MODIFIED 6' DIA. TYPE "C" MANHOLE/INLET. SEE DETAIL

H. 1' RIBBON CHANNEL. SEE DETAIL SHEET C2.10. I. SINGLE GRATE TYPE "A" INLET, PER COA STD DWGS

. DEBRIS TREATMENT MANHOLE SYSTEM PER DETAILS SHEET C2.11

----- PROPERTY LINE  $\chi^{5301.15}$  Existing ground spot elevation 95.53 PROPOSED SPOT ELEVATION S=2.0% PROPOSED DIRECTION OF FLOW PROPOSED CURB & GUTTER — — — EASEMENT PROPOSED STORM DRAIN INLET PROPOSED STORM DRAIN MANHOLE PROPOSED RETAINING WALL EXISTING OVERHEAD POWER LINES

Bohannan A Huston

AND POWER POLES EXISTING BARBED WIRE FENCE

IT IS THE CLIENTS RESPONSIBILITY PRIOR TO OR DURING CONSTRUCTION TO NOTIFY THE ARCHITECT IN WRITING OF ANY PERCEIVED ERRORS OR OMISSIONS IN THE PLANS AND SPECIFICATIONS OF WHICH A CONTRACTOR THOROUGHLY KNOWLEDGEABLE WITH THE BUILDING CODES AND METHODS OF CONSTRUCTION SHOULD REASONABLY BE AWARE. WRITTEN INSTRUCTIONS ADDRESSING SUCH PERCEIVED ERRORS OR OMISSIONS SHALL BE RECEIVED FROM THE ARCHITECT PRIOR TO THE CLIENT OR CLIENTS SUBCONTRACTORS PROCEEDING WITH THE WORK. THE CLIENT WILL BE RESPONSIBLE FOR ANY DEFECTS IN CONSTRUCTION IF THESE PROCEDURES ARE NOT FOLLOWED.

No. Date Issue / Description


Project

DIAMOND MESA

ALBUQUERQUE, N.M.

ACS BRASS TABLET STAMPED "TRANS" Geographic Position (NAD 1927) N.M. State Plane Coordinates (Central Zone) X= 354,899.45 Y= 1,471,822.67 Ground-to-Grid Factor = 0.99967921  $\Delta \Omega = -00^{\circ}16'42''$ 

SLD 1929 Elevation = 5118.43

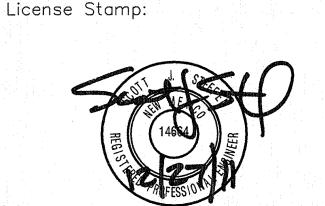

Project Contact: Phone #:

Fax #: E-Mail:

Principal in Charge: Project Director Project Designer:

Project Manager:

Sheet Title:

**GRADING & DRAINAGE** PLAN

Sheet No.

C2.03